

JULY

26c U.S. Postage

Popular Science

Founded MONTHLY

300
Pictures



Observation Officer
Jumping to Safety. See page 50.

J.D. TOWNE

Copyrighted material



The right partner, a smooth floor and the Victrola !

- The instrument that is always ready to oblige with the best dance music;
- that plays itself and permits every one to dance;
- that keeps right on playing as long as any one wants to dance.

Are you familiar with the delights of dancing to the music of the Victrola? Go to any Victor dealer's and ask to hear some Victor Dance Records. He will gladly play the newest dance music for you, and demonstrate the various styles of the Victor and Victrola—\$10 to \$400.

Victor Talking Machine Co.
Camden, N. J., U. S. A.
Berliner Gramophone Co., Montreal,
Canadian Distributors

"Victrola" is the Registered Trade-mark of the Victor Talking Machine Company designating the products of this Company only.

Warning: The use of the word **Victrola** upon or in the promotion or sale of any other Talking Machine or Phonograph products is misleading and illegal.



Victrola XVII, \$250
Victrola XVII, electric, \$300
Mahogany or oak

Victor Supremacy

New Victor Records demonstrated at all dealers on the 28th of each month

Jumping to Safety. See page 20.

Popular Science Monthly

Volume 91
July-December, 1917

Modern Publishing Company
225 West 39th Street
New York

This volume contains:

960 pages
1306 articles
2082 pictures

Copyright, 1917, by
MODERN PUBLISHING COMPANY
All rights reserved

Popular Science Monthly

INDEX

Volume 91—July-December, 1917

AERONAUTICS			
	Page		Page
Ancestors of the Bird and Airplane.....	3	The By-Products of the Grapefruit Obtained from the Culls.....	555
The Strength of Human Wings.....	32	A Little Bit of Egypt on a California Ostrich Farm.....	570
Fighting from Balloons.....	50	Let the Birds Save a Billion Dollars a Year.....	588
Fighting in the Air.....	76	Sowing Tree Seed in the Snow.....	588
America's Biggest Flying Machine.....	200	Gold-Plated Teeth for the Sheep Is Common in Scotland.....	591
U. S. Dirigible D.N. 1.....	225	Keep Livestock Away from Railroad Tracks.....	644
"Pillows" as Airplane Targets.....	327	A Spading Machine Which Makes Patriotic Gardening Worth While.....	685
A Fire-Chief's Airplane.....	385	A Pig Carries His Own Pen.....	698
The Ideal Aerial Bomb.....	386	A Portable Alfalfa Mill.....	698
Will the Dinners of the First Trans-Oceanic Flight Be Hot?.....	425	A Homemade Plow.....	706
A Life-Preserver for Aeronauts.....	439	Providing a Treat for the Birds in Cold Weather.....	728
The Charge of the Lightest Brigade.....	530	Grooming the Horse with a Vacuum-Cleaner Mitten.....	746
The Airplane to the Rescue of Storm-Tossed Mariners.....	538	This Is the Way They Plow in Porto Rico.....	750
The Zeppelins Are Coming! Hug the Ground.....	540	Hatching Chickens in Glass Globe by Electricity.....	806
Protecting the Airplane with a Fire-Proof Coating.....	542	The War Gardens of Railroad Employees and Station Agents.....	893
Air Scouts Learn to Sketch Battlefields.....	545	His Majesty, the Turkey.....	902
The New Blimp Type of Dirigible.....	546	Cattle-Guard Made of Cactus.....	905
Italy's Huge Bombing Triplane.....	688	Raising Terrapins on the Farm.....	906
Catapulting Seaplanes from U-Boats.....	696	Consider the Rat.....	916
Directing the Big Gun Fire from Airplanes.....	701		
New Gun-Tunnel Airplane.....	709	ARCHITECTURE	
Testing the Fighting Aviator.....	711	The Door to This Siberian Home Is Located on the Roof.....	101
A New Map-Holder for the Aviator.....	728	Circular Farm Garage Built with Silo Forms.....	187
Sixty Miles an Hour Is the Climbing Speed of Flying-Machines.....	744	Roadtown—The Commuter's Utopia.....	188
Making a Safe Landing at Night from an Airplane.....	752	Unique Shelter for Garden Entrance.....	292
Fishing in the Air.....	803	Making a Durable Playhouse for the Children.....	300
A Biplane Which Crashed Through a Roof.....	838	How Sound-Proof Rooms Were Built.....	329
Sixteen Airplanes Against One Destroyer.....	850	Star Spangled Banner in Brick.....	382
The Sun, an Enemy to Airplanes.....	857	Like a Spider in His Web.....	561
Testing Airplane Engines at Factory.....	861	This Store Sets a New Style in Exterior Decoration.....	671
Dummy Airplane Targets.....	866	Trees in the Forest One Week—Houses the Next.....	735
Commuting by Airplane.....	879	A Folding Staircase for the Fire Escape.....	839
Our Aviation Problems.....	894	House Numbers in Concrete.....	875
Aviators Now Can Carry Their Telephones Under Their Hats.....	907	A Miniature Hotel with Two Thousand Rooms.....	878
Testing Airplanes in a Man-Made Storm.....	910	A Chimney with Windows.....	892
AGRICULTURAL SCIENCE		ASTRONOMY	
Guinea Pigs Were Once Cultivated Like Chickens for Food.....	27	How the Sun Looks in the Arctic Circle.....	164
Making the Cow's Tail Behave with a Trolley Restraint.....	27	What's on the Moon?.....	256
A New Corn-Husking Machine.....	60	A Laboratory Two Miles in the Air.....	401
A Garden in Which Weeds Are Not Only Tolerated but Cultivated.....	61	How Old Is the Earth?.....	747
To Make Your Lawn Attractive You Must Edge It Evenly.....	89	A Parsec—The Greatest Unit of Measurement.....	807
An Adjustable Rake for the "Land Patriots".....	90	Chained to Our Earth!.....	835
Silo Roof Opens Like Umbrella.....	106	CHEMISTRY	
Take Good Care of the Eggs This Year.....	167	A Suitcase Laboratory for the Laundryman.....	7
Growing Mustard and Water Cress on Blankets.....	204	Whiskey from Jam and Potatoes.....	72
Plowing and Pulverizing the Soil in One Operation.....	205	Mixing a Durable Water Color Aluminum Paint.....	300
Soya Beans, a Substitute for Meat.....	206	Manufacturing Prussian Blue from American Product.....	303
Studying the Effects of Calf-Foods by Means of Photographic Records.....	253	The Chemical Wealth of Some of Our Lakes.....	407
The "Pretty Maids" of a Chinese Window Garden.....	269	The Hottest Heat.....	414
The Stationary Fruit Net.....	273	Buttons Are Now Made as a By-Product of Beer.....	517
To Prevent a Colt from Becoming Tangled in Halter Rope.....	288	Getting Sulphur Without Liberating the Fumes.....	671
An Old Cake Tin Makes a Good Watering Pan for the Poultry Yard.....	300	Indigo from Michigan.....	702
A Plumbing System for the Farm Residence.....	305	Powder Gases Wash Away Steel Guns.....	754
Watering Plants Drop by Drop.....	354	Making Money Out of a Nuisance. The Industrial Rise of Acetylene Ash.....	848
Subduing the Cow's Tail.....	388	Oleomargarine Glorified.....	877
The Latest Tree-Trimming Ladder.....	407	Sausage Made from Cottonseed.....	909
A Tin-Pan Orchestra to Scare the Birds Away.....	430	CIVIL ENGINEERING	
A Stylish New Coat for the Baby Lamb.....	507	Making Paving Machinery from Odds and Ends.....	597

Why a Sidewalk Was Built on the Top of a Storm-Sewer Tunnel.....	Page 746
Building a Park Around the Debris of a Burned-Down Schoolhouse.....	722
Two Billion Paving Bricks a Year.....	855
Measuring the Flow of Rivers.....	867

ELECTRICITY

Electrified Street Directions.....	33
An Effective Burglar Alarm.....	49
Cooling a Room with Cold Water.....	62
An Electric Machine for Cutting Uniforms.....	71
Newspapers in the Sky.....	104
A Telephone Attachment Which Performs the Services of a Watch Dog.....	105
Seal Your Letters by Electricity.....	114
Applying Insulation to Splices Made in Electric Wires.....	147
A Simple and Easily Made Electric Battery Motor.....	147
Rebuilding Worn-Out Dry Battery Cells.....	148
Method of Insulating Secondary "Pies" in Transformers.....	149
Steadying Voltage of Dynamo Driven by Gasoline Engine.....	150
Increasing the Voltage of a Dry Battery.....	150
Keyless Lamp Socket for Switching Electric Currents.....	151
The Effect of Electricity and Music on the Human Organism.....	152
A Rain Alarm Made of a Broken Electric Globe.....	152
Protect Yourself Against Highwaymen with an Electrified Cane.....	191
An Electric, Self-Winding Clock.....	222
A Light for Luring Fish.....	233
The First Life-Long Flashlight.....	240
A Flashlight Attached to Your Razor.....	251
An Electric Cord for the Sash Curtain.....	280
Simple Oscillograph to Record Current Alternations.....	284
Reversing Rheostat for Controlling a Small Motor.....	309
A Drip-Pan Alarm for the Ice-Box Drain.....	311
The Electric Stevedore.....	328
Telephoning from a Trolley-Car.....	353
The Ben Franklins of Today.....	363
The Electric Manicurist.....	400
Increasing England's Crops by Electricity.....	421
The Price of This Kiss Was Death.....	432
A Method for Recharging Dry Cells.....	442
His Lighting Bill Is Twenty-five Cents a Month.....	536
"Do It Electrically" Also Applies to the Barber.....	538
Using Resistance in Field Wiring on Automobile Dynamo.....	606
Connecting a Spot Light in an Automobile Dynamo Circuit.....	613
Electric Lamp Attached to a Spoon for Tongue Depressor.....	618
This Electric Heating Faucet Has No Switch or Coils.....	668
An Electric Wire in the Street Ignites a Balloon.....	670
Using an Electric Heater to Dry the Glue on Envelopes.....	672
Announcing the Election Returns by Telephone.....	740
Making Telephones and Phonographs Clearer.....	745
Click! Click! Go These Electrically Operated Scissors.....	748
Telegraphing by Typewriter.....	756
Automatic Cut-Outs for Charging Storage Cells.....	789
A Practical Electric Vacuum Cleaner.....	791
Making an Electric Furnace for the Laboratory.....	792
Testing Electric Wires for High Tension Currents.....	797
Resistance in Circuit to Make Double Tone Automobile Horn.....	797
Making a Selenium Cell for the Laboratory.....	799
A New Way of Oiling Machinery by Electricity.....	825
Illuminated Muffs.....	881
Combining an Electric-Elevator with the Shoe-Shining Chair.....	888
Applying the Principle of the Phonograph to the Telegraph Sounder.....	889
Reducing Packing Costs in Handling Telephone Sets.....	908
A Telephone Conversation May Be Almost "Private" Nowadays.....	913
Telephone Conversation Made Easy by a New Device.....	919
Charging Storage Batteries with Direct Current.....	947
Simple Method of Making Storage Cells.....	947
Auto-Transformer in Headlight Circuit on a Magneto.....	952

Making a Good Outdoor Ground to a Pipe.....	Page 952
Finding the Combined Value in Parallel Resistances.....	959
Heating a Soldering Iron with an Electric Arc.....	960

HOUSEKEEPING MADE EASY

Save Your Bottles. A Shortage of Jars and Cans Is Threatened.....	37
Not Even the Space Underneath This Desk Is Wasted.....	37
A Machine for Ironing Stockings.....	49
Household Appliances.....	52-53
A Tea-Making Machine.....	66
Using Your Player Piano as a Vacuum Cleaner.....	72
Changing the Apartment Telephone into a Pay-When-You-Call System.....	85
Alarm Which Tells You When Your Bathtub Has Been Filled to Whatever Depth You Desire.....	87
Combining a Strainer with the Bung of a Barrel.....	90
Making the Kitchen Range One Hundred Per Cent Efficient.....	111
A Clever Bottle-Opener.....	190
Co-operative Kitchens to Solve the "High Cost" Problems.....	198
Children May Write on These Walls Without Fear of Punishment.....	204
An Electric Fan Runs Without Electricity.....	217
Household Appliances.....	238-239
Keeping Out Flies When You Open the Door.....	260
Household Bookless Bookkeeping on the Poker-Chip Principle.....	267
Put Your Flowers Outdoors on this Adjustable Window Shelf.....	271
Hanging Backing Cloth for Wall Paper.....	283
A Double Deck Revolving Clothes Hanger for a Yard.....	287
Iceless Refrigerator Using Evaporation for Cooling.....	289
Sterilization Is the Essential Factor in Canning Vegetables.....	290
The Buriap Cooler.....	351
Scrub Your Walls by Machinery.....	360
Housekeeping Made Easy.....	372-3
An Approved Smoker's Kit.....	410
A New Attachment to Hold the Trousers in Place.....	420
A Handy Clothes Closet for Your Vacation.....	424
The Clam-Shell as a Decoration.....	435
That Bit of Butter Left on Your Plate—What Becomes of It?.....	519
This Vacuum Cleaner Is Used Like an Ordinary Broom.....	519
Housekeeping Made Easy.....	552-553
Fountain Spot-Remover Works Like a Scrubbing Brush.....	568
An Owl with Eyes of Scissors and Backbone of Paste.....	576
You Can Roll This Can Without Spilling the Garbage.....	593
A Wooden Lighthouse Candlestick and How It Is Made.....	600
Sending the Wash to the Laundry Through a Glass-Lined Chute.....	664
The Full Dinner Pail.....	669
An Accommodating Gas Stove.....	670
What to Do with That Dripping Umbrella.....	671
Keeping Your Neckties Smooth.....	672
New Can-Opener Which Does Not Destroy the Can.....	679
Housekeeping Made Easy.....	694-695
A Necktie Rack.....	702
Cook Over the Gas Lamp.....	721
Making a Window Seat Out of the Radiator.....	725
Dry Your Fruits and Vegetables at Home.....	736
Carry Your House Key in Its Own Bag.....	736
The Kitchen Cabinet Up-to-Date.....	742
The Temperature Alarm.....	747
Keeping the Shampooing Soap Suds Out of Your Eyes.....	804
Storing Needles and Thread in the Handles of Scissors.....	828
Solving Kitchen Problems Electrically.....	830
Abolishing the Garbage Can.....	833
Rocking the Baby Fore and Aft.....	842
New Shoe-Polishing Kit.....	857
Improved Office Appliances.....	870
Electric Fish-Scaler.....	873
Baby's Wheeled Dressing Table.....	877
Housekeeping Made Easy.....	890-91
A Pelican in Your Wardrobe to Hold Your Coat.....	904
Want to Go to the Attic? Just Pull Down the Stairs.....	912

MECHANICAL ENGINEERING	Page
This Typewriter Prints in Every Type and Language.....	5
Is Your Typist a Rapid Operator? This Machine Will Time Her.....	25
Big Steel Guns and How They Are Made.....	38
Typewriting in Code.....	59
Mechanical Appliances.....	74-75
A Cushioning Drawbridge Gate.....	80
A Safety Coat for Workmen.....	96
The Last Word in Fountain Pen Efficiency—An Eraser Attachment.....	97
Removing Iron Rivets with a Pneumatic Hammer.....	97
With the Warm Weather Come Improvements in Ice-Cream Making.....	100
Safety Nets of Rope for Skyscraper Workers.....	114
Largest Indoor Waterfall.....	166
A Street Cleaner Built Like a Carpet Sweeper.....	203
Mechanical Appliances.....	210-211
A Coal Mine in His Cellar.....	215
Repairing Flag Pole Without Steeplejack.....	216
Canning Beans by Machinery.....	221
A Portable Elevated Saw.....	228
A New Addressing Machine.....	234
A Conveyor for Loading Coal.....	237
A Self-Propelling Sprinkler.....	240
A Mechanical Bank Teller.....	245
The Needle Bath in Shell Making.....	248
A Portable Nail Distributor.....	249
The Evaporation of Water Drives This Remarkable Clock.....	254
One Horsepower Will Run All the Watches in the World.....	261
A Small Sand Spreader Is Useful All the Year Round.....	263
Panning for Gold in Central and South America.....	264
The Compressed-Air Orchestra.....	265
The Efficient Garbage Collector.....	397
Mechanical Kinks.....	398-9
A Machine for Reclaiming Scrap Material.....	410
Three Roadmaking Machines in One.....	421
A Time-Saver for the Repairman.....	425
Standardizing the Die-Sinker.....	440
Gear Wheels Made of Cotton.....	517
Steam Jets Which Save Thousands of Dollars in Large Power Plants.....	523
Do It with Tools and Machinery.....	534-535
Stamping Two Thousand Letters an Hour.....	537
A Substitute for Forms in Concrete Roofs and Floors.....	543
An Iron Worker's Steel Glove.....	544
How One Furnace Can Save a Big Slice of the Country's Coal Bills.....	564
We Burn Coal Lavishly, but We Have Plenty to Burn.....	567
Making a Fortune Out of Cement Factory Dust.....	569
Blowing Stumps Away with Air.....	576
Welding Ten Miles of Pipe for a Skating Rink.....	584
Drilling with This Electric Drill Is Like Shooting a Pistol.....	593
Let This Automatic Device Feed Your Envelopes.....	595
The Overdriven Nail and the High Cost of Living.....	543
Potted Plants as a Part of a Plumber's Equipment.....	548
Perfect Bread Slicing Machine for the Commissariat.....	645
Fastening Motors to Ceilings Without Scaffolding.....	673
Weighing Your Coal by the Ounce or the Pound.....	686
A Device for Handling Rugs.....	699
A Simplified Gasoline Engine.....	704
Stamping Oranges.....	705
Extinguishing Flames of a Gas Well.....	708
Mechanical Appliances.....	718-719
The Most Ornamental Smokestack in the World.....	734
How the Cellar Shut-Off Nozzle Originated.....	740
This Furnace Practically Takes Care of Itself.....	742
Any Boy Can Build a Concrete Wall.....	745
Whirling Concrete Poles into Shape.....	749
Fire Doors That Close Themselves.....	750
Sorting Letters with Gravity Chutes.....	752
A Valveless Pump for Gearset Grease.....	753
Cutting Sheet Metal with a New Machine.....	757
Handling Cotton Bales with an Over-Head Trolley.....	757
The Giant Crane of the Austrian Navy.....	758
A Jeweler's Ruse.....	760
A New Siphon That Starts Itself Without Suction or Pumping.....	832
Turning Valves on Their Seats Automatically.....	859

	Page
Furnace Burns Soft Coal and Cleans Its Own Radiator.....	867
Largest Direct-Current Power Plant.....	868
Improved Mechanical Appliances.....	871
Running the Oven by the Hot-Air Furnace.....	879
Making Flour from Pigskin.....	882
Barking Wood by Machinery.....	885
A Dipper Dredge That Served as a Drydock.....	893
Two Locomotives to the Aid of a Shivering Manufacturing Plant.....	899
Doing the Work of Three Hands with Two, on a Soldering Job.....	900
Which Way Will the Tree Fall?.....	901
New Looms for Old—A Wartime Necessity.....	904
A Collapsible Concrete Form Which Works on the Principle of an Umbrella.....	905
The Smallest Bandsaw.....	907
Another Biggest Thing in the World—This Time a Riveting Machine.....	913
Hot Water in an Instant.....	920

MEDICINE, SURGERY AND HYGIENE

Be Thou Wary of the Bubbling Cup.....	86
The Hospital Toothbrush—It Has a Removable Pad.....	95
The Private Hairbrush—The Bristles Can Be Locked Up.....	95
The U. S. Armies Prepare to Fight Germs.....	106
That Wad of Dental Cotton—Was It Sterilized?.....	107
An Ice Helmet to Relieve the Fever Patient.....	115
Separating Russian Prisoners from Vermin.....	119
Chiropodists for the Army.....	164
A Holder and Sterilizer for the Toothbrush.....	205
Gigantic Models of Mouths.....	221
A Single First-Aid Dressing.....	235
How Policemen Revive You When You Faint.....	237
The Feet and Legs of American Citizens Are Un-sound.....	263
Closing Up a Wound Without Using a Surgeon's Needle.....	269
Feeding Germs on a Special Diet.....	270
Inducing Artificial Respiration with a Vacuum.....	350
A Device for Supporting the Arch.....	385
The Dental Hygienist.....	387
A Spring-Motor for the Human Jaw.....	408
A Treatment for Distemper in Dogs.....	434
If You Lisp or Stammer Use a Mirror or Candle.....	484
A Self-Inflicted Tug-of-War to Increase Your Height.....	484
Combination Knife and Fork for the Wounded.....	485
Choosing the Air for Our "Castles".....	503
A Crutch Built on the Principle of the Rocking Chair.....	523
The Army Medical Museum's Giant Skull.....	551
The Massaging Chair.....	564
A Huge Barber-Shop Sterilizer on Wheels.....	583
This Death's Head Poison Bottle Will Prevent Fatal Mistakes.....	594
Bomb Exits for America's First Portable Hospital.....	596
Fat People Are Unpatriotic.....	645
Medical Men in the Army.....	685
Open Your Mouth and Let the Doctor Flashlight Its Interior.....	687
Preventing Typhoid.....	706
Testing the Fighting Aviator.....	711
The Best Night Light for the Sick Room.....	729
A Medical Battery No Bigger Than an Ordinary Flashlight.....	731
How About That Third Cup of Coffee for Breakfast?.....	734
Train Your Skin So That It Will Not Be Sensitive.....	744
Artificial Lungs for New Born Babies.....	807
It Bathes, Massages, and Dries Us.....	832
The Old Indian Priests Had No Easy Time of It.....	837
Toe Spring for Enlarged Joints and Bunions.....	838
A Disappearing Crutch.....	854
Curing Wounds with Sugar.....	867
Fracture Setting Machine.....	875
Employing Destructive Gases in the Warfare Against the Sleeping Sickness.....	888
Using Brine Baths as a Cure for Shell Shock.....	899
Examining Recruits for Tuberculosis.....	909
Treating the Wounds of the War by Electricity.....	918

MILITARY AND NAVAL SCIENCE

How the Fighters Will Be Fed.....	6
-----------------------------------	---

	Page
The Poison Gases that Kill Men in Trench Warfare	24
Big Steel Guns and How They Are Made	38
A New Caterpillar Truck	57
A Submarine's Trip on Land	58
Fire-Crackers to Ward Off Submarines	59
Our Unsinkable Cargo Fleet	63
An Inverted Periscope Used Under Water	68
The Shoe Hospital of the Allies	61
California's Conception of a "Tank"	67
Millions Spent for Shells	70
A Signal Gun	71
Conserving Wheat with Alfalfa	72
An Electric Rammer	80
Motor-Boats for Submarine Chasers	82
Dummy Guns Train England's Gunners for the Sea	94
To Save Money During War Time Why Not All Dress Alike	100
The U. S. Armies Prepare to Fight Germs	106
Protecting the British Fleets with Chain-Nets	112
Separating Russian Prisoners from Vermin	119
Drag-Bombing Submarines with Airplanes	163
Handling a Submarine	168
The Time Fuse and How It Works	192
Antiseptic, Anaesthetic Bayonet	216
A New French Word "Camouflage"	217
The Onerous Task of Rejecting Recruits	218-219
The New French "37"	220
A Great Map of Warring Europe	222
An Automobile-Mounted Machine-Gun	226
How the Germans Mutilated Their Boats	230
The Largest American Flag	245
A New Method of Foiling Bomb-Droppers	247
Applying the Idea of the Needle Bath in Shell-Making	248
An Army Tool-Shield	266
Figures That Give An Idea of the Task of Transporting Our Armies	271
Why Not the Land Torpedo?	323
A Target Which Answers	349
A Visor for the Helmet	350
The Marines Sleep on Their Life-Preservers	354
Hurling Barbed Wire at the Enemy	355
The Primer of the Giant Shell	361
The Biggest Red Cross Flag	369
Details Involved in Making Shrapnel	369
Target Practice with Coast Defense Guns	369
Moving a Piano Across the Sahara	378
Desert Sandshoes	379
The Mother of the Submarine	380
Italian Soldiers Paint Their Faces	382
Rifle-Firing Kinks Taught West Pointers	383
Body Armor for the Soldier	389
Newspaper Torches	390
Testing the Hearing of a Soldier	392
Revolver Machine Gun	393
How the U-Boats Get Through the Nets	395
Khaki Has Been Used Since 1848	401
All Around a Battleship	402
The War Dress of the New Guinea Soldiers	406
Demolishing Cottages with a Battering Ram	409
The Detonator Head	419
A Million Dollars a Year to Paint Our Navy	424
Thrusting Spears for Cavalry	430
Military Marching for Beginners	475
Is This the Machine-Gun of the Future?	483
Three Million Pairs of Shoes Ordered for the Army	507
Firing Shells Charged with Gasoline Which Ignites on Impact	507
Will the Shell Burst When It Is Fired?	513
The New Enfield Rifle	518
A Shock Absorber for the Soldier's Kit	521
Statistically, What Is Your Chance of Being Killed in This War?	532
The Camouflage Soldier	533
Saving the Food Cargo of a Torpedoed Ship	540
Forty-Three Bombs in a Freight Car of Scrap Iron	542
The "Red Cross" for the Soldiers; the "Red Star" for Their Steeds	544
The Carrier Pigeon Still Holds Its Own as Trusted Messenger	554
Shoot or Stab This Dummy, and an Explosion Occurs	555
Megaphoning the Reveille	568
Fighting a Gas Attack in the Trenches	580
Moving Targets to Quicken the Eye and Steady the Aim	585

	Page
What You Will Need When You Go to Training Camps	596
Gun-Buoy for Repelling Submarines	643
A Merry-Go-Round for the German Soldiers	644
A Leopard Ship of the Sea	645
A Versatile Helmet	646
Cowards in the Army Are Rare	646
Fighting at Night with Searchlight Torpedoes	680
What's Wrong with the Submarine?	682
Medical Men in the Army	685
Packing Chocolate in Sausage-Links	685
Shells with Scissors Attachments That Cut Wire Entanglements	686
Portable Army Bread-Mixer	689
Catapulting Seaplanes from U-Boats	696
Identification Rings for Soldiers	699
A Shoe-Repairing Truck for the Army	700
Guarding Venice	706
The New Service Flag	707
Assembling Torpedos	717
A Temporary Tombstone for the Unexploded Shell	721
Paper Uniforms for German Soldiers	728
A Bullet That Flies Like a Comet	729
The Machine-Gun Principle Applied to the Revolver	730
Eliminating the Periscope from the Submarine	731
Men Who Ought to Make Good Rifle Shots	732
Business Is Booming in War Horses and Mules	736
Three Shots with a Single Shell	739
Will a Projectile Fly True?	743
A French "75" Anti-Airplane Gun with a Camouflage Dressing	744
How a Fighting Dummy Teaches Men to Use the Bayonet	824
Steel Castings for Modern Dreadnoughts	827
Reaching the Soldiers, Wounded Far Up in the Mountains	839
The Unsinkable Submarine	840
The Possibilities of a 60-Inch Gun	844
Testing Shells for Hardness	847
The French "Horizon Blue" Is the Best Color for Uniforms	848
What Defective Ammunition Means	849
New Motor Truck Kitchen	851
Blinding the Enemy with Searchlights	859
A Bomb in a Piano	865
Dummy Airplane Targets	866
A German Military Obstacle	869
The Latest Sea Camouflage	876
Protecting Battleships with Compressed Air	886
German Trenches as Comfortable as Houses	889
England's Great Under-Sea Walls of Bombs	915

MOTOR VEHICLES AND THEIR ACCESSORIES

A Hint to Motorists—Keep Your Radiator Clean	7
Differentials for Motor Vehicles	30
Automobiles, Motor-Trucks and Accessories	34-35
Measuring Motor-Truck Loads Automatically	36
The Youngest Manufacturer of Automobiles	48
A Solution to Tire Troubles	58
Auto Engine Cooler on Steam Ejector Plan	62
Transforming an Auto Roadster into a One-Ton Truck	73
A Ten-Ton Motor-Truck on Eight Wheels	88
A New Type of Transmission Employs Cork Inserts	100
The Problem of the Automobile Top	102
A Community Garage Comprises Fifty Buildings on One Lot	111
Making the Acetylene Light as Brilliant as the Electric Lamp	120
Combined Ice-Box, Pantry and Trunk for Autos	165
Testing a Car's Power to Pull Itself Out When Stuck	167
A First Assistant to the Motorcycle Cop	169
The Automobile's Mechanical Cost Keeper	186
A Folding Crib in the Automobile and Summer Camp	191
A Funnel Will Fill Up Your Automobile Tank Without Spilling the Gasoline	193
Automobiles, Motor-Trucks and Accessories	194-195
Convenient Automobile Doors	224
Automobile Run on Alcohol	229
The Cost of French Army Cars	233
A Keyless Lock for Your Ford	236
Auto Engine Cooler Operates on Steam Ejector Plan	246

INDEX TO VOLUME 91

V

	Page
One Inventor's Idea for Lengthening the Life of a Rubber Tire	255
Making a Trolley-Car of the Motor-Truck	261
Device to Remove Automobile Bodies Without Scratching	262
The Newest Child's "Pushmobile"	263
An Easily Adjusted Tire That Locks Itself on the Wheel	268
A Motor-Truck for Ice Cream Delivery	272
Tipping Truck for a Large Cylindrical Oil Tank	282
Miniature Automobiles and Their Race Meets	283
Effects of Oil and Grease on Rubber Tires	288
Repairing a Worn Plunger in an Automobile Oil-Pump	293
A Tractor Trailer Made for an Old Automobile	295
Inflation and Weight Governs the Resiliency of Tires	296
Constituency of Rubber for Side Walls of a Tire	302
Salvaging Motor Wrecks with an Equipment Car	324
Motor Truck Carries Thirty-Eight Soldiers	326
Live Steam or Vapor to Save Gasoline	351
A Lock which Makes the Ford Car Thief-Proof	353
Automobile Accessories	357
Men Whom the Automobile Has Made Rich	358-359
The Gasoline Automobile as a Locomotive	360
The Air-Propelled Unicycle	370
Loading Coal Baskets from a Motor Truck	379
Cleaning the Air Fed to Automobile Cylinders	383
The Biggest Automobile Spring	384
What Six Gallons of Gasoline Can Do	409
A Dust-Proof Cover to Keep the Automobile Luggage Clean	417
A Tire Pressure Gage No Bigger Than a Pencil	421
Storing Automobile Fenders	424
A Garage Built with the Contour of a Cathedral	431
An Anti-Kick Device for the Ford	435
Caring of Inner Tubes to Prevent Chafing	455
Dust Proofing the Automobile Priming Cup	455
Rim Cuts in Tires	470
Automobiles, Motor-Trucks and Accessories	508-511
Turning a Car in Its Own Length	512
This Truck Loader Will Lift One Ton Ten Inches Per Second	517
Your Motor Is Known by the Piston Rings It Has	522
The Small Caterpillar Tractor Rings the Death Knell of the Industrial Railroad	532
The Rising Price of Automobiles	543
Inspecting a Six-Mile Tunnel by Automobile	544
A Motor Truck Line 1540 Miles Long	548
Advertising by Motor-Truck	549
Photographing the Jolts of an Automobile	550
Loading Trucks Without Disturbing Sidewalk Traffic	554
A Car-Lifting Brake	560
Improved Electric Gearshift for Autos	567
Buying a "Used Car"	573
This Tire Pump Gets Power from the Engine Crankshaft	585
A Harrow-Like Brake for Mountain-Climbing Automobiles	590
The Common Rotary-Valve Gasoline Engine Is a New Departure	600
Testing for Trouble That Causes Poor Auto Lights	610
How to Relieve Your Auto Brakes	617
Electrically Operated Turntables for Automobiles	669
Automobiles, Motor-Trucks and Accessories	674-7
It Has Both a Pneumatic and a Solid Tire	681
Preventing the Ford Engine from Overheating	687
Touring in a Motor-Truck	697
Transporting a Precious Mirror	703
An Automobile Safety Device	705
Kerosene-Driven Farm Tractor	720
Hauling a Seven-Ton Truck Out of the Mud	735
Changing a Roadster Into a Five-Passenger Car	737
Getting More Mileage Out of Gasoline	738
A Simple Cylinder Re-Boring Machine	748
A New Way of Cushioning the Front Spring Action of an Automobile	828
Three-Purpose Electric Drill	828
The Automobile Driver Must Know What to Do in Case of Accident	831
Bell Gives Warning When Automobile Backs Up	834
A Powerful Motor Sprinkler	849
New Motor Truck Kitchen	851
Automobile Accessories	852-53
Mirrors to Avoid Auto Accidents	855
Burning Distillate in Your Auto Engine	864

	Page
Keeping Auto Engine at Right Temperature.....	856
Turning the Headlights Electromagnetically.....	919
Forty-Five Miles an Hour on This Motorcycle Sleigh.....	920
An Automobile Steering Wheel for a Bob-Sled....	928

NATURAL SCIENCE

The Grave-Digger Beetle.....	25
How Scientists Capture Mosquitoes Alive for Experiment and Study.....	26
Japanese Mosquitoes for Bird Food.....	68
Counting the Drops in a Fog.....	91
Mountains Float.....	108
The Common Housefly Is the Most Unpopular of Insects.....	110
The Misunderstood Shark.....	196
Teaching the Proper Care of Forests by Object Lessons.....	199
It Is Beautiful Because It Is So Ugly.....	201
Teaching Children Natural History with Animal Pictures Made of Sand.....	201
Mysterious Ice Mines.....	207
Poison Ivy and How to Avoid It.....	207
The Curious Ways of Egypt's Holy Beetle.....	252
What Monterey Did with a Whale.....	255
Everybody Knows the Squash Bug.....	264
Coaxing Music from a Pile of Rocks.....	267
Imitating Nature with a Miniature Volcano.....	286
An Irish Thrush Rings for His Food.....	288
Potash from California Sea Kelp.....	325
Operating upon Trees.....	346
Unwashed Sponges Are Dirty.....	351
Penitentiary Roof Garden.....	390
Feeding London's Zoo Animals.....	400
The Night Song of the Tree Cricket.....	406
Faces in Walnut.....	407
Why Pheasants Need Foster Mothers.....	410
Growing Umbrella Handles.....	420
How a Cyclone Bent a Flagpole.....	433
Why Does a Cat Have a Tail?.....	438
This Bird's Nest Is a Two-Room Apartment.....	525
If You Had No More Teeth Than an Elephant You Couldn't Be a Soldier.....	572
Teaching the Truth About the Misunderstood Snake.....	579
Rivers That Flow in Two Different Directions.....	678
Why Do Salmon Go Annually Out to Sea?.....	681
A Thirty-Five Acre Island of Mud Near Memphis.....	721
The Robber Crab.....	730
Orchids That Grow on Telegraph Wires.....	731
How Plants Accommodate Themselves to the Climate.....	737
San Salvador's Terrible Quake.....	741
A Lizard That Squirts Blood from Its Eyes.....	805
Palm Springs.....	805
Snow Honeycombs and "Penitents".....	806
How Did One Egg Get Inside of the Other?.....	826
The Cut Branch Did Not Die.....	836
Exploded Beliefs about the Arctic.....	839
You Can Hold a Dozen of These Coconuts in One Hand.....	848
The Eccentricities of the Sleeping Horse.....	851
Can a Frozen Fish Be Restored.....	873
Mysterious Sound That Baffles Science.....	881
Eat Your Dates with an Easy Mind.....	918

PHOTOGRAPHY AND MOTION-PICTURES

A Photographic Trick—Try It the Night of the Fourth.....	7
Making "Night Scenes" for the Motion Picture....	24
Wireless in the Talking Movies.....	33
Making Motion Pictures at Home.....	54
Taking Motion Pictures on the Road in a Queer Vehicle.....	61
An Attachment Which Will Lock Your Camera to the Tripod in an Instant.....	120
Dinner Served in Gondolas on a Champagne River.....	220
Camera Handled Like a Pistol.....	241
Directing a Motion Picture Show from the Manager's Office.....	254
Taking Snap Shot Action Pictures at Night.....	280
A Solution for Reclaiming Over Exposed Blue Prints.....	287
Leveling a Motion Picture Camera Tripod.....	292
A Quick Action Electric Switch for Photographers.....	307
Taking the Glare Out of Motion Pictures.....	324

	Page		Page
Taking Photographs with a Concealed Camera	327	Women Working on French Dirigible	812-13
Airplane Camera Takes 750 Exposures	328	Performing Dogs	814
A Motion-Picture Projector Which Can Be Carried in a Suitcase	423	The Allies' Big Repair Tents	815
The Original Motion Picture Film	484	Comfort Kits for Our Soldiers	816-17
Taking Pictures a Thousand Feet Under Water	577	Avoiding a Broken Head in Boxing	818-19
Moving Pictures That Really Talk	578	Fresh Air for New York's Anemic Children	820-21
Aim and Pull the Trigger to Photograph an Enemy from the Air	586	Making Rifles and Bullets for Our Soldier Boys	822-23
Making It Easy to See the "Movies"	599		
Finger-Print Camera for Modern Sherlock Holmes	678	PRACTICAL WORKERS' DEPARTMENT	
Making Pictures and Projecting Them with the Same Machine	722	Cutting Clippings from Magazines with a Pin	121
Harnessing a Fighting Lion for the Films	739	Solid Board Fence with Artistic Upper Edge	121
A Moving-Picture Show, the Martian Might See	856	Rustic Furniture Made of Poles and Logs	121
A Motion-Picture Camera on One Leg	878	Using a Drop of Water for Lens in Photomicrography	123
How the Lion and the Lamb Lie Down Together in the Motion Pictures	884	An Effective Fireproofing for Children's Clothing	125
Hang That Book from Your Shoulders	892	Collecting Ants in a Sponge and Drowning Them	125
Incandescent Lamps May Now Be Used to Project Motion Pictures	893	Exterminating Moles and Gophers by Asphyxiation	125
		Exhibiting Specimens of Flowers in Single Blossoms	126
		A Tracing Cloth Repair That Does Not Affect Transparency	126
PICTURE PAGES		Differences in Curing Time of Parts Makes Poor Tire Repair	126
The Flag Equipment of an American Battleship	8-9	Porcupine Removes Window Pane to Gain Admittance	126
An Airplane View of Salonika	10	Round Belt Guide on a Washing Machine Wheel	127
How New York Firemen Save Lives	11	A Vine Covered Teepee for the Garden	127
Testing the Senses	12-13	A Shaft-Polisher Made Like a Lemon Squeezer	127
Primitive Man's Art and Handicraft	14	Building an Artistic Bird-House for the Garden	128
Odd Specimens of Tattooing	15	A Printing Process for Imitating Hard Woods	129
Selecting Fit Men for Our Navy	16-17	An Improvised Stage for a Country Fairy-Play	131
The Latest Styles for Automobile Bodies	18	An Experiment in Optics Using Heated Graphite	132
Killing the Dry Frog in the Opera Singer's Throat	19	Small Hand Drill Made from a Cheap Watch	132
Gas Masks Used in Peacetime	20-21	A Snap-Fastener for the Cupboard Door	132
Importance of the Hoe, Spade and Pitchfork in War	22-23	Awnings for the Veranda and How They Are Made	133
Bayonet Practice for Our Recruits	170	Fastening an Oar-Lock to Keep It from Falling Out	134
Why the Hindenburg Line Seemed So Impregnable	171	A Boomerang Flyer	135
Sculpture of Fat and Sugar	172-173	How to Cut Roses So That the Plants Are Not Injured	136
The Chimney Sweeps of Paris	174	Sheet Metal Working Simply Explained	137
Novel Methods of Recruiting	175	A Pin Inverted in a Cork to Make an Oil Dropper	138
The Importance of Rope on a Battleship	176-177	An Automatic Watering Tank for Poultry Yards	138
Making the American Flag	178-179	A Trough for Thoroughly Washing Film Negatives	138
A Waterspout	180	Safety Guard Placed on an Emery-Wheel Dresser	139
Keeping the Animals Cool in the Zoo	181	A Nest-Box Trap for Catching the English Sparrow	139
Soldiers' Art Exhibit in Paris	182	Look Over Stored Tires Before Applying Them to Rims	139
President Wilson's Message Reaches the Germans	183	An Easily Made Garage from a Metal Tank	140
Prisoners and Wounded Alike Must Have Pleasure	184	A Cheap and Effective Method of Bracing a Roof	140
Queer Trees and Near Trees—All Are Useful	185	Small Closet in Door Frame Stile for Milk Bottle	140
In the Grottoes Under the Battlefields	330	Winning an Athlete's Laurels	141
Trench Farms of the Philippines	331	Sticky Fly Paper Used to Keep Insects Away from Poultry	145
The Eagle Builds Remote from Man	332	Saving Concrete in Setting Posts in Holes	145
Bungalows on a Roof	333	Waterproofing Blue Prints and Drawings for Rough Handling	145
And the Inventors Never Cracked a Smile	334	A Coating Which Gives the Appearance of Stone to Wood	146
France's Tank Contribution to the War	335	A Special Ladder for Use in Boiler Shops	146
They Earn Their Living with Their Senses	336-337	Three Plates and Three Color Screens Used in New Color Photography	146
Natural Figures in Wood	338	Making a Push Cart Oil Sprinkler for Dusty Drives	281
Profit in Raising Skunks	339	Never-Slip Calks Used on Lawn-Mower Wheels	281
New Eagles of the Western Front	340	Three Methods for Finding a Chosen Card	281
Armor Appears on the Airplane	341	End Mills Made of Broken and Worn Twisted Drills	282
Making an Army Hat	342-343	Fastening Nails So They May Be Quickly Withdrawn	282
Wood Carving by Machinery	344	Waterproofing for Concrete Walls and Floors	282
New Fashions in Gas Masks	345	An Open Shelter for the Yard or Flat Roof	290
Army Refrigerating Devices	486	A Self-Acting Fountain for the Home Conservatory	291
Trained Horses for the New York Mounted Police	487	Preserving Unpainted Surfaces Caused by Wear	293
Making Anti-Submarine Nets	488-489	A Substitute for a Shoe Horn in an Emergency	293
What It Means to Feed and Clothe the Armies of the Allies	490-491	A Tool for Accurately Lining Shop Shafting	294
The Sahara Viewed from an Airplane	492	A Turned Down or Pistol Grip Handle for a Rake	294
Specimens of Indian Art	493	A Cement Wash for Applying to a Damp Wall	296
Food—Food Everywhere and Not a Bit to Eat	494	A Porch Swing Made from Your Favorite Rocker	296
French Forces Using Liquid Fire	495	Sheet Metal Working Simply Explained	301
Dolling Up Your Foad	496-497	Folding Camp Fireplace Made of Angle Iron	302
Big Guns Used by the Coast Artillery	498-499	Garden Seat with Checkerboard in Its Top	302
Various Stages in the Development of a Wasp	500-502	Making an Electric Searchlight for a Motor-Boat	307
Posing on Flying Rings	648-9	Running Bell-Wires Through Walls	442
Queer Ways of Making a Living	650-1	A Binder for Water Colors	446
The Way of the Slacker Is Hard	652-3	Window Tappers Which Tap Intermittently	454
Baths Without Bath-tubs and Milk Without Dairies	654	Bath Water Supply for an Army Camp	456
Cliff Dwellers Near Santa Fe	655	The Right Meaning of the Term Reaming	456
Russia's Modern Joans of Arc	656	Sending Small Coin by Mail	456
A Sharp Shooter Wearing a New Water Jacket	657		
Odd Uses of the Talking Machine	658-9		
Exploits of Tanks and Airplanes	660-1		
Who's Who and What's What in the Army	662-3		
Making Serums for Uncle Sam's Army	808-09		
X-Ray Photographs	810-11		

	Page		Page
Painting the Automobile.....	457	Wigwam Made of a Tripod.....	639
A Bubbling Fountain with Icing Reservoir.....	461	A Siphon Made of Gas Pipe and Fittings.....	640
A Hat Hook Made of a Lead Pencil.....	461	Making a Miter Box for Cutting Trestle Legs.....	640
Nails Which May Be Quickly Withdrawn.....	461	Replacing Tongue in a Fancy Brass Hook.....	640
A Wire Stretcher for Repairing a Fence.....	461	A Window Ventilator Which Eliminates Drafts.....	761
Keeping Rope Strands from Unraveling.....	462	Flaps Used on Inner Tubes to Prevent Pinches.....	761
Saving Chemicals in Developing Motion-Picture Films.....	462	Keeping Insects Away from Lunch Boxes.....	762
A Shoe Lace Tie That Will Stay Tied.....	462	The Construction of an Automatic Centering Tool.....	762
A Driver to Turn Studs in Aluminum Castings.....	463	Caution in Turning Corners to Prevent Tire Injury.....	762
A Lasting Paint for Heated Surfaces.....	463	Making a Cigar Stand on the Top or Side of a Hat.....	762
Keeping Vise Jaws Open with a Spring.....	464	Smoke Your Own Fish.....	763
Making Fly Traps for Packing Houses.....	464	Simple Ejector for Removing Water from an Ash Pit.....	765
Short Cuts in Sign Painting.....	465	Automobile Footboard Used as a Roller Board.....	765
Preparing Demar Varnish.....	466	A New Way to Make a Hydraulic Test for Steam Boilers.....	765
Rubber Plugs in Handsaw Handle.....	466	Some Common Abrasives.....	766
Using Ball of Soap to Recover Screw.....	466	Half-Soling Rubber Overshoes to Give Longer Wear.....	768
Sheet Metal Working Simply Explained.....	467	Simple Designs for Sheet Metal Working.....	769
Clothes-Hangers Used for Handles in Barrel Covers.....	468	Table Leg Sliders Made of Shotgun Shell Wads.....	770
Pocket-Knife Cigar Cutter.....	468	Blue Print Drying Rack to Hang Over Sink.....	770
Typewriter Soldiers.....	468	Simple Die Casting for the Home Shop.....	771
Knock-Down Canvas Boat.....	469	Expansion Shield for Screws Made of Sheet Lead.....	771
Passing Cigarette Smoke Under Handkerchief.....	470	Painting on Cemented or Concrete Surfaces.....	771
An Outboard Motor.....	471	Two-Speed and Reverse Countershaft for a Small Lathe.....	773
Making and Using a Casting Rod.....	472	The Damage Caused by Running Tires Deflated.....	773
Burning Glass Made of Watch Crystals.....	474	A Jack to Keep Automobile Weight from Tires.....	774
Burning a Lump of Sugar.....	474	Camera Focusing Screen for Fine Detail Work.....	774
Burning Out Designs in a Piece of Paper.....	479	Lathe Centers Used as a Clamp for Gluing a Box.....	774
Knockdown Walls to Make a Portable Summer House.....	480	Applying a Change-Speed Device to an Automobile Clutch.....	775
Using a Bicycle Pump for a Water Rheostat.....	601	Softening Carbon with Steam in the Automobile Engine.....	776
A Flexible Spline Used for a Draughtsman Curve.....	602	Testing Gasoline Engine Compression.....	776
New Type of Acid Proof Brush for Soldering Flux.....	606	Preventing Hinge Rods from Loosening on an Automobile Hood.....	777
The Underwriter's Knot for Flexible Cords.....	610	The Proper Camber for Front Wheels.....	777
Testing for Trouble That Causes Poor Automobile Lights.....	610	Making a Re-Winder for a Motion Picture Film.....	778
Making a Practical Vacuum Cleaner.....	611	A Hard Finish for a Lunch Counter Top.....	778
Blackboard an Adjunct to the Amateur's Shop.....	614	A Storage House for Potatoes.....	779
An Interesting Thermo-Magnetic Motor.....	614	A Paste Lubricant for Starting Screws and Nails.....	781
An Undercoating for Copper to Hold Paint.....	614	To Keep the Ends of Rafters from Spreading.....	782
Stropping a Razor on the Fleshy Part of the Hand.....	615	Making a Substantial Cardboard Pulley for Belts.....	782
Warming Army Tents with Improved Stoves.....	615	An Insulator and Fire Protector for a Stovepipe.....	782
Making a Campfire Tent with an Awning.....	616	A Solution for Electro-Plating with Aluminum.....	782
Preserving Flowers in Natural Colors with Wax.....	616	A Lead Pencil Sharpener with Dust Collector Box.....	783
How to Reline Your Automobile Brakes.....	617	A Stain for Giving Wood a Brilliant Rose Color.....	783
Cord Cutter Made from a Safety Razor Blade.....	618	Repairing a Fast-Pin Hinge Riveting.....	783
Temporary Repair on a Broken Lubricator Filling Glass.....	618	Drawing Perspective Views.....	783
Sheet Metal Working Simply Explained.....	619	Removing the Point of a Broken Center Drill.....	784
Ingredients That Make the Best Kind of Glue.....	620	Safe Method of Joining Airplane Sections or Wings.....	784
An Inexpensive Cesspool Made of a Barrel and Cask.....	620	A Closet Rod Which Will Accommodate Several Suit Hangers.....	784
Pedal-Operated Brake for a Belt Driven Motorcycle.....	621	Repairing a Broken Link in a Motorcycle Chain.....	784
Making a Soldering Iron Heater of Pipe and Fittings.....	621	Etching Photographs on the Surface of Glass.....	784
A Durable Paint for Surfaces Exposed to the Weather.....	621	A Modest Home at a Modest Price.....	785
Clip for Carrying Pipe in the Vest Pocket.....	622	Grouping Sheet Music Into Books.....	786
A Silvering Process for Glass Instruments and Mirrors.....	622	Testing for Trouble That Causes Poor Automobile Lights.....	796
Holding the T-Square on the Drawing-Board.....	622	Chemical Flasks Made from Electric Light Bulbs.....	921
Range Finder to Locate Landmarks and Signal Fires.....	623	A Concrete Mixer Made Out of an Old Mower.....	921
A Convenient Pivoted Card File for the Desk.....	624	Comic Photograph Made with Film Negatives.....	922
Three Methods for Finding a Chosen Card.....	625	Protection Curtain for a Mechanic's Work Bench.....	922
Piping Automobile Engine Exhaust Gas from Garage.....	626	Testing the Strength of Norway Iron.....	922
Edging Flower Beds with Bottles.....	626	Coating for Window Glass to Keep Off the Frost.....	923
Repairing a Broken Test Tube or Beaker.....	626	Instruction Marker for Photographic Plate.....	923
Making and Using a Casting Rod.....	627	Drill Holder for the Tailstock of a Lathe.....	923
Making a Cabin Tent Out of Ordinary Sheeting.....	629	Some Useful Hints for the Owner of a Phonograph.....	923
Holding Papers on a Movable Sloping Desk-Top.....	630	The Balanced Aquarium for the Proper Care of Fish.....	924
Keeping Oil from V-Belt of a Motorcycle.....	630	V-Block with Clamps for Small Drill Press.....	924
Building a Model Airplane Kite.....	631	Making a Sprinkler Hose Nozzle for the Boiler Room.....	925
Repairing a Broken Link in a Motorcycle Roller Chain.....	632	Making a Gage for an Oil Storage Tank.....	926
Grouping Sheet Music Into Books and Binding Them.....	632	Finishing a Book Trough in Natural Wood.....	926
A Teeter Swing for Public or Private Playground.....	633	An Individual Strap-Hanger for a Crowded Car.....	927
An Experiment with Sulphate of Soda.....	633	A Garage Air-Compressor Made from Automobile Engine.....	927
Cutting Brass Tubing Rapidly on a Buzz Saw.....	634	An Emergency Repair on a Leaking Water Pipe.....	927
A Wood Lift Built in Like a Dumb-Waiter.....	634	Door Catch Made of a Spring Shoe Tree.....	928
Improving Piano Tone by Making Air Humid.....	635	Reshaping Artists' Paint Tubes for Refilling.....	928
Simple Camera Attachment for Photographic Enlarging.....	635	Tearing a Pack of Cards in Half with Ease.....	928
Bracing for an Iron Pipe Fence Post.....	636	Construction of a Bob-Sled.....	929
Attaching Linoleum to a Cement Floor.....	636	Boring Mill Tool-Holder for Saving Expensive Steel.....	932
Casing for Carrying Tube Cements Without Damage.....	636	An Improvement on an old Card Trick.....	932
A Silver Plating Bath and How to Use It.....	636	Newspaper as a Substitute for Chalk Talk Board.....	932
A Simple Toy Motor Run with Dry Sand.....	638	Treadle for an Automobile Foot Accelerator.....	932
		Coal Is Dear. Learn How to Burn It.....	933

	Page
Hand Bob-Sleds Made of Barrel Staves.....	934
Making Butt Mortises with an Ordinary Rabbit Plane.....	934
Making a Talking Machine Stylus from a Toothpick.....	934
Making a Whistling Weather Vane for the Barn..	934
Winding a Coil Spring Evenly.....	934
Cutting Rafters for Gothic Roof Barn Construction	935
Fruit Jar Rubber Ring to Repair Bicycle Tire Puncture.....	935
The Proper Care of a Soldier's Wardrobe.....	935
Improving the Qualities of Cheap Lead Pencils...	936
A Barrel Stave Iceboat.....	937
A Homemade Sight Feed Oil Indicator for an Automobile.....	938
A Simple Method of Fastening Umbrella Handles	938
Simple Designs for Sheet Metal Working.....	939
Garden Hose Used as a Form for Cement Pipe...	941
Eliminating Noise from Shift Levers.....	941
Repairing a Scratch on an Automobile.....	941
How to Straighten a Warped Drawing Board.....	942
Making a High Gloss Finish on a Matt Surface Picture.....	942
Protecting Drawings on Drawing Board.....	942
Setting a Lathe Quickly for Taper Turning.....	942
Teeth of a Hack-Saw Blade Used for Spacing on Section Liner.....	946
How to Make a Secure Joint in Copper Tubing...	948
Things to Know About Lubricants for Machinery...	948
Constructing a Thermostat to Regulate Furnace	953
A Coating to Make a Battery-Box Acid Proof....	954
Heating Sheet Hard Rubber to Cut Round Disks..	959
Lighting the Dash-Board of an Auto from the Side Light.....	960
Sheet Asbestos to Make a Packing for Steam Chests	960

RADIO COMMUNICATION

"Silent Music"—Recreation for the Bedridden...	28
Curious Circuit for Audion on a Wireless Set....	151
Conversion of Kilometers to Nautical Miles.....	151
An Experimental Wireless Aerial Made of Zither Strings.....	151
To Prevent the Ears Perspiring When Wearing Telephones.....	152
Mounting Tinfoil on Glass Condenser Plates.....	152
How Germany's Secret Service Wireless Stations Are Being Weeded Out.....	153
A Crystal Detector Holder for Wireless Apparatus	155
Effect of the Moon and Season on Wireless in the Tropics.....	155
A Trussed Aerial Spreader for Long Wires.....	156
Position of Wireless Waves Passing Over Land...	156
Cloudy Days Best for Wireless Wave Signals.....	156
Improving the Tone of a Test Buzzer Used on Wireless Detector.....	156
Simple Construction of a Rotary Gap Disk.....	156
Simple Solutions of Wireless Problems.....	157
Magnetic Brake for a Wireless Rotary Gap.....	160
Adjusting the Detector of a Receiving Set.....	160
How the Government Seals Unofficial Stations...	208
A Simple Arc Lamp Using a Thermostat Control...	308
Slow Acting or Sluggish Relays.....	308
An Ingenious Wiring System for Two Inductive Transformers.....	310
A Variable Condenser for a Receiving Set.....	310
An Amplifying Electrostatic Radio Receiver.....	311
Treating Cardboard Tubes for Tuners.....	311
Strong Wireless Signals in Winter Time.....	312
A Testing Set That Does Not Use a Battery.....	312
How the Radio Inspectors Trapped a Disorderly Amateur.....	313
How to Make a Kick-Back Preventer for Wireless Apparatus.....	314
A Use for Discarded Cylindrical Food Boxes.....	314
Variable Primary Coil Using a Switch Instead of a Slider.....	314
America's New Semi-Wireless System for Telephoning from Captive Balloons.....	315
A Polarity-Changer for Reversing Lighting Battery Current.....	315
Dormitory Beds Furnish the Essential for Antennas	316
An Insulation for Secondary Terminals.....	316
Wireless Work in Wartime.....	317
A Simple Fixed Adjustment Detector.....	320
An Audion Battery Made of Medicine Vials.....	441
An Easily Adjusted Detector-Stand.....	441

	Page
Wireless Signals Transmitted by Telephone.....	442
Fighting the Big Guns with Wireless.....	443
Supplanting the School Bell with Wireless.....	445
How to Make a Variable Condenser for Five Cents	446
Wireless Work in Wartime.....	447
An Inexpensive and Quickly Made Detector.....	450
Relieving the Strains on Aerials.....	450
Sustained Wave Telegraphy Between the United States and Germany.....	451
Double Set of Receivers for Visitors.....	453
A High Voltage Lead-In Insulator Tube.....	453
Loading Coil in Series with the Secondary.....	453
A Ticker Interrupter Made from a Buzzer.....	454
A Simple and Attractive Loading Coil.....	601
Transmitting Wireless Messages Underground Without Aerial.....	602
Sending Wireless Messages Under Fire.....	603
Construction of a Rotating Arm for a Rotary Gap	606
Wireless Work in Wartime.....	607
A Grid Placed in the Wings of an Airplane.....	614
Increasing the Efficiency of the One-Inch Spark Coil	787
Wireless Work in Wartime.....	793
A Strong Guy-Wire Anchor for Aerial Poles.....	797
A Magnetic Telegraph Key for the Wireless Operator	798
Ballast Weights for Antenna to Prevent Aerial from Overturning.....	800
The Marconi Company Sues the Government.....	913
Detecting Defective Insulators.....	914
The Human Morse Code.....	950
An Inexpensive Multi-Point Loading Coil.....	953
Water Glass Gage for a Lead-In Insulator.....	954
Wireless Work in Wartime.....	955
An Easily Constructed High Tension Insulator...	959

RAILWAYS

This Railroad Crossing Cleans Itself and Eliminates Jolts.....	5
Attacking Mail-Car Robbers with Deadly Fumes...	27
Owens Valley, California, Has a Freight-Car Hotel	87
Can the Railway Train Be Made Noiseless?.....	92
Flushing Streets with Water Pipes on Trolley Cars	107
Street Railway Smoking Car.....	214
The Largest Traveling Kitchen.....	224
The Biggest Locomotive.....	251
A Refrigerator Car That Really Works.....	394
The Most Powerful Locomotive in the World.....	396
Street Cars Pull Each Other Up.....	411
A Sanitary Dining Car.....	418
Solving the Car Shortage Problem.....	422
Lest the Engineer Forget.....	436
Canning the Baby in a Super Sleeper.....	513
How Print Butter Is Shipped to the Retailer.....	519
Flagman's Shelter House Built Like a Mosque...	551
Safeguarding Our Bridge and Railroad Crossings...	565
Putting Driving Wheels Under the Locomotive Tender.....	570
A Lift Deck for Automobile Freight Cars.....	592
A Lumberman's Camp Which Can Be Moved from Place to Place on Rails.....	598
Special Cars for Persons Carrying Parcels.....	708
Loading Cattle on Trains in a New Way.....	723
Diminutive Electric Locomotives.....	738
How a Railroad Steam-Shovel Traveled Through New York City.....	747
An Iron "Flag" for Protecting the Railroad Car Inspector Against Injury.....	755
Keeping the Trains from Being Blown Off the Tracks.....	824
A One-Man Rail Grinder.....	825
A Labor-Saving Dump Car.....	884

SHIPS AND SHIP BUILDING

Why You Can't Compare Ships in Tons.....	29
A New Life-Boat.....	60
Salvaging in Armor.....	93
Motor Attachment Which Prevents the Rowboat Propeller from Being Injured.....	96
The Latest Salvaging Device—An Electromagnet...	113
An Electric Eye Watches the Smoke Screen During a Battle.....	115
Practical Motor-Boating.....	116
A Two-Million-Dollar Hospital Ship.....	206
A Ship with Six Hulls.....	209
The U.S.S. "Recruit".....	212
New Type of Life Boat.....	223

	Page		Page
The Unbeaten "Constitution"	242	Is Curled Hair Becoming Stylish in Japan?	26
The Largest Model of a Ship Under a Roof	252	These Magnifying Glasses Are Worn Like Spectacles	29
Disguised Submarines	265	Making a Second "Self" for Dressmaking Purposes	48
Giant Mushroom Anchors for Holding Buoys	265	Ingenious Toys Made by Soldiers	57
Practical Motor-Boating	275	A Hair-Drying Frame	61
Toy Compressed Air Boats	297	A German Medal Commemorating the Sinking of the Lusitania	66
A Paddle-Wheel Canoe	393	A Safety Chain for Your Pocketbook	69
A New Life-Saving Platform	408	Platinum Is Too Useful to Be Used as Jewelry	69
Practical Motor-Boating	426	A Twelve-Year-Old Inventor's Combination Umbrella and Rain-Cape	91
Making the River Drive a Ferry Boat	432	The Straw Hat for Storms	95
The Graveyard of Ships That Passed in the Night	520	Giving Convicts a Real Chance	98
The Life-Preserver Is More Important Than Meals Aboard Ship	521	This Really Happens More Often Than You'd Think	101
Boats That Travel on Land and Water	525	Five Hundred Indian Languages	165
She Launches Seaplanes and She's Unsinkable	529	Mechanical Hair-Parter	165
A Houseboat of Marble	538	A Tight Cord Fastener	166
Even a Battleship Would Sink If It Were Not Cleaned	554	Foiling the Pickpocket and Protecting Your Watch	167
Shall We Build Concrete Ships?	556	Use Your Natural Arm If a Craftsman	187
She Was Torpedoed but Her Cargo Plugged the Hole	569	A Helmet for Smoke-Filled Rooms	199
Signaling Storms to Mariners	582	A Chinese Composing Room	202
A Leopard Ship of the Sea	645	Wire Hood for Protection Against Mosquitoes	202
What's Wrong with the Submarine	682	Teaching the Blind How to Write on Straight Lines	208
Cast-Steel Ships	690	Deadening Noise by Pasting Tar Paper on Floors	228
A Bungalow Takes a Sail Across San Francisco Bay	751	A Pencil with Nine Good Points	228
A Thriving Fishing Village That Floats	760	A Novel Change Receptacle	233
Raising Sunken Ships with Collapsible Air Bags	829	An Open-Air Barber Shop	235
Boat Carries Engine in Its Fin	872	Wild Goats Live on the Roof	236
SPORTS AND PASTIMES		Cold Water Pipes to Cool a Room	246
Dickory, Dickory, Dock, the Mouse Ran Up the—Clock	29	Another Improvement on the Policeman's "Billy"	247
A Refrigerator Basket for the Picnic Outing	31	A Fortune from Old Razor Blades	248
A Many-Sided Bathing Cap	69	Fifty-five Packages of Chewing Gum for Everybody	249
This Board Will Help You Learn to Swim	85	Wave Your Cane Flag	249
A Vast Fortune Is Chewed Up Every Year	103	An Accommodating Church—It Goes Wherever It Is Wanted	260
Land Skates with Brakes and Pneumatic Tires	109	If Your Parrot Thirsts, Give Him a Drink	260
Rafting the Rapids on the Rio Grande in Jamaica	110	A Buttonhole Watch	261
A Rein-Spur	190	An Automatic Revolver No Bigger Than Your Watch	262
Scraping a Baseball Bat	214	The Rate at Which Food Prices Have Advanced	265
An Automatic Bait-Casting Fishing Rod	226	The Dumb Turk. He Smokes Cigarettes	268
The Speed of a Baseball	227	The Outdoor Trap for the Anti-Fly Campaign	271
This Spoon Hook Won't Tangle	240	Holding the Whetstone Where It Is Needed	273
Conquering Your Cramps Under Water	250	Going to College to Learn Wood Graining	274
With an Axe and Two Springboards He Chops His Way Up a 120-Foot Tree	253	The "Swat the Fly" Campaign Is On	274
A Hook and Bait Carrier	326	Collecting Old Newspapers	280
Shooting Snapping Turtles	368	A Paper-Disk Flipper	329
A New Game of Pocket Billiards	388	A Kitchen on Wheels	348
Anchoring the Fisherman to the Fishing Pier	392	Washing for Gold in the Guianas	349
An Amusement Park in a Vacant Lot	412	Risking Lives in Government Surveys	352
Hitching a Fishing Line to a Kite	412	Cardboard Covers for School Desks	352
Detecting the Undertow Before It Catches the Swimmer	431	Eat More Fruit and Drink Less Water	353
Pulling and Pushing to Make the Swing Go	524	Using a Dozen Different Inks Without Mistake	354
Lowering the Life-Boats by Means of Gear-Operated Davits	533	Making Mud-Highways	362
Put These Webbed Gloves on and Swim Like a Duck	532	Food for the Taking	374
Maltreating a Water Bottle to Test Its Strength	536	The Broomstick Periscope	378
Making a Mule Push and Pull at the Same Time	586	Why Are Skirts So Short?	378
A Water-Cooling and Purifying Pipe for the Fastidious Smoker	590	The Biggest Bible	384
The Suitcase Talking-Machine	644	An Encounter Between Fire and Ice	389
The American Boy's Wagon	670	A Heel Which Wears Straight	394
Looping the Loop in a Rocking Chair	673	The Candle Industry Still Flourishes	397
Fishing for Herring with a Windmill	724	Float Made of Raisins	397
Making the Swimming Pool Attractive	725	Self-Operated Cradle	400
Playing Patriotic Tunes on the Air-Brake	737	A Fire Hose with Ten Nozzles	408
Making Comfortable Quarters for the Pet Snake	829	A Waving Flag for Your Buttonhole	409
Eskimos of Alaska Held a Reindeer Fair	837	This Device Won't Let Your Hat Blow Off	411
The Pull-Motor	842	Measuring the Wear on Roads	413
Watch-Case Revolver	843	Goats' Milk Saves Babies' Lives	416
Mechanical Toys	862-63	A "Safety First" Device for the Bill Folder	417
A Christmas Tree Stand	874	Experts Punch the Time Clock for Slow Stevedores	418
A Jungle in a School-Yard	880	A Shrewd Marketwoman Made of Figs	418
The Home-Made Ice Sleds of the Chinese Boys	881	What's Become of the Breweries?	423
A Toy Gun for the Pacifists	883	A New Clock Scheme for the Daylight Saving Plan	432
Novel Color Mixer for Teaching Color Effects	888	The Umbrella Hat	484
A Billiard Table That Folds Up When Not in Use	909	From Soup to Nuts	514
A Mouse Spins Cotton Thread	912	Work the Typewriter Standing or Sitting	516
Winning an Athlete's Laurels	943	Each Salesman Has His Own Telephone in This Grocery	516
MISCELLANY		A Pencil-Pen Without Wood, Rubber or Graphite	520
The Largest Straw Hat in the World Is Yours If It Fits	24	Two Ties in One	522
		It Holds and Presses Your Tie at the Same Time	522
		In Japan the Barber Cleans His Patron's Ears	524
		It Takes About 150 Pounds Pressure to Break an Egg	525
		What Makes a Man a Criminal	526

	Page		Page
Let Cheese Be Your Meat Substitute.....	531	Flushing Sidewalks Without Disturbing Cars.....	710
How You Light Your Cigar in Italy.....	537	A Self-Filling Pipe.....	717
The More You Pay for Your Clothes, the More They Suffer on the Clothes Line.....	569	Iron Signs Give Good Advice to Tourists.....	724
And These Are Not Leather?.....	571	Showing House Numbers on Street Signs at Corners.....	725
Where Violin and Tennis Strings Come From.....	581	Leather from the Sea.....	726
A Convenient Device for Keeping Your Razor Blades Clean.....	584	Why Anthracite Coal Lands Differ in Price.....	731
A New Zinc Product Which Is a Substitute for Tin- foil.....	585	This Kerosene Lamp Has a Horizontal Wick.....	751
To Keep Out Burglars Leave Your Key in the Door.....	591	"Woodman, Spare That Tree,".....	755
The Over-All Has Entered the Fashion Sheets.....	591	A Device for Keeping Bananas Clean.....	804
Is This the Secret of Curious Finger Prints?.....	594	The War Price on Monkeys.....	804
The Ivory Pie-Crust Trimmers of New England.....	595	A Badge Which Tells the Story of Your Life.....	807
Pack Your Water-Proof in Your Bag.....	595	The Largest Ball of Twine.....	824
The Mechanical Cigarette-Filler.....	646	The Most Expensive Coat in All the World.....	834
His Drum Is Made of Human Skin and His Trum- pet of a Thighbone.....	647	How the "Ship of the Desert" Is Anchored When the Caravan Rests.....	831
The Favorite Pocket-Knife of the Jackies.....	647	Is This the Secret of the Earth's Magnetism.....	843
A Machine That Moistens the Indoor Air.....	664	Rice for Face Powder.....	854
Filtering the Snores Out of Sleep.....	665	A New Method of Learning to Play the Violin.....	860
A Space-Saving Display Fixture.....	668	Protecting Your Shoes from Mud.....	861
How to Store Flour to Prevent It from Molding.....	672	A Palace of Corn.....	874
Efficiency as Applied to an Ink-Bottle Holder.....	678	Wealth in Scrap Piles.....	883
Fuel from Waste Paper.....	679	Wearing Spikes on Your Feet to Prevent Slipping on Ice.....	889
A Fountain Ink-Eradicator.....	679	The "Complex Dinner" Container for Long Trips.....	900
You Can't Spill Ink When Pouring from This Bottle.....	681	! Out a Cigarette and a Lighted Match with One Motion.....	901
Lucky and Unlucky Telephone Numbers.....	687	We Boycott the Chinese but Not His Hair.....	904
Holding Crowds at Store Windows.....	693	To Open a Stubborn Knife-Blade, Throw It from You.....	907
Dolls That Proclaim the Fashions.....	693	Arrowhead Lamp Posts Mark the Arrowhead Trail.....	908
A Novel Tobacco Pouch.....	700	Filtering Out the Harsh Tones from a Phonograph.....	911
Dogs Instead of Horses.....	702	We Use Eighteen Times as Much Light as Did Our Great-Grandfathers.....	914
A Pad and Pencil Attached.....	703	Matches? Take One at a Time, Please.....	914
A Xylometer.....	704	Sharpening Your Pencil Without Soiling Your Fingers.....	918
A Time-Saving Measuring Board.....	707		
Transforming the Bow Leg.....	710		

You Can Take Hills on High Without A Knock

if you will keep your motor free from carbon. That knock—the difficulty you have climbing hills—poor pick-up—lack of power—noisy motor—pre-ignition—in fact 80% of engine trouble is caused by carbon. Clean it out with

JOHNSON'S CARBON REMOVER

and your engine will run like it did the first 500 miles—quietly and full of “pep.” And your gasoline consumption will drop 12% to 25%.

You Can Do It Yourself

For 25c—five minutes' time—and no labor, you can remove all carbon. Simply pour an oz. of Johnson's Carbon Remover into each cylinder. It softens the carbon and releases it from the metal—then as the engine is operated the deposit powders and goes out with the exhaust.

Use It Every 1000 Miles

If you will use Johnson's Guaranteed Carbon Remover at regular intervals, giving carbon no chance to accumulate, you will automatically eliminate most valve trouble and your engine will always be clean and at its highest efficiency. Write for folder on Keeping Your Car Young—it's free.

If your dealer cannot supply you with Johnson's Carbon Remover use attached coupon

Knock! Knock!!

Use **JOHNSON'S CARBON REMOVER** and take these hills on high!

S. C. JOHNSON & SON, Dept. PSM7Racine, Wis.
 I enclose \$1.00 for which please send me by prepaid express enough Johnson's Guaranteed Carbon Remover to keep my motor clean for 6000 miles.

NAME.....
 ADDRESS.....
 CITY..... STATE.....
 My dealer's name is.....

**Made and Guaranteed by
 S.C. JOHNSON & SON
 Racine, Wisconsin, U.S.A.**

"Signed Lumber is Safe Lumber."

It's a pretty good idea (now that the lumber mills in the Southern Cypress Mfrs. Assn. are IDENTIFYING EVERY CYPRESS BOARD THEY SAW) to MENTION TO YOUR LUMBER DEALER, CONTRACTOR OR CARPENTER — and to ASK YOUR ARCHITECT to SPECIFY — that YOUR CYPRESS MUST BE

**"TIDEWATER" CYPRESS
IDENTIFIED BY
THIS TRADE-MARK
Stamped in the End of Every Piece
or APPLIED TO EVERY BUNDLE**



When a manufacturer places his imprint indelibly upon his product it evidences to the consumer two factors of value which, together, are the sum total of all any buyer wants; these factors are integrity of purpose and complete responsibility on the part of the maker of the desired commodity.

The above legally registered "Tidewater Cypress" trade-mark is now *YOUR INSURANCE POLICY of LUMBER QUALITY.*

It appears stamped mechanically into the end of EVERY board and timber of

CYPRESS "THE WOOD ETERNAL."

Thoroughly dependable Cypress Flooring, Siding, Moulding and Shingles, etc., which come in bundles, bear the same mark on EVERY BUNDLE.

The legal right to apply this epoch-making symbol of STRICT RESPONSIBILITY IN LUMBER MAKING AND SELLING is restricted to those Cypress mills which, by their membership in the Southern Cypress Manufacturers' Association, attest their devotion to its Principles of SERVICE to the CONSUMER. Only mills cutting "Tidewater" Cypress are eligible for membership. (Cypress which grows too far inland is not equally noted for the "Eternal," or decay-resisting, quality.) Only mills which subscribe to the Association's standard of scrupulous care in Methods of MANUFACTURE, INTEGRITY OF GRADING and ACCURACY OF COUNT can belong to the Association. These responsible mills the Association now licenses to CERTIFY THEIR CYPRESS by applying the registered trade-mark with their identifying number inserted.



TRADE MARK REG. U.S. PAT. OFFICE

BY THIS MARK YOU KNOW THAT IT'S CYPRESS. "THE WOOD ETERNAL," AND WORTHY OF YOUR FAITH. IT IS WELL TO INSIST ON SEEING THIS TRADE-MARK ON EVERY BOARD OFFERED AS "CYPRESS."



TRADE MARK REG. U.S. PAT. OFFICE

Let our ALL-ROUND HELPS DEPARTMENT help YOU MORE. Our entire resources are at your service with Reliable Counsel.

Southern Cypress Manufacturers' Association

1249 HIBERNIA BANK BLDG., NEW ORLEANS, LA., or 1249 HEARD NATIONAL BANK BLDG., JACKSONVILLE, FLA.

INSIST ON TRADE-MARKED CYPRESS AT YOUR LOCAL LUMBER DEALER'S. IF HE HASN'T IT, LET US KNOW.

When writing to Advertisers please mention Popular Science Monthly

Popular Science Monthly

239 Fourth Ave., New York

Volume 91

Waldemar Kaempffert, Editor

No. 1

Contents for July, 1917

AERONAUTICS	Page		Page
Ancestors of the Bird and Airplane	3	Typewriting in Code	59
The Strength of Human Wings	32	Mechanical Appliances	74-75
Fighting from Balloons	50	A Cushioning Drawbridge Gate	80
Fighting in the Air	76	A Safety Coat for Workmen	96
		The Last Word in Fountain Pen Efficiency—An Eraser Attachment	97
AGRICULTURAL SCIENCE		Removing Iron Rivets with a Pneumatic Hammer	97
Guinea Pigs Were Once Cultivated Like Chickens for Food	27	With the Warm Weather Come Improvements in Ice-Cream Making	100
Making the Cow's Tail Behave with a Trolley Restraint	27	Safety Nets of Rope for Skyscraper Workers	114
A New Corn-Husking Machine	60		
A Garden in Which Weeds Are Not Only Tolerated but Cultivated	61	MEDICINE, SURGERY AND HYGIENE	
To Make Your Lawn Attractive You Must Edge It Evenly	89	Be Thou Wary of the Bubbling Cup	86
An Adjustable Rake for the "Land Patriots"	90	The Hospital Toothbrush—It Has a Removable Pad	95
Silo Roof Opens Like Umbrella	106	The Private Hairbrush—The Bristles Can Be Locked Up	95
		The U. S. Armies Prepare to Fight Germs	106
ARCHITECTURE		That Wad of Dental Cotton—Was It Sterilized?	107
The Door to This Siberian Home Is Located on the Roof	101	An Ice Helmet to Relieve the Fever Patient	115
		Separating Russian Prisoners from Vermin	119
CHEMISTRY		MOTOR VEHICLES AND THEIR ACCESSORIES	
A Suitcase Laboratory for the Laundryman	7	A Hint to Motorists—Keep Your Radiator Clean	7
Whiskey from Jam and Potatoes	72	Differentials for Motor Vehicles	30
		Automobiles, Motor-Trucks and Accessories	34-35
ELECTRICITY		Measuring Motor-Truck Loads Automatically	36
Electrified Street Directions	33	The Youngest Manufacturer of Automobiles	48
An Effective Burglar Alarm	49	A Solution to Tire Troubles	58
Cooling a Room with Cold Water	62	Auto Engine Cooler on Steam Ejector Plan	62
An Electric Machine for Cutting Uniforms	71	Transforming an Auto Roadster into a One-Ton Truck	73
Newspapers in the Sky	104	A Ten-Ton Motor-Truck on Eight Wheels	80
A Telephone Attachment Which Performs the Ser- vices of a Watch Dog	105	A New Type of Transmission Employs Cork Inserts	100
Seal Your Letters by Electricity	114	The Problem of the Automobile Top	102
Applying Insulation to Splices Made in Electric Wires	147	A Community Garage Comprises Fifty Buildings on One Lot	111
A Simple and Easily Made Electric Battery Motor	147	Making the Acetylene Light as Brilliant as the Electric Lamp	120
Rebuilding Worn-Out Dry Battery Cells	148		
Method of Insulating Secondary "Pies" in Trans- formers	149	NATURAL SCIENCE	
Steadying Voltage of Dynamo Driven by Gasoline Engine	150	The Grave-Digger Beetle	25
Increasing the Voltage of a Dry Battery	150	How Scientists Capture Mosquitoes Alive for Ex- periment and Study	26
Keyless Lamp Socket for Switching Electric Cur- rents	151	Japanese Mosquitoes for Bird Food	68
The Effect of Electricity and Music on the Human Organism	152	Counting the Drops in a Fog	91
A Rain Alarm Made of a Broken Electric Globe	152	Mountains Float	108
		The Common Housefly Is the Most Unpopular of Insects	110
HOUSEKEEPING MADE EASY			
Save Your Bottles. A Shortage of Jars and Cans Is Threatened	37	PICTURE PAGES	
Not Even the Space Underneath This Desk Is Wasted	37	The Flag Equipment of an American Battleship	8-9
A Machine for Ironing Stockings	49	An Airplane View of Salonika	10
Household Appliances	52-53	How New York Firemen Save Lives	11
A Tea-Making Machine	66	Testing the Senses	12-13
Using Your Player Piano as a Vacuum Cleaner	72	Primitive Man's Art and Handicraft	14
Changing the Apartment Telephone into a Pay- When-You-Call System	86	Odd Specimens of Tattooing	15
Alarm Which Tells You When Your Bathtub Has Been Filled to Whatever Depth You Desire	87	Selecting Fit Men for Our Navy	16-17
Combining a Strainer with the Bung of a Barrel	90	The Latest Styles for Automobile Bodies	18
Making the Kitchen Range One Hundred Per Cent Efficient	111	Killing the Dry Frog in the Opera Singer's Throat	19
		Gas Masks Used in Peacetime	20-21
MECHANICAL ENGINEERING		Importance of the Hoe, Spade and Pitchfork in War	22-23
This Typewriter Prints in Every Type and Lan- guage	5	PHOTOGRAPHY AND MOTION-PICTURES	
Is Your Typist a Rapid Operator? This Machine Will Time Her	25	A Photographic Trick—Try It the Night of the Fourth	7
Big Steel Guns and How They Are Made	38	Making "Night Scenes" for the Motion Picture	24
		Wireless in the Talking Movies	33
		Making Motion Pictures at Home	54
		Taking Motion Pictures on the Road in a Queer Vehicle	61
		An Attachment Which Will Lock Your Camera to the Tripod in an Instant	120

CONTENTS FOR JULY—Continued

	Page		Page
PRACTICAL WORKERS' DEPARTMENT		Simple Solutions of Wireless Problems 157	
Cutting Clippings from Magazines with a Pin.....	121	Magnetic Brake for a Wireless Rotary Gap.....	160
Solid Board Fence with Artistic Upper Edge.....	121	Adjusting the Detector of a Receiving Set.....	160
Rustic Furniture Made of Poles and Logs.....	121	RAILWAYS	
Using a Drop of Water for Lens in Photo-micrography.....	123	This Railroad Crossing Cleans Itself and Eliminates Jolts.....	5
An Effective Fireproofing for Children's Clothing.....	125	Attacking Mail-Car Robbers with Deadly Fumes.....	27
Collecting Ants in a Sponge and Drowning Them.....	125	Owens Valley, California, Has a Freight-Car Hotel.....	87
Exterminating Moles and Gophers by Asphyxiation.....	125	Can the Railway Train Be Made Noiseless?.....	92
Exhibiting Specimens of Flowers in Single Blossoms.....	126	Flushing Streets with Water Pipes on Trolley Cars.....	107
A Tracing Cloth Repair That Does Not Affect Transparency.....	126	SHIPS AND SHIP BUILDING	
Differences in Curing Time of Parts Makes Poor Tire Repair.....	126	Why You Can't Compare Ships in Tons.....	29
Porcupine Removes Window Pane to Gain Admittance.....	126	A New Life-Boat.....	60
Round Belt Guide on a Washing Machine Wheel.....	127	Salvaging in Armor.....	93
A Vine Covered Teepee for the Garden.....	127	Motor Attachment Which Prevents the Rowboat Propeller from Being Injured.....	96
A Shaft-Polisher Made Like a Lemon Squeezer.....	127	The Latest Salvaging Device—An Electromagnet.....	113
Building an Artistic Bird-House for the Garden.....	128	An Electric Eye Watches the Smoke Screen During a Battle.....	115
A Printing Process for Imitating Hard Woods.....	129	Practical Motor-Boating.....	116
An Improvised Stage for a Country Fairy-Play.....	131	SPORTS AND PASTIMES	
An Experiment in Optics Using Heated Graphite.....	132	Dickory, Dickory, Dock, the Mouse Ran Up the—Clock.....	29
Small Hand Drill Made from a Cheap Watch.....	132	A Refrigerator Basket for the Picnic Outing.....	31
A Snap-Fastener for the Cupboard Door.....	132	A Many-Sided Bathing Cap.....	69
Awnings for the Veranda and How They Are Made.....	133	This Board Will Help You Learn to Swim.....	85
Fastening an Oar-Lock to Keep It from Falling Out.....	134	A Vast Fortune Is Chewed up Every Year.....	103
A Boomerang Flyer.....	135	Land Skates with Brakes and Pneumatic Tires.....	109
How to Cut Roses so that the Plants Are Not Injured.....	136	Rafting the Rapids on the Rio Grande in Jamaica.....	110
Sheet Metal Working Simply Explained.....	137	WAR PROBLEMS	
A Pin Inverted in a Cork to Make an Oil Dropper.....	138	How the Fighters Will Be Fed.....	6
An Automatic Watering Tank for Poultry Yards.....	138	The Poison Gases that Kill Men in Trench Warfare.....	24
A Trough for Thoroughly Washing Film Negatives.....	138	Big Steel Guns and How They Are Made.....	38
Safety Guard Placed on an Emery-Wheel Dresser.....	139	A New Caterpillar Truck.....	57
A Nest-Box Trap for Catching the English Sparrow.....	139	A Submarine's Trip on Land.....	58
Look Over Stored Tires Before Applying Them to Rims.....	139	Fire-Crackers to Ward Off Submarines.....	59
An Easily Made Garage from a Metal Tank.....	140	Our Unsinkable Cargo Fleet.....	63
A Cheap and Effective Method of Bracing a Roof.....	140	An Inverted Periscope Used Under Water.....	68
Small Closet in Door Frame Stile for Milk Bottle.....	140	The Shoe Hospital of the Allies.....	61
Winning an Athlete's Laurels.....	141	California's Conception of a "Tank".....	67
Sticky Fly Paper Used to Keep Insects Away from Poultry.....	145	Millions Spent for Shells.....	70
Saving Concrete in Setting Posts in Holes.....	145	A Signal Gun.....	71
Waterproofing Blue Prints and Drawings for Rough Handling.....	145	Conserving Wheat with Alfalfa.....	72
A Coating Which Gives the Appearance of Stone to Wood.....	146	An Electric Rammer.....	80
A Special Ladder for Use in Boiler Shops.....	146	Motor-Boats for Submarine Chasers.....	82
Three Plates and Three Color Screens Used in New Color Photography.....	146	Dummy Guns Train England's Gunners for the Sea.....	94
RADIO COMMUNICATION		To Save Money During War Time Why Not All Dress Alike.....	100
"Silent Music"—Recreation for the Bedridden.....	28	The U. S. Armies Prepare to Fight Germs.....	106
Curious Circuit for Audion on a Wireless Set.....	151	Protecting the British Fleets with Chain-Nets.....	112
Conversion of Kilometers to Nautical Miles.....	151	Separating Russian Prisoners from Vermin.....	119
An Experimental Wireless Aerial Made of Zither Strings.....	151	MISCELLANY	
To Prevent the Ears Perspiring When Wearing Telephones.....	152	The Largest Straw Hat in the World Is Yours If It Fits.....	24
Mounting Tinfoil on Glass Condenser Plates.....	152	Is Curled Hair Becoming Stylish in Japan?.....	26
How Germany's Secret Service Wireless Stations Are Being Weeded Out.....	153	These Magnifying Glasses Are Worn Like Spectacles.....	29
A Crystal Detector Holder for Wireless Apparatus.....	155	Making a Second "Self" for Dressmaking Purposes.....	48
Effect of the Moon and Season on Wireless in the Tropics.....	155	Ingenious Toys Made by Soldiers.....	57
A Trussed Aerial Spreader for Long Wires.....	156	A Hair-Drying Frame.....	61
Position of Wireless Waves Passing Over Land.....	156	A German Medal Commemorating the Sinking of the Lusitania.....	66
Cloudy Days Best for Wireless Wave Signals.....	156	A Safety Chain for Your Pocketbook.....	69
Improving the Tone of a Test Buzzer Used on Wireless Detector.....	156	Platinum Is Too Useful to Be Used as Jewelry.....	69
Simple Construction of a Rotary Gap Disk.....	156	A Twelve-Year-Old Inventor's Combination Umbrella and Rain-Cape.....	91
		The Straw Hat for Storms.....	95
		Giving Convicts a Real Chance.....	98
		This Really Happens More Often Than You'd Think.....	101

POPULAR SCIENCE MONTHLY is issued monthly. Yearly subscription in the United States \$1.50. Canada, \$2.00. Foreign \$2.50. SINGLE COPY, 15 cents.

POPULAR SCIENCE MONTHLY may be had at all news stands in the United States and Canada; also from the International News Company, Breams Bldg., Chancery Lane, London, E. C., and at Brentano's, 37 Avenue de l'Opéra, Paris.

Forms close the twenty-fifth of the second month preceding date of publication. Advertising rates on application. Entered as second class matter at the New York Post Office, under the Act of Congress of March 3, 1879.

The contents of this Magazine are copyrighted and must not be reprinted without permission. H. J. Fisher, President; R. C. Wilson, Vice-President; O. B. Capen, Secretary and Treasurer.

MODERN PUBLISHING COMPANY, 239 Fourth Avenue, New York City

Now You Save the \$51

That It Used to Cost to Sell You a Typewriter

When the Oliver Nine was priced at \$100 over half of it was spent in selling you the machine. That we found out in 22 years of selling. Some of it went to salaries and commissions for 15,000 salesmen and agents—some was necessary to pay the rent of 50 expensive offices. Tradeouts and a dozen other costly and wasteful practices demanded their share.

We could have sold the machine for \$49 then—as we do now—if the old customs had not been so ingrown. People expected salesmen to come and talk. And push through a sale.

But now economic conditions are different. Men know more of efficiency. Short cuts pay. Frills are foolish. Bed-rock prices alone appeal.

To Meet Today's Demands

The Oliver Typewriter Company rebelled from the old way and startled the country. It cut the price in two by doing away with monstrous sales expense.

Now we send an Oliver to you direct from our shipping room at the factory. And you get the \$51.

It wasn't necessary to cheapen the machine nor put out a lighter model. We offer the identical model—brand new—never used—for \$49.

This Oliver Nine is the finest, the costliest, the most successful model we ever built. If any typewriter is worth \$100 it is this handsome machine, the greatest Oliver triumph.

Over 600,000 have been sold. This is the same commercial machine used by the U. S. Steel Corporation, the National City Bank of N. Y., Montgomery Ward & Co., The National Biscuit Co., The Pennsylvania Railroad and a host of others.

It is not a special model made to sell at a lower price. But it is the same handsome, sturdy Oliver long admired by all.

Free Trial—No Money Down

To make the economy of the Oliver Nine available for everyone, we have arranged a simple plan. Here it is:

We ship an Oliver Nine to you for five days free trial. Use it in your office or at home. Try it out without anyone to influence you.

If you want to keep it, send us \$3.00 per month until the \$49 is paid.

That is the entire plan. Simple, isn't it? You are the sole judge. At no time during the trial are you under the slightest obligation to buy. We will even refund transportation charges if you decide not to keep it. This is not a cheap machine in any particular—except the price.

Follow This Suggestion

Fill out and mail the coupon now. It will bring a free-trial order blank, our latest catalog and an amazing book. All free.

You may then have an Oliver for trial, if you wish. And own it for 50 per cent less than other standard makes. Surely no economy could be greater. And you would make no sacrifice in quality nor performance.


Don't wait—know all the facts now—all the inside secrets exposed for the first time. Fill out the coupon below—tear it out and put it in the mail. It does not obligate you.



The Oliver Typewriter Company
110-A Oliver Typewriter Bldg., Chicago, Ill.

THE OLIVER TYPEWRITER COMPANY,
110-A Oliver Typewriter Building, Chicago, Ill.
Mail me your book "The High Cost of Typewriters—The Reason and the Remedy," de luxe catalogs and further information—all free and without obligation to me.
Name.....
Street Address.....
City.....
State.....
Mail Now

HAWKINS ELECTRICAL GUIDES

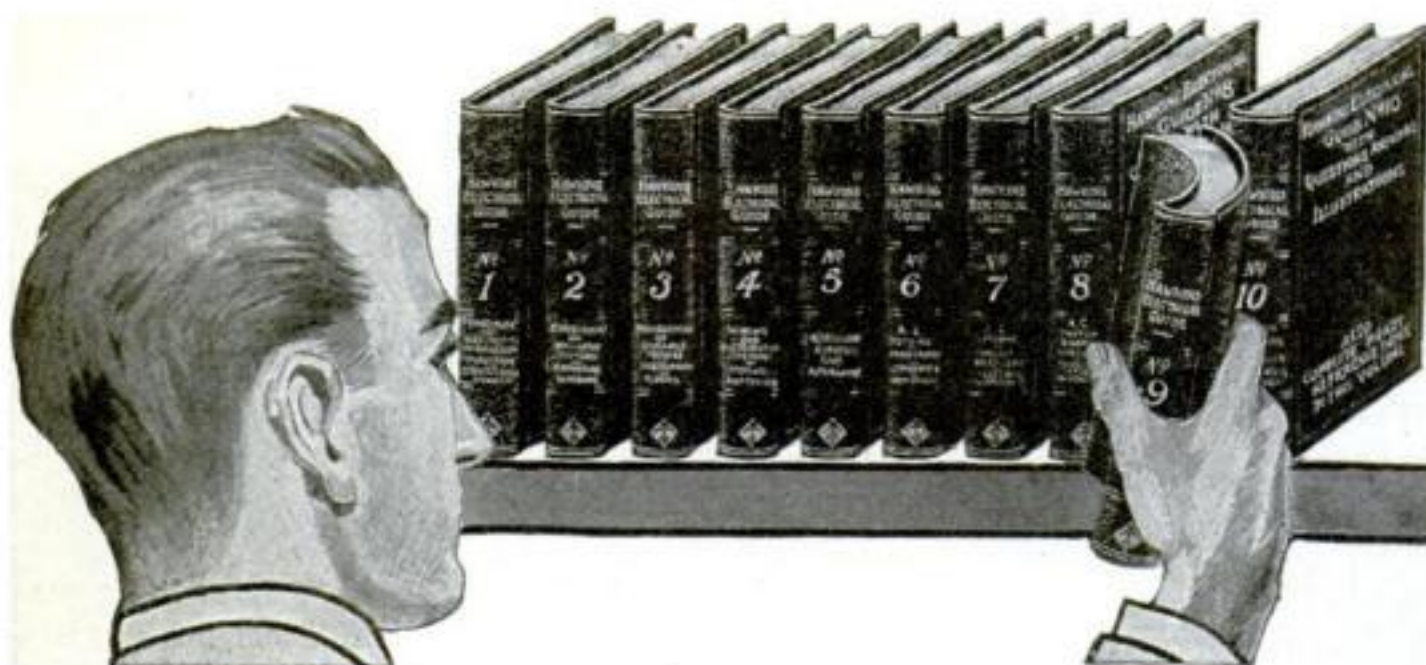

**10 Volumes
3500 Pages
4700 Pictures**

**Pocket Size
Flexible Black
Covers**

**\$1 Per Volume
\$1 Per Month**

An advertisement written entirely by men who have pushed ahead to greater success in Electricity through owning and using the Guides.

Helped Him Make Good

"It is only right for me to recommend highly the Hawkins Guides, for they have been of the greatest assistance to me in placing me in my present position as Superintendent of Construction Department of one of Ohio's largest Electrical Companies. I would like to see every man have a set of Hawkins Guides." Geo. Knecht, Columbus, Ohio.

A Man Who Arrived

"I am a machinist—I never professed to be an electrical machinist. But I received an unsolicited offer of a position in the Steel Works here (by the largest stockholder). And I want to say that I got my 'Juice' from Hawkins Guides. They are the only books for a man who wants to learn without having to wade first thru a lot of technical phrases he doesn't understand."

W. R. Hammer, Connellsville, Pa.

Up the Ladder

"While in Cuba, I applied for the position of Chief Electrician for the Government. I secured it, and though only a machinist I pulled through with the wonderful help of the Guides. With a repair shop, full supplies and three men, I had 100 telephones to care for, part of the system being under water. I also had the lighting system for shops and residences and wiring for power. Before that time I had never taken a transmitter or receiver apart. Owing to the climate, I later left there and have secured a fine position in the Westinghouse Electric Co."

William Cardell, Newark, N. J.

In the Naval Service

"I wish to state to you that I have resigned the position of Chief Electrician of Sears-Roe-buck plant here in Dallas, and joined the U. S. Navy as an Electrician. Made a good grade which was largely aided by the Guides of Hawkins. I can highly recommend them."

Frank E. Lane, Dallas, Tex.

Saved Him Money

"Hawkins Guides saved me just \$3.50 the first time I looked through No. 10 Book. I had a spark coil played out, and that book showed me how to rewind it; and I made it as good as new. Hawkins Guides are the best ever."

H. F. Ramey, Piedmont, Mo.

Superintendent

"I am now superintendent of the Dunnville Hydro-Electric Systems, and Hawkins Guides were a great help to me in holding down a responsible position."

W. E. Swartz, Dunnville, Ontario.

Even in College

"I am attending Cornell University, but I use the Hawkins Guides every day for general information which I cannot get in recitation work or in laboratory experiments. I'll always speak a good word for the ever-ready Guides."

J. Winfield Kurtz, Joanna, Berke Co., Pa.

Wireless Operators

"I have worked wireless for ten years—but I wish I had these books years ago, as they have saved me a great deal of trouble."

H. Marshall,

Steamer M & B No. 2, Walkersville, Ont.

HAWKINS ELECTRICAL GUIDES

Help

"My work lately has comprised the supervision of four trucks and other cars; also the wiring and electrification of sundry buildings on our place—the C. W. Munson Farm Assn., Roslyn, L. I., including the Packing House, Hot Houses, etc. There's never a point comes up that Hawkins Guides do not help me to solve."

Jacob Weiss, Port Washington, L. I.

The Trouble With Them

"The only trouble I find with the Hawkins Guides is that everybody is always borrowing them. My set was even borrowed by a high school instructor for reference work in a physics class. I find them highly instructive."

Carl Hasenwinkle, Hettinger, N. D.

First Aid

"Number 10 Guide arrived all O. K. and completes the set, which I am very proud of. I don't think it would be possible to find a better set for either the beginner or the professional electrician."

Elmer A. Stevens,

U. S. S. Nebraska, Postmaster, N. Y.

In the Naval Electrical Dept.

"The Hawkins Guides are great help to me in the Naval Electrical Department, which they cover very thoroughly."

C. J. Cornell,

U. S. Receiving Ship, Brooklyn, N. Y.

Handy to Carry

"The great beauty of them is that you can carry them in your pocket. That suits me, for I

never want to be without them." F. S. Collins,
Richardson Engineering Co., Hartford, Conn.

Look Through This List of Subjects:

No. 1 Contains 348 pages, 388 illustrations. Electrical signs and symbols—static and current electricity—primary cells—conductors and insulators—resistance and conductivity—magnetism—induction coils—dynamo principles—classes of dynamos—armatures—windings—commutation—brushes, etc.

No. 2 Contains 348 pages, 394 illustrations. Motor principles—armature reaction—motor starting—calculations—brake horsepower—selection and installation of dynamos and motors—galvanometers—standard cells—current measurement—resistance measurement—voltmeters—wattmeters—watt hour meters—operation of dynamos—operation of motors, etc.

No. 3 Contains 300 pages, 423 illustrations. Distribution systems—wires and wire calculations—inside, outside and underground wiring—sign flashers—lightning protection—rectifiers—storage battery systems, etc.

No. 4 Contains 270 pages, 379 illustrations. Alternating current principles—alternating current diagrams—the power factor—alternator principles—alternator construction—windings, etc.

No. 5 Contains 320 pages, 614 illustrations. A. C. Motors—synchronous and induction motor principles—A. C. commutator motors—induction motors—transformers—losses, construction, connections, tests—converters—rectifiers, etc.

No. 6 Contains 298 pages, 472 illustrations. Alternating current systems—switching devices—circuit breakers—relays—lightning protector apparatus—regulating devices—synchronous condensers—indicating devices—meters—power factor indicators—wave form measurement—switch boards, etc.

No. 7 Contains 316 pages, 379 illustrations. Alternating current, wiring power stations—turbines: management, selection, location, erection, testing, running, care and repair—telephones, etc.

No. 8 Contains 332 pages, 436 illustrations. Telegraph—simultaneous telegraphy and telephony—wireless—electric bells—electric lighting—photometry, etc.

No. 9 Contains 322 pages, 627 illustrations. Electric railways—electric locomotives—car lighting—trolley car operation—miscellaneous applications—motion pictures—gas engine ignition—automobile self-starters and lighting systems, electric vehicles, etc.

No. 10 Contains 513 pages, 599 illustrations. Elevators—cranes—pumps—air compressors—electric heating—electric welding—soldering and brazing—industrial electrolysis—electro-plating—electro-therapeutics—X-rays, etc.

Also a complete 126-page ready reference index of the complete library. This index has been planned to render easily accessible all the vast information contained in the 10 electrical guides. There are over 13,500 cross references. You find what you want to know instantly.

SEND NO MONEY

The entire set of 10 Volumes
SHIPPED TO YOU FREE

EASY PAYMENTS

Accept the offer now—mail the coupon today. If you decide to keep the books you can make settlement at only \$1 per month until paid for.

Send no money. Examine the books first. Use them for seven days in connection with your work, and decide for yourself that they are the most complete, the most helpful and the clearest written electrical books ever published.

This unusual offer is a sign of our confidence in the Guides.

THEO. AUDEL & CO.
72 Fifth Ave., New York, N.Y.

THEO.
AUDEL & CO.
72 Fifth Avenue
New York, N.Y.

Please submit me for examination Hawkins Electrical Guides (price \$1 each). Ship at once, prepaid, the 10 numbers. If satisfactory I agree to send you \$1 within seven days and to further mail you \$1 each month until paid.

Signature.....

Occupation.....

Business Address.....

Residence.....

Since we have not yet had the pleasure of business relations with you, we shall appreciate your giving us name of reference on line below.

Reference..... P. S. M. July '17

When writing to Advertisers please mention Popular Science Monthly



33,000 sq. ft. of Additional Floor Space

Come to Detroit

The Automobile Center and

LEARN THE AUTOMOBILE BUSINESS

DETROIT trained men get preference and get jobs quickly. No other city can give what Detroit offers. Think what it means to learn in the Michigan State Auto School. Factories endorse our school, glad to employ our graduates or offer them territory in which to sell cars and start garages. Unlimited opportunities. 71% of Automobiles are made in Detroit. You're right in the Heart of the Auto Industry. Men are needed everywhere as testers, repairmen, chauffeurs, garage men, and salesmen. Hundreds of our graduates start in business for themselves.

Earn \$75 to \$300 A Month

We teach you to handle any auto proposition. You graduate in from ten to twelve weeks. Our equipment is new, up-to-the-minute, and complete. No old, obsolete motors, chassis or electrical equipment used. Students actually build cars from start to finish, getting factory training in assembling, block-testing, road-testing, everything. Special complete course in Oxy-Acetylene brazing, welding and cutting, separate from regular course. Learn to time motors, rebore cylinders, adjust carburetors, magnetos, valves and bearings quickly and accurately. Six-cylinder Lozier, Chalmers "6," Detroit

"6," Overland, and 8-cylinder King are used for road instruction. We have the following completely equipped chassis:

Chalmers "6-30"-1917 chassis	Detroit "6-45"-1917 chassis
Willys-Knight, 1917 chassis	Saxon "6" 1917 chassis
Studebaker "6" 1917 chassis	Maxwell 1917 chassis
Hudson Super-Six 1917 chassis	Cole "8" 1917 chassis
Oldsmobile "8" 1917 chassis	Buick Light "6" 1917 chassis
Detroit-Electric 1917 chassis	Winton "6" chassis
G. M. C. Truck	Packard Twin "6" 1917 chassis

All completely equipped for students to work on. We have more than 20 motors in our block test department—2 cyl., 4 cyl., 6 cyl., 8 cyl., and 12 cyl. Our electrical department is complete, having every standard starting, lighting, and ignition system, including Delco System as used in Buick, Hudson, and Packard Twin "6."

Detroit Is the Place to Learn—Start Any Time

There are 44 auto factories in Detroit and vicinity and 140 accessories and parts factories. Our students have the privilege of going through any or all of them. We operate Starting, Lighting, Ignition Service Station. This has added thousands of dollars' worth of equipment and makes our electrical department unequalled. Students get actual experience in handling all kinds of electrical auto equipment and taking care of trouble. We have just installed a Sprague Electric Dynamometer for block-testing purposes for students' use. Ours is the only Auto school having

this equipment. Auto factories need Dynamometer men constantly. Factories and garages are paying big salaries to men who know how to handle electrical equipment quickly and properly. Detroit is the automobile center. You get practical instruction. School open all the year. Enter classes any time, any day. Three classes daily: morning, afternoon, evening. All instructors are members of the Society of Automobile Engineers (S. A. E.). There is a great demand for Michigan State Auto School students. Auto factories write and phone for men constantly.

Money-Back Guarantee

We guarantee to qualify you in a short time for a position as chauffeur, repair man, tester, demonstrator, auto electrician, garage man, or automobile dealer, paying from \$75 to \$300 monthly or refund your money. We have constantly more requests for Detroit trained men at GOOD salaries than we can supply.

Follow the Crowd to the Michigan State Auto School. Come to Detroit



THIS IS ONE OF THE FEBRUARY 1917 CLASSES



Additional Building and Equipment

Thousands of dollars' worth of new equipment, plenty of room for students to work, at 687-89-91 Woodward Ave., in addition to our building at 11-19 Selden Ave. Our school has grown by leaps and bounds, students come from all over the world. We are constantly adding new equipment. Our electrical department is thorough and complete.

Factory Co-Operation

We have completed arrangements with the Auto factories to put them in touch with men who intend going into business for themselves. Men who know the auto business from A to Z are in biggest demand.

Remember, the price of course is based on giving full value. Graduates in the complete auto course are competent to handle farm tractors.

Auto Factories Endorse Our School

The Leading Automobile factories in Detroit, as well as in other cities, endorse our school. They have been watching our school and graduates for years and are satisfied. They are putting their latest model, complete chassis in our school for students to work on. They are employing our graduates in their factories and service stations and assisting them in opening garages and salesrooms. They allow our students to go through their factories. They need trained, competent men and are asking for more of our graduates constantly. The Michigan State Auto School in Detroit, the heart of the Auto Industry, is endorsed by the Leading Auto Factories, is receiving their hearty co-operation. What better endorsement could you ask?

Act Quickly—NOW!

Fill in the coupon; get full particulars, "Auto School News" and New 128-Page Illustrated Catalog. All absolutely free. Or better still, jump on the train, as hundreds have done, and come to the "Heart of the Automobile Industry," and learn right. We have no branches. Write or come direct to this school.

Michigan State Auto School

The Old Reliable School A. G. ZELLER, Pres.
587 Auto Building—687-89-91 Woodward Avenue DETROIT, MICHIGAN, U. S. A.

SEND THIS COUPON TODAY

Michigan State Auto School
587 Auto Bldg., 687-89-91 Woodward Ave.,
Detroit, Mich., U. S. A.

Gentlemen: Send me absolutely FREE "Auto School News," and New Catalog, or better still,

you can expect me about.....


Name.....

Street.....

Town..... State.....

PREPARE TO SERVE YOUR COUNTRY

The United States Needs thousands of truck, transport, aeroplane and motorcycle drivers. Trained competent men are needed, men who can take care of the machines, men who *know how to keep them in service*. Any piece of motor driven machinery the government owns or will own *must be in service*. Preference will be given to trained men. No matter what service the Army is doing it *must be fed*. If it is on the firing line it will need thousands of rounds of ammunition. The importance of trained men is very evident. Food and ammunition must be delivered regularly. Then too the army must often be transported.

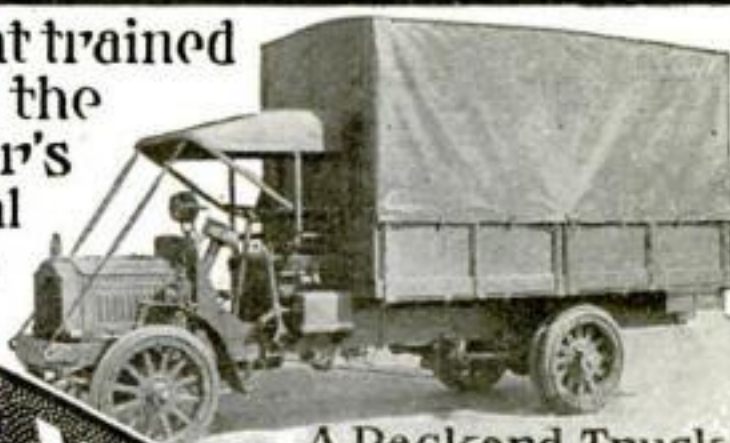

A Packard Truck
Used By The
U.S. Government

Quartermaster Department and Signal Corps Needs Trained Men

The Michigan State Auto School trains men thoroughly. Every student learns pleasure cars, trucks, motorcycles and gasoline motors of every kind from A to Z. Graduates of the Michigan State Auto School are in big demand by the leading Automobile plants in Detroit. These factories know from actual experience that our men are thoroughly, completely and practically trained. No matter what happens to a truck or pleasure car, a Michigan State Auto School graduate is competent to repair it. Cars in the care of a graduate give highest efficiency.

This is the kind of men Our Government wants and is daily enlisting. Trained men who will be efficient themselves and keep every bit of motor driven equipment in the most serviceable condition.

This branch of the Army Service pays good salaries. There are wonderful opportunities for *clean, clear headed, trained men* to advance in the service and certainly *now is the time to train*.



Aerial View of Motor Truck Group at Ft. Sam Houston, Texas
(Major F. H. Pope Cavalry Commanding)

This view gives an idea of the large number of transport trucks that will be used in our Army. Thousands of trained men are needed and will be needed to care for these machines and keep them operating up to their highest efficiency. Trained

men will be given preference and men who graduate from the Michigan State Auto School are now and have been holding big, responsible jobs in Detroit and over the country and will be able to serve their country in the most efficient way.

You Can Serve Your Country Best as a Trained Man

TRAINED Auto and Motor Mechanics are always in big demand. Men who have learned motor mechanics from beginning to end at the Michigan State Auto School can take care of every type of motor, motorcycle, automobile, truck, motor boat, aeroplane and stationary engines and are capable of filling any of the positions in the Army where competent men are needed.

You can serve your country *better* as a trained man and draw more money. You can complete your course in from 10 to 12 weeks and there will be a place waiting for you. Trained men are needed most and will be paid highest salary. You can serve both your country and yourself best and certainly in these times of preparation, you should do your part.

Men who can drive and keep up motor transport trucks are needed by the Quartermaster Department.

Motorcycle and Auto Mechanics and drivers will be needed by the Signal Corps and in every branch of the service as Chauffeurs for officers' cars and as messengers. Motor Mechanics will be needed for Aeroplane work—this branch of the service is very important.

Motor Mechanics will be needed on the "Mosquito Fleet" of "U-boat chasers," "Tanks," tractors and trench digging machines will need Trained Motor Mechanics.

Train NOW to do your part *right*.

Learn a Business That You Can Use When Peace Comes

By training to serve Your Country best you are preparing yourself in one of the best paying businesses of today. You can readily see your country's need. After Peace comes you will find plenty of jobs—and hundreds of good locations to go into business for yourself. There will always be Automobiles in abundance—trucks of every size are being used more and more each year, the newspapers are full of advertisements asking for *men who know their business*.

The men get from \$75.00 to \$300 a month and many foremen and superintendents get more. Good pay is the rule but the best pay always goes to the trained man.

The work is interesting as well as profitable—new things are coming on the market continually, there are hundreds of new, interesting problems coming up in the work.

Train NOW and Serve Your Country Best

Auto Books



Just Out

A great automobile library is just off the press. It is called **Automobile Engineering**, and in it you will find everything about modern automobiles. Hundreds of pages explain all the new systems of ignition, starting and lighting. Welding, vulcanizing, and commercial garage equipment and operation is thoroughly covered. Five thick volumes, 5½x8 inches, flexibly bound in genuine morocco leather, gold stamped. 2,200 pages; 2,000 illustrations, tables and diagrams. Written in simple, easily-understood English, and carefully cross-indexed for quick reference.

Shipped Free

Don't send a penny. Just put your name and address in the coupon and we'll send all five volumes to you, express prepaid. Read them—study them—examine them carefully before you decide to buy. If you don't like them after 7 days—write us and we'll take them back at our expense. If you keep them, send only \$2.00 within 7 days, and then \$2.00 a month—50c a week—until the introductory price of \$16.80 has been paid. The regular price of this set will be \$25.00.

Partial List of Subjects

Motors, Welding, Motor Construction and Repair, Carburetors, Valves, Cooling, Lubrication, Fly-Wheels, Clutch, Transmission, Final Drive, Steering, Tires, Vulcanizing, Ignition, Starting and Lighting Systems, Wiring Diagrams, Shop Kinks, Commercial Garage Equipment, Electrics, Storage Batteries, Motorcycles, Commercial Trucks, Glossary.

Consulting Service FREE

In addition to the books you get free of all charge a \$12.00 Consulting Membership. If any question puzzles you—write us. Our corps of auto experts will solve any auto problem. Ask all the questions you want for a whole year. This service is absolutely free.

AMERICAN TECHNICAL SOCIETY
Dept. A120B, Chicago, U. S. A.

Please send me a set of **Automobile Engineering** for 7 days' free examination. If I decide to buy, will send \$2 in 7 days and balance \$2 a month until \$16.80 has been paid, when books and Consulting Membership will be mine. Otherwise will notify you and hold books subject to your order. Title not to pass until fully paid.

NAME.....

ADDRESS.....

REFERENCE.....

MAIL

This Coupon

See these books before you decide to buy. Remember—don't send us a penny. Just fill in and mail the coupon. This offer is open to any person living within the boundaries of the U. S. and Canada.

AMERICAN
TECHNICAL
SOCIETY
Dept. A 120B
Chicago, U.S.A.

\$200
Per
Day

*The Man Who
Makes the Goods*

Salesmen Get the Big Pay

\$200
Per
Hour

*—and the Man
Who Sells Them*

TRAVELING SALESMEN WANTED

Hundreds of good positions open. Experience unnecessary. Earn while you learn. Write today for large list of openings and testimonials from hundreds of our Members we have placed in good positions paying \$100 to \$500 a month. Address nearest office.
Dept. 5197. NATIONAL SALESMEN'S TRAINING ASS'N. CHICAGO NEW YORK SAN FRANCISCO

ELECTRICAL ENGINEERING

men with training are always in demand. Having trained over 2000 young men in the past 23 years in the fundamentals of Applied Electricity, **The Bliss Electrical School**, with its well-equipped shops and laboratories, is peculiarly well qualified to give a condensed course in Electrical



including Mathematics, Steam and Gas Engines, Mechanical Drawing, Shop Work, and Theoretical and Practical Electricity, in all branches. Students actually construct dynamos, install wiring and test efficiency of electrical machinery. Course, with diploma, complete

IN ONE YEAR

For practical young men with limited time. 24th year opens Sept. 27th. Catalogue on request. 102 Takoma Ave., Washington, D. C.

Learn Mechanics of Aviation

Write today. See how you can learn the principles of Aeronautical Construction and Engineering in your spare time at home. Save all the time and expense of laborious field training. Big opportunities now for trained Aviation Experts in different branches of the service. \$50.00 to \$250.00 a week.

Write At Once! Big tuition reduction offer now open. Write for details while this offer lasts. No obligations.
American School of Aviation, Dept. 1307, 431 S. Dearborn St., Chicago, Ill.

Be a Cartoonist—Illustrator—Commercial Artist. Earn \$25 to \$100 a week in fascinating profession.

LEARN ART AT HOME


New, easy Course. Outfit FREE to new Students. Easy terms. Write for booklet, free. Washington School of Art, 1117 H St. N. W., Wash., D. C.

Co-operative Electrical Education

Earn While You Learn. We prepare you to hold a good-paying position with wonderful chances for advancement. We secure for you a position in an electrical or manufacturing concern for half of each day at good wages, the remaining half day you get instruction in our laboratories, testing and class-rooms.

One-Year Practical and Theoretical Electrician Course—D.C. & A. C.
Two-Year Commercial Engineering.
Three-Year Electrical Engineering.

Clip this ad and return for free illustrated book. Mention age, education and course interested in. Enter any time.
School of Engineering of Milwaukee, 325 Stroh Bldg., Milwaukee, Wis.



Learn Piano! This Interesting Free Book

shows how you can become a skilled player of piano or organ in your own home, at one quarter usual cost. Dr. Quinn's famous Written Method is endorsed by leading musicians and successful 26 years. Play chords at once and complete piece in every key, within 4 lessons. Scientific yet easy to understand. Fully illustrated. For beginners or teachers, old or young. All music free. Diploma granted. Write today for 64-page free book "How to Study Music." **W. L. QUINN CONSERVATORY, STUDIO 2 G, SOCIAL UNION BUILDING, BOSTON, MASS.**

When writing to Advertisers please mention Popular Science Monthly

What the WAR means to Electrical MEN

"The Nation needs each man in the endeavor that will best serve the common good. The Nation is being served only when the sharp shooter marches, and the machinist remains at his levers" said President Wilson in his proclamation of May 17th.

Men with electrical training are needed now more than ever before, both at home and at the front.

But America needs experts in electricity—not dabblers. You can't learn electricity out of a book.

The Only Way to Learn Electricity

The only way you can become an expert is by doing the very work, under competent instructors, which you will be called upon to do later on. In other words, *learn by doing*. That is the method of the New York Electrical School.

Our concentrated work with actual apparatus under actual conditions will put you abreast of men with from 5 to 10 years' experience in the electrical field. 4,500 of our students have gone forth into electrical success.

Learn by doing. This method makes you an expert, able to command a high salary. All instruction is individual. You go ahead as fast as you can learn. Good students complete the course in seven months. Send today for free 64 page book. Tear out this advertisement and mail it with your name and address.

New York Electrical School
40 West 17th St., New York, N. Y.



"Never Mind
How Strong
You Are—

What D'ye KNOW?"

Today it's a battle of wits—and *brains win*. Muscle and brawn don't count so much as they used to. The great question now is "What do you know?" It draws the line between failure and success.

What do you know? Have you special ability? Could you "make good" in a big job right now?

For 25 years the International Correspondence Schools have been training men for better work and bigger salaries. They can train YOU, no matter where you live, what hours you work, or how little your education. Mark and mail the coupon and find out—it won't obligate you in the least.

TEAR OUT HERE

INTERNATIONAL CORRESPONDENCE SCHOOLS, Box 5809, Scranton, Pa.


Explain fully about your Course in the subject marked X:

- | | | |
|---|---|---------------------------------------|
| <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> ADVERTISING | <input type="checkbox"/> CHEMISTRY |
| <input type="checkbox"/> Mechanical Engineering | <input type="checkbox"/> Salesmanship | <input type="checkbox"/> Illustrating |
| <input type="checkbox"/> Mechanical Drafting | <input type="checkbox"/> Commercial Law | <input type="checkbox"/> Farming |
| <input type="checkbox"/> Civil Engineering | <input type="checkbox"/> Bookkeeping | <input type="checkbox"/> Poultry |
| <input type="checkbox"/> Stationary Engineering | <input type="checkbox"/> Stenography | <input type="checkbox"/> French |
| <input type="checkbox"/> Mining Engineering | <input type="checkbox"/> Civil Service | <input type="checkbox"/> German |
| <input type="checkbox"/> Architecture | <input type="checkbox"/> Ry. Mail Service | <input type="checkbox"/> Italian |
| <input type="checkbox"/> Architectural Drafting | <input type="checkbox"/> AUTOMOBILES | <input type="checkbox"/> SPANISH |

Name _____

Address _____

Machine Shop Practice Complete

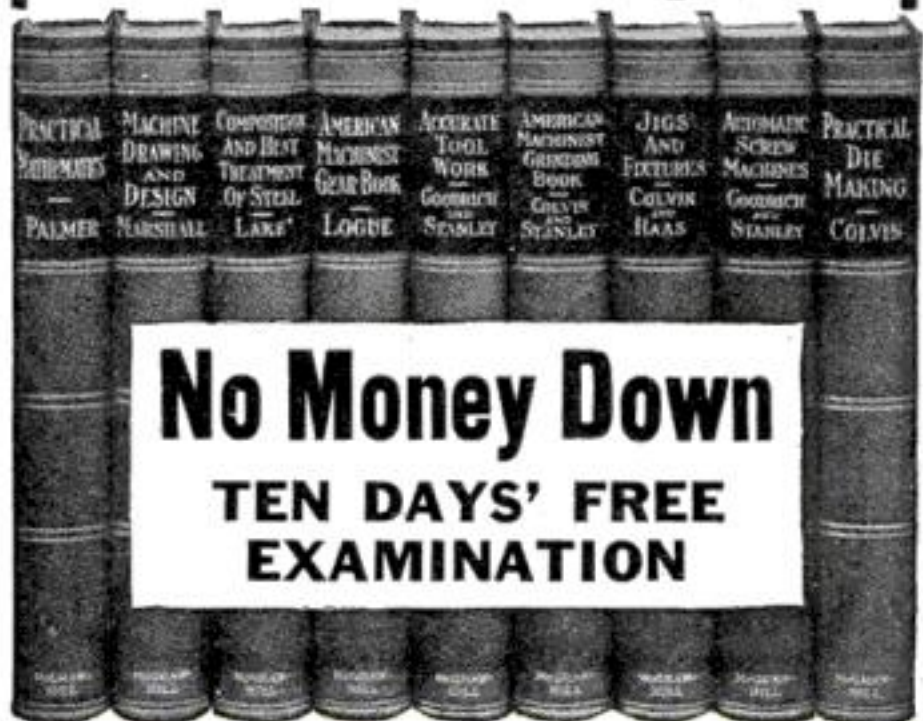

No Money Down
TEN DAYS' FREE
EXAMINATION

These Nine Volumes Shipped to You Without Deposit

Small Monthly Payments If You Are Satisfied

The Machine Shop Library is now accepted as the standard set of books on shop practice in America.

Nine Vols.—6 x 9 inches—3000 illustrations. Handsomely and strongly bound in morocco-grained cloth; titles in gold.

3000 pages of experience

The Machine Shop Library affords you one of the surest means of entering the machine shop field fully prepared for a better position. It teaches you as in practice—saving long months of apprenticeship at low wages. Nine authorities tell you in 3000 pages that which took them years to learn in the leading shops of the United States and England.

Prepare now for promotion

Machine shop workers now make higher wages than ever before. Begin now and prepare yourself for a well-paid machine shop position. An hour or less of your time each day with the Machine Shop Library is all that is necessary to place yourself in direct line for promotion. We will send the books to your home address on receipt of the coupon below, for a 10-day free examination. We will also pay the return charges if you decide not to keep them for any reason. Now is the very best time to begin where these machine shop specialists left off. In order to find the value of the Machine Shop Library, merely fill out the coupon and return to us at once.

FREE EXAMINATION COUPON

McGraw-Hill Book Co., Inc., 239 W. 39th St., New York

Gentlemen:—I am interested in your Machine Shop Library. You may send me the nine volumes, charges paid, for my inspection. If satisfactory I will send \$2 in ten days and \$2 per month until I have paid the price of the books, \$16. If the books are not what I want, I will write you for shipping instructions.

SIGNATURE

RESIDENCE ADDRESS

CITY AND STATE

NAME OF EMPLOYER

REFERENCE

ADDRESS P. S. July, '17

WAR JOBS

★ "UNCLE SAM" ★

★ WANTS HELP ★

★ \$800⁰⁰ to \$1800⁰⁰ a Year ★

★ Many of the U. S. Government departments are now Overloaded With War Work.

★ Hundreds of clerks; stenographers; bookkeepers; etc. Must Be Appointed at once to help on this work.

★ You can now easily get a big paid Permanent position, and at the same time Help Your Country in This Time of Need.

★ Common sense education sufficient.

★ Men-women, 18 or over, eligible.

★ Rapid increase in pay.

★ Pull unnecessary.

★ Fill out and mail coupon.

★ Do It Now.

FILL OUT COUPON

SEND COUPON BELOW

FRANKLIN INSTITUTE

Dept. D-110, ROCHESTER, N. Y.

This coupon, filled out as directed, entitles the sender to (1) free sample examination questions; (2) a free copy of our book, "Government Positions and How to Get Them;" (3) free list of positions now easily obtainable; and (4) to consideration for Free Coaching for the examination here checked.

COUPON

.. Railway Mail Clerk	[\$900 to \$1800]	.. Customs Positions	[\$800 to \$1500]
.. Postoffice Clerk	[\$800 to \$1200]	.. Internal Revenue	[\$700 to \$1800]
.. Postoffice Carrier	[\$800 to \$1200]	.. Stenographer	[\$900 to \$1500]
.. Rural Mail Carrier	[\$500 to \$1200]	.. Clerk in the Departments	
.. Bookkeeper	[\$900 to \$1800]	at Washington	[\$800 to \$1500]

Name.....

Address.....D 110

USE THIS BEFORE YOU LOSE IT

LEARN TO DRUM

Easiest instrument to play. Most demanded instrument today. Earn \$15.00 or \$20.00 weekly as a side line nights, or double that much as an occupation. Demand far exceeds the supply. We can place dozens of pupils in fine positions. Motion picture theatres, vaudeville, musical comedy, bands, dance orchestras, cabarets, summer and winter resorts must have drummers, and pay fine salary. The great growth of motion picture theatres makes an enormous demand for drummers everywhere. Opportunity knocks but once. Listen! Now is your chance. Write today.



No Instruments to Buy

You don't have to invest any money in instruments until you have learned to play. We teach you by mail in a few lessons at surprising low terms. Double your income, on the most popular instrument known.

Send for our free booklet. Write Now—Today.

MICHIGAN SCHOOL OF DRUMMING
LANSING, MICHIGAN

LEARN MUSIC AT HOME!

SPECIAL OFFER—EASY LESSONS FREE—Piano, Organ, Violin, Banjo, Mandolin, Guitar, Cornet, Harp, Cello, Clarinet, Piccolo, Trombone, Flute, or to sing. You pay only for music and postage—which is small. No extras. You learn by note. Beginners or advanced pupils. Plain, simple, systematic. 16 years' success. Start at once. Send your name and get free booklet by return mail. Address U. S. School of Music, Box 194-G, 225 5th Ave., N. Y. City.



TWENTY-FOUR PRACTICAL ART LESSONS

together with interesting stories of the struggles and achievements of leading Illustrators and Cartoonists. Every modern method in the lucrative field of cartooning, designing, newspaper, magazine and commercial illustrating fully explained in the STUDENT ILLUSTRATOR. Amateur's work published and criticised. \$1.50 per year, four months \$0.50.

Dept. 27-1012 H. Street N. W. Washington, D. C.

GOV'T POSITIONS

NEW BOOK FREE!

Earn \$75 to \$150 monthly at once. Rapid promotion. Easy work. Short hours. 15 and 30 day vacations, full pay. Lifetime positions. No strikes, no "lay-offs," no "straw bosses," no pull needed. Ordinary education sufficient. American citizens 18 or over eligible no matter where you live.

NEW BOOK FREE Tells about Railway Mail, Post Office, Panama Canal, Custom House and many other Gov't positions. Tells how to prepare for Examinations under supervision of former U. S. Civil Service Sec'y-Examiner. Write today—postal will do. Address: PATTERSON CIVIL SERVICE SCHOOL, 167 News Bldg., Rochester, N. Y.

WRITE TODAY



Enormous Profits



START GROWING MUSHROOMS

Learn the latest authoritative way to make still bigger profits than you ever thought possible or ever made growing mushrooms. Add \$10 to \$75 a week to your income. Anyone, men, women and children can do it in spare time in city or country. Grow in basements, cellars, sheds, boxes, etc. Start now. Demand bigger than supply. Send for big free book of expert authority, "The Truth About Mushrooms." Write to

Bureau of Mushroom Industry, Dept. 394, 1342 N. Clark St., Chicago



New Book Free

Write today for the book that tells about the opportunities in the profession of Signal Engineering. Men are needed. Learn, too, how you can get the training that you need to fill the big job.

\$125 to \$300 a Month

The free book will give you just the information you want. Write for it now—immediately. Here is a golden opportunity.

Dept. of Signaling Dept. #120—1810 Wilson Ave. Ravenswood Sts., Chicago, Ill.

NATIONAL TRADE



DENTAL SCHOOL

506 S. Wabash Ave., CHICAGO, ILL.
LEARN MECHANICAL DENTISTRY—DEMAND UNLIMITED

Earn \$1200 to \$4000 yearly in mechanical dentistry. A big and growing demand everywhere for mechanical dentists—like a gold mine unexplored. Attend this school any time of the day or evening; be taught individually and learn by actual practice, without book study. Our System, the most complete in the world, is used exclusively in this school. We are constantly called upon to fill high-salaried positions. Why not qualify for one? Be fair to yourself; find out more about exceptional opportunity we offer. Visit the school or write for booklet A.

If You Want an Electrical Book and don't know where to get it, write Book Department, Popular Science Monthly, 239 Fourth Avenue, New York City.

EARN TELEGRAPH

Morse and Wireless—R. R. Accounting (Station Agency) taught. Splendid opportunities. Positions secured. Marconi Co. contracts to employ graduates. We own and exclusively occupy two large modern buildings equipped with R.R. and Western Union wires and complete 2 K. W. Marconi Wireless Station. Largest school—established 42 years. Investment \$25,000. Endorsed by Railroad, Marconi and Western Union Officials. Expert practical teachers. Low living expenses; easily earned if desired. Tuition low. Easy payments. Correspondence courses also. Catalogs Free.

Dodge's Telegraph, Ry. & Wireless Institute
21st Street, Valparaiso, Ind.



Learn Electricity

Earn \$25 to \$60 Per Week

Earn While You Learn



Electricity is the big money-making industry. Edison says the field is just in its infancy. Right now there are not enough electrical engineers to fill the big paying positions open. Our Free Employment Bureau is kept busy supplying this great demand. Hence, we are making a VERY SPECIAL OFFER to students; write for it today.

COYNE TRADE AND ENGINEERING SCHOOLS

Teach You in a Short Time at Small Expense

Our courses are simple, easy, thoroughly practical. Small tuition. Easy terms. Tools and equipment furnished. Our graduates demand handsome salaries. Don't pass this.

Men Wanted We also teach DRAFTING (all Branches), PLUMBING, BRICKLAYING and MOTION PICTURE OPERATING. Each student receives individual, practical instruction right in our big shops. You learn under actual working conditions with the tools right in your own hands. Schools open day and evening all year. Big demand for men. Earn \$5 to \$8 a day from the completion of our course, or make \$3,000.00 to \$5,000.00 a year in your own business.

Free Tools We furnish all the material and tools you use in taking our course—ABSOLUTELY FREE.

Only a very small amount for tuition. Easy payments.

Write Now!

Send for Free Catalog and Special Offer today. Let us show you how to make a big success. Be sure to mention trade in which you are interested.

Bennett Wellington Cooke, Dir.,
Coyne Trade and Engineering Schools,
35-51 E. Illinois St.,
Dept. 140 Y Chicago



Our Main Building

This Fob FREE

Are you interested in the mechanical side of an automobile, its proper operation and economical maintenance?

OWNERS—GARAGEMEN—CHAUFFEURS.

The AMERICAN CHAUFFEUR is a live monthly magazine featuring articles in common sense language, by "men who know," on instructive topics, which will be interesting and of great value to every auto owner, chauffeur and garageman.

FREE OFFER.

To introduce the AMERICAN CHAUFFEUR, we are offering this plated lacquered watch fob, with seal grain leather strap, as illustrated, ABSOLUTELY FREE, with a three months subscription to the AMERICAN CHAUFFEUR at the regular price of 25c.

Your money refunded if either the magazine or fob does not come up to your expectation.

THE AMERICAN CHAUFFEUR
127 Butler Building
Cincinnati, Ohio



From A. B. Paine's "Boy's Life of Mark Twain."

DIE, THOU VILLAIN!

He had thought of being a great Indian Chief, or a soldier—but the biggest idea of all had come to him. He would be a Pirate!

Now his future lay plain before him. His name would fill the world and make people shudder. And, at the zenith of his fame, how he would suddenly appear at the old village and stalk into church, brown and weather-beaten, in his black velvet doublet and trunks, his great jackboots, his crimson sash, his belt bristling with horse-pistols, his crime-rusted cutlass at his side, his slouch hat with waving plumes, his black flag unfurled, with the skull and crossbones on it! His career was determined.

That was one of Tom Sawyer's dreams, and he turned his dreams into play.

Remember the days when you dreamt of being a Pirate?—When you thought you would be a black avenger of the Spanish Main?

Get back the glamour of that splendid joyousness of youth. Read once more of Tom Sawyer, the best loved boy in the world; of Huck, that precious little rascal; of all the small folks and the grown folks that make Mark Twain so dear to the hearts of men and women and boys and girls in every civilized country on the face of the globe.

MARK TWAIN

Out of the generous West came Mark Twain, giving widely and freely to the world such laughter as men had never heard.

There seems to be no end to the things that Mark Twain could do well. When he wrote history, it was a kind of history unlike any other except in its accuracy. When he wrote books of travel, it was an event. He did many things—stories, novels, travels, history, essays, humor—but behind each was the force of the great, earnest, powerful personality that dominated his time, so that even then he was known all over the face of the globe. Simple, unassuming, democratic, he was welcomed by kings, he was loved by plain people.

If foreign nations love him, we in this country give him first place in our hearts. The home without Mark Twain is not an American home.

The Centennial Half Price Sale Must Close

Mark Twain wanted these books in the hands of all the people. He wanted us to make good-looking, substantial books, that every man could afford to own. So we made this set, and there has been a tremendous sale on it.

But Mark Twain could not foresee that the price of paper, the price of ink, the price of cloth, would all go up. It is impossible to continue the long sale. It should have closed before this.

Because this is the one hundredth anniversary of the founding of Harper & Brothers, we have decided to continue this half-price sale while the present supply lasts.

Get your set now while the price is low. Send the coupon to-day before the present edition is all gone.

HARPER & BROTHERS NEW YORK
1817 1917

Harper & Bros., New York.

Pop. Sci. 7-17

Send me, all charges prepaid, a set of Mark Twain's works in 25 volumes, illustrated, bound in handsome green cloth, stamped in gold, gold tops and untrimmed edges. If not satisfactory, I will return them at your expense. Otherwise I will send you \$1.00 within 5 days and \$2.00 a month for 12 months, thus getting the benefit of your half-price sale.

Name.....

Address.....

10% added to price in Canada because of duty.

When writing to Advertisers please mention Popular Science Monthly

QUICK-ACTION ADVERTISING

HERE OUR READERS AND ADVERTISERS MEET TO TRANSACT BUSINESS

RATE 12 CENTS A WORD. Remittance in the form of currency, check, money order or stamps **MUST ACCOMPANY THE COPY.** The August issue will close June 23rd.

AUTOMOBILES AND ACCESSORIES

SAVE 50% to 70% on your next tire purchase. Our tires are practically blow-out and puncture-proof. Guaranteed for 3,500 miles. Send for illustrated catalog No. 4 and Price List. Tuxedo Auto Tire Exchange, 304 W. 54th St., New York City.

TIRES—Double Tread Guaranteed for good service. Absolutely Puncture-Proof. Big—Strong—Extra, heavy, 30x3 tire \$5.00; 30x3½ \$6.00; 33x4 \$9.00; 34x4 \$9.25; 36x4½ \$12.00; 37x5 \$13.00. Big saving on other sizes and tubes also. Trade in your old tires. Discount to dealers. 10% deposit required on C. O. D. orders. Send for list now! State size and bead of tire. Max Liben & Co., 205P West 48th Street, New York.

AUTO top roof for any model car \$6 to \$15 parcel post paid. Easy to apply, you save ¾ price of new top. Samples and catalog free. S. & H. Top Co., 414 Hunt St., Cincinnati, O.

"GAS-SOL" gives you 15 to 40% more mileage and eliminates carbon. Money back Guarantee. 100 tablets treats one hundred gallons gasoline. Price One Dollar. Live Agents wanted. Gas-Sol, Dept. B, Wakefield, Mass.

I want to send you proof of the wonderful pulling power of the Classified Columns of this magazine. If you want to buy something, sell something or exchange something, write to-day for full particulars. D. W. Coutlee, Manager Classified Department, Popular Science Monthly, 239 Fourth Avenue, New York.

CONVERT your bicycle into a motorcycle at small cost by using Shaw Motor Attachment. Catalog free. Shaw Mfg. Co., Dept. 180, Galesburg, Kansas.

CYLINDER Grinding. Quality, price and service are the result of specializing exclusively in a single line. New oversize pistons and individually cast rings properly fitted will give your motor more power than when new. "The grinding that puts the punch in your motor." Write for prices, giving make, year, bore and number of cylinders. You won't regret it. Bridgeport Piston Ring Co., Third St., Bridgeport, Conn.

PATENTS—For automobiles are in great demand. We have special Automobile Department in charge of experts who are in touch with demands of trade. Write for What to Invent and List of Patent Buyers, sent free. Victor J. Evans & Co., 172 Ninth, Washington, D. C.

DOUBLE Service Tires—almost puncture-proof. Sizes 30x3 \$5.50, 30x3½ \$6.60, 33x4 \$8.80, 34x4 \$9.90, 36x4 \$9.90, 36x4½ \$11, 36x5 \$12.10, 37x5 \$12.10. Non-skid, \$1.00 extra. 10% required on C.O.D. orders. State if Q.D. straight-bead or clincher type. Special discount to dealers. We also carry a full line of new tires at special prices. I. Jaffess, 1319 D 5th Avenue, New York. Branch—241 W. 54th Street.

AUTO Engines: 4 cylinder, water cooled. \$35.00; Buick 10, Buick 17, 34, 31; Flanders, 20; Metz, Mitchel, other good motors. Low price. BOSCH Magnetos: All sizes \$10.00 each up. Remy and Spilldorf magnetos and coils \$3.00 each. Write for list. Johnston, West End, Pittsburgh, Pa.

PATRIOTIC Radiator Cap for Ford cars, holds flag and improves general appearance of car, made of polished black composition and metal. Price \$1.00, agents sample fifty cents. Sales Manager, W. R. Allport, Niagara Falls, N. Y.

GET into biggest money making end automobile business—replacing necessary equipment. Live, ambitious men wanted as special factory representatives, exclusive territory, taking orders for tops, top coverings, seat covers, "Stik-Tite" Windows. No experience necessary. No capital required. No competition. Copyrighted system protects you. Free catalog, samples, full details. Cincinnati Auto Specialty Company, Dept. SA77, Cincinnati, Ohio.

PAINT Your Own Car, for \$5. Autonamel is used like paint, but is not paint; any amateur can make it lay as smooth as glass. Paint requires skill; there is no such thing as a satisfactory substitute for Autonamel. It is impossible to believe what can be done with it until understood. Write for booklet "X." Jet Black and eight colors. Autonamel Company, Rochester, New York.

STARTER—Generators, magnetos, coils repaired, sold, bought, exchanged. Why pay exorbitant prices for repairs. Send it to us. Jobs returned in 48 hours. Absolute guarantee. Onody Automobile Electric Service, 334-338 Oak Street, Buffalo, N. Y.

*Popular Science Monthly,
New York City.*

Gentlemen:

Returns from my advertising in your publication have proven extremely gratifying. During January, February, March and thus far in April, Popular Science Monthly has led every other medium regardless of rate. I will go further than this and say that returns from Popular Science Monthly during these months have been double those from every other publication used with one exception.

Very truly yours,

FREDERICK E. WOOTEN.

**Read the advertisement under
"For Inventors"**

WANTED—Magnetos, coils, generators, starters, all makes, any condition. Give make, type, weight, condition, how used, lowest price. Ben Wade 4105-07 Cottage Grove, Chicago.

"GIDZ" Eliminates carbon. "More Power to You." Endorsed by practical men. One Dollar can convince. Agents wanted. "Gidz" Galesburg, Illinois.

CYCLECARS AND SMALL CARS

THE lowest priced car in the world. See page 120. Tribune Engineering Co.

GRANDFATHER'S CLOCKS

BUILD your own Grandfather's Clock with our free blue prints. Works, dial, etc. \$5 and up. Others with chimes at all prices. Write for free offer, Clock Co., Nicetown, Pa.

WANTED

WANTED: Electric Portable Drills, all sizes. Johnston, West End, Pittsburgh, Pa.

MOTORCYCLES, BICYCLES AND SUPPLIES

MOTORCYCLE Bargains, Second-hand and Rebuilt Motorcycles. Henderson, Harleys, Indian, Excelsiors, Emblems, Thorns, all in A-1 shape tuned up, ready to ride, \$35 to \$100. Motorcycle tires \$3. Automobile tires \$3. Best Motorcycle belts \$5. Second-hand bicycles \$5. Tandems \$20. Old Motorcycles taken in trade, highest prices allowed for them. Swap in yours. Deninger, The Price Cutter, Rochester, N. Y.

LARGE stock of rebuilt motorcycles, new parts for all makes 25% discount; second-hand parts, good as new, 50% discount. Motorcycle Parts Mfg. Co., Chicago, Illinois.

CONVERT your bicycle into a motorcycle at small cost by using Shaw Motor Attachment. Catalog free. Shaw Mfg. Co., Dept. 68, Galesburg, Kansas.

MAKE your bike a motorcycle with our 2 H.P. motor. Good hill climber; fits all bicycles; price \$32. Ashland Motor Works, Dept. A, Ashland, Ohio.

BARGAINS in used motorcycles—All machines guaranteed and in A-1 condition ready for use. Write for terms and new bulletin. Photos free. Harley-Davidson Sales Company, Birmingham, Alabama.

WANT to sell your motorcycle? I have a method that has sold many. Write me today for full particulars. D. W. Coutlee, 239 Fourth Avenue, New York.

A Light Car at Motorcycle prices. See page 120. Tribune Engineering Co.

BIG Bargains in all makes of Used Motorcycles. Over 75 in stock. If interested send for Bulletin No. 6. Gotham Sporting Goods Company, 57 Warren St., New York City.

WELDING

DON'T Scrap Aluminum Parts—Trial Bar 50c. So-Luminum, new welding compound for aluminum, is stronger than aluminum—perfect substitute for acetylene. 1-2 time and cost. Use gasoline torch. \$3.00 lb. Ask Booklet D. So-Luminum Mfg. Co., 1790 Broadway, New York.

OXY-ACETYLENE Welding Plants \$25.00 to \$250.00. Small cash payment. Balance to suit. Plants for all purposes. Address Bermo Supply Company, Omaha, U. S. A.

TOOLS AND SUPPLIES

MARK Your Signature on Steel, Copper and Brass Tools with the Mark-o-Acid Outfit. Proves ownership. Complete outfit 50c. Mark-o Co., Box 15, St. Paul, Minn.

TOOL Cases for carpenters and machinists; write for catalog. Keystone Case Co., 215 Keystone Ave., Chicago.

TOOLS—For shop, factory, garage and home—many high-class tools attractively priced in our "Odds and Ends" pamphlet—which is mailed free on request by Montgomery & Co., Inc., 111 Fulton St., New York City.

DUPLICATING DEVICES

"MODERN" Duplicator—a Business Getter. \$1 up, 50 to 75 copies from pen, pencil, type-writer; no glue or gelatine. 35,000 firms use it. 30 days' Trial. You need one. Booklet Free. J. V. Durkin & Reeves Company, Pittsburgh, Pa.

AERONAUTICS

THE National Aero Institute offers you the opportunity to learn the principles and mechanics of Aviation in your spare time at home. Hundreds—yes, thousands—of men are wanted in this new field at once. Opportunity is ripe. Fame and financial independence await you. Write for free particulars of the training we offer. You can save time and money—you can put yourself ahead of the men who must go through apprenticeship on aviation fields—by equipping yourself as an Aviation expert in short time at home. Very limited introductory offer now in force. Write for details while it lasts. National Aero Institute, Dept. B-120, Morton Bldg. Chicago, Ill.

CHICAGO Aero Works—limited offer: Newport Scout; Star and Junior Tractor Plans, \$2.50. 328 River, Chicago.

THE American School of Aviation offers new and complete Courses in Aviation. Exceptional opportunities open for men who write today for our Special Reduced Price Offer. American School of Aviation, Dept. 7907, 431 South Dearborn St., Chicago.

AERIAL Age, America's only illustrated weekly, presents the latest developments in aeronautics throughout the world. Up to the minute technical information concerning aero-engines, aeroplanes, accessories and patents. Complete model news and instruction. Trial subscription six months, twenty-six issues, One Dollar. Sample copy free. Aerial Age, 280 Madison Avenue, New York City, New York.

AVIATION Dictionary, \$1, cloth \$1.50. Languages Publishing Company, New York.

PATENTS wanted in Aeronautics. U. S. Government spending millions in this class for Army and Navy. Our Aeronautic Department will give full information on this subject upon inquiry. Write for What to Invent, sent free. Victor J. Evans & Co., 179 Ninth, Washington, D. C.

AVIATION. Send for Free and prepaid literature on Aviation. Courses in Practical Aeronautics and Flying. Learn how you may prepare yourself for this fascinating and big paying profession at home. Special Limited Offer to all who write immediately. American School of Aviation, Dept. 7587, 431 South Dearborn St., Chicago.

MODEL Aeroplanes of every description. Materials and supplies for Model Aeroplanes. Compressed air motors for model aeroplanes and boats. Complete course in aeroplane construction. Send 5c for descriptive catalogue. Wading River M.F.G. Co., 550 Macon Street, Brooklyn, N. Y.

BOATS AND LAUNCHES

DARROW'S Steel Boats. Finished parts or patterns. Catalogue, 78 models. F. H. Darrow, 604 Erie St., Albion, Mich.

TRADE SCHOOLS

EARN More Money. Learn Sign Painting, Card Writing, Paperhanging, Graining, Marbling, Tiffany Decorating, Practical training in all branches by expert teachers. Catalogue Free. Chicago Painting School, 131 North Fifth Avenue, Chicago.

ELECTRICITY, Plumbing, Bricklaying, Mechanical, Architectural and other Drafting Courses. Motion Picture Operating taught by practical work. Largest, best equipped practical trade school in America. Short time to learn. Small cost, easy payments. Write for big illustrated book; it's free. Coyne Trade & Engineering Schools, Dept. 740Y, Chicago, Ill.

MODELS AND MODEL SUPPLIES

WE carry a complete line of brass gears and model supplies. Send for catalogue. The Pierce Model Works, 3495 Pierce Ave., Chicago, Ill.

WANTED—New Ideas. Write for list of Patent Buyers and Inventions Wanted. \$1,000,000 in prizes offered for inventions. Our Four Books sent free upon request. Victor J. Evans & Co., 176 Ninth, Washington, D. C.

HARD Rubber Articles developed and manufactured. Rubber, glass or metal models quickly and cheaply made. Swanberg, 1459 McIrose Street, Chicago.

MOTORS, ENGINES AND MACHINERY

WESTINGHOUSE, Wagner, Century, Emerson, Crocker-Wheeler, Western, Fort Wayne, General Electric rebuilt motors guaranteed for one year. Alternating and direct current. All sizes from 1-30 H.P. upwards. Tell us your needs. Satisfaction guaranteed or money refunded. Send for illustrated pricelist supplies and motors just issued. Hyre Electric Co., 609 FX South Dearborn St., Chicago.

CHARGING Dynamos: Several hundred small machines from Bankruptcy stock. Also lighting dynamos and several moving picture Arc generators. One and three phase motors up to 5 H.P. in stock for immediate shipment. 1/4 H.P. A.C. motors \$15.00. All sizes, low prices. Write for list. Johnston, West End, Pittsburgh, Pa.

NEW A.C. motors 110 volt, 60 cycles, 1750 RPM, 1/4 H.P. \$12.50, 1/2 H.P. \$15.00, 3/4 H.P. \$29.00, 1 H.P. \$32.50. Headquarters for motors and generators. Doubleday-Hill Electric Company, 719-21 Liberty Avenue, Pittsburgh, Penna.

ELECTRICAL

"ELECTRICITY Made Simple"—A book devoid of technicalities. Simple, plain and understandable. Students and electrical workers whose opportunities for gaining information on the underlying principles of electricity have been limited will find this book of inestimable value. 233 Pages, 108 Illustrations. Price \$1.00. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

WONDERFUL bargains. Illustrated pricelist showing electrical motors and supplies including sockets, wire, cleats, loom, switches, rosettes, porcelain goods, tape, plugs. Hyre Electric Co., 609KD South Dearborn St., Chicago.

INVENT Something: Your ideas may bring wealth: free book tells what to invent and how to obtain a patent, through our credit system. Talbert & Parker, 4675 Talbert Bldg., Washington, D. C.

FORMULAS AND TRADE SECRETS

"TWENTIETH Century Book of Recipes, Formulas and Processes"—This book gives you the information that represents the collection of years and the expenditure of thousands of dollars. Contains complete directions for making everything from simple glues and adhesives to the tanning of leather, the making of photographic materials, perfumes, soaps, plating of silver and gold, working of metals, etc. 800 Pages, 10,000 Selected Subjects. Price \$3.00. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

100 Valuable Formulas, Including Big Catalogue, 10c. "Ideal," 3313-PS7, Belle Plaine, Chicago.

50 Rigidly Tested Formulas: money makers for live person. Doctor, 3835 Vincennes Avenue, Chicago.

RELIABLE formula for removing callus, 10c. J. Cifra, 2628 Marion Avenue, Cleveland, Ohio.

GUMMED LABELS—ADVERTISING STICKERS

NEW Large Catalog of Attractive Gummed Labels and Advertising Stickers Free. 3000, 75c upwards. Royal Label Company, 414 Cherry, Philadelphia.

LABEL Catalog "B" Free. Wolf Labels, 3136 Jasper Street, Philadelphia.

FIREARMS AND ANTIQUES

BUY, Sell, Exchange, all sorts old-time and modern firearms. Stephen Van Rensselaer, Antiques, 805 Madison Avenue, New York.

RAZORS AND DULL RAZOR BLADES

GRIND, hone any blade, 2c. Razors, 25c. Keenedge, Oshkosh, Wisconsin.

TELEPHONE APPLIANCES

TELEPHONE Holder. Phone hands free, \$5-\$3. Convenient method. Farewell tiresome way. Kallajian Mfg., Boston, Mass.

TELEGRAPHY

LEARN Telegraphy at home in half usual time with the wonderful Automatic Transmitter, The Omnigraph. Connected with Sounder, Buzzer or Head Phones will send unlimited Continental or Morse messages, at any speed. Adopted by U. S. Government and leading Universities, Colleges and Telegraph Schools. Trifling cost. Catalog free. Omnigraph Mfg. Co., 39A Cortlandt St., N. Y.

TELEGRAPHY—Morse and Wireless—also Station Agency taught. Graduates assisted. Cheap expense—easily learned. Largest school—established 42 years. Correspondence courses also. Catalog free. Dodge's Institute, 16th St., Valparaiso, Ind.

ADVERTISING

ADVERTISE! 20 words in 120 monthlies \$1. Southwestern, 1413-2 Berendo, Los Angeles.

ADVERTISING Stickers, inexpensive and effective advertising; a universal business help; splendid field for agents. St. Louis Sticker Co., Dept. P, St. Louis, Mo.

MAILING LISTS

RELIABLE Lists. Auto Owners, Farmers, Housewives. Address 1735 Davenport, Iowa.

LETTER SPECIALISTS

IS your Advertisement in this section producing the best possible results? If not, let us prepare one for you that will. Strong, forceful sales letters, circulars, folders and booklets written, at attractive rates. Results Guaranteed. Criterion Service, Inc., R134, Jersey City, N. J.

"THE Ten Great Secrets of a Successful Letter." A wonderful little book by Ad-Man Davison, highest paid letter writer in the world: 40 minutes' reading that means more orders and remittances! Cloth bound, postpaid, \$1. Ad-Man Davison Publishers, 17c Madison Ave., New York.

COLLECTIONS

DEBTS collected quickly! Established 25 years. William H. Dodd, Dept. S, 87 Nassau St., New York.

KIMLEY'S Business Service, Indianapolis, Ind. Collections, Adjustments and Information. Everywhere. Personal calls. Correspondence solicited.

NEWS CORRESPONDENTS

WRITE for newspapers and magazines. Big Pay. Experience unnecessary; details free. Press Reporting Syndicate, 400, St. Louis.

SHORT STORIES—POEMS

WANTED—Stories, articles, poems for new magazine. We pay on acceptance. Handwritten MSS. acceptable. Submit MSS. to Comes Magazine, 1243 Stewart Bldg., Washington, D. C.

WRITE for free copy "Hints on Writing and Selling Photoplays, Short Stories, Poems." Atlas Publishing Co., 236, Cincinnati.

TYPEWRITERS AND SUPPLIES

LARGEST stock of Typewriters in America. Underwoods, one-fourth to one-half manufacturer's prices, rented anywhere, applying rent on purchase price; free trial. Installment payments if desired. Write for catalogue 11. Typewriter Emporium (Estab. 1892). 34-36 West Lake Street, Chicago, Illinois.

GOOD Serviceable Typewriters \$10 and up. Post card brings list. First-class ribbons, any standard machine 35c. Hub Typewriter Co., 286 Devonshire St., Boston.

TYPEWRITERS—Prices wrecked. All makes nearly new and rebuilt, \$5.00 up. Coronas and other portable machines, \$10.00 up. Write for Catalogue 25K. Beran Typewriter Co., 58 W. Washington St., Chicago.

STARTLING values in Typewriters, \$10 to \$15, up. Factory rebuilt. All makes. Shipped on trial. Write for our Special Offer No. 120G. Whitehead Typewriter Co., 186 N. La Salle St., Chicago.

FRESH Typewriters one-third manufacturers' prices! Investigate Free Trials (name typewriter you prefer). Co-Operative Union, Covington, Kentucky.

When writing to Advertisers please mention Popular Science Monthly

PRINTING, ENGRAVING AND MULTIGRAPHING

AT Last! Beautiful Lithography for small users. 1,000 Letterheads, 1,000 Billheads and 1,000 Statements \$9.90. Engraving Free. Kaydee Lithographing Co., 772 Teutonia, Milwaukee.

"SHOW Your Colors" Flag labels 75c per 1,000. 100 samples 10 cents. Helmar Company, Hoboken, N. J.

GOOD Printing at low prices; 1,000 good letterheads, envelopes, cards, billheads, labels, circulars, \$2.50; samples free; catalogues, booklets and circulars our specialty. Ernest L. Fantus Co., 523 S. Dearborn St., Chicago, Ill.

I Want to send you proof of the wonderful pulling power of the Classified Columns of this magazine. If you want to buy something, sell something or exchange something, write today for full particulars. D. W. Coutlee, Manager Classified Department, Popular Science Monthly, 239 Fourth Avenue, New York.

SERVICEABLE Pre-used Printing Presses, Type, Supplies. Lowest prices. List for stamp. P. Bargains, Richland, Pa.

PERFECT Letter Shop, Muncie, Indiana. Multigraphs 500 purple letters with black letterheads \$2.15. Samples for stamp.

500 Swell Linen-Finish Letterheads printed two colors, \$2.50, Bond \$2.00, postpaid. Price list. Samples free. Starb & Co., Box (P-81), Hamilton, Ohio.

EMBOSSER Stationery—Trifle more than Common. Samples. Commercial Embossing Company, Wilkes-Barre, Penn.

50 Classy Calling Cards and patented card case, 25c. Extra grade, Linen, 35c. Samples. Retter, 302 Fourth, Tippecanoe City, Ohio.

TYPEWRITTEN Form Letters. \$2.00 thousand. Get samples and price-list. Ralph Young, Canton, Ohio.

AUTHORS—MANUSCRIPTS

MANUSCRIPTS typewritten carefully and promptly, 50c per thousand words, with one carbon. We also read and criticize. \$1.00 for 5000 words or under. A trial will insure your future patronage. Criterion Service, Inc., R134, Jersey City, New Jersey.

WRITERS: Stories, poems, plays, etc., are wanted for publication. Literary Bureau, 117, Hannibal, Mo.

DOLLARS for Manuscripts, Novels, Stories, Articles, Plays, Poetry sold on commission: free inspection. International Literary Bureau, 261, Chicago.

MOTION PICTURE PLAYS

WRITE Photoplays; \$50 each. Experience unnecessary; details free to beginners. Producers' League 194, St. Louis.

WRITE Photoplays in spare time and earn money. Try it. Big prices paid; constant demand. No correspondence course. Details free. Glese & Co., 294 Whiteman Street, Cincinnati, Ohio.

WRITE for free copy "Hints on Writing and Selling Short Stories, Poems, Photoplays." Atlas Publishing Co., S-236, Cincinnati.

MOTION PICTURE BUSINESS

\$35.00 Profit Nightly. Small capital starts you. No experience needed. Our machines are used and endorsed by Government institutions. Catalog free. Atlas Moving Picture Co., 414 Franklin Bldg., Chicago.

\$20 to \$50 Nightly, complete professional outfit, machine film. Everything furnished on Payment Plan. Catalog free. Moving Picture Sales Co., Dept. 11A, 540 Plymouth Place, Chicago.

OPTICAL GOODS

MICROSCOPE, magnifies 3,600 times. Every microscope guaranteed to give a clear and perfect definition of object. Price 25c. Send stamp for catalog. Specialty Mfg. Co., 14, Box 164, Milton, Pa.

MUSIC AND SHEET MUSIC

SONG Poems Wanted. Big demand. Writers receive over \$1,000,000 yearly from publishers. Send for National Song, Music & Sales Service Booklet. Brennen Suite 25, 1431 Broadway, New York.

CAMERAS, PHOTOGRAPHY AND SUPPLIES

"PHOTOGRAPHY Self-Taught." Complete instructions on how to operate the camera, develop the plate or film, print and finish the picture. 160 pages. 59 illustrations. 25c. Cloth 50c. (coin.) Criterion Service, Inc., R134, Jersey City, New Jersey.

SELL your prints, \$2.00 up, any size. Learn Photographic Journalism. Copyrighted book of instructions with markets, only 50c. Clement Moore, Publisher, New Egypt, N. J.

INVENTIONS—Wanted in Motion Pictures and Photography. Special Department for these classes of invention. Advice. What to Invent and List of Patent Buyers sent free. Victor J. Evans & Co., 173 Ninth, Washington, D. C.

FILMS Developed, 10c, all sizes. Prints 2 1/4 x 3 1/4, 3c; 4 1/4 x 4 1/4, 4c. We give Profit Sharing Coupons. 24 hour service, work guaranteed. Send negatives for samples. Girard's Com. Photo Shop, 316 High St., Mills Alderman Bldg., Holyoke, Mass.

50c Trial Offer for 10c. Best Kodak Finishing. Any size roll developed, 10c. Six prints free with first roll. Or, send six negatives, any size, and 10c (stamps) for six prints. 8 x 10 Enlargements, 30c. Roanoke Photo Finishing Co. (formerly Roanoke Cycle Co.), 22 Bell Ave., Roanoke, Va.

5c Roll Development. Cyko Prints 2c, 2 1/4c, 3 1/4c. May, Owensboro, Ky.

I Want to send you proof of the wonderful pulling power of the Classified Columns of this magazine. If you want to buy something, sell something or exchange something, write today for full particulars. D. W. Coutlee, Manager Classified Department, Popular Science Monthly, 239 Fourth Avenue, New York.

FILMS developed Free. Print 4 x 5 or smaller 3 cents. Beautiful work. 8 x 10, 25 cents. Photos on postals \$2.00 hundred. \$15.00 thousand. Photos copied. Photo supplies. Deyograph Art Co., Jamaica, New York City.

IF you appreciate quality, send us your Developing and Printing. Trial Roll finished at your own price. Sample Enlargement 20c. Myland, 2129 N. Front, Philadelphia.

WILL develop any six exposure roll under 4 x 5, make the prints and one 8 x 10 enlargement for 40c. Motion Picture Products, 3238 Harrison St., Chicago, Ill.

FOR MEN AND WOMEN

"SNOW White Fluid." A new White Ink for marking books or prints. An excellent opaque for films or negatives. 25c. coin or stamps. J. L. Johnston, Fine-Arts Building, Rochester, N. Y.

POMO Indian Sun Baskets. Price free. Gilhams, Highland Springs, Cal.

"SEXUAL Philosophy," 12c. Clear, specific, authoritative, complete, best satisfies. Fred B. Kaessmann, Lawrence, Mass.

WHAT will coming year bring to you? Reliable scientific forecast from planetary aspects. Send 10c and date of birth for trial reading. L. Thomson, Dept. 100, Kansas City, Mo.

HOME Study leading to degrees from old residential college. B. W., 6922 Stewart Ave., Chicago.

MAN or Woman to travel for old-established firm. No canvassing. \$1170 first year, payable weekly, pursuant to contract. Expenses advanced. D. G. Nichols, Philadelphia, Pa., Pepper Bldg.

VILLA money: big package postpaid for 25c. M. Grossman, Rosewell, New Mexico.

FREE—Harmless Recipe destroys all craving for tobacco. Superba Co., BT, Baltimore, Maryland.

BE a Detective. Excellent opportunity, good pay, travel. Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Mo.

ZODIAC Horoscope Reading showing Character, Talents, Future Possibilities, etc. Invaluable for your Future Welfare. Send birth-date and ten cents (coin) for Trial Reading. E. M. Heath, Dept. P., Fairbanks Bldg., Chicago.

MODERN science in canning vegetables and fruits without sugar or compounds. Preserve your surplus food for winter and save money, send 25c. E. Lehman, 811 North 4th, Camden, New Jersey.

"AMERICA First!" Beautiful Shield 25c prepaid. Ernest Benninghofen, Anderson, Indiana.

SHOW your patriotism day and night. Send 25 cents for two transparent American flags for your auto lamps, windows, etc. Harry Wardell, Sea Bright, New Jersey.

MANUFACTURE a necessity needed in every home. Big demand. Brand new. Particulars free. Mains, Box 22, Port Matilda, Pa.

FOR INVENTORS

DESIGNER and Builder of high-grade machinery, tools, dies, gauges, and instruments, by the single piece, or in quantities, at very reasonable rates. Expert, and confidential model and experimental work. We also make accurate drawings, tracings, and blue-prints for inventors, and others. Get our prices. J. B. Murphy, Lock Box, 675, Plainfield, New Jersey.

PATENTS on Easy Payments. Send Sketch or Model for free search and certified registration of your invention for your protection. Free Book tells What to Invent and How to Secure a Patent on our Easy Payment Plan. C. C. Hines & Co., 592 Loan and Trust Bldg., Washington, D. C.

INVENT Something: Your ideas may bring wealth; free book tells what to invent and how to obtain a patent, through our credit system. Talbert & Parker, 4691 Talbert Bldg., Washington, D. C.

PATENTS secured or all fees returned. See E. E. Vrooman & Company's advertisement, page 134.

FIND Out for Yourself what to invent and how to procure and sell a patent for the same. My book, "Inventor's Universal Educator," covers the matter from A to Z. 140 pages, elegantly bound. Also contains 600 mechanical movements and 50 perpetual motions. Price \$1.00, postage free. F. G. Dieterich, 601 Ouray Bldg., Washington, D. C.

UNPATENTED Inventions Sold. No advance fee. Inventors Advocate, K, Washington, D. C.

PATENTS Wanted. Inventors write for Free Booklet. Tells how to get the cash value of your invention. Fredk. E. Wooten, Sta. F., Philadelphia, Pa.

THE Patent Salesman will help you sell your patent. Sample copy 5 Cents. The Patent Salesman, 518 Central Bldg., Rochester, N. Y.

PATENTS without advance attorney's fees. Free report and books. Frank Fuller, Washington, D. C.

INVENTIONS Commercialized on cash and royalty basis. Inventors and Manufacturers write at once. Adam Fisher Mfg. Co., 2183 Railway Exchange, St. Louis, Mo.

HAVE you an idea? If so, you should protect it by a patent. Send us a model or sketch for free opinion of patentability. Write for our Four Books sent-free to any address. Victor J. Evans & Co., 156 Ninth, Washington, D. C.

INVENTORS—We specialize in manufacturing new patented articles, make models—dies—and do experimental work. Leo J. Gerding Mfg. Co., Dept. E., Opera Place, Cincinnati, Ohio.

HIGH-VALUE Patents. See R. S. & A. B. Lacey's advertisement on page 134.

CLEVELAND Specialty & Mfg. Co., Cleveland, Ohio, design or make special metal articles to order. Tools, Models, Stampings. Inventions developed.

PATENTS FOR SALE

WIRE Stretcher for sale or manufacture. Chas. McPherson, Saskatoon, Saskatchewan.

CASH or Royalty. Patent on new resilient vehicle wheel. Patent just granted. Practical, inexpensive, nothing like it before. For further information write Arvid Bohlin, 184 Lamberton Street, Trenton, New Jersey.

CAN Opener for sale or manufacture. L. Kiral, 306 E. 71st Street, New York City.

When writing to Advertisers please mention Popular Science Monthly

PATENTS AND PATENT ATTORNEYS

PATENTS Secured or fee returned. Actual search free. Send sketch or model. 1917 Edition, 90-page patent book free. My patent sales service gets full value for my clients. It should never require more than two days to report upon the patentability of your invention; nor longer than ten days to prepare your application for filing. Longer delay amounts to gross neglect and the jeopardizing of your rights. For prompt personal service write: George P. Kimmel, 214 Barrister Building, Washington, D. C.

PATENTS—Send sketch for free search and report. Books on patents, book of reference letters, and dining table novelty sent free. John S. Duffe & Co., 608 F Street, Washington, D. C.

WE have a large number of marketable patents for sale, either outright or on royalty basis. If you are on the lookout for a live proposition, write us today. Criterion Service, Inc., R134, Jersey City, New Jersey.

NO Attorney fees until patent allowed. Send sketch for free report. Books free. Frank Fuller, Washington, D. C.

PATENTS obtained through D. Swift are being sold to Large Manufacturers. Write today for free books of "Inventions needed" and surpassing references. D. Swift, 371 Seventh St., Washington, D. C. Established in 1889.

PATENTS—Trade-Marks. Send for my free book, "How to Get Them." It's full of information you should know. Joshua R. H. Potts, 8 S. Dearborn St., Chicago; 929 Chestnut St., Philadelphia; 805 G St., Washington.

PATENTS Bring Riches; Protect Your Invention. Attorney's fee payable when patent allowed. Plain advice and "Patent Facts" free. Trade-marks registered. Jaynes and Jaynes, 600 Kellogg, Washington, D. C.

IDEAS Wanted—Manufacturers are writing for patents procured through me. Three books with list hundreds of inventions wanted sent free. I help you market your invention. Advice Free. R. B. Owen, 44 Owen Bldg., Washington, D. C.

PATENTS—Herbert Jenner, patent attorney and mechanical expert, 606 F St., Washington, D. C. I report free of charge if a patent can be had and its exact cost. Send for circular.

PATENTS low as \$17 total cost. Particulars free. Patent News, Dept. 20, Washington, D. C.

INVENT Something; Your ideas may bring wealth; free book tells what to invent and how to obtain a patent, through our credit system. Talbert & Parker, 4624 Talbert Bldg., Washington, D. C.

PATENT applications filed on partial payment plan. We help sell the patent. Trade-marks, copyrights, etc. Milo B. Stevens & Co., 640 F St., Washington, 351 Monadnock Bldg., Chicago. Established 1864.

PATENTS Wanted—Write for List of Patent Buyers who wish to purchase patents and What to Invent with list of inventions wanted. Send sketch for free opinion of patentability. Our Four Guide Books sent free upon request. Patents advertised free. We assist inventors to sell their inventions. Victor J. Evans & Co., 155 Ninth, Washington, D. C.

PATENT—Advice and Books free; highest references; best results. I procure patents that protect. Watson E. Coleman, Patent Lawyer, 622 F St., N. W., Washington, D. C.

PATENT secured or fee returned. Free Patent Book and Selling Guide. We will promote your patent. Write Sues & Co. Attys., 534 7th St., Washington, D. C.

PATENTS secured or all fees returned. See E. E. Vrooman & Company's advertisement, page 134.

INVENTIONS of merit can be sold by our system. For further particulars write American Investment Co., Washington, D. C.

PRACTICAL Patent Service such as comes only with the mature judgment and years of experience of an old established firm, you can secure from Fetherstonhaugh & Co., 401 Victor Building, Washington, D. C., 35 years in U. S. and Canada. Free Booklet.

PATENT your Ideas—\$9,000 offered for certain inventions. Books, "How to Obtain a Patent," and "What to Invent," sent free. Send rough sketch for free report as to patentability. Manufacturers constantly writing us for patents we have obtained. We advertise your patent for sale at our expense. Established 20 years. Address Chandlee & Chandlee, patent attorneys, 1013 F St., Washington, D. C.

HIGH-VALUE Patents. See R. S. & A. B. Lacey's advertisement on page 134.

PATENTS, Trade-Marks and Copyrights. Our handbook on patents will be sent free on request. All patents secured through us are described without cost to the patentee in the Scientific American. Munn & Co., Patent Attorneys, 624 Woolworth Bldg., N. Y. Washington, D. C., office, 625 F St.

PATENTS on Easy Payments. Send Sketch or Model for free search and certified registration of your Invention for your Protection. Free Book tells What to Invent and How to Secure a Patent on our Easy Payment Plan. C. C. Hines & Co., 592 Loan and Trust Bldg., Washington, D. C.

"**PATENTS** and Patent Possibilities" is a 72-page treatise which tells all about patents, what to invent and where to sell it. It gives honest advice to inventors and tells about the successes of some of my clients, also explaining what are frequent causes of failure. Manufacturers are constantly writing for protective patents upon all kinds of sound inventions. Can you help supply their wants? The book is free. Write for it today. H. S. Hill, 929 McLachlen Building, Washington, D. C.

C. L. Parker, Patent Attorney, McGill Building, Washington, D. C. Inventors' hand-book, "Protecting, Exploiting and Selling Inventions," sent free upon request.

PATENTS. R. Morgan Elliott & Co., Patent Attorneys, Mechanical, Electrical and Chemical experts, 714-722 Woodward Bldg., Washington, D. C.

I want to send you proof of the wonderful pulling power of the Classified Columns of this magazine. If you want to buy something, sell something, or exchange something, write to-day for full particulars. D. W. Coutlee, Manager Classified Department, Popular Science Monthly, 239 Fourth Avenue, New York.

NORMAN T. WHITAKER, Patent Lawyer, Attorney-at-Law and Mechanical Engineer. Former Examining Official U. S. Patent Office. Suite 28, Legal Building, Washington, D. C.

THE Patentome is free. An education in obtaining patents. Established 1865. Anderson & Son, Attorneys, 712 7th St., Washington, D. C.

SEND for Free Booklet, "All About Patents and Their Cost." Shepherd & Campbell, Patent Attorneys, 734-E 8th St., N. W., Washington, D. C.

EDUCATIONAL AND INSTRUCTION

"**HOW to Make Things Electrical**"—A valuable workshop manual for the student or experimenter. Complete directions for building over 100 pieces of Electrical Apparatus, together with a series of Electrical Experiments. Includes such useful articles as motors, electric toasters, stoves, clocks, bell transformers, etc. Clear concise directions and careful drawings are features of this book. 200 Pages, 184 Illustrations. Price \$1.00. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

GOOD Cartoonists earn enormous incomes. Demand cannot be supplied. Our highly developed course of instruction will fit you, at minimum expenditure of time and money. We guarantee to refund your money if you are not satisfied in every way. Write today for particulars. Dennon School of Cartooning. Studio 18, Harrison, N. Y.

ORNAMENTAL Casting, make moulds yourself, two hundred illustrations Free. Mahler, Woodhaven, Long Island, N. Y.

WANTED—New Ideas. Write for list of Patent Buyers and Inventions Wanted. \$1,000,000 in prizes offered for inventions. Our Four Books sent free upon request. Victor J. Evans & Co., 178 Ninth, Washington, D. C.

EXPERIMENTAL Wireless Stations—Their Theory, Design, Construction and Operation, by Philip E. Edleman. Contains a complete account of sharply tuned modern wireless installations for experimental purposes which comply with the new wireless law. Includes wireless telephony and quenched spark system. This book is intended for experimenters who regard the art of wireless as more than a mere plaything, and who will find it a stepping stone to a serious preparation for high positions in the practical field. Written with particular regard to clearness, simplicity and direct usefulness, this book should be of exceptional value to the amateur as well as the more advanced worker. Contains 219 pages, 80 illustrations. Price \$1.50. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

WORLD-ROMIC, Languages Masterkey, 56c. Languages Publishing Company, New York.

SPANISH Alphagram, Pronunciation Masterkey, 37c. Languages Publishing Company, New York.

HAVE you ever studied German? If so read Aus Nah und Fern, fascinating magazine for students of German. Vocabulary. Two-year subscription, \$1.00; one year, 70c. Nahfern, Care of Parker School, 330 Webster Avenue, Chicago.

"**TWENTIETH** Century Book of Recipes, Formulas and Processes"—This book gives you the information that represents the collection of years and the expenditure of thousands of dollars. Contains complete directions for making everything from simple glues and adhesives to the tanning of leather, the making of photographic materials, perfumes, soaps, plating of silver and gold, working of metals, etc. 800 Pages, 10,000 Selected Subjects. Price \$3.00. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

MARR'S "DE Bookkeeping in Two Lessons," 25c. B285, Nashville, Tenn.

I Want to send you proof of the wonderful pulling power of the Classified Columns of this magazine. If you want to buy something, sell something or exchange something, write today for full particulars. D. W. Coutlee, Manager Classified Department, Popular Science Monthly, 239 Fourth Avenue, New York.

FREE Tuition by Mail:—Normal, Grammar School, High School, Bookkeeping, Shorthand, Typewriting, Civil Service, Agricultural, Drawing, Domestic Science, Engineering, Automobile, Salesmanship, Law, and Real Estate Courses thoroughly taught by mail. Membership Fee \$10.00; tuition free to first applicants. For "Free Tuition Plan," address Carnegie College, Rogers, Ohio.

IS He Crazy? The owner of a plantation in Mississippi is giving away a few five-acre tracts. The only condition is that figs be planted. The owner wants enough figs raised to supply a Canning Factory. You can secure five acres and an interest in the Factory by writing Eubank Farms Company, 934 Keystone, Pittsburg, Pa. They will plant and care for your trees for \$6 per month. Your profit should be \$1,000 per year. Some think this man is crazy for giving away such valuable land, but there may be method in his madness.

MONEY-MAKING Farms, 15 States, \$10 an acre up; stock, tools, and crops of ten included to settle quickly. Write for Big Illustrated Catalogue. Strout Farm Agency, Dept. 12, New York.

THE Real Estate Educator—A book for hustling real estate boosters, promoters, town builders and every man who owns, sells, rents or leases real estate. Covers fully Workmen's Compensation Act, Income Tax Law, Employer's Liability Act, Statute of Frauds, How to Sell Real Estate, How to Become a Notary Public or Commissioner of Deeds, "Pointers," "Don'ts" and other information. 256 Pages, Cloth. Price, \$1.00. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

CALIFORNIA little farms near Los Angeles for sale easy payments. Write E. R. Walte, Shawnee, Oklahoma.

POULTRY

"**500** Yearly Profit with Twelve Hens." Complete instructions in book form by expert on Gallino-Culture. Price 25c. Cloth 50c. (coin.) Criterion Service, Inc., R134, Jersey City, New Jersey.

When writing to Advertisers please mention Popular Science Monthly

AGENTS AND SALESMEN WANTED

\$1,000 per Man per County: Strange invention startles world—agents amazed. Ten inexperienced men divide \$40,000. Korstad, a farmer, did \$2,200 in 14 days. Schleicher, a minister, \$195 first 12 hours. \$1,200 cold cash, made, paid, banked by Stoneman in 30 days; \$15,000 to date. A hot or cold running water bath, equipped for any home at only \$6.50. Self-heating. No plumbing or waterworks required. Investigate. Exclusive sale. Credit given. Send no money. Write letter or postal today. Allen Mfg. Co., 387 Allen Bldg., Toledo, Ohio.

EARN \$50 to \$100 monthly distributing Parker Hosiery to repeat customers at mill prices. All or spare time. Protected territory. Credit. J. Parker Mills, 2733 No. 12th St., Phila., Pa.

AGENTS: 500% profit. Sign letters for office and store fronts, samples and particulars free. Inter State Sign, 2422 N. Halsted St., Chicago.

AGENTS—Ho-Ro-Co Skin Soap and toilet goods plan beats everything for agent's profits. "Ho-Ro-Co," 133 Locust Street, St. Louis, Mo.

AGENTS \$60 a week, to travel by automobile and introduce our 300 candle-power coal-oil lantern. Write for particulars of our free auto offer. Thomas Co., 861 North St., Dayton, Ohio.

AGENTS: Sell rich looking 36 x 68 imported rugs, \$1.00 each; Carter, Tenn., sold 115 in 4 days, profit \$57; you can do same. Write for sample offer selling plan; exclusive territory. Sample rug by parcel post prepaid, 98c. E. Condon, Importer, 12 Pearl Street, Boston, Mass.

SWELL suit free for 2 hours' work. Show it to your friends and make \$5.00 an hour in your spare time. We show how. Costs nothing to try. Write quick for measure blank and our handy sample outfit. All Free. We deliver everything free. Look into this. Paragon Tailoring Co., Dept. 7A51, Chicago.

SALESMAN—Acquainted with grocery trade; large demand, liberal commission, pocket sample. Wirth Salesbook Co., Chicago.

"EASY-Steps," scientific foot comforters; all sizes; quick, big sellers; dozen pairs \$2.25; profit 200%. Samples 25c. Manhattan Popular Products, Brooklyn, N. Y.

AGENTS: Our gold window letter proposition beats 'em all. Stalbritte Co., Dept. W., 1115 Second Avenue, New York City.

AGENTS: Sell joke novelties; stamp brings particulars. Mears, 66, Anderson, Indiana.

AGENTS: \$8 to \$12 for six hours' work. Big money in automobile transfer initials and flags—applied in ten minutes. \$1.35 profit on \$1.50 order. Get this quick. Write today. Auto Accessories Co., 29 Advertisers Bldg., Dayton, Ohio.

"WANTED—Salesmen everywhere. 3500 mile factory guaranteed tire. Large commission for exclusive territory. Opportunity. References. W. & G. Tire Co., Flatiron Building, New York."

BUILD a Business of Your Own—Start small—grow. Manufacture big selling advertised specialties yourself from Guaranteed Manufacturers Formulas. No Machinery required. Marvello—The Little Wizard Laundry Tablet—Something New—No Wax, Lye or Potash. Egg-O-Lene. Pure Food Egg Substitute—represents eggs nine cents dozen. Carbo-Cide, Wonderful Gasoline Intensifier—decarbonizer for Automobiles—Fibro-Vac Guarantee Puncture Plugger tire treatment. Latest Formula Lists, Propositions—stamp Miller, Industrial Chemist, Tampa, Florida.

NEWEST Money Maker! Eleven piece toilet set selling like blazes at \$1 with \$1 carving set free! Enormous profits! Tremendous hit! Randall sold 30 one day. Success sure. K. Pierce Co., 906 Lake St., Chicago.

233% Profit selling Jubilee Spark Intensifiers to automobile owners, garages. Sure cure for spark plug troubles. Sells like wildfire. Brand new. Exclusive territory. Write today. Jubilee Mfg. Co., Dept. P6, Omaha, Nebraska.

SKELETON Key, unlocks doors 10c, ten—all different—50c, twenty and premium \$1.00; "Self-threading" needles, assorted sizes 10c, three packages 25c. Ernest Benninghofen, Anderson, Indiana.

SALES Agents for widely advertised electric lighting outfit for farms and country homes. Exclusive territory to right man with automobile. No other capital needed. Fidelity bond required. Address the Western Electric Company, 195 Broadway, New York City, or 500 South Clinton St., Chicago, Ill.

AGENTS—\$30 a Week and Expenses. Free samples, gold and silver letters for store fronts, office windows and glass signs; any one can put them on; big demand everywhere; liberal offer to general agents. Metallic Letter Co., 400 N. Clark St., Chicago.

NEW Patriotic War Atlas Free with my 1917 "Business Guide." Sells everywhere. Beginners clear \$7 daily. 50% commission. Outfit Free. Prof. Nichols, Box A-7, Naperville, Ill.

LATEST patriotic sensation; electrically illuminated American flag. Can be attached to any electric socket. Sells at sight—\$1. 100% profit. Eastern Lighting Company, 171 Broadway, New York.

AGENTS—To travel by automobile introducing our Big Line of fast summer sellers. The greatest line on earth. Make \$10 a day easy. Complete outfit and automobile furnished to workers. Write at once for exclusive territory. American Products Co., 8547 Third St., Cincinnati, Ohio.

AGENTS. New summer phonograph—the Portophone. Built into a carrying case. Ideal for automobiles, canoes, campers, etc. Wonderful tone. Low price. Big profits. Write for demonstrating sample. Orchestrola Co., 1661 North St., Dayton, Ohio.

GET into biggest money making and automobile business—replacing necessary equipment. Live, ambitious men wanted as special factory representatives, exclusive territory, taking orders for tops, top coverings, seat covers, "Stik-Tite" Windows. No experience necessary. No capital required. No competition. Copyrighted system protects you. Free catalog, samples, full details. Cincinnati Auto Specialty Company, Dept. SC77, Cincinnati, Ohio.

FASTEST Selling Specialty ever Invented. Every man needs them. No competition. Large profits, high grade, Guaranteed Proposition. Protected territory. This is an agents' Bonanza. Also fifty other high grade specialties. Live-wire agents wanted everywhere. Write today. Expanding Cuff Button, Corporation, Sheboygan, Wisconsin.

I want to send you proof of the wonderful pulling power of the Classified Columns of this magazine. If you want to buy something, sell something, or exchange something, write to-day for full particulars. D. W. Coutlee, Manager Classified Department, Popular Science Monthly, 239 Fourth Avenue, New York.

FOREMEN, Shopmen, and Office men wanted to work spare time as special representative of large well known mail order house, selling Watches, Diamonds and Jewelry on Credit. Liberal commissions and exclusive sales rights granted. No investment or deposit required for outfit or samples. Write at once for details. Address S. D. Miller, Dept. 17, Agency Division, Miller Bldg., Detroit, Mich.

AGENTS: Big profits selling our New \$2.50 Automatic adding machine. Quick sales. Ten a day easy. No competition. Anyone having adding to do is positive customer. You'll be glad you wrote us. Bassett, 5921K Indiana Ave., Chicago.

\$50.00 a week up. All the Free Clothes you want to wear simply to advertise us. Write today for self-measuring blanks, style chart, big book of samples, etc. Send no money. A postal card brings all. We pay expressage on everything. American Woolen Mills Co., Dept. 7A51, Chicago.

AGENTS: Make real money this year, not "paper money." Sell our wonderful Luminous Articles. "They shine in the dark." Crucifixes, Match Boxes, Bulbs for all lights, Switch Plates, Clocks, Startling! Everlasting! Mysterious! Pioneer Corporation, (Luminous Specialists), 1263 W. 63rd, Chicago.

AGENTS financially responsible who understand heating plants to sell Blasko Fuel Saving Devices on monthly payment plan. Every heating plant a prospect. Guaranteed to save 20%. Evaporation tests at two universities averaged 25% saving. Wolff Fuel Saver Company, 12 East Jackson, Chicago.

WANTED—New Ideas. Write for list of Patent Buyers and Inventions Wanted. \$1,000,000 in prizes offered for inventions. Our Four Books sent free upon request. Victor J. Evans & Co., 174 Ninth, Washington, D. C.

MERCHANTS buy at sight. New changeable letter sign for window advertising. Large metal sign with 270 letters. Sells \$1.50. 300% profit. Write for proposition. Changeable Sign Co., 591 E. 102d, Cleveland.

"WASHWHITE" makes easy sales. Big Profit. Sure repeat business. Genuine Rogers Silverware Free to your customers, and valuable Premiums for you. Free printed matter and Sales Course. Free samples with every order. Cleans clothes without rubbing, and without injury to the finest fabric. 7 big washings for 15 cents. Sales Guaranteed. Write for Our Offer. The Nacma Co., Dept. L-8, 20 W. Lake St., Chicago.

MAKE and Sell your own goods. Formulas by Expert Chemists. Manufacturing Processes and Trade Secrets. Formula Catalog for stamp. Elmer Mystic Company, Washington, D. C.

GENERAL Agents—Crew Managers— Capable of earning \$75 or more weekly. Sell new guaranteed home specialty backed by \$200,000 corporation. Big profit. Quick sales. Exclusive territory. Sales Manager, Dept. L-6, 20 W. Lake St., Chicago, Ill.

GET Davis' Latest Proposition. \$15.00 Daily a Cinch. No matter how often you have answered my advertisements in last 20 years get my 1917 "Prosperity Offer." E. M. Davis, Dept. 51, 900 Lake, Chicago.

\$10 Daily refinishing chandeliers, brass beds, automobiles, by new method; producing amazing results; no capital or experience necessary. Particulars free. Gunmetal Co., Avenue F, Decatur, Illinois.

SELL copyrighted comic advertising novelties. 15 samples 10c. Chambers Works, Plainwell, Michigan.

SALESMEN—Sell wholesale and retail, new dimmer switch for automobiles. Just out, large commissions, easy sales. Apply immediately. Sills & Amidon, Oneida, N. Y.

DECALCOMANIE Initials for monogramming automobiles, etc. Wholesale price list and samples free. Globe Decal Company, Manufacturers, Jersey City, N. J.

WILSON Safety Cutter and mat beveler; 400% profit; 25c for sample. E. P. Wilson Company, 828 Francisco Street, Los Angeles, California.

AGENTS Wanted—Toliver Puncture-Proof Inner Tubes sell easily—our Agents make \$5.00 to \$50.00 a day net profit—no competition. If you wish to establish a business of your own with unlimited possibilities for profit write us for complete details. Toliver Tube & Tire Co., 207 Tramway Bldg., Denver, Colorado.

HELP WANTED

YOU can turn your spare time into dollars by taking subscriptions from your friends and acquaintances. You, as a regular reader of "Popular Science Monthly," know its good points and can present its attractive features in a way which will readily secure a large number of subscribers. Convince me that you are in earnest and willing to take advantage of this opportunity, and I will gladly send you full particulars as to how to go about the work, and also special appointment papers for your territory. Don't wait until your neighbor has secured the appointment—write today. Circulation Director, Popular Science Monthly, 239 Fourth Avenue, New York.

WANTED three hundred young men to learn Watch-work, Jewelry-work, and Engraving, in order that we may be able to supply the demand on us for workmen. Address postal card to Bradley Polytechnic Institute, Department "M," Peoria, Ill., asking for our latest catalog giving full particulars.

BE a Mirror Expert, \$3-\$10 a day; spare time home at first; no capital; we train, start you making and silvering mirrors French method. Free prospectus. W. F. Derr, Pres., 579 Decatur Street, Brooklyn, N. Y.

EARN \$10.00 to \$20.00 weekly mailing letters at home. Outfit and particulars 10c. Morrisso, 2513 S. 2nd, Philadelphia, Penn.

When writing to Advertisers please mention Popular Science Monthly

BE a Finger Print Expert—\$25 to \$50 a week in this new and fascinating profession. Write—find out how you can learn at home to supply the big demand for finger print experts in banks, big factories, detective agencies, etc. Special limited offer—write while it lasts. Evans University, Finger Print Dept., Room B120, 1810 Wilson Ave., Chicago, Ill.

WORK for Uncle Sam. He is the best employer. Big pay, sure work, easy hours, long vacations, rapid advance. Thousands of jobs open this year. I will help you get one. Write for my big Free book, DY 947 today. Earl Hopkins, Washington, D. C.

DETECTIVES make big money! Travel and see the country. We instruct you at a nominal cost. Write for free booklet. American School of Criminology, Scherer Bldg., Detroit, Mich.

DETECTIVES earn from \$25 to \$100 per week and traveling expenses. We show you how. Write today for free booklet. National School of Detectives, 489 Fifth Ave., N. Y., Room 487.

BE a detective. Excellent opportunity, good pay, travel. Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Mo.

BECOME Detectives—Big wages, wonderful opportunities; Wagner, 1243 Lexington Avenue, New York.

WANTED at Once—A trustworthy person with good reference, to distribute advertising matter from house-to-house. Must be a good walker and steady worker, for I offer legitimate employment to satisfactory person. Good pay. Send stamp for Application Contract Blank. None Free. Address Oliver P. Barkley, Distributing Agency, 100 Mount Pleasant, Pennsylvania.

EARN \$900 to \$1800 per Year. Government Railway Mail, Post Office and other "exams" coming. Prepare under Former Civil Service Examiner. Book free. Patterson Civil Service School, Box 3019, Rochester, N. Y.

STOP Slaving, Silver Mirrors, Plate Tableware home. Sure income. Clarence Sprinkle, Dept. 40, Marion, Ind.

ANY Intelligent Person may earn \$25 to \$40 weekly corresponding for newspapers; \$12 to \$18 weekly in spare time; experience unnecessary; no canvassing; steady work. Send for particulars. National Press Bureau, Buffalo, N. Y.

WRITE Photoplays; \$50 each. Experience unnecessary; details free to beginners. Producers' League, 194, St. Louis.

\$125.00 per month and all traveling expenses. Railway Traffic Inspectors in great demand, due to 8-hour law and congested conditions; new profession, promotion sure; demand for our graduates far exceeds supply; three months course during spare time, thoroughly prepares intelligent men. Ask for Booklet A12, Frontier Prep. School, Buffalo, New York.

WANTED Immediately—Thousands men—women, 18 or over, for U. S. Government Jobs. War means many vacancies. \$100 month. Steady work. Life appointment. Write for list positions. Franklin Institute, Dept. D50, Rochester, N. Y.

HUNDREDS of people make Big Money writing Photoplays, Stories, etc. So can You! We accept your ideas in Any form—correct Free—sell on Commission. Details Free. Writer's Service, Dept. 18, Auburn, N. Y.

NEW YORK Auto Specialty Manufacturers allotting agencies complete line selling accessories, want salesmen to handle city, county, state agencies. Gorman Company, 47 W. 42nd St., New York.

SOLDIERS and sailors need socks. Good money made at home knitting hosiery. Machines furnished on time. We pay you fixed rates for making the goods the year round. Wheeler, Inc., W-339 Madison, Chicago.

ANY honest person may earn up to \$2.00 each day, with us, in a few hours spare time. Write now. No capital; no canvassing. American Jewelers, 1948 Riverside, California.

WANTED—Men. Become automobile experts and salesmen. \$35 week easily earned. Learn easily at your home while earning. Write immediately for free sample correspondence lessons. Franklin Institute, Dept D820, Rochester, N. Y.

AEROPLANE Instruction—Thousands of aeroplane mechanics needed, right now. Will give 4 weeks course on full sized machines for \$110. No book study, but actual work. G. P. O., Box 1166, New York City.

SALESMAN—\$6,000 Accidental Death, \$30.00 Weekly Accident Benefit, \$25.00 Weekly Sick Benefit, \$10.50 yearly, half amount \$5.50. \$250,000 deposited Insurance Department. Become independent. Experience unnecessary. Guaranteed steady income from renewals. Registration Dept. A., Newark, N. J.

RAILWAY Mail Clerks Wanted. \$75.00 month. Examinations soon. Also Salesmen Wanted. Civil Service and Salesman-ship Courses by mail. For "Free Tuition Plan," address Carnegie College, Rogers, Ohio.

BUSINESS OPPORTUNITIES

TERRITORIAL Managers Wanted for the Century's Greatest Seller—Naspe. "The Polish that Silver Plates!" A Compound that actually cleans, polishes and replates with pure silver, articles of silver and nickel-plate. Wonderful opportunity for man of ability to establish large agency. Popular price; exclusive territory. Write for proposition. Naspe, Dept. A, 410 La Fayette Street, New York.

LETTERS that Land Orders—Big-man literature and advertising copy at prices that insure continuous service. Circulars, folders and booklets prepared, illustrated and printed. Tell us your wants. Criterion Service, Inc., R134, Jersey City, New Jersey.

MAIL Dealers, Agents: Dime brings sample and information about the slickest proposition you ever heard of. Gregory Fay, 1044 Bellevue, Syracuse, New York.

START An All-Profit Mail-Order Business. Add several dollars weekly to your income. Explanatory booklet for dime. No free particulars. Cutler's Sons, Reading, Penna.

BE a detective. Excellent opportunity, good pay, travel. Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Mo.

BE Independent! Go into the Real Estate Business. Great opportunities open now; easily acquired without capital. Send for detailed information. It's free. Dept. 72, MacMichael Realty Co., Victor, N. Y.

DISTRIBUTOR and Dealer Agents Wanted Everywhere for cleverest line electrical specialties ever created. Sterling Corporation, 1280 West Third St., Cleveland O.

FREE—3 Months to get acquainted; devoted to news and opportunity. The Western Miner, 2541 W. 37th Ave., Denver, Colorado.

ARTIFICIAL Marble, Sanitary Flooring, complete instructions, \$1. Ornamental casting, concrete, plaster, papiermache, decorations, garden furniture, statuary, rubber moulds, electrometallurgy. Particulars, 200 illustrations free. Mahler, C-721 Woodland Ave., Woodhaven, L. I., New York.

EXPERT Chemist will furnish Formula, and Trade Secrets in all lines. Lists free. W. L. Cummings, Ph.D., 217 Standart St., Syracuse, N. Y.

ADVERTISE. Get business everywhere. 25 words in 100 monthly magazines 3 months, \$1. 100 Weeklies \$2. 40 Sunday papers, \$10. A. Quadri, 426 E. 149th St., New York.

LEARN how to invest "Scientifically" in Oil. Get facts and figures. Valuable booklet detailing System for cost and postage, 12c. Department 1, 313 Beatty Building, Houston, Texas.

ADVERTISERS, Mail Dealers. Our 1915 rate book lists 2,000 principal publications, rates, circulation. Includes 30 mail order plans. Price, 10c. Dearborn Advertising Agency, 500 Franklin Bldg., Chicago, Ill.

MULTIGRAPH Letters build business. Most economical and effective advertising. Printing. Addressing. Low rates, careful work, service. Multigraph-Peerless Letter Company, 241 Fourth Avenue, New York.

WE pay 25c each for farmers' names, Send dime for contract. "C-Sun," Leroy, Mich.

MANUFACTURERS, Promoters and Patent Buyers are invited to write us stating the line of invention in which they are interested, as we can supply their wants in any class of patents. Victor J. Evans Co., 152 Ninth, Washington, D. C.

UNPATENTED inventions sold! No advance fee. Inventors Advocate, H. Washington, D. C.

WE Start You in Business, furnishing everything; men and women, \$30.00 to \$200.00 weekly operating our "New System Specialty Candy Factories," home or small room anywhere; no canvassing. Opportunity lifetime; booklet free. H. Ragsdale Co., East Orange, N. J.

DOLLARS Yearly in Your Backyard—No ginseng, mushroom dope. New ideas. Investigate. Particulars free. O. Metz, 313 East 89, New York.

WE pay 25c each for names and ad- dresses. Send dime for contract. C—Directory, Grand Rapids, Mich.

AMBRO Mining Corporation, with seven mining claims in the famous Mineral Hill Mining District, offers a limited amount of shares of their capital stock at 5c per share. This is a going mine and there have been several shipments of Lead and Silver ore from this property for which good returns were received. Get in on the ground floor while there is a chance. Ambro Mining Corporation, 600 W. Pratt St., Baltimore, Maryland.

WRITE for newspapers and magazines. Big Pay. Experience unnecessary, details free. Press Reporting Syndicate, 4005, St. Louis.

I changed my income from \$600 to \$3,000 a year with a small mail-order business. Started with \$3. Free Booklet tells how. 2c postage. Al Scott, Cohoes, N. Y.

"HIRE Yourself as Boss." Big corporation will back you in a money making Mail Order business selling guaranteed quick sale goods. Start the work at home or office in spare time without interfering with work. No stock to carry. No canvassing. Valuable Instructions Free. Write for free instructive booklet "Forceful Facts." Wm. J. Dick, Mgr., Dept. L16, 20 W. Lake, Chicago, Ill.

"CONSTRUCTION of Induction Coils and Transformers"—The biggest 25 cents' worth in the field of electrical literature. Tells how to design and build magnetic leakage transformers, high frequency apparatus, low voltage transformers, induction coils, condensers, gaps, etc., and gives dozens of valuable hints. Send for your copy to-day. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

BOOST Your Business. 25 Model Grocery Advertisements prepaid only \$1.00. 12 Clothing Ads. 50c. Written by experts. Other series for other lines. Write Ira Crawford, Business Builder, Box 128, Duluth, Minn.

LUMACO Pointers, a unique monthly. Teaches mail order business, plans, tips and formulas. Send for copy. Arthur Lutz Manufacturing Co., York, Pa.

BUILD a \$5000 business in two years. Let us start you in the collection business. No capital needed; big field. We teach secrets of collecting money; refer business to you. Write today for Free Pointers and new plan. American Collection Service, 739 State Street, Detroit, Mich.

MAIL Order—Valuable Secrets to Success, 25c. Profit by expert's experience. Fletcher, S., Westwood, New Jersey.

YOUNG Man: Improve your mechanical efficiency. Send for my complete catalog of valuable books—it's free. I also have books on Human Nature, Thought Culture, Mind Power, Hypnotism, Mesmerism, Personal Magnetism, Seership, Spiritualism, Clairvoyance, Concentration, etc. Tell me your wants. A. W. Martens, P-77, Burlington, Iowa.

WOULD you invest \$10 for a rattling good prospect of receiving \$243.70 yearly income for life? If so, communicate with Harrison Brothers, Poughkeepsie, N. Y.

INVESTORS Magazine free to you. \$10 invested with us has made others \$290.00 in few months. "Hoffman's Investment Journal," tells how this was done. This magazine gives facts about the real earning power of money. Tells how many have started on the road to fortune. We will send it three months Free. If you want to make money, write for this magazine today. Hoffman Trust Company, 722 Carter Building, Houston, Texas.

CONDUCT a Candy Kitchen; very small capital required; booklet free. Kennon School, 509 Wells St., Dept. 103, Chicago.

INVENT Something; Your ideas may bring wealth; free book tells what to invent and how to obtain a patent, through our credit system. Talbert & Parker, 4690 Talbert Bldg., Washington, D. C.

Mail Dealers. Sell our new copyrighted courses. Good demand—big profit. Efficiency Library, New Egypt, N. J.

When writing to Advertisers please mention Popular Science Monthly

GAMES AND ENTERTAINMENTS

TRICKS, Puzzles, Jokes, Toys, Games, Novelties, Doll and Cane Racks, Plays, Wigs, Stage Supplies, Escapes and Illusions, Large 1917 catalog free. Oaks Magical Co., Dept. 375, Oshkosh, Wis.

"CARD Tricks—How to Do Them". Be a live one; amuse your friends. Complete book 25c. (coin.) Criterion Service, Inc., R134, Jersey City, New Jersey.

GROW Chemical Plants while you watch. Chemicals, 20c coin. Zenith Chemical Laboratories, Duluth, Minn.

CLEVER Invention (Patented), 100 samples, 10c. DeLoof, A-247 Harmon, Detroit.

MAGIC—Escapes—Illusions—Catalog of Parlor Tricks Free. Professional Catalog with 500 Illustrations, 1000 Tricks, 10c. Hornmann Magic Co., Sta. 17, 470 8th Ave., New York.

STAMPS AND RARE COINS

THE way to build your Stamp Collection. Send 50c for one of my Approval Books, select the stamps you want to the value of Fifty Cents and return me the book. Other and more valuable books if you are deeply interested. F. J. Pope, Charlotte, Vermont.

105, China, etc., Stamp Dictionary, list 2c. Album, 500 illustrations, 3c. Bullard, Station AA, Boston.

STAMPS—500 fine foreign, incl. Mex. War, Salvador, incl. officials, Guatemala, China, etc., only 10c. Best App. Sheets 60 to 80% dis. We give Valuable extra Presents free! Big 120 page catalog free. We buy stamps. Hussman Stamp Co., St. Louis, Mo.

OLD Coins. Large Spring Coin Catalogue of coins for sale free. Catalogue quoting prices paid for coins, ten cents. William Hesslein, 101 Tremont St., Boston, Mass.

FREE, 60 different stamps including New Foundland, China, Japan, Mexico, etc., to applicants for our high grade approvals. Send 2c stamp for return postage. The Edgewood Stamp Company, Dept. M, Milford, Conn.

STAMPS. 75 All Different, 2 cents. Mention paper. Quaker Stamp Co., Toledo, Ohio.

\$2 to \$600 paid for hundreds of old coins dated before 1895. Send 10 cents at once for new illustrated coin value book. Size 4 x 7. It may mean your fortune. Clarke & Co., Coin Dealers, Box 76, LeRoy, N. Y.

STAMPS—12 different from warring nations, 10c; 10 different foreign coins, 15c; 20 Belgian stamps, 10c. Lists free. Toledo Stamp Co., Toledo, O.

17 varieties Hayti stamps 20c. List of 7000 varieties, low priced stamps free. Chambers Stamp Co., 111C, Nassau St., New York City.

FREE, 25 different British Colonials to applicants for approvals. Postage 2c. 200 different foreign, 17c. Nickles, Room 15, 122 Florida Ave., Washington, D. C.

CALIFORNIA gold, quarter size, 27c. Large cent before 1821, Columbian nickel and price list 10c. Norman Shultz, King City, Missouri.

FIVE Villa Coins and Bills 35c. Moore Coin Company, Commerce, Texas.

I want to send you proof of the wonderful pulling power of the Classified Columns of this magazine. If you want to buy something, sell something or exchange something, write today for full particulars. D. W. Coutlee, Manager Classified Department, Popular Science Monthly, 239 Fourth Avenue, New York.

\$100.00 Villa (seven bills), postpaid 35c. Border Trade Post Co., Albuquerque, New Mexico.

PICTURES, POSTCARDS AND PEN-NANTS

EXQUISITE Art Photographs, Post Cards and Pictures for the den, club and library. Wish to emphasize in particular, that my products are intended for the gentleman who appreciates distinctive quality, something without a chance for criticism and invite you to test same. Catalog 10c. Your money refunded if you are not satisfied. O. W. Miller, 105 Chambers St., New York.

PHOTOS, fascinating studies from living models. No trash. The kind you have been looking for. Large sample and particulars, 10 cents. Jorst Company, Box 253, Saginaw, Mich.

RECEIVE pretty postcards from far and near. Best club membership, 10c. Jolly Card Exchange, Eight A-St., Decatur, Indiana.

16 samples of photos of girls in bewitching poses for 10 cents. Kaye Co., Ottawa, Ill.

REAL Photos, Charming Beauties, fascinating poses. Send dime for large sample and catalog. P. S. Shaw, 44 Boylston St., Boston.

PICTURES of Men Who Have Done Things—Set of ten beautiful photographs already for framing. Just the thing for your den or library. Each picture contains description of what these men have done and gives date of birth, etc. List includes Benjamin Franklin, Thomas A. Edison, Alexander Graham Bell, William Marconi and others. Send for a set today—while the supply lasts. Price 10 cents. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

RECEIVE pretty cards from everywhere. Membership and six pretty cards, 10c. Riverside Exchange, Knoxville, Md.

PHOTOS of girls in bathing costumes, attractive photographs, twelve for one dollar, a money back guarantee. H. M. Biggin, Sharon, Pa.

BOOKS AND PERIODICALS

EXPERIMENTAL Wireless Stations—Their Theory, Design, Construction and Operation, by Philip E. Edleman. Contains a complete account of sharply tuned modern wireless installations for experimental purposes which comply with the new wireless law. Includes wireless telephony and quenched spark system. This book is intended for experimenters who regard the art of wireless as more than a mere plaything, and who will find it a stepping stone to a serious preparation for high positions in the practical field. Written with particular regard to clearness, simplicity and direct usefulness, this book should be of exceptional value to the amateur as well as the more advanced worker. Contains 219 pages, 80 illustrations. Price \$1.50. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

USED Books. Bargains. Catalog. Higens K-2441 Post, San Francisco. (Books Bought.)

"TWENTIETH Century Book of Recipes, Formulas and Processes"—This book gives you the information that represents the collection of years and the expenditure of thousands of dollars. Contains complete directions for making everything from simple glues and adhesives to the tanning of leather, the making of photographic materials, perfumes, soaps, plating of silver and gold, working of metals, etc. 800 Pages, 10,000 Selected Subjects. Price \$3.00. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

MAGAZINES at Rock Bottom Prices. Send today for our free catalog "A." S. C. Hanson Magazine Agency, 4926 Kinzie, Chicago.

FREE Handbook for mechanics and contractors in any line. Shows how to make your work easy; do more and better work and save money. State your occupation and the book is yours Free. Van Expansion Bolt Company, 26A West Lake Street, Chicago.

"ELECTRICIAN'S Wiring Manual"—When you are on the job let this book be your helper. Contains hundreds of kinks for the practical wireman, the contractor or the helper; a clear explanation of the National Electrical Code, and other features of great value to the electrician. Twenty-seven Chapters, 410 Pages, 415 Illustrations of sound practical information, flexible leather binding, pocket size. Price \$1.50. Book Department, Popular Science Monthly, 239 Fourth Avenue New York.

P. Reese Company, Mt. Pleasant, Pa., can supply any book published. Catalogs free.

"HOW to Make Wireless Instruments"—This book will give you just the information you need. It is a treatise for the experimenter and amateur on the construction of wireless instruments and apparatus. Contains 94 Pages, 30 Different Instruments and 80 Illustrations. Price 25 Cents. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

WORLD-ROMIC, Languages Masterkey, 56c. Languages Publishing Company, New York.

"CONSTRUCTION of Induction Coils and Transformers"—The biggest 25 cents' worth in the field of electrical literature. Tells how to design and build magnetic leakage transformers, high frequency apparatus, low voltage transformers, induction coils, condensers, gaps, etc., and gives dozens of valuable hints. Send for your copy to day, Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

AM selling brand-new technical books at reduced prices and on easy terms. Send for list of sets on Shop Practice, Carpentry and Building, Plumbing, Automobile Repairing, and Electrical, Steam, and Civil Engineering. C. H. Ward, Drexel Ave. and 58th Street, Room B-120, Chicago.

YOU can turn your spare time into dollars by taking subscriptions from your friends and acquaintances. You, as a regular reader of "Popular Science Monthly," know its good points and can present its attractive features in a way which will readily secure a large number of subscribers. Convince me that you are in earnest and willing to take advantage of this opportunity, and I will gladly send you full particulars as to how to go about the work, and also special appointment papers for your territory. Don't wait until your neighbor has secured the appointment—write today. Circulation Director, Popular Science Monthly, 239 Fourth Avenue, New York.

10 Magazines, 50 letters, 10 post cards, 200 money making spare time plans. All yours for 25c prepaid. Value \$5.00. Educational Bureau, New Egypt, N. J.

THE Real Estate Educator—A Book for hustling real estate boosters, promoters, town builders and every man who owns, sells, rents or leases real estate. Covers fully Workmen's Compensation Act, Income Tax Law, Employer's Liability Act, Statute of Frauds, How to Sell Real Estate, How to Become a Notary Public or Commissioner of Deeds, "Pointers," "Don'ts" and other information. 256 Pages, Cloth. Price, \$1.00. Book Department, Popular Science Monthly, 239 Fourth Avenue, New York.

"RAILROADING as a Vocation." The Science of Transportation written in an understandable way. Send fifty cents to Chas. Elliott, Fayetteville, N. C.

Learn Aviation

Learn at home! The U. S. Government will spend 60 million dollars on aviation. Right now we need thousands of flying men. And there is even greater need for Airplane Designers; Builders; Salesmen; Assemblers; Repairmen; Inspectors; Instructors; Mechanics. This course gives you all the basic training for these positions. Write Today! Get our Special Offer. Learn how you can get free a flying model and all materials to build your own model. Don't fail to write us today! National Aero Institute, Dept. B-820 Morton Bldg., CHICAGO

YOUR SPINE NEEDS STRETCHING



This University discovery is the most important health invention of the century. It remakes and rejuvenates the Human Body. It produces normal spines. It frees impinged and irritated nerves, corrects contracted muscles, shortened ligaments; eliminates congestion, improves circulation and drainage of the body. IT WILL INCREASE THE BODY'S LENGTH. THE PANDICULATOR CO., Cleveland, O.

When writing to Advertisers please mention Popular Science Monthly



BUD MORRISS, Chief Instructor American School of Aviation

Aviation

PRACTICAL AERONAUTICS BY MAIL

EARN \$50 to \$500 a Week!

HERE is the one inexhaustible gold mine of opportunity and here is the man

who will lead you to it. It is the most extraordinary condition ever presented, owing to the sudden world-wide demand for aeroplanes. High class positions by the thousand calling for trained men—fame and fortune actually thrust at them. Salaries of from \$50 to \$500 a week are awaiting men who can fill these positions. And now, for the first time in history, a practical, home-study course in practical aeronautics is open to every man at a trifling expense. No matter what your occupation, you can prepare for a better position with big pay. Now is your opportunity.

Enter a practically untrodden field—a new profession. Seize the opportunity that has burst upon the country with tremendous force. Hustle ahead with the rapid development of the aeroplane industry which is outrivaling that of automobile and motion picture, as the quick and sure road to financial independence.

**Prepare NOW
for these positions**

Aeronautical Engineer
Aeronautical Instructor
Aeronautical Contractor
Aeroplane Repairman
Aeroplane Mechanic
Aeroplane Inspector
Aeroplane Salesman
Aeroplane Assembler
Aeroplane Builder

Conducted by Famous Aviators and Aeroplane Builders

The Course has been prepared by men of international reputation. Mr. Bud Morriss, the well-known aviator, is Chief Instructor and personally guides the progress of each student. He is assisted by a distinguished staff of Aviators, Aeroplane manufacturers and Aeronautical Engineers. Every Lesson, Lecture, Blue Print and Bulletin is self-explanatory, in plain terms for quick understanding. The Course is absolutely up-to-the-minute with every known fact concerning Aeronautics. You get practical, working knowledge of the very highest merit. Now is the time and this is your opportunity to step right into fame and fortune. You are needed. Where there's a will here's the way.

What Our Students Say:

Mr. Stanfield Fries

Fort Bliss, Tex.

My estimation of the new course is excellent; it could positively not be any better.

Mr. Z. Purdy

Shreveport, La.

It is hard to believe that lessons on such a subject could be gotten up in such an interesting manner.

Mr. Lloyd Royer

Haigler, Neb.

I can hardly thank you enough for the way you have personally taken up my enrollment.

Mr. Mayne Eble

Manistee, Mich.

I believe I learn more from my lessons than an aviator who takes his first lesson with an airman in a aeroplane.

Write Now for Our Great Offer

Send the coupon for full particulars of our remarkable special offer open to you now. Find out all about the marvelous opportunities that are opening in the Aviation game. This offer is the greatest stepping stone to bigger opportunities ever known. Write today for complete literature, all free and prepaid. You are not obligated in any way. Do not waste time in thinking about it. Act! Send the coupon or a letter or a post card will do. Write at once.

American School
of Aviation
431 So. Dearborn St.
Dept. 2757,
Chicago, Ill.

Gentlemen: Please send me free and without obligation, full particulars of your Course in Practical Aeronautics and your Special Offer to those who write at once.

American School of Aviation

431 So. Dearborn Street, Dept. 2757, CHICAGO, ILL.

Name.....

Address.....

When writing to Advertisers please mention Popular Science Monthly

EARN

\$200 TO \$350

EVERY MONTH



Two kinds of men make up the world—those who give orders and those who carry them out. Those who give orders make the big money, \$2400 to \$4000 or more per year. Those who take orders must be satisfied with little jobs at \$10 to \$25 a week! The only way to get the BIG money is to gain special knowledge in a field that needs trained men—and of all lines open to you **ELECTRICITY** offers the greatest, most profitable opportunities today. The industry is actually crippled for lack of trained men—not common, unskilled help, but men with practical, expert knowledge!

FREE

20 LESSONS IN

ELECTRICITY

Albert W. Wicks, Electrical and Mechanical Engineer and Bachelor of Science wants to give you 20 lessons in Practical Electricity **FREE**. Send your name on Coupon for amazing 30-Day OFFER. Read our free book which describes wonderful opportunities waiting for Electrical Men and NEW methods used by Prof. Wicks in teaching by mail. Go into business for yourself or earn \$2400 to \$4000 yearly in a big job. No text books. No previous experience needed.

LEARN

AT HOME

Wonderful NEW System

No need to leave your home or present position. Use part of your spare time to study and advance yourself. Entire Course Costs You Nothing unless you are completely satisfied. Write postal or mail coupon now while we offer 20 regular lessons free. This offer may never appear again. Write NOW before you turn this page. Address

A. W. WICKS, E. E. Director
WICKS ELECTRICAL INSTITUTE
 81 W. Randolph St., Dept. 477, CHICAGO, ILL.

A. W. WICKS, E.E. Director, Wicks Electrical Institute,
 81 W. Randolph St., Dept. 477, Chicago, Ill.

Without any obligation on my part, please send me full particulars of your 20 Free Lessons Offer and all other information about your wonderful new system for teaching Electricity at home.

Name.....
 Address.....

Learn to Write

BEGIN TODAY I can make a good penman of you at home during spare time. Write for my free book, "How to Become a Good Penman." It contains specimens and tells how others mastered penmanship by the Tamblin System. Your name will be elegantly written on a card if you enclose stamp to pay postage. **FREE BOOK** Write for it Today

F. W. Tamblin, 437 Meyer Bldg., Kansas City, U. S. A.

INDIANA, Terre Haute.

Rose Polytechnic Institute

A College of Engineering. Courses in Mechanical, Electrical, Civil, Chemical and Architectural Engineering. Extensive shops, well-equipped laboratories in all departments, expenses low, 34th year. For catalog containing full information and professional register of alumni, address G. L. MEES, President.



Become a MOTION PICTURE Photographer

Salaries \$40 to \$150 Weekly. Easy, fascinating. Travel everywhere. War has doubled demand for trained men. Learn in few weeks, day or evening classes. Actual practice in up-to-date studio. Call or write for booklet—free. Easy terms. Special Offer Now. N.Y. Institute of Photography, 3107, 141 W. 36th Street, New York City

ENGINEERING MECHANICAL ELECTRICAL

One Year Practical Courses. Day and Evening classes. Splendid equipment and instruction. Low tuition. For particulars address

DETROIT TECHNICAL INSTITUTE
 Box 306, Y. M. C. A. Building, DETROIT, MICH.



DO YOU LIKE TO DRAW?

Cartoonists are well paid

We will not give you any grand prize if you answer this ad. Nor will we claim to make you rich in a week. But if you are anxious to develop your talent with a successful cartoonist, so you can make money, send a copy of this picture, with 6 cents in stamps for portfolio of cartoons and sample lesson plate, and let us explain.

The W. L. EVANS SCHOOL OF CARTOONING
 825 Leader Bldg., Cleveland, Ohio

New Automatic Adder \$2.50



Makes adding easy for anyone. It's accurate, quick, durable and easily operated. Capacity 999,999.99. Save time, brain work and eliminates errors. Thousands of pleased owners. Guaranteed one year. Delivered complete \$2.50. Order yours today. Agents wanted.

J. H. BASSETT & CO., Dept. 48, 5921 INDIANA AVENUE, CHICAGO, ILL.




Amazing Profits in Mushrooms

Anybody can add \$10 to \$40 per week to their income, in spare time, entire year, growing mushrooms in cellars, sheds, barns, boxes, etc. I tell you where to sell at highest prices.

Free Illustrated Instruction Booklet
HIRAM BARTON
 Desk 3, 329 W. 48th Street, New York

When writing to Advertisers please mention Popular Science Monthly

WANTED MEN!

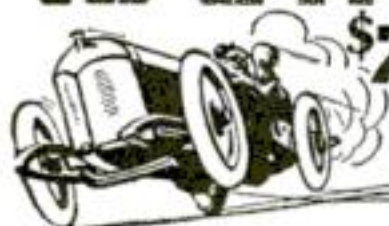

**\$75 TO \$300
A MONTH!**

Demand for capable automobile and tractor men far exceeds the supply. Our graduates secure good paying positions as Salesmen, Demonstrators, Factory Testers, Garage Managers, Drivers and Tractor Experts.

\$50 course FREE

Only six weeks required to train you in this great school. Most complete instruction. Instructors all experts. Enroll now and receive \$50 Course in Tractor and Lighting Engineering Free. Write today for our Big Free Book and \$50 Free Scholarship Certificate.

RAHE'S AUTOMOBILE TRAINING SCHOOL

*Largest Auto Training School
In the World*

1026 Locust St., Kansas City, Mo.



Stop forgetting

**Memory
the Basis
of All
Knowledge**

The Key to Success
The secret of business and social success is the ability to remember. I can make your mind an infallible classified index from which you can instantly select thoughts, facts, figures, names, faces. Enables you to concentrate, develop self control, overcome bashfulness, think on your feet, address an audience. Easy. Simple. The result of 20 years' experience developing memories of thousands.

Write Today for free booklet, "How to Remember" and Copyrighted Memory Test, also how to obtain my FREE book, "How to Speak in Public."

DICKSON SCHOOL OF MEMORY,
1929 Hearst Bldg., Chicago, Ill.

Prof. Henry Dickson, Principal

COPY THIS SKETCH

and let me see what you can do with it. Illustrators and cartoonists earn from \$20.00 to \$125.00 a week or more. My practical system of personal individual lessons by mail will develop your talent. Fifteen years' successful work for newspapers and magazines qualifies me to teach you.

Send me your sketch of President Wilson with 6c in stamps and I will send you a test lesson plate, also collection of drawings showing possibilities for YOU

The Landon School of Illustrating and Cartooning
1451 Schofield Building, Cleveland, O.



TRAVEL

—see the world!

Railroad Inspectors

WAR CREATES BIG DEMAND!

\$125 Monthly and All Expenses.

"Do your bit" by helping prevent accidents and traffic congestion! War supplies and the new eight-hour law have created a tremendous demand for trained Traffic Inspectors at \$125 monthly and all travelling expenses. A new profession with wonderful opportunities for advancement. Demand for our graduates far exceeds the supply—from railroads throughout America. Three months course, during spare time, thoroughly prepares intelligent men. Ask for our illustrated booklet No. G9.

FRONTIER PREPARATORY SCHOOL, Buffalo, N. Y.



AMERICAN SCHOOL OF CORRESPONDENCE
CHARTERED AS AN EDUCATIONAL INSTITUTION
CHICAGO, U.S.A.

Refund Guarantee

This Certifies That James R. Webster in consideration of his making the enclosed Application for Enrollment immediately, is guaranteed the return of the ENTIRE AMOUNT paid on his Course, if, within one week after the completion of his tenth examination, he will notify the School that he does not wish to continue his Course.

Signed and Sealed Feb. 21-1917 *A. S. Mullen*
Date *Feb. 21-1917* *A. S. Mullen*
President

Find Out What Training Means to You

WE hear a great deal nowadays about training—and how it has put men into high positions.

But do you realize what training will do for you? Here is an offer through which you can find out. The American School will start training you for the very position that you are dreaming about and you can see just exactly how this training helps you in your daily work.

Take Ten Lessons —Then Decide

You can take ten lessons in any course offered by the American School with the distinct understanding that if, after you have completed the ten lessons, you are not convinced that this training is going to put you in a high position, every cent that you have paid will be refunded.

Send the Coupon Today

Make your mark in this coupon before the position in life that you are dreaming about and let us tell you how easy you can get the training that will fit you for that job, right in your own home.

You will be under no obligations. Send the coupon now.

American School
of Correspondence, Chicago, U.S.A.

Dept. G120B

American School of Correspondence,
Dept. G120B, Chicago, U. S. A.

Gentlemen: Please send me booklet and tell me how I can fit myself for the position marked X.

... Electrical Engineer	... Business Law
... Elec. Light & Power Supt.	... Business Manager
... Hydroelectric Engineer	... Auditor
... Telephone Engineer	... Accountant
... Architect	... Certified Public Acc't
... Architectural Draftsman	... Stenographer
... Building Contractor	... Bookkeeper
... Building Superintendent	... Fire Ins. Inspector
... Structural Engineer	... Fire Ins. Adjustor
... Structural Draftsman	... Fire Ins. Expert
... Mechanical Engineer	... Sanitary Engineer
... Mechanical Draftsman	... Master Plumber
... Civil Engineer	... Plumb'g & Heat'g Est.
... Steam Engineer	... Heat'g & Vent. Engin'r
... Shop Foreman	... Reclamation Engineer
... Shop Superintendent	... Automobile Engineer
... Sheet Metal Draftsman	... Automobile Repairer
... Lawyer	... High School Course

We also prepare for civil service examinations in all engineering subjects.

Name.....

Address.....

When writing to Advertisers please mention Popular Science Monthly



“Look at Him Today!”

“Six years ago he started in here just as you are doing. Now he’s General Manager and makes more in a day than he used to make in a week. I’ll tell you how he did it. The first week he was here he began to train for the job ahead by studying in spare time with the International Correspondence Schools. Inside of six months he got his first promotion. But he kept right on with the I. C. S. I tell you a man like that is bound to get ahead. Some day he’ll be President of the Company. You’ve got the same chance he had, young man, and if I were you I’d follow his example. Take up some I. C. S. course and do it right away. Use your spare time. Study. What *you* are six years from now is entirely up to you.”

TEAR OUT HERE INTERNATIONAL CORRESPONDENCE SCHOOLS BOX 5802, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

- | | |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEER | <input type="checkbox"/> SALESMANSHIP |
| <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> ADVERTISING |
| <input type="checkbox"/> Electric Railways | <input type="checkbox"/> Window Trimmer |
| <input type="checkbox"/> Electric Wiring | <input type="checkbox"/> Show Card Writer |
| <input type="checkbox"/> Telegraph Engineer | <input type="checkbox"/> Sign Painter |
| <input type="checkbox"/> Telephone Work | <input type="checkbox"/> Railroad Trainman |
| <input type="checkbox"/> MECHANICAL ENGINEER | <input type="checkbox"/> ILLUSTRATING |
| <input type="checkbox"/> Mechanical Draftsman | <input type="checkbox"/> Cartooning |
| <input type="checkbox"/> Machine Shop Practice | <input type="checkbox"/> BOOKKEEPER |
| <input type="checkbox"/> Gas Engine Operating | <input type="checkbox"/> Stenographer and Typist |
| <input type="checkbox"/> CIVIL ENGINEER | <input type="checkbox"/> Cert. Public Accountant |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> TRAFFIC MANAGER |
| <input type="checkbox"/> MINE FOREMAN OR ENGINEER | <input type="checkbox"/> Railway Accountant |
| <input type="checkbox"/> Metallurgist or Prospector | <input type="checkbox"/> Commercial Law |
| <input type="checkbox"/> STATIONARY ENGINEER | <input type="checkbox"/> GOOD ENGLISH |
| <input type="checkbox"/> Marine Engineer | <input type="checkbox"/> Teacher |
| <input type="checkbox"/> ARCHITECT | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Contractor and Builder | <input type="checkbox"/> Mathematics |
| <input type="checkbox"/> Architectural Draftsman | <input type="checkbox"/> CIVIL SERVICE |
| <input type="checkbox"/> Concrete Builder | <input type="checkbox"/> Railway Mail Clerk |
| <input type="checkbox"/> Structural Engineer | <input type="checkbox"/> AUTOMOBILE OPERATING |
| <input type="checkbox"/> PLUMBING AND HEATING | <input type="checkbox"/> Auto Repairing |
| <input type="checkbox"/> Sheet Metal Worker | <input type="checkbox"/> Navigation |
| <input type="checkbox"/> Textile Overseer or Supt. | <input type="checkbox"/> AGRICULTURE |
| <input type="checkbox"/> CHEMIST | <input type="checkbox"/> Poultry Raising |
| | <input type="checkbox"/> Spanish |
| | <input type="checkbox"/> German |
| | <input type="checkbox"/> French |
| | <input type="checkbox"/> Italian |

Name _____

Present Occupation _____

Street and No. _____

City _____ State _____

This is the story of thousands of successful men. They did their work well, and in spare time, with I. C. S. help, trained themselves for advancement. That’s the thing for *you* to do. Whatever your chosen work may be, there is an I. C. S. Course that will prepare you right at home for a better position with bigger pay.

More than 100,000 men are getting ready for promotion right now in the I. C. S. way. Let us tell you what we are doing for them and what we can do for you. The way to find out is easy. Just mark and mail this coupon. It won’t cost you a cent or obligate you in the least, but it may be the first step toward a bigger, happier future. Don’t lose a minute. Mark this coupon and get it into the mail right now.

When writing to Advertisers please mention Popular Science Monthly

Rear Admiral Fiske, Naval Strategist



"Permit me to express my admiration for the POPULAR SCIENCE MONTHLY in its present form. You are doing a splendid thing in making science really popular. The whole structure of modern civilization is built on physical science and its application to the mechanic arts; and the more successfully and widely we can utilize physical science, the higher a civilization we shall have. Your magazine is making a generous and powerful contribution to this end."

Bradley A. Fiske

The First Successful Fliers of Man and Nature



About seven million years ago the first bird began to fly. Flight was merely gliding, and clumsy gliding at that, which developed from the about-to-be birds instinctively spreading their limbs when falling from trees or jumping up in exuberance of spirits. Notice how closely the lines and movements of the first living flier resemble those of the pioneer motor-driven flier behind it

Popular Science Monthly

239 Fourth Avenue, New York City

Vol. 91
No. 1

July, 1917

\$1.50
Annually

A Bird with Four Wings


When Nature decided to evolve a bird out of a reptile she molded a four-winged flyer curiously like the first flying machine

By Maurice Krosby

BIRDS came later than fishes and reptiles in the evolution of life. But what manner of creature was it that linked fish with bird? What was the first bird that ever flew? Fossil remains and imprints have so far given only scant information as to how the feathered descendants of the fish or the reptile gradually came into possession of the power of flight. Intermediate links in the development have left but few and faint traces, and this is due, at least in part, to the extreme remoteness of the transition period during which birds became birds from whatever they were before. The change was so radical that it required millions of years by Nature's slow methods.

Fortunately a single natural document has come down through the ages which goes far toward explaining the mechanics that made the elongated swimming fish or crawling reptile fit for sustaining, propelling and balancing itself in the air, and this document, as it happens, also establishes a most curious and interesting parallel between Nature's experiments in flying and those fundamental experiments by Professor Langley of the Smithsonian Institution in Washington to which the inauguration of the airplane era in flight is due, more than to any other one cause. The document referred to is a true document; for it was found printed by natural forces on the rocks of the Solinghofen quarry in Germany. Here, in a formation not less than seven million years old, one of the ancestors of the

modern bird, a strange feathered reptile, had been imprisoned, caught unawares perhaps in one of the every-day upheavals of that formative age when mountain ranges,

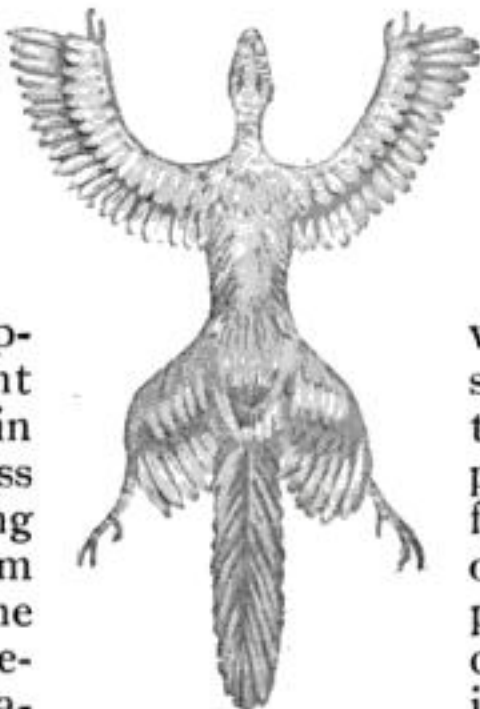

This is Nature's first attempt at creating a flyer

continents and oceans were still in the making. Its skeleton, its outlines and its feathers are here preserved, stamped in unmistakable distinctness in stone, which is now hard but which must have been plastic as clay when the fluttering creature was seized in deadly embrace. More than twice as old as any of the prehistoric monsters reconstructed from their bones in our museums of natural history, the fossil imprint of the Tetrapteryx, as this creature has been named (meaning "four-winger"), represents an indisputable and descriptive record of perhaps the earliest feathered flyer.

The Tetrapteryx record was discovered fifty-five years ago, but science has only recently undertaken to interpret it mechanically. William C. Beebe, while curator of birds at the New York Zoological Park, demonstrated that several species of modern birds, and especially the white-winged dove, show very marked traces of just such wings on the legs, called pelvic wings, as the Tetrapteryx record reveals. On the very young dove, at the time when its body is still bare but for the sprouting flight feathers of wings and tail, twelve flight feathers and six coverts begin to grow from the outer and upper edge of the leg, extending in two rows from the knee almost to the base of the tail. While the growth of these tell-tale feathers is soon arrested and is covered up

in the surrounding plumage, so that the grown bird shows only traces, the fact that the young of the species pass rapidly through the same evolution that is represented in the succession of innumerable generations of their ancestry, almost clinches the conclusion that birds are descended from a type equipped with wings on all four limbs, as the Tetrapteryx, and that Nature has learned gradually to replace four small and imperfect wings, weakly muscled, by two larger and stronger wings under perfect control.

Frederic A. Lucas, Director of the American Museum of Natural History, called attention last year in the American Museum Journal to the great force of the evidence which has thus been collected to prove how Nature learned to accomplish flight, the interest centering in birds, on account of their considerable weight, rather than in bats and insects.

The ancestor-bird, faithfully reproduced from the record, and the ancestor-airplane are presented in illustration herewith, side by side. The dimensions of the bird have been relatively exaggerated to facilitate the comparison, and the resemblance in structure is striking. Langley's "aerodrome" repeatedly flew over the Potomac in 1895, sustaining its own weight in the air for more than one minute at a time by the action of its two pairs of planes or wings and two rotary propellers, of five to six feet diameter, driven from a diminutive steam engine developing one to one and one-half horsepower. The necessity for placing the power equipment and the propellers amidships called for an elongated body for the machine as a whole, so that the weight might be evenly supported by planes at the rear as well as in front. This constructive difficulty has been overcome in modern airplanes, but it was decisive for Langley's machine, with its small power, in the same degree and almost for the same reasons as for the

original, four-winged bird. The latter came from a race whose fore and hind limbs were spaced well apart, whose legs were relatively heavy and whose arm muscles were weak. Its structure had to be modified by hereditary influences before it would balance at all in the air, hung from the arm


sockets alone, as birds do. Meanwhile Nature did practically as Langley did. She adopted the compromise solution of upholding the rear weight by large feathery extensions from the legs and tail, and it may be noticed that the fantastic feather tail of the Tetrapteryx was built up around a tail-like appendage and was not all feathers under muscular control like that of the modern bird. Nature evidently found it impossible to change the bony structure in less than millions of years, working from the basis of a reptile with only growth and heredity as the tools at command, but she could make feathers grow in the place of horny scales, which are made of almost the same material, by a comparatively brief evolution.

To transform Langley's machine into the modern airplane was a task much simplified by the advent of the compact and powerful gasoline engine, small enough to be moved forward in line with the support from planes arranged on the biplane or monoplane principle and strong enough to pull the machine safely, in most cases, through disturbing eddies of the atmosphere.


This decided change in the machine took the place of all the transformations in bone dimensions, balance and muscle strength by which the Tetrapteryx became a bird after starting out in the world with an anatomical construction very much like an animated parachute or gliding machine. But the mechanical flyer is still an infant compared with Nature's eon-old product.



As the wings increased in power the rear wing decreased in size

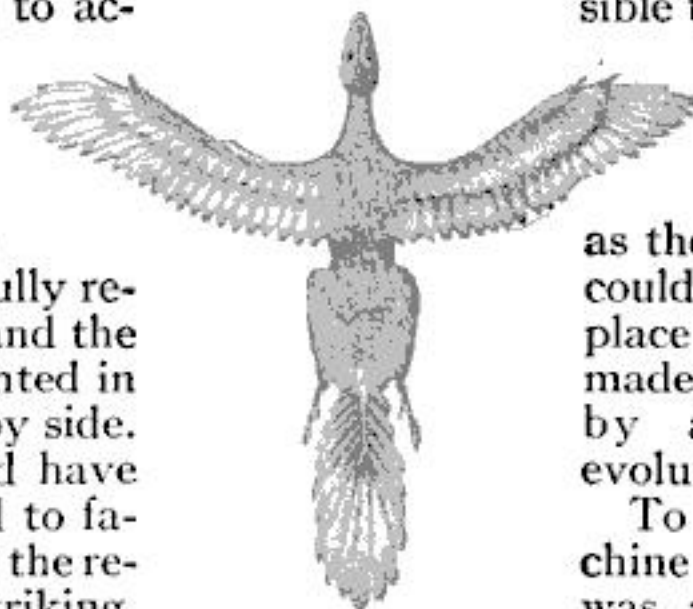

Gradually the tail shortened and the feathers lengthened

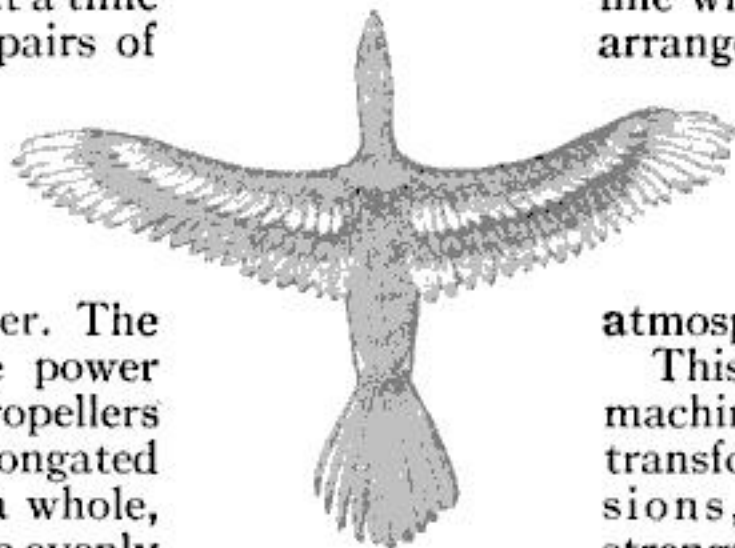

The fan-shaped tail of the bird of to-day is a kind of a rudder

This Typewriter Prints in Every Type and Language

THE multiplex typewriter, shown on the right, can type in all the languages and in hundreds of different styles of type. Naturally, it is radically different from the usual machine. Instead of having fifty different type blocks all mounted on separate steel bars, it uses one plate on which all the characters of one style are cast. This plate is removably attached to the machine. By sliding it off and sliding on another plate having a different set of characters, the typewriter is converted instantly.

Two different plates, in fact, can be carried in the machine at one time. These plates are curved and can be adjusted into



A typewriter which prints any kind of type. Samples of its work appear on the left


guists, to physicians and to all who have to use unusual characters, this typewriter is invaluable to the advertising man. An advertising manager of a large department store, for instance, can send his advertisement to the newspapers all written in the correct style and size of type.

This Railroad Crossing Cleans Itself and Eliminates Jolts

WHEREVER a road crosses railway tracks, this light weight steel crossing belongs.

It will fit any standard-gage track, it can be put down or taken up by one workman in thirty minutes, or in case of repair work it can be adjusted to a skeleton track in ten minutes with sufficient security to allow teams, automobiles and other heavy traffic to pass safely.

Its surface is such that mud, snow, gravel, sleet or ice cannot get a purchase, yet its knobs prevent horses from slipping. It eliminates jolting.

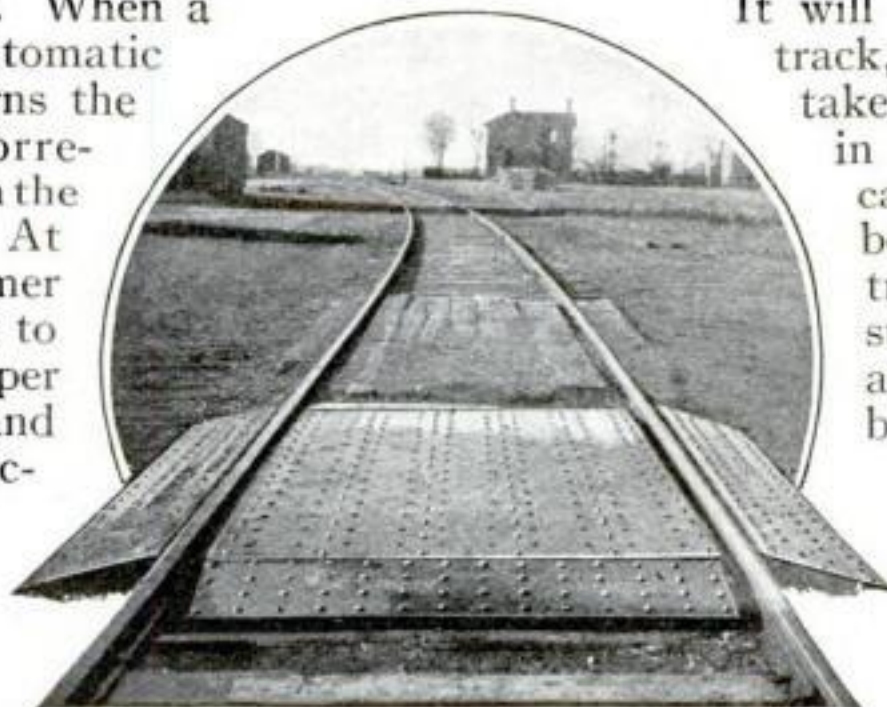

This crossing provides a level space between the tracks and a sloping surface to the road

Four Exceptional Blanket Groups



For \$5.50 pair, white blanket, with pink and blue borders, silk binding, mixed wool and cotton filling on cotton warp, 70 x 32 inches. For \$6.50 same quality, 76 x 84 inches.

For \$12 pair, all - wool plaid blanket, silk bound, 72 x 84 inches.

Third Gallery, New Building.

Four Exceptional Blanket Groups



For \$5.50 pair, white blanket with pink and blue borders, silk binding; mixed wool and cotton filling on cotton warp; 70 x 82 inches.

For \$6.50 same quality, 76 x 84 inches.

For \$12 pair, all - wool plaid blanket, silk bound, 72 x 84 inches.

Third Gallery, New Building.


The advertising manager can send his copy to the printer looking just as he wants it to look in type

a slot in the circular type-carrier after the carrier has been withdrawn from the machine. The type-carrier fits into the center of the machine. When a key is pressed, an automatic spring mechanism turns the carrier until the corresponding character on the plate faces the front. At the same time, a hammer at the back is released to knock the writing paper against the ribbon and the character. The actual impression of the character is thus made on the same principle as in other typewriters.


Besides being of especial value to lin-

How Our Fighters Will Be Fed

Nothing is left to guesswork. Menus are planned by chemists and physicians

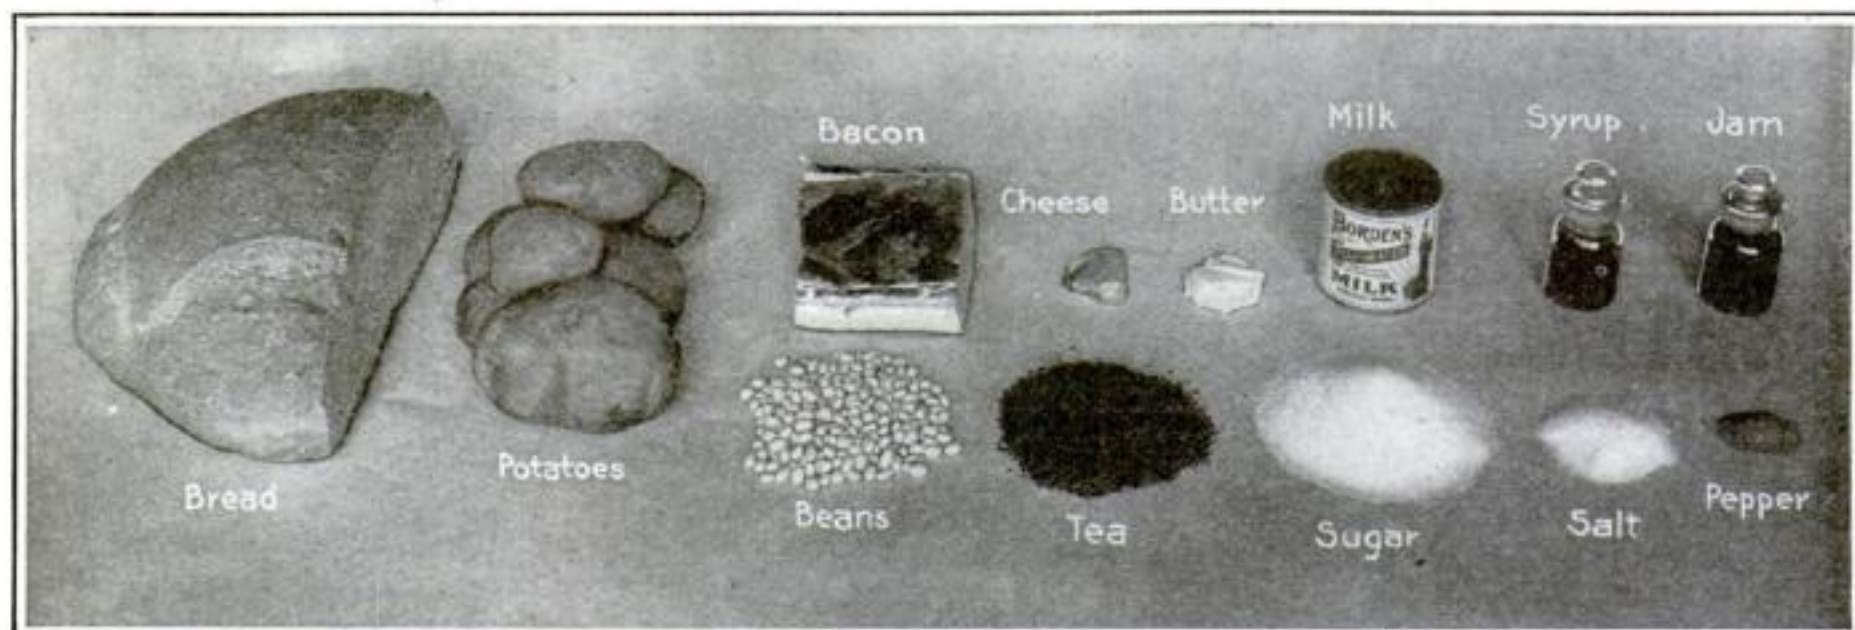

Above: The daily Army ration of the garrison or permanent camp. Other articles in prescribed quantities of equal food value may be substituted if desired

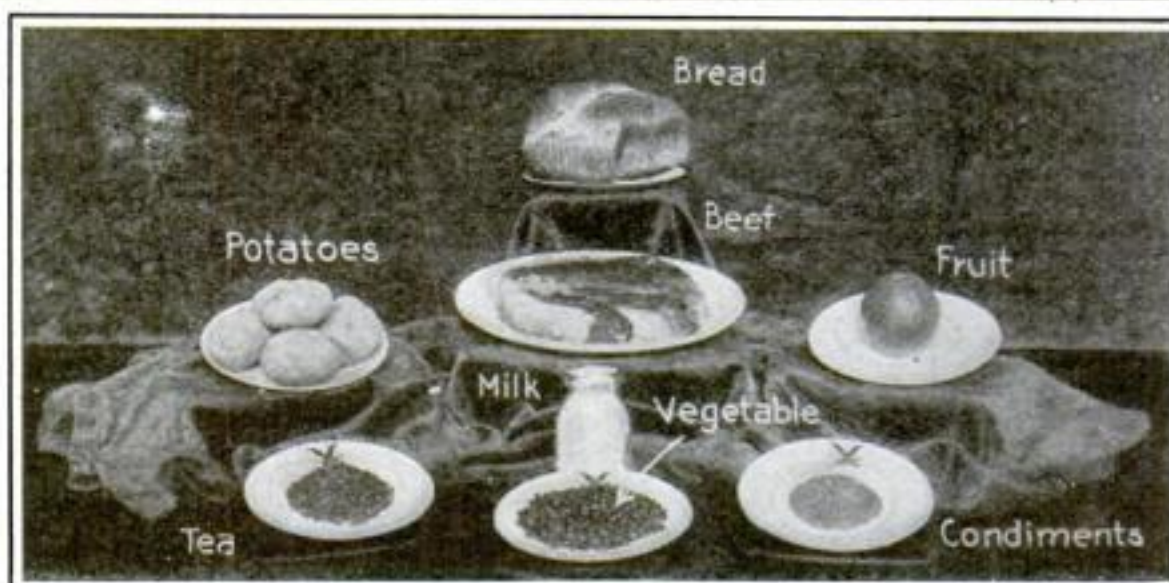

It costs the Government only about twenty-eight cents a day per man to provide such wholesome-looking meals as this on the left for the men of our Navy

Photos © Press Illus. Serv.

UNCLE SAM has written generous menus for his fighting men on land and on sea and if the regulations which he has prescribed are followed his soldiers and sailors need never go hungry. He provides approximately twenty-eight cents a day to buy food for each one of his soldiers and a like allowance is made for his sailors. To the housekeeper who has to contend with war-time prices of food-stuffs, this sum seems entirely inadequate, but it must be remembered that Uncle Sam buys his supplies in ton lots and not by the pound.

There is no guesswork in either the army or the navy when it comes to determining just how much food a man shall be given. All this has been figured out and the person charged with the responsibility of supplying the food merely follows certain tables.

The fixed allowance or portion of food furnished a soldier or sailor each day is called a ration. It consists of specified components or substitutive articles. There may be an over-issue of any ration component, provided there is an under-issue

or equal value of other components; but the total cost of a man's rations at the end of a month must not exceed the average of the daily allowances for that period.

In garrison or permanent camp, a soldier's allowance of food consists of the following components and quantities, or specified quantities of substitutes: Beef, 20 oz.; flour, 18 oz.; baking powder, .08 oz.; beans, 2.4 oz.; potatoes, 20 oz.; prunes, 1.28 oz.; coffee, 1.12 oz.; sugar, 3.2 oz.; evaporated milk, .5 oz.; vinegar, .16 gill; salt, .64 oz.; black pepper, .04 oz.; cinnamon, .014 oz.; lard, .64 oz.; butter, .5 oz.; syrup, .32 gill; and flavoring extract, .014 oz. A number of substitutive articles are provided for each of the ration components. For instance, instead of the 20 ounces of beef, a like quantity of mutton may be supplied or 12 ounces of bacon, 16 of canned meat, 14 of dried fish or other meat substitutes. Instead of the bean component, 1.16 ounces of either rice or hominy may be supplied. Prescribed quantities of dried apples or peaches or of jam and preserves may be substituted for the prunes. The reserve ration is less varied.

A Photographic Trick—Try It on the Night of the Fourth

THE young man in the accompanying illustration, pictured as looking so calmly and critically at us from behind one of the rings of Saturn or some other astronomical wonder, is really standing out in his own back yard, in Hornell, New York, and posing for his photograph while whirling a sparkler, such as children delight in for the safe and sane Fourth of July celebration.

A four by five camera was used with a polychrome plate. The photograph was taken by the light of the sparkler, and the dark spot over the right shoulder is the hand which held and whirled it.



Posing for a photograph by the light of a whirling sparkler which he holds

the suitcase laboratory illustrated, with which valuable information is quickly obtained as to the purity of chemicals.

This "pocket edition" laboratory enables the laundryman to test all his materials as he buys them. Thus he is able to assure himself that everything used in his establishment is of a sort that will not damage or harm the goods entrusted to him. In other words, he submits all his purchases to a chemical analysis, without going to the expense of hiring a chemist to do the same thing for him.


When closed, the laboratory resembles a suitcase. It becomes a laboratory by raising the handle side and lowering the side which forms the lid. The lowered side forms a table.

A Suitcase Laboratory for the Use of the Laundryman

THE Mellon Institute of Industrial Research has been studying the laundry business scientifically. It wants to help the laundrymen guard against bad laundry materials. The result has been



The suitcase laboratory which is used by laundrymen for testing the materials they use and the hardness of water

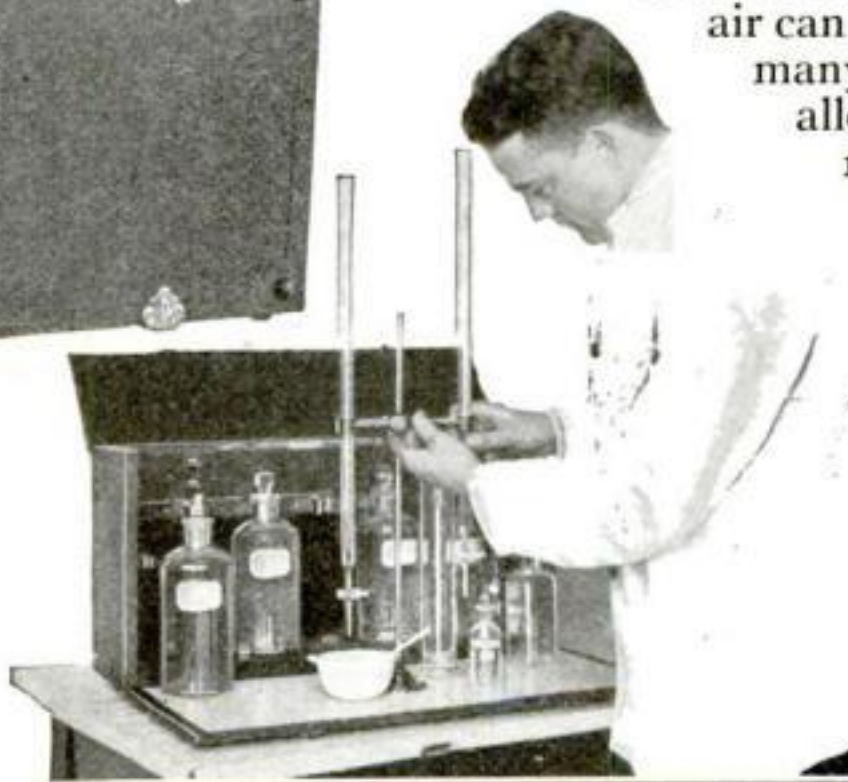

A Hint to Motorists—Keep Your Radiator Clean

TO assure the efficient operation and long life of your automobile, it is essential that the radiator be kept clean. Every radiator has been designed for the purpose of dissipating some of the heat from the engine to prevent it from overheating. The radiator can only accomplish this when the radiator cells are cleared of

mud so that the comparatively cool air can circulate through it. Yet many are the cars which are allowed to clog up with mud and dirt until it almost takes a hammer to knock it out. A

good antidote is a powerful stream of water from a hose; or where this may not be convenient, a stiff brush or a broom will assist in solving the cleaning problem.

Care in this respect will be repaid in good measure.

The Flag Equipment of an American Battleship




At left: Centerpiece of the flag of Salvador, difficult and expensive to make. At right: Centerpiece of the flag of Costa Rica, which requires more than two weeks to make




At right: The dragon flag of China and the white elephant of Siam

Photos ©
Press Illus. Serv.

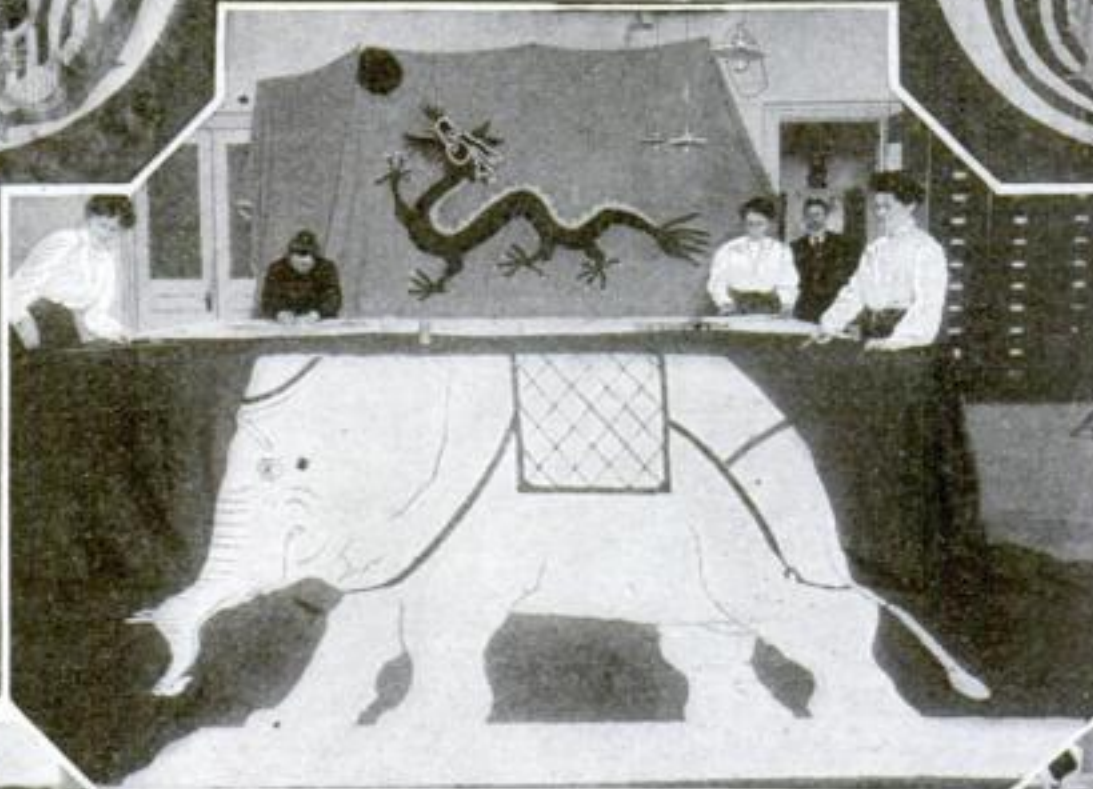


Below: Measuring and cutting the flags. This is laborious

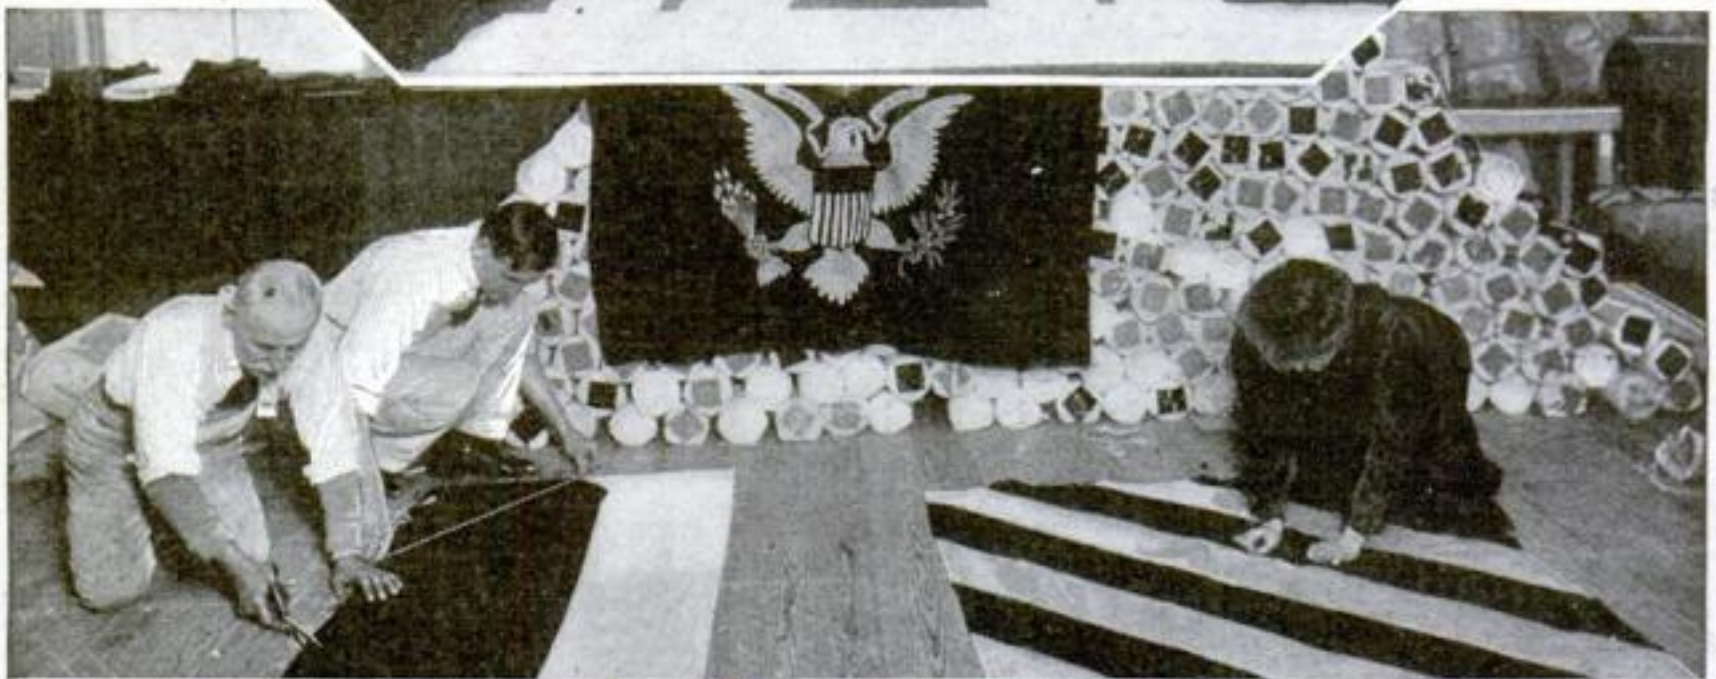

The complete flag equipment of an American battleship. About 250 flags are carried. Each flag is carefully rolled and packed away in a waterproof bag to await future use

Consists of 250 Flags of Various Kinds Costing \$2,500

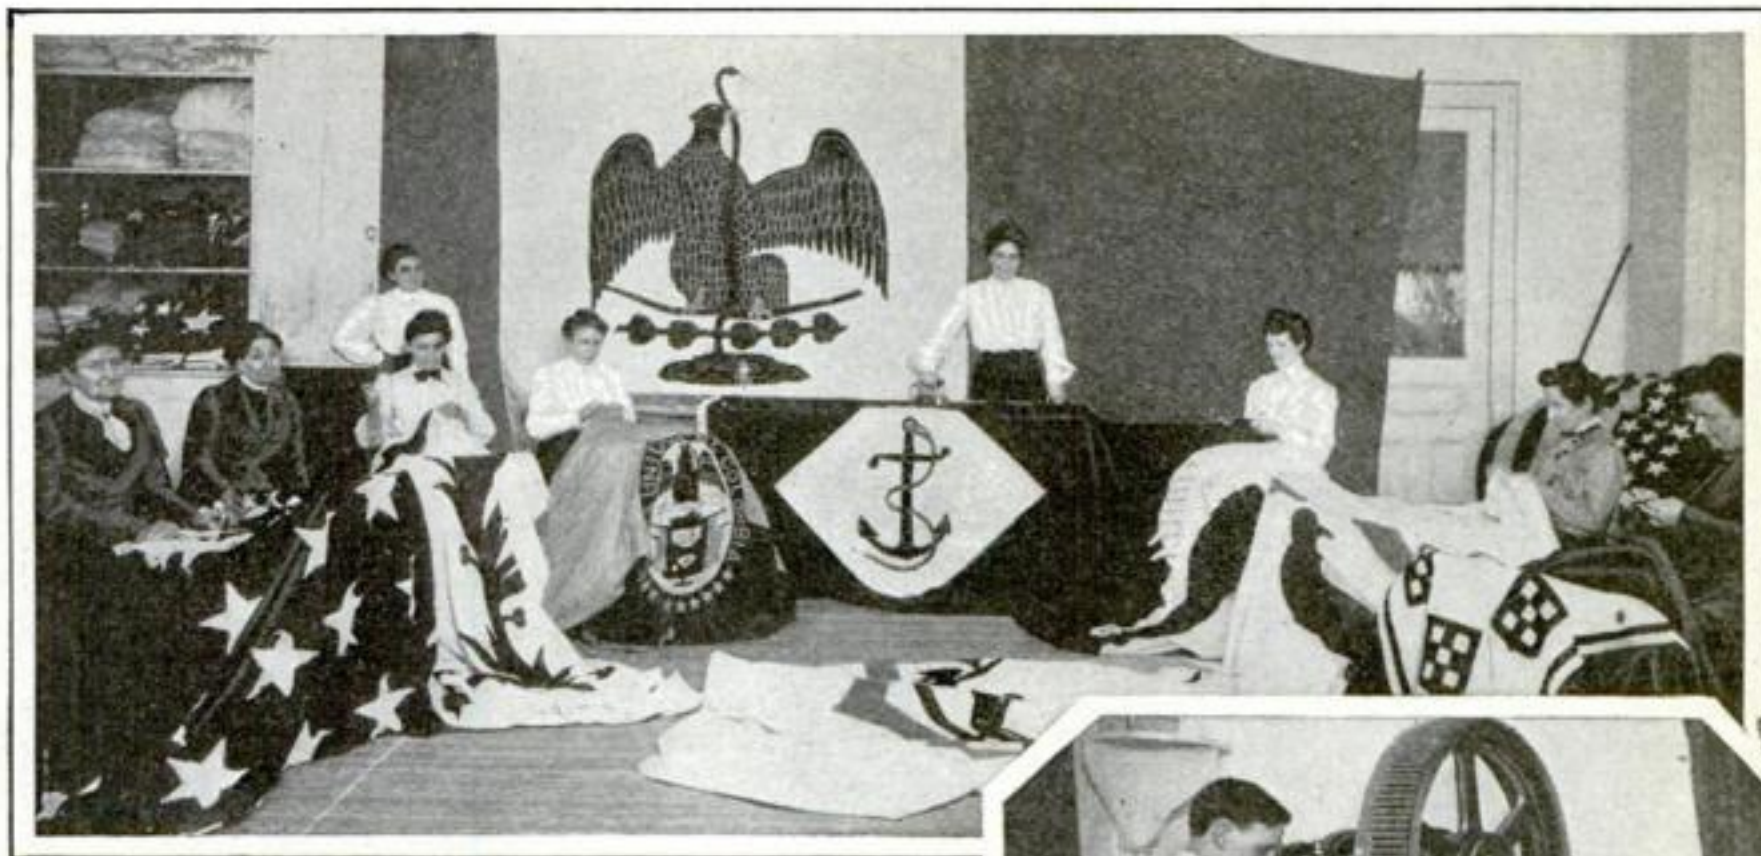


Hand sewers putting in centerpieces of foreign flags. In the background is the Mexican flag

Below: Experienced women flag makers at work in the Navy Yard of New York City




Above: How the stars are cut out. A machine does the work accurately and expeditiously

Photos © Press
Illus. Serv.

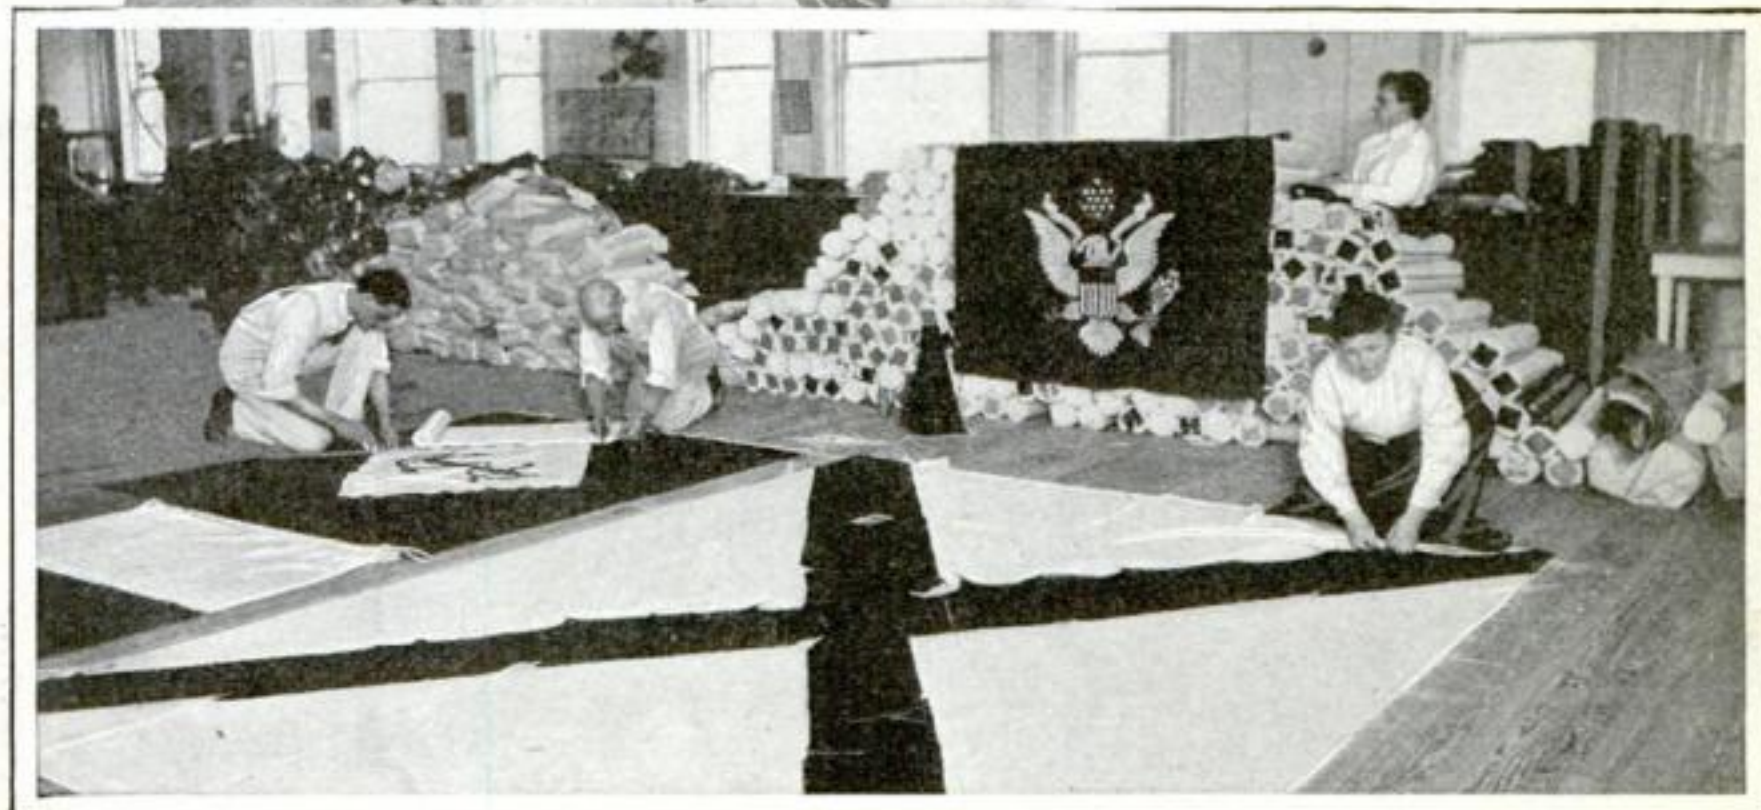

Measuring and basting up flags on the floor. The method is laborious but it is the only one possible. The President's flag is pictured in the background

An Airplane Spies on Greece

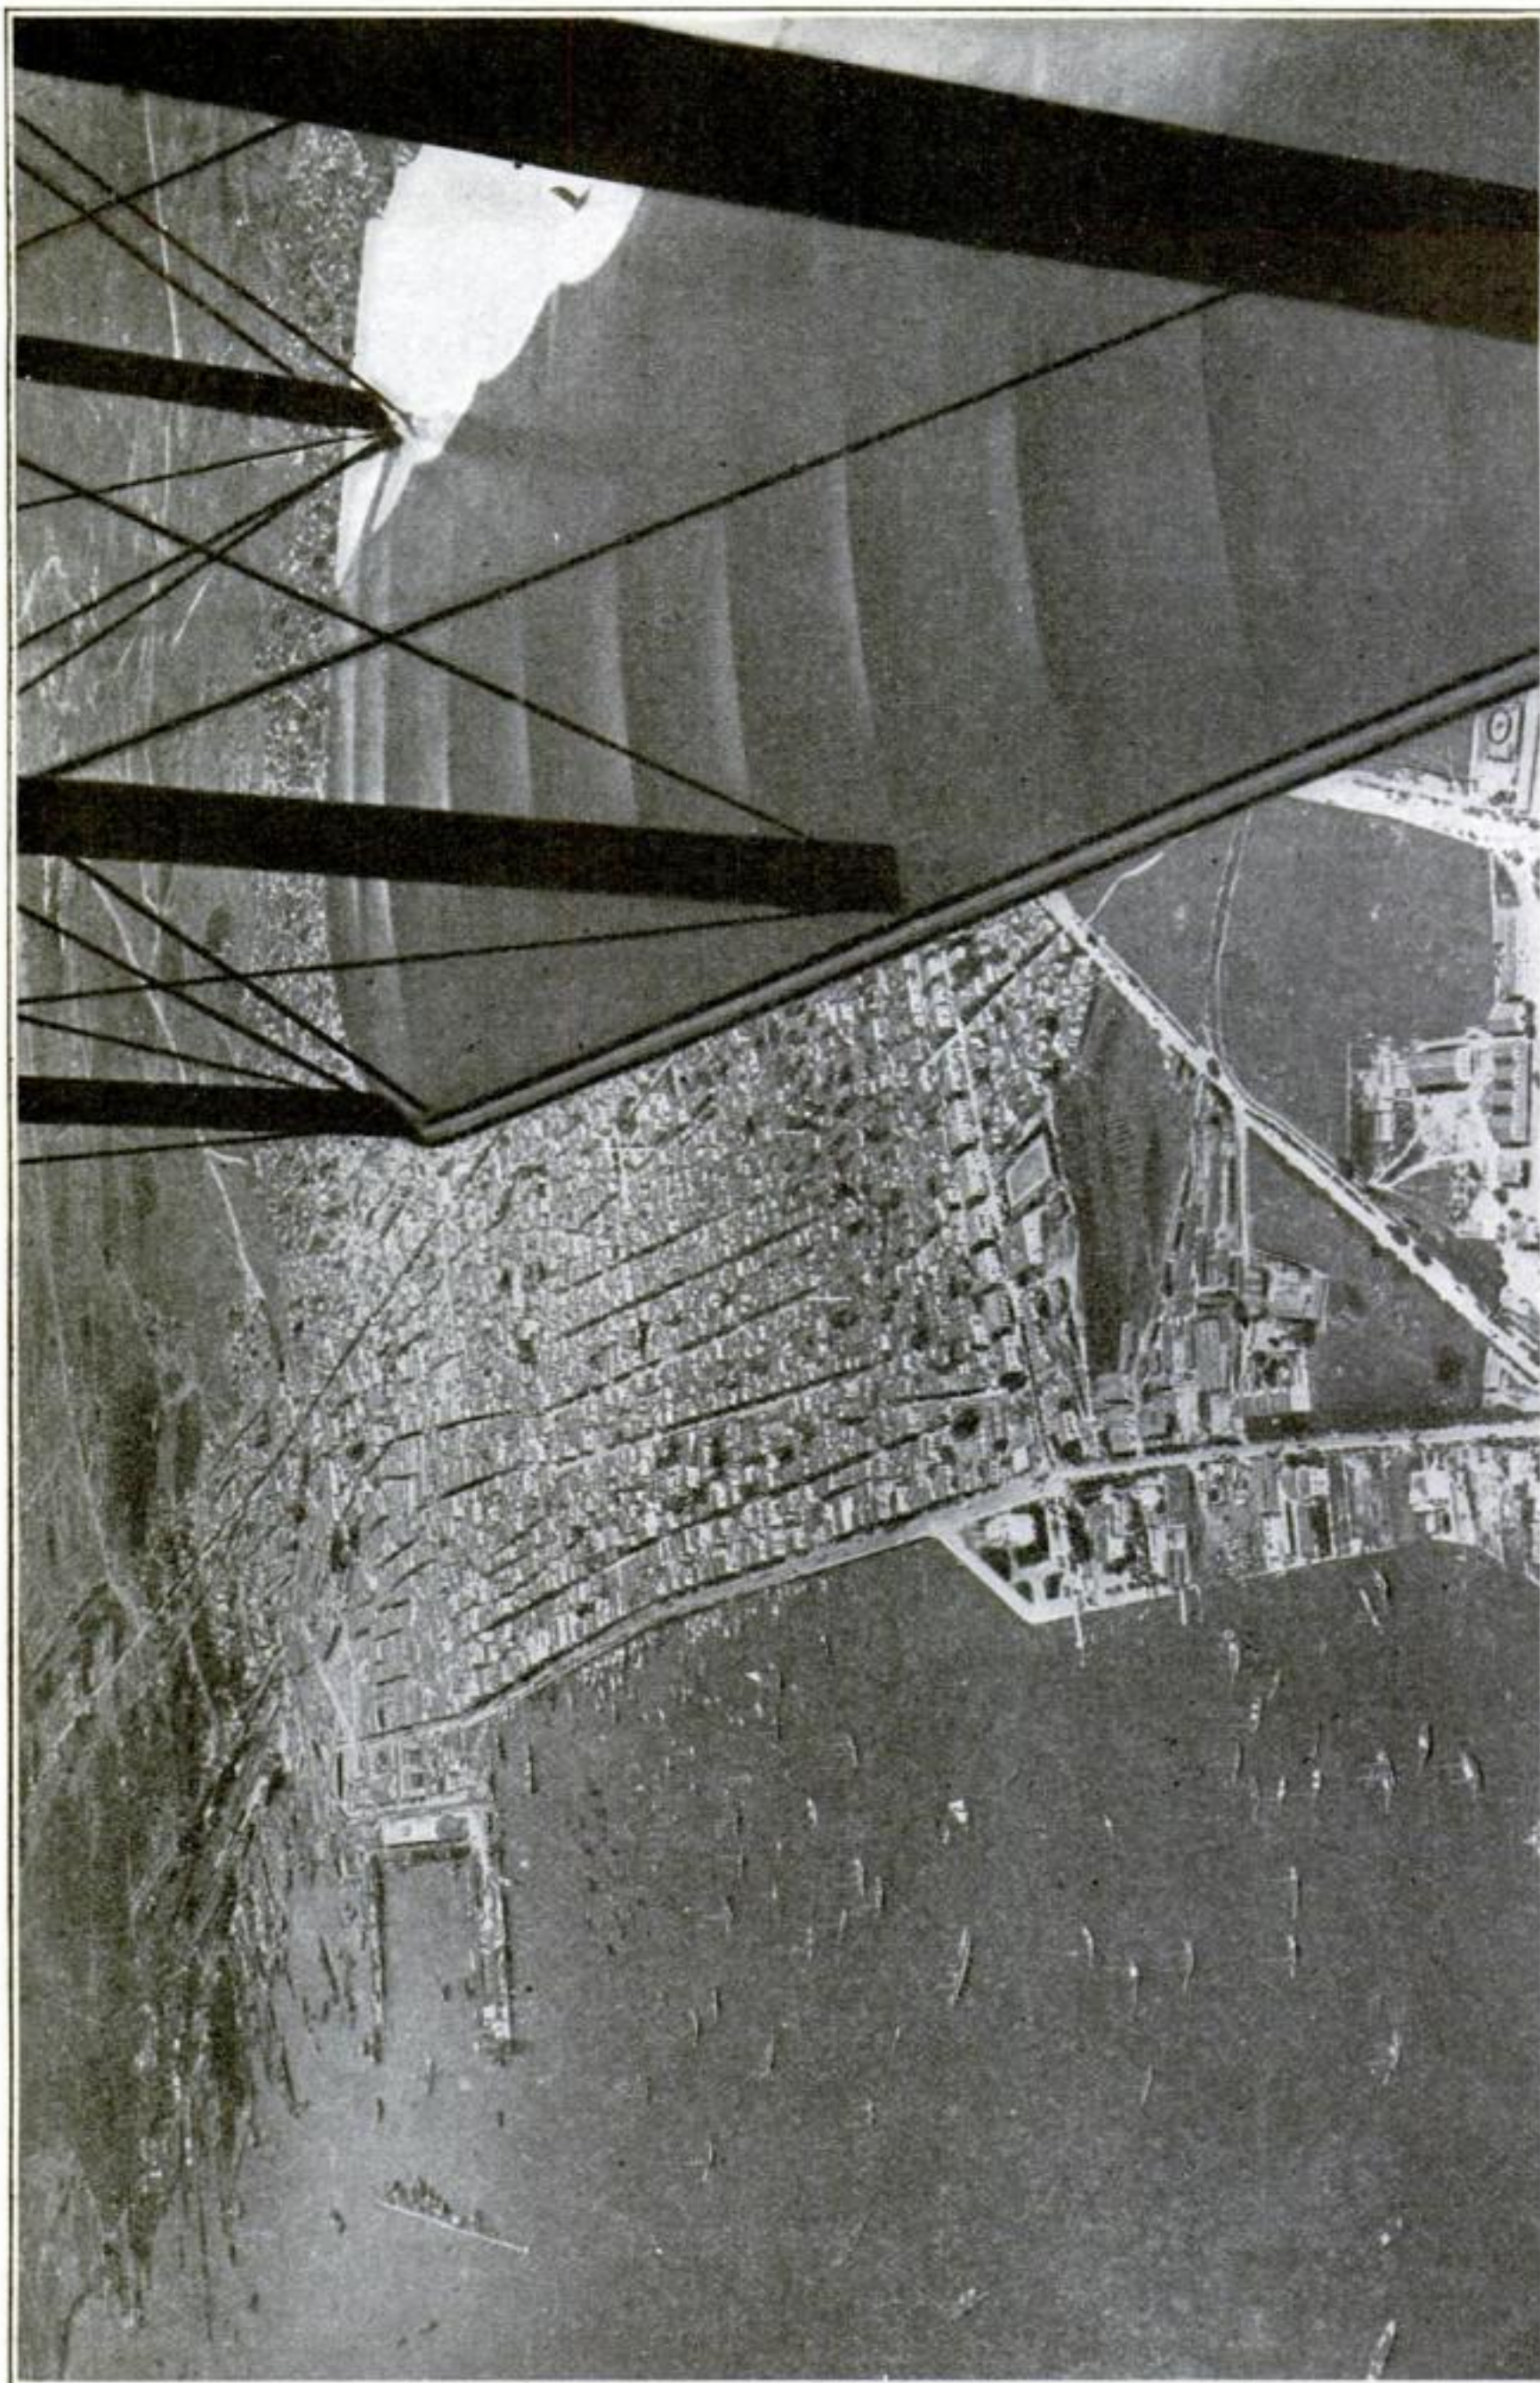

© Press Illus. Serv.

A bird's-eye view of Salonika, photographed from an airplane. Among other things, this war has established the value of the airplane in reconnoitering work. Because the aviator equipped with a camera is able to photograph an enemy's territory, he is able to supply the general staff with information unobtainable by any other means. As a general rule stereoscopic pictures are the kind taken

New York Firemen Have Strenuous Training




It looks easy, but would you care to try it? The only safe way to strike a life net is with feet and hands extended. This method has to be mastered by the probationary firemen

Photos © Press Illus. Serv.



Above: Climbing by means of a scaling ladder, and sliding down a rope, using a safety brake appliance. At left: The correct position to assume when jumping into a life net


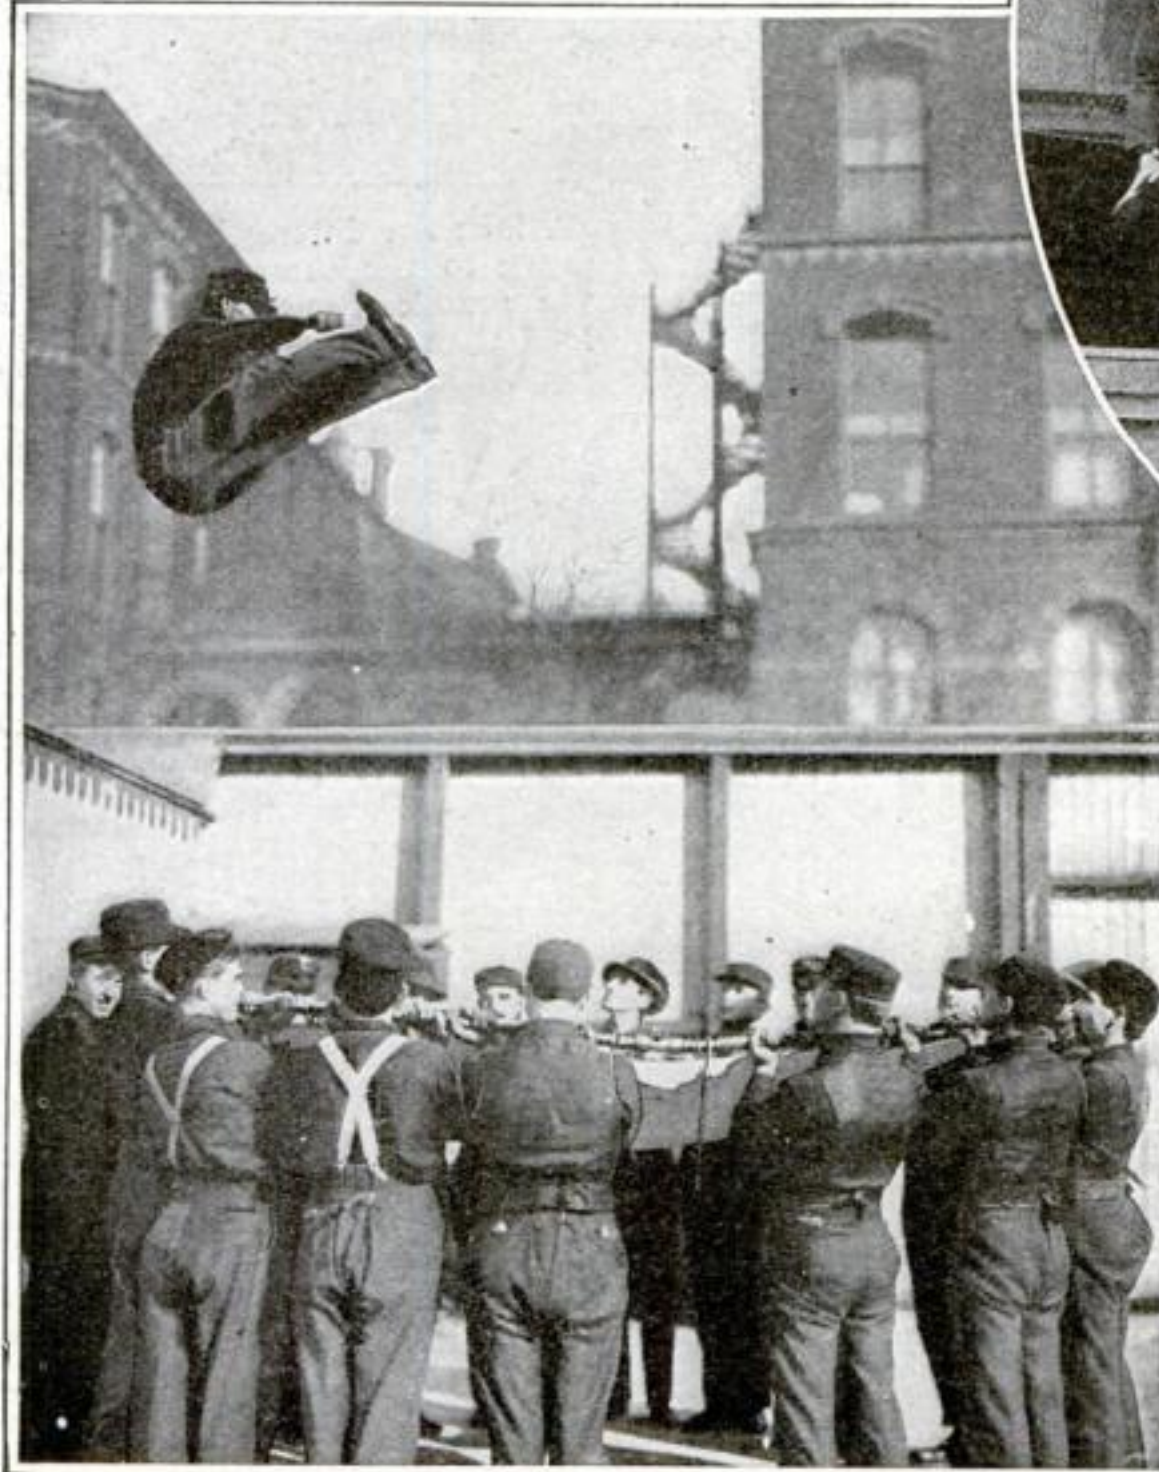


Holding the net in the right way. Note the position of the hands. They are held neck high and the palms are turned toward the men to be in the best position to resist the pull

Tests Which Scientists Use to Show Why We Can


The eye is a kind of photographic camera. You don't always want a bright light when you photograph, and neither does the eye when it sees. A camera has a diaphragm which can be opened more or less to regulate the amount of light admitted; the eye has an iris which does the same automatically. But the eye can be fooled. In the picture the observer is looking through a lens at an object. When the object is moved farther away and the lens removed the iris opens to see better, and yet the intensity of the light has not changed and the widening of the iris is unnecessary

Photos by Jacques Boyer

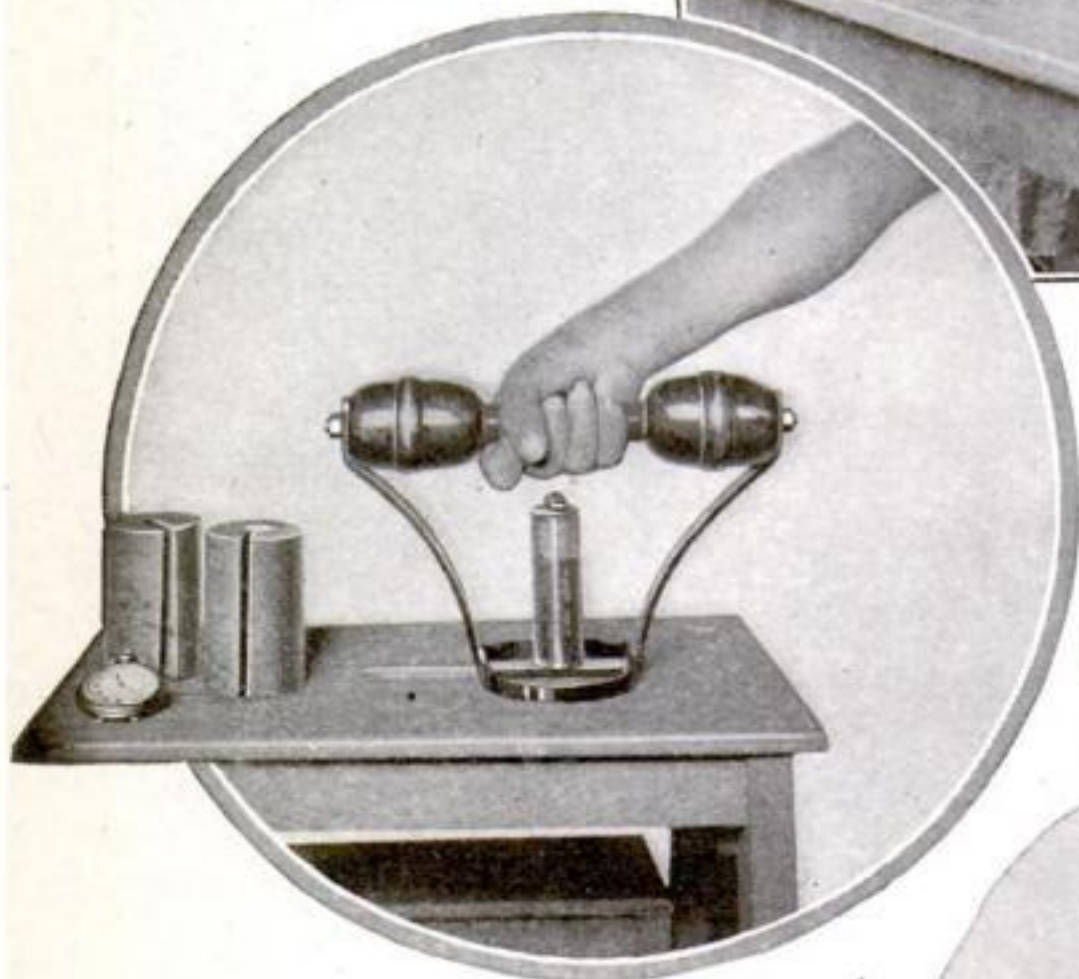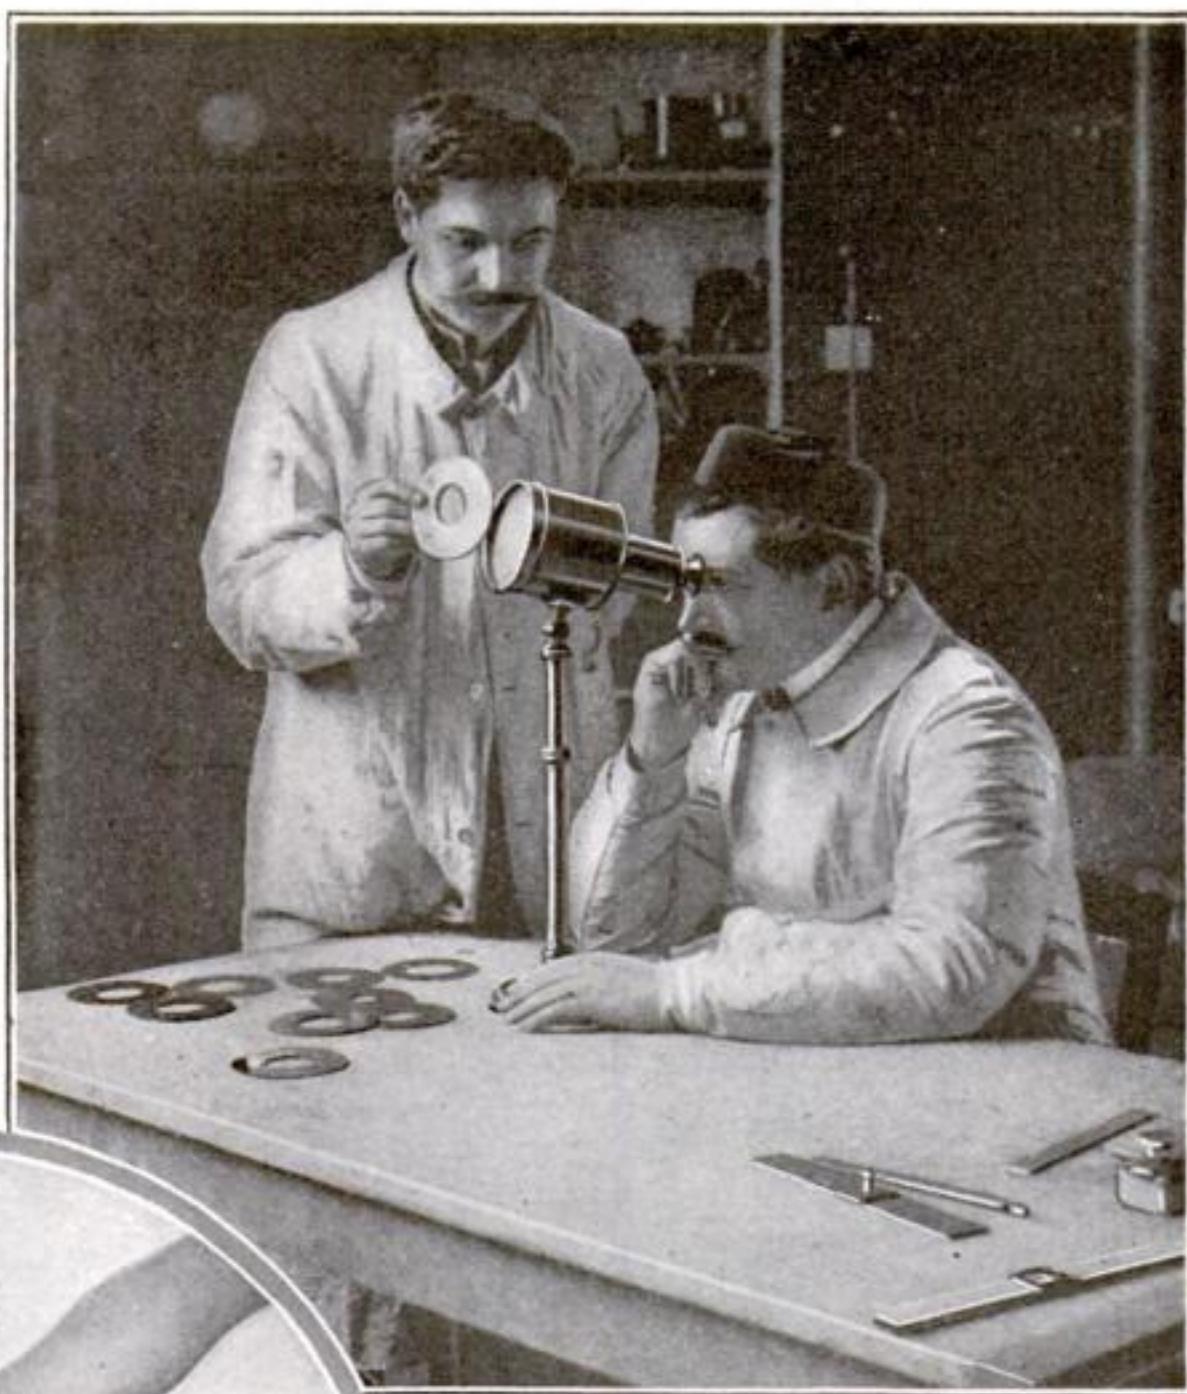


At left: An interesting test to prove to the human brain that the muscles can lift a greater load than seems possible. The load is increased very gradually

The "olfactometer" which determines the density of vapor at which the first perception of smell is possible. By its use we learn that there are many odors which we do not perceive

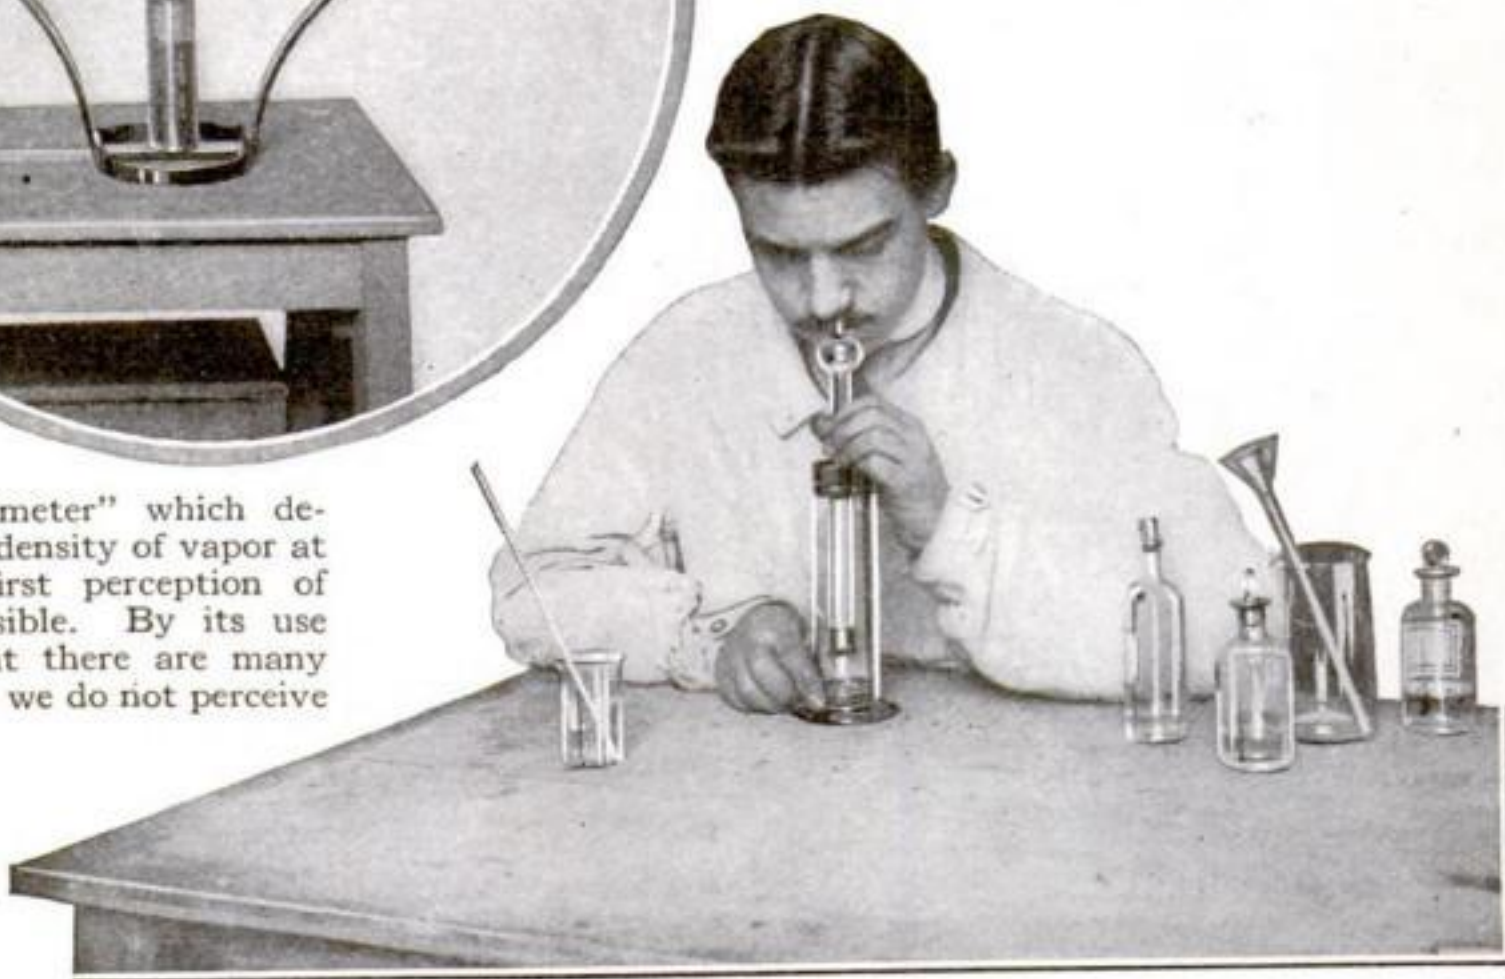

Not Always Believe Our Own Eyes and Ears

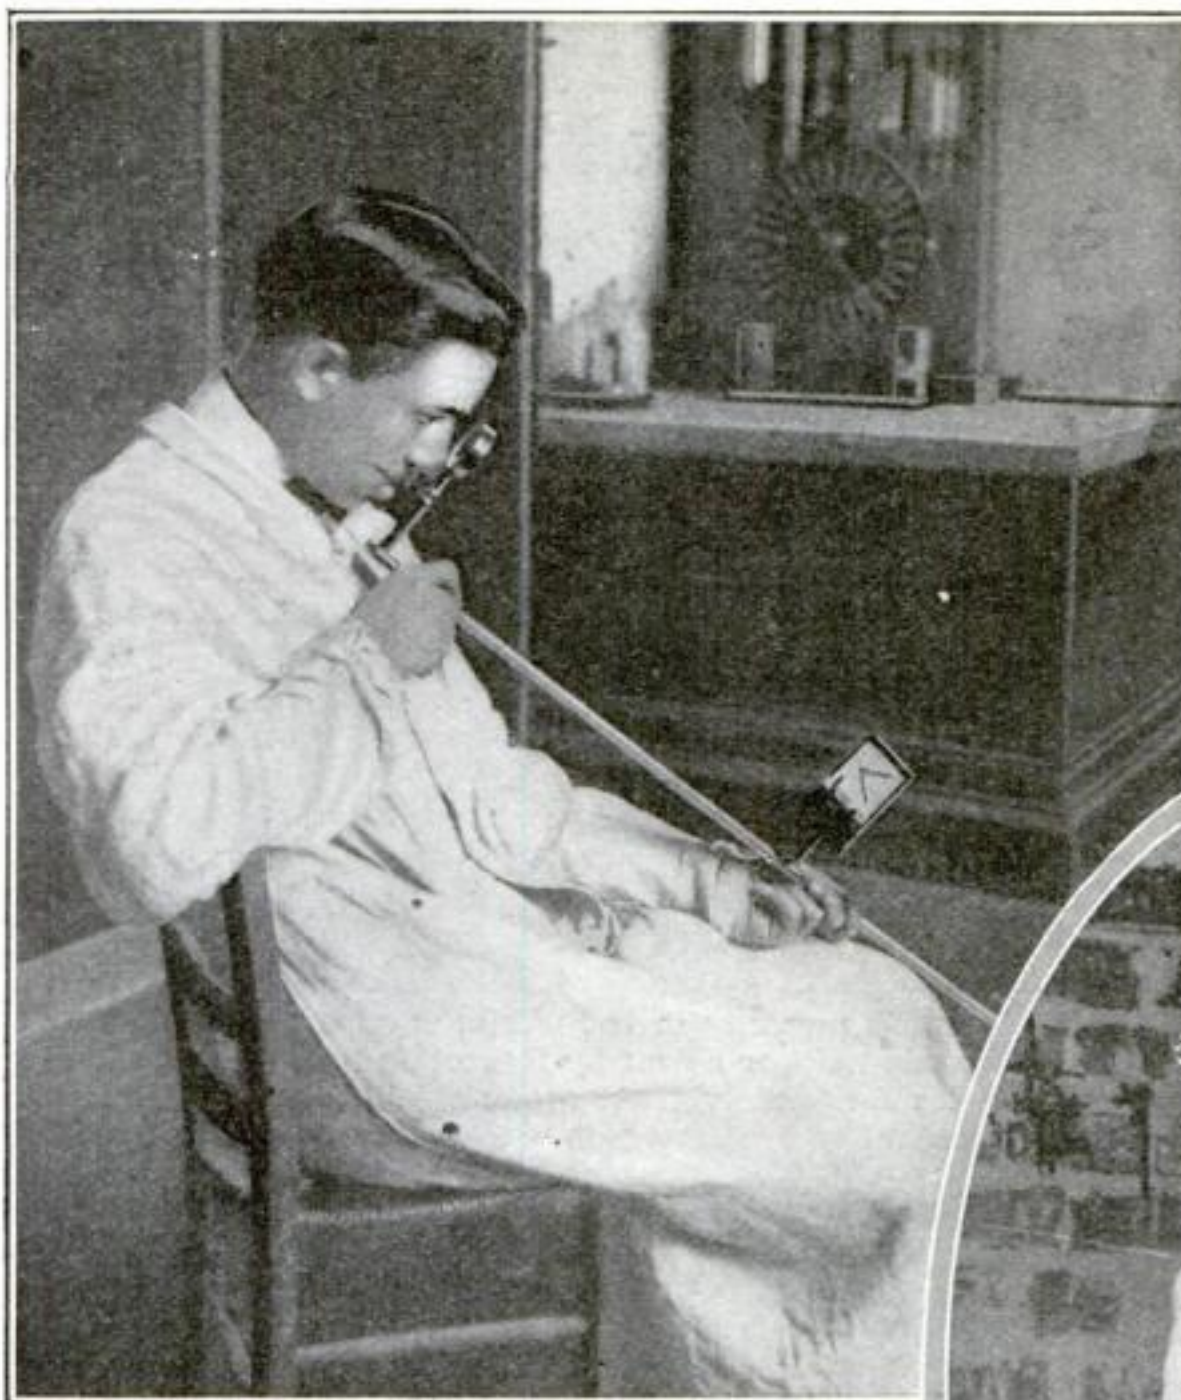

Another trick played on the eye is shown in the illustration at the left. A man looks through a lens at an object placed a short distance from it. The object is then moved farther away and the lens is removed. The brain realizes that the distance has been increased and here again the iris of the eye widens, even though the intensity of light was not altered



Your sensitiveness to temperature may be tested by placing your hands in two jars of water of different temperature. If the hands are crossed as in the picture above, it will be almost impossible to tell by the sense of feeling which hand is in the hot water and which in cold



Acuteness of hearing is determined by varying the volume of sound let into the ear through an opening in a tube. For some people the full volume of sound may be audible through a tiny section of the opening while others get it only through the fully opened tube

Photos by Jacques Boyer

The Oldest Man-made Things in the World




The oldest canvas painting in the world, executed about 3,500 years ago, found in Upper Egypt by Robert de Rustafjaell. The paint work has fortunately been preserved in all its freshness



The oldest known sculpture represents a seated man claspng an oval-shaped vase. It is probably 7,000 years old and bears witness to primitive man's conception of beauty and manly grace



The finger imprint in the circle preserves to us the oldest evidence of man, estimated at 250,000 years

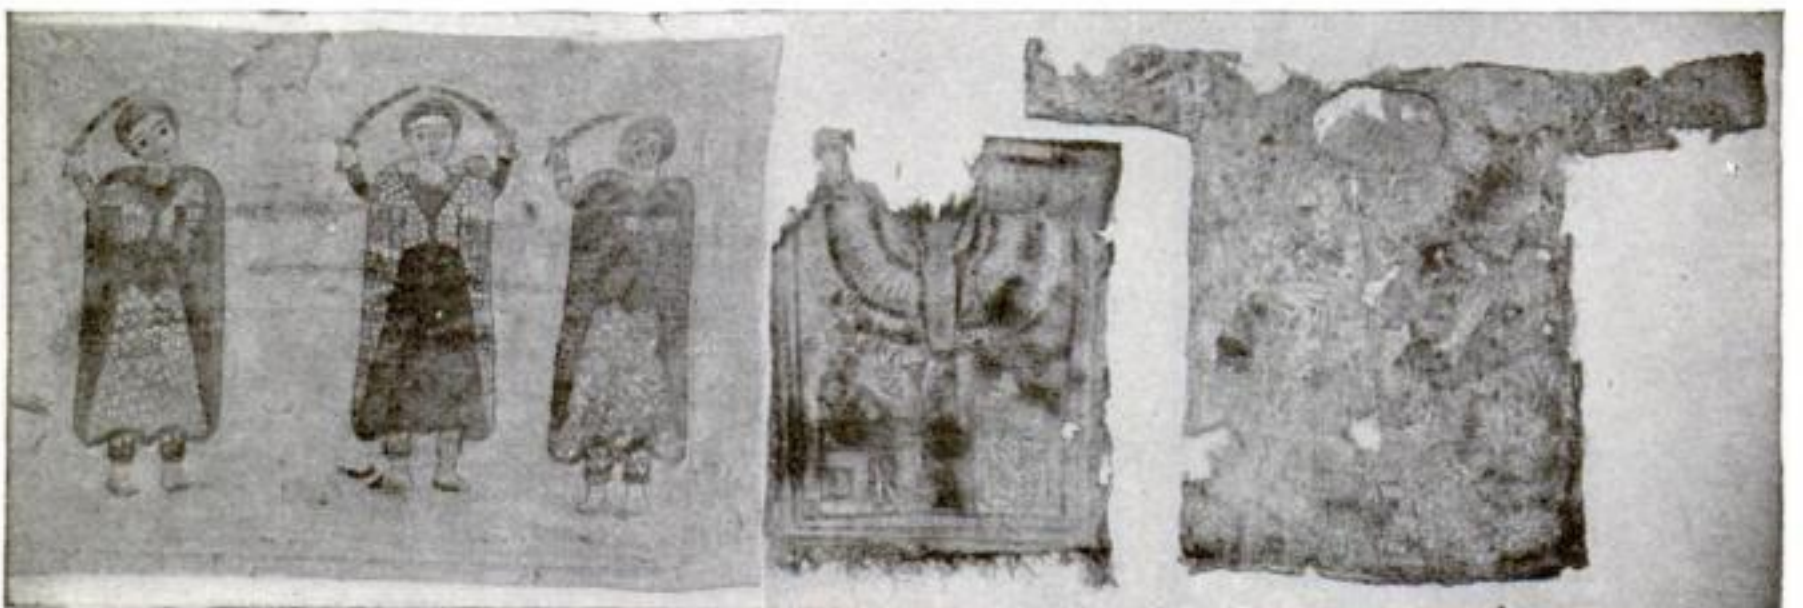

At left above is the earliest known painting of a Christian subject on canvas—the Saints Raphael, Michael and Gabriel. At right above are two baby shirts, the oldest known shirts

Improving on Man's "Natural Finish"



Tattooing is performed by puncturing the skin and introducing under it colored fluids to produce an indelible stain in a pattern



Goddess of the Night, tattooed by Sutherland MacDonald on the back of an Englishman. This seems too fine a specimen to be covered up




Above: An elaborate example of English tattooing—an eagle pursuing birds




Japanese tattooing executed by Hori Chyo, a celebrated exponent of the art


At right: Coat of Arms and motto tattooed on the arm of an English officer

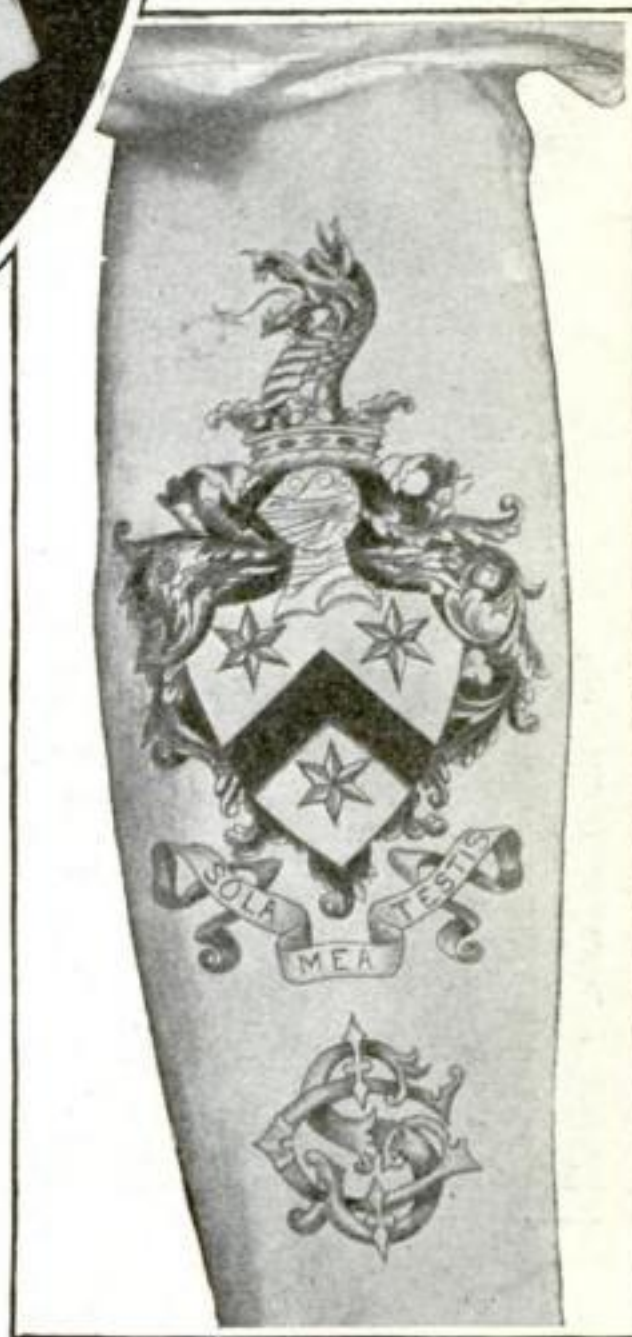

Picking the Best in Brain and Brawn.

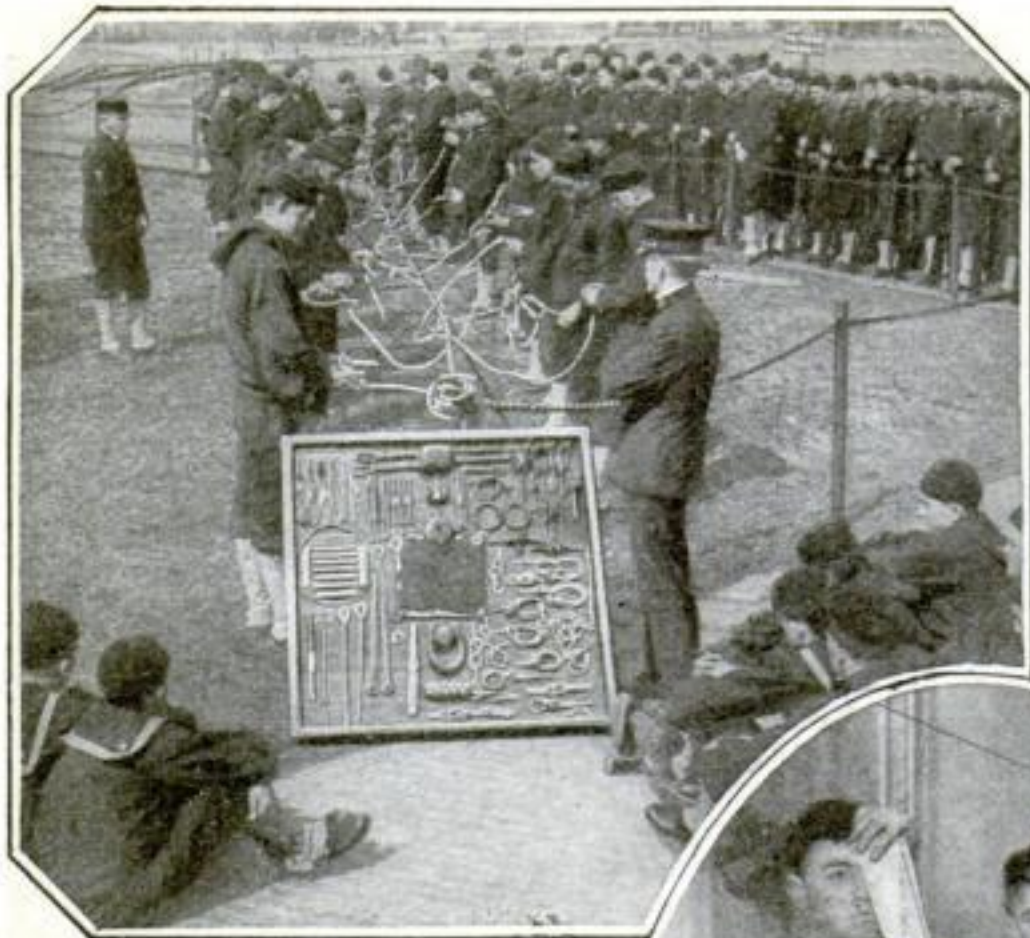

Instructors teaching a class of young bluejackets how to tie and splice ropes. On the board are various examples of knots and splices, some of which are extremely difficult to master

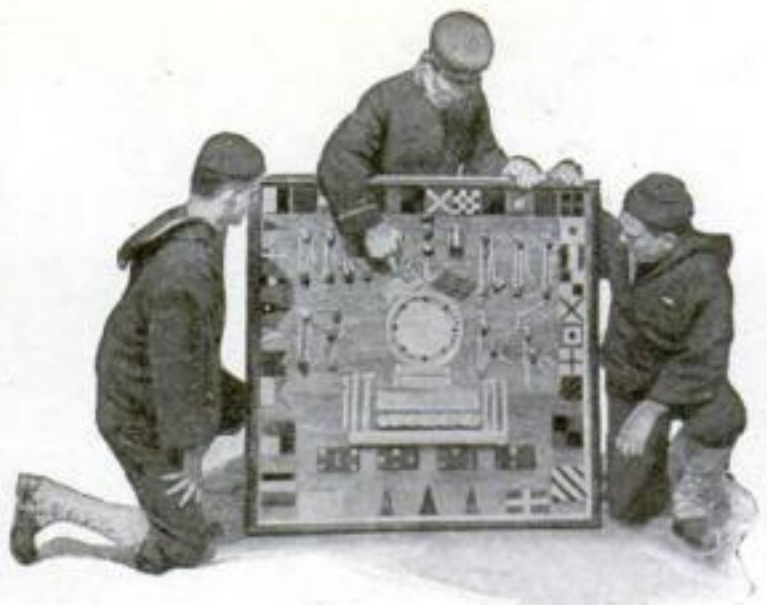

Photos © Int. Film Serv.

An officer explaining the significance of a battleship's hoist flags and how they are raised into position




A recruit undergoing the eye test. First one eye is examined and then the other. The sailor is operating a board containing letters of all sizes



A detachment of bluejackets, members of an artillery division, going through a field drill on board a man-of-war. Sham battles are carried on in deadly earnest

and Training Them for the Navy

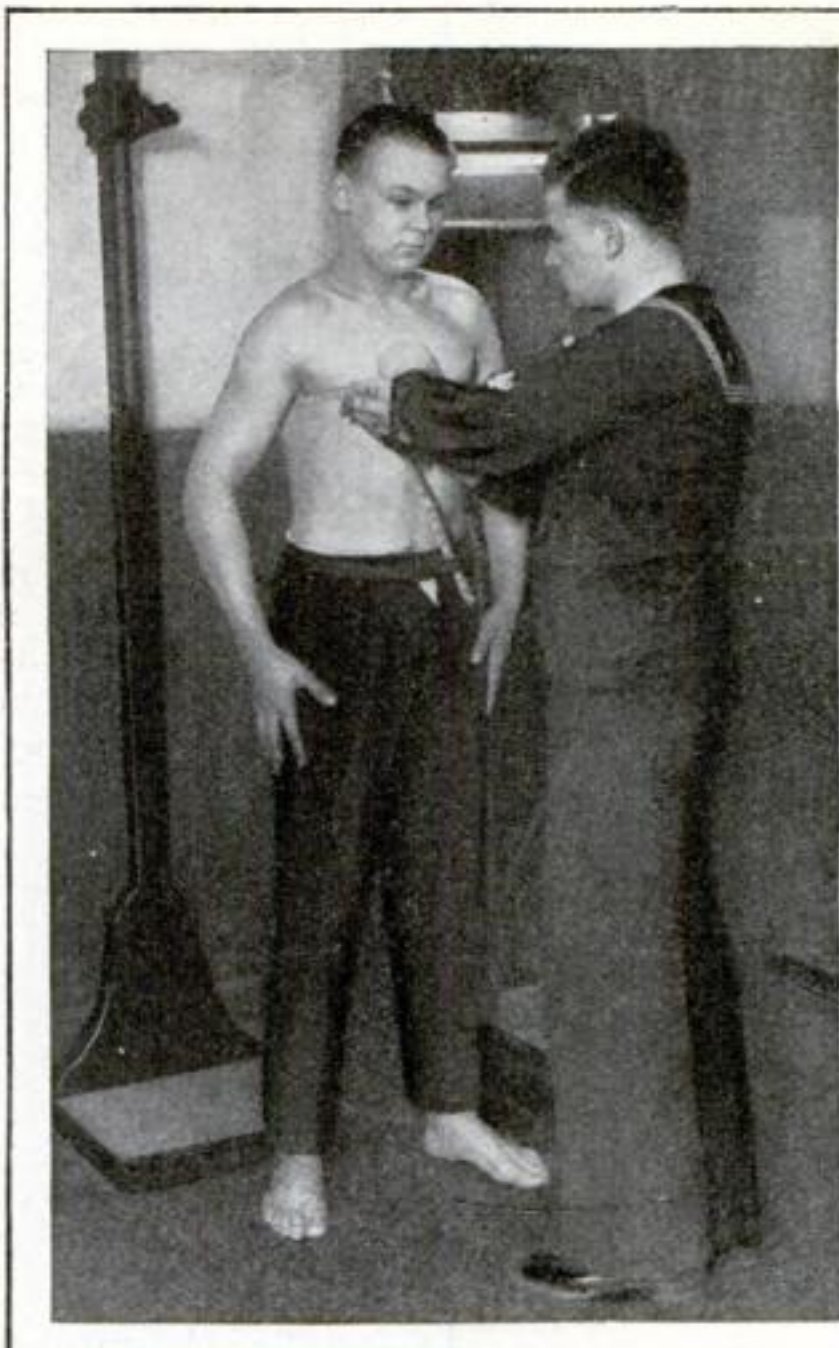


Photos © Int. Film Serv.

Taking the chest measurement of a recruit. He is a fine specimen, with a chest expansion of four inches. At right: The recruit picks out skeins of yarn that harmonize in color, to determine whether or not he is color blind



A bluejacket squad practicing overhead firing with the ordinary service rifle. Their targets are a fleet of imaginary enemy airplanes

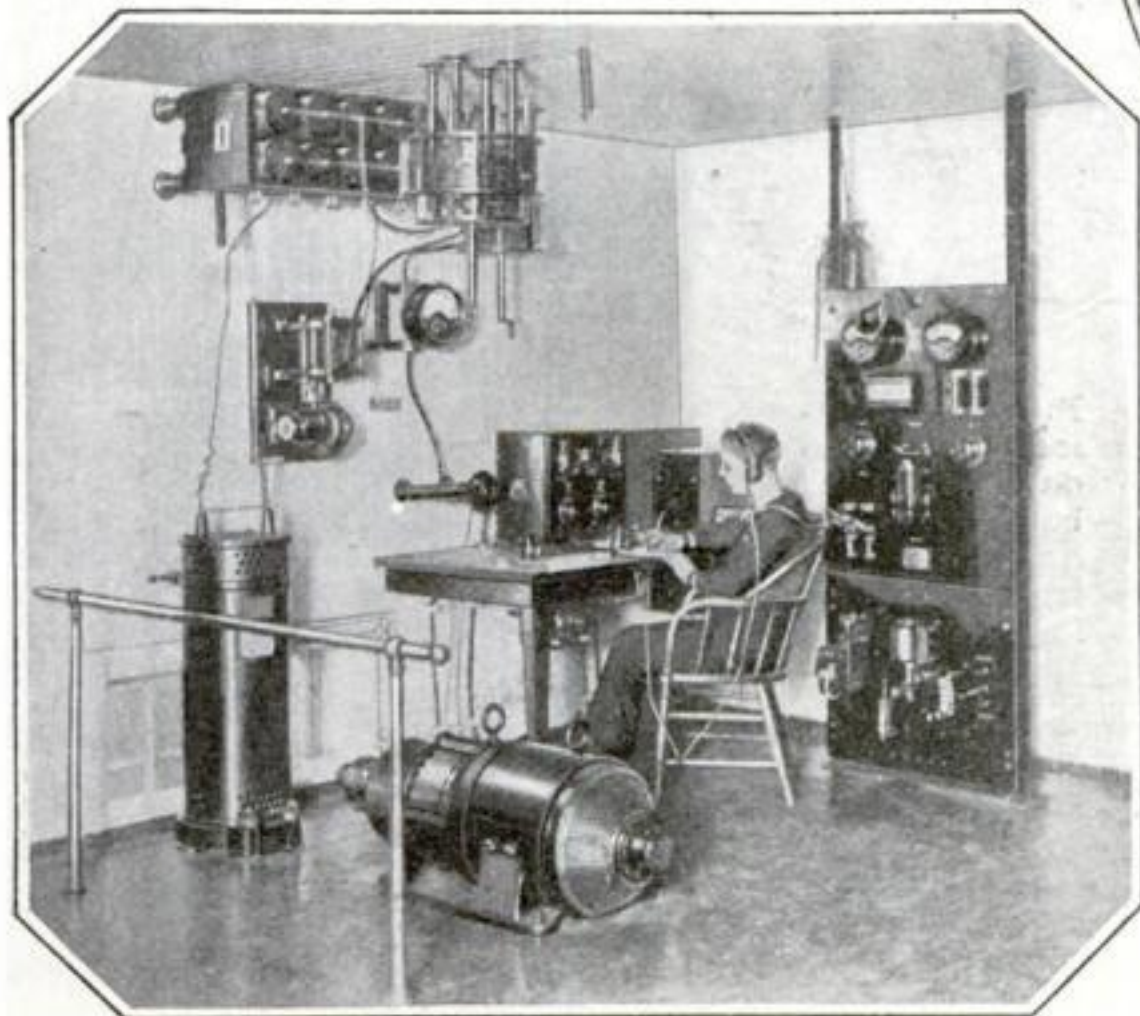



The wireless telegraph room and equipment of a modern battleship. The operator performs a service which is second in importance to none

Making Motor-Car Bodies to Order

There are styles in automobile bodies just as there are in milady's gowns. Here the pattern plotters are shown at work



Wives of millionaires have car bodies built to order, with interior linings that can be changed whenever desired to match a gown

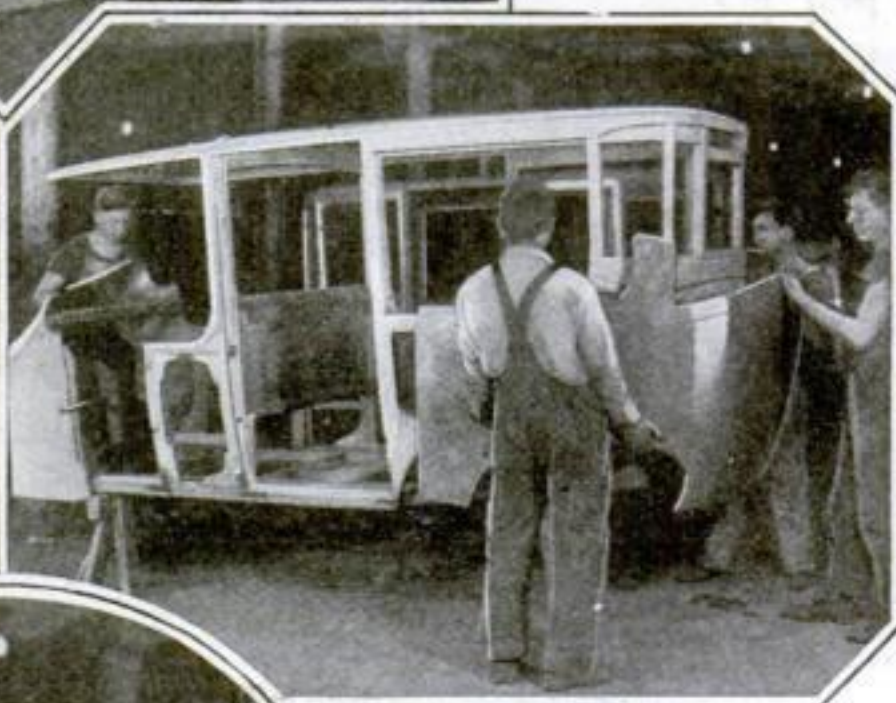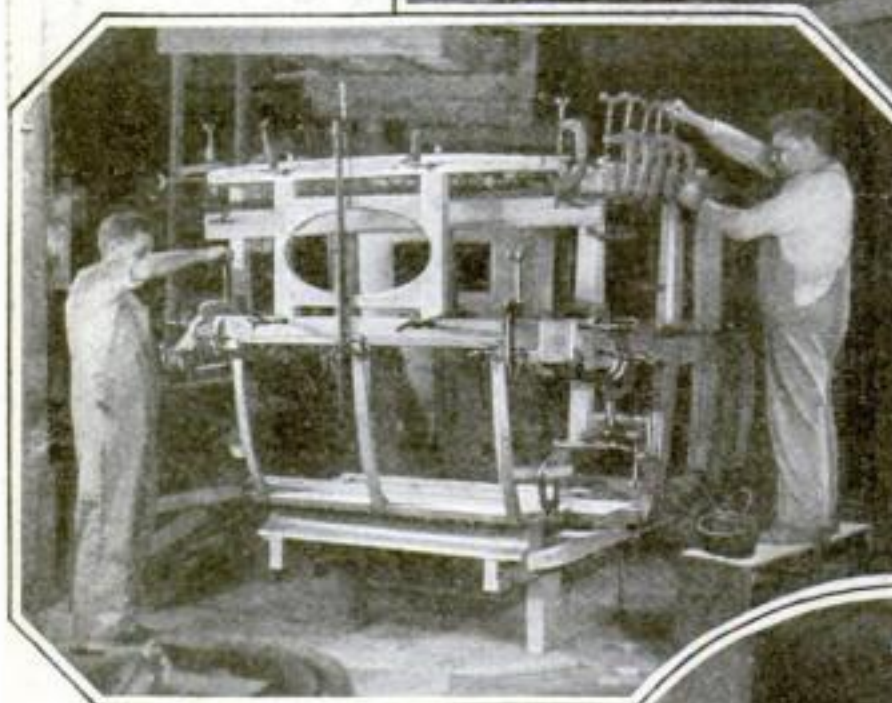


Photos Universal Film Co.

Above: Setting up the body after the various parts have been cut to order. The next operation is to glue the parts securely together



Fitting the aluminum overcoat on the skeleton body of white ash. The fit must be made absolutely perfect to withstand the vibration

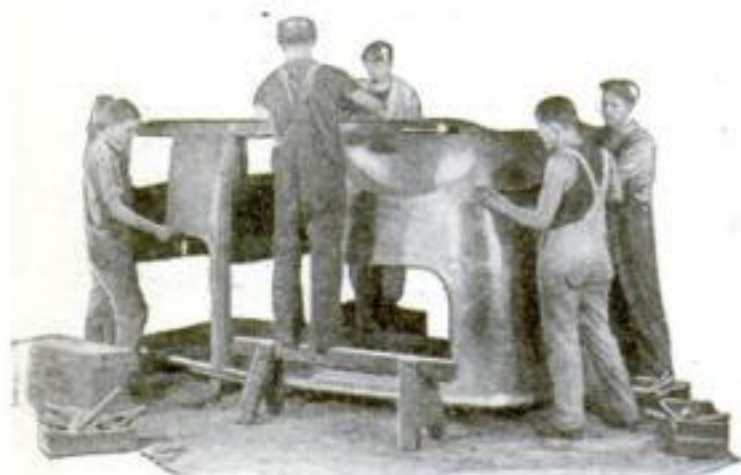


A body, with its aluminum overcoat, turned upside down for a part of the fitting operation

Putting the finishing touches on a limousine body. None but an expert is trusted with this important task



Special workmen attaching the trimming and upholstery to a modern high-priced car

Killing the Dry Frog in the Opera Singer's Throat

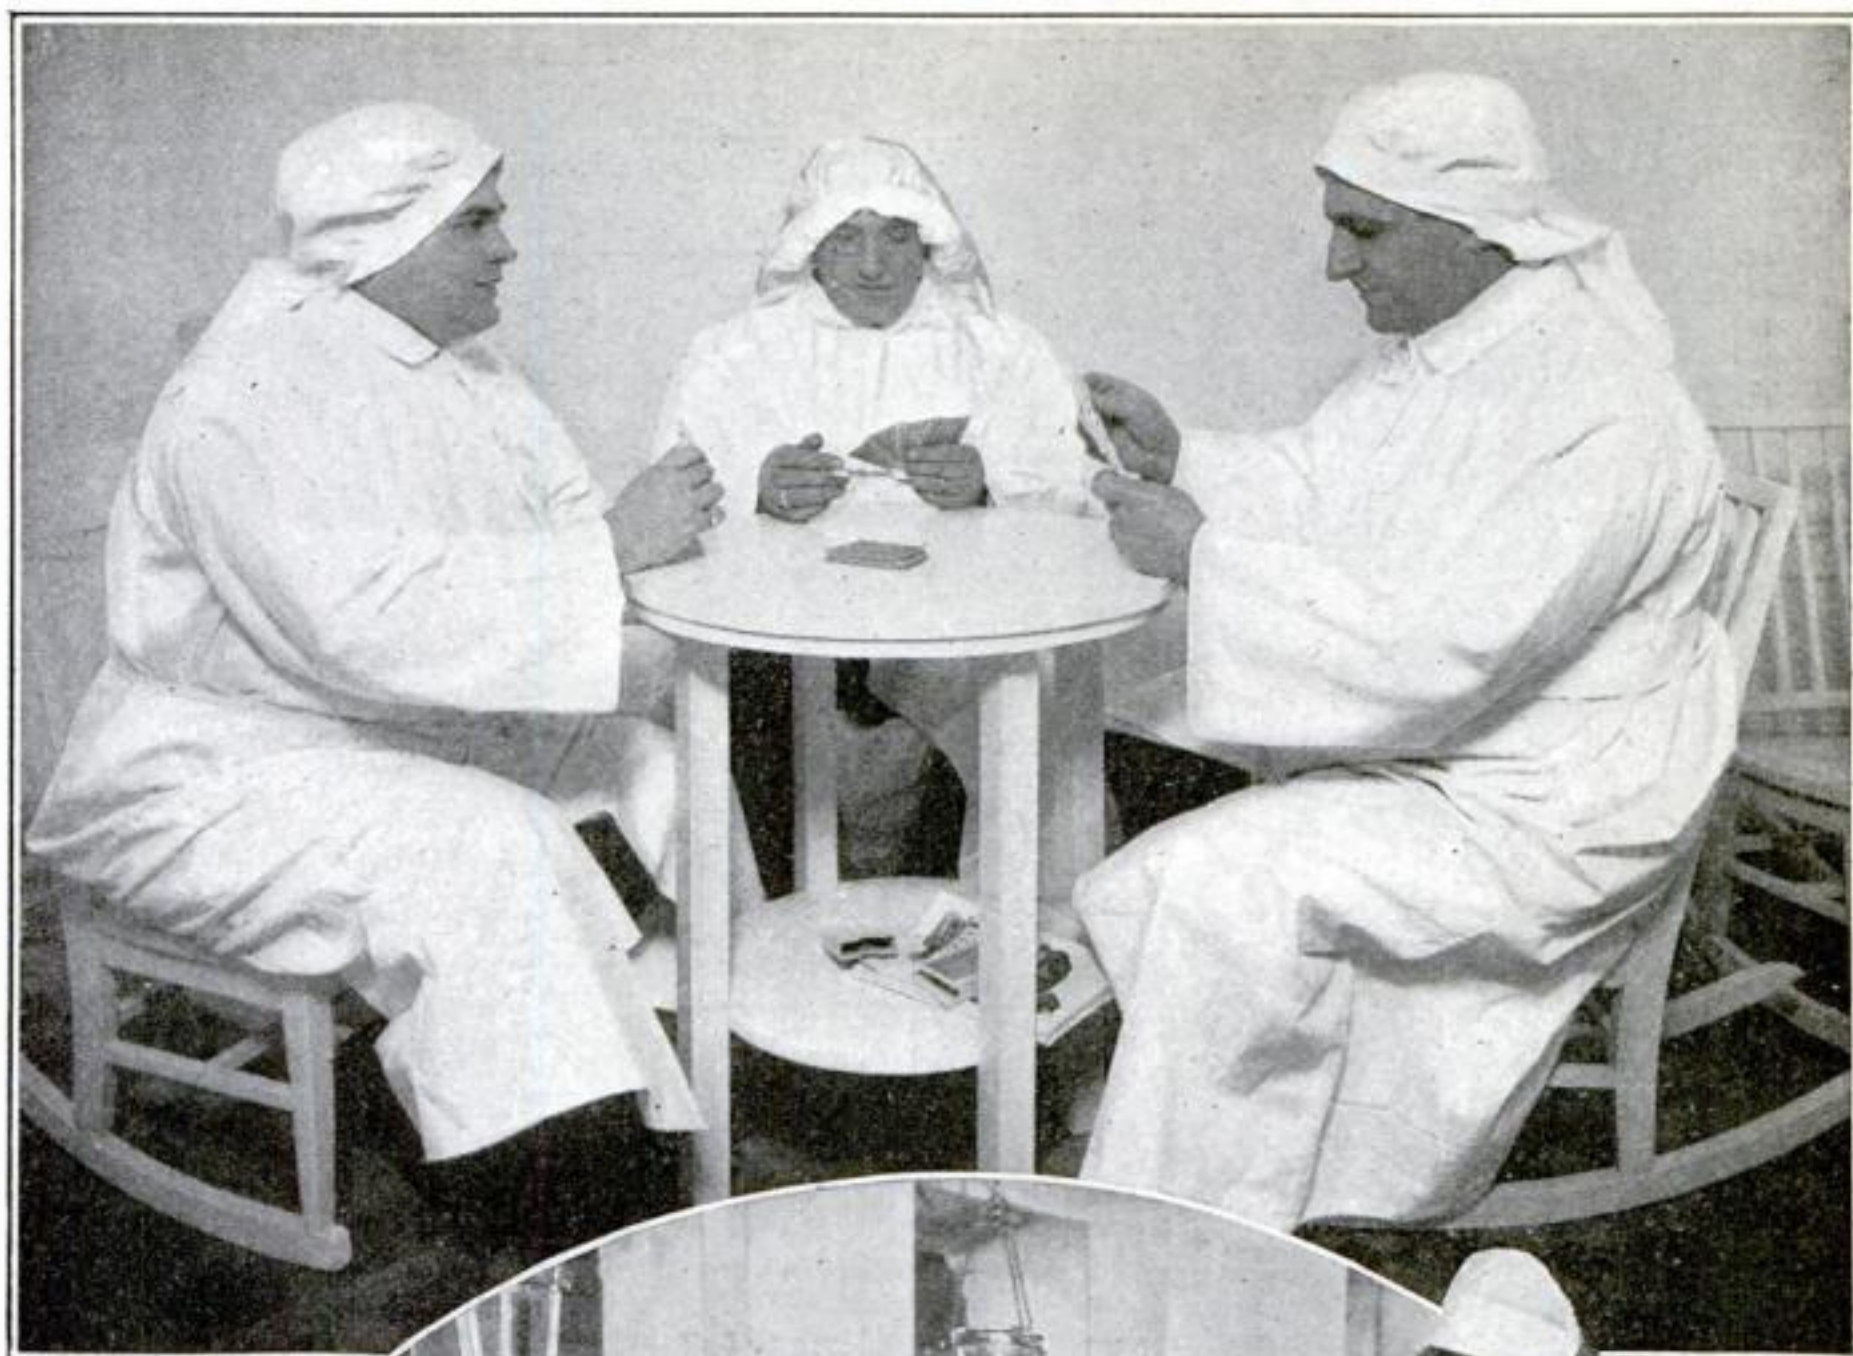


Photos ©
Press Illus. Serv.



Contrary to your first impression the figures in the first picture are not fortune-tellers but opera singers playing cards in an inhalation room. They are breathing the prepared air which is said to be beneficial to the throat. From right to left are Pasquale Amato and A. de Segurolo. In oval: Taking the nasal douche. The singers are A. de Segurolo and Pasquale Amato

The European Trenches Are Not the Only

Gas masks a new development? Hardly. They have been used for years in American industries. At the left a girl is shown putting caps on bottles of disinfectants

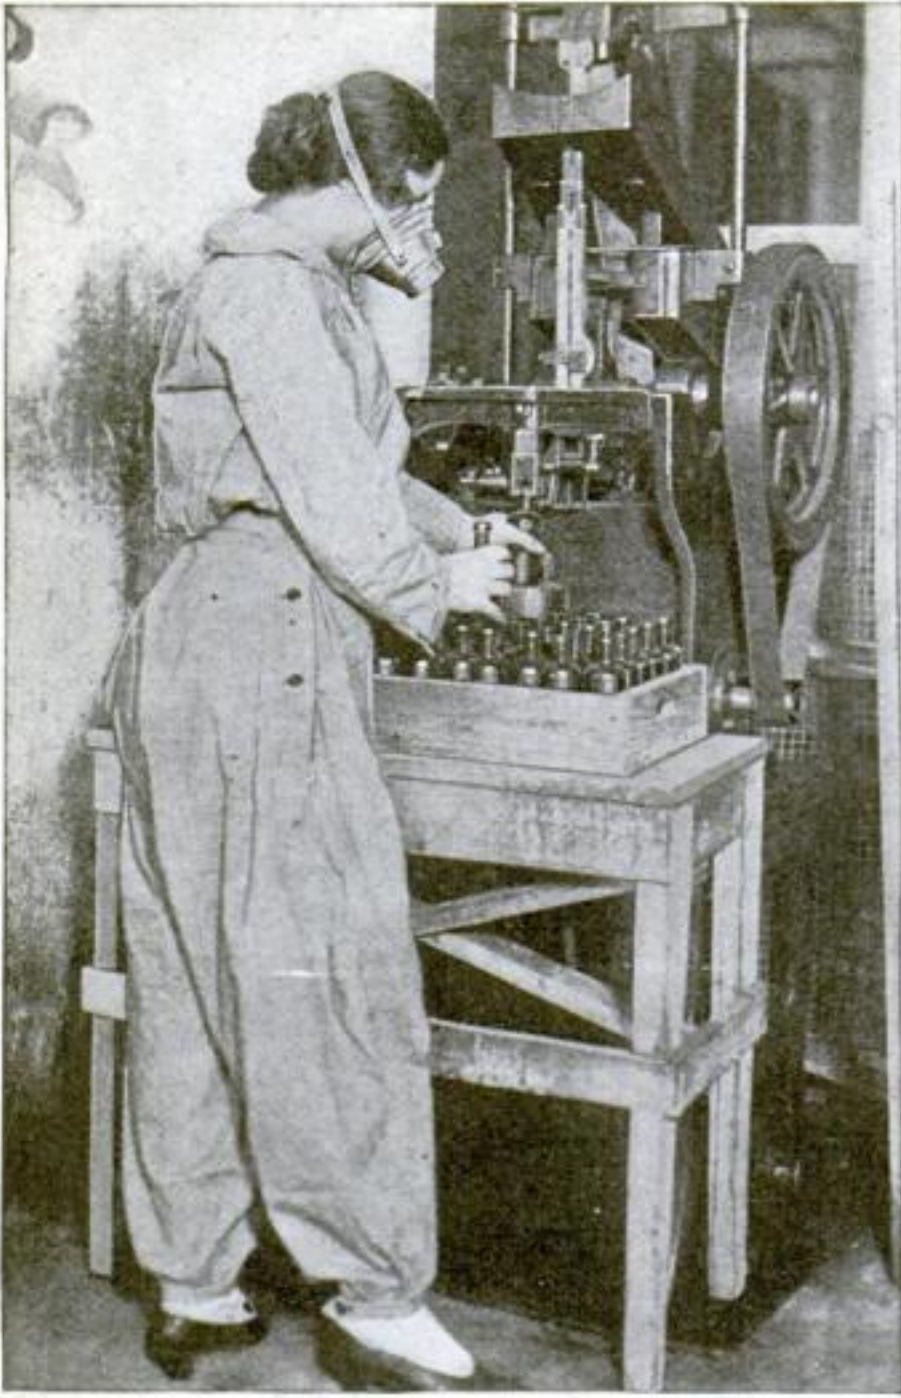

Photos © Kadel and Herbert



Foreign cotton has to be disinfected to kill the boll weevil. Here it is treated with hydrocyanic gas, pumped at a pressure of 1,000 pounds a square inch. A whiff of the gas is fatal

Handling barrels of chloride of lime which gives off an irritating dust powder and chlorine gas, the destructive gas used in trench warfare. The men are well protected by their masks

Places Where Gas Masks Are Necessary

A gas mask worn by the photographer enables him to take a picture of the man who is shown at left below repairing a leak in an ammonia tank. During the time the photograph was taken choking fumes of ammonia were escaping in great volume from the tank, which is situated in a cold storage plant



Photos © Kadel and Herbert



Repairing the ammonia tank, a task made safer through the use of the gas mask. The cylinder below the mask contains chemicals which absorb all of the poisonous fumes and allow only pure air to reach the lungs




A chemist experimenting with a dangerous combination of chemicals which give off poisonous fumes. With the gas mask protecting his nostrils, he is able to approach close enough to his work to watch it intently

How the Stay-at-Homes Can Provide the Sinews

America turns to the soil in earnest. Even women are responding to the call for active service. Mrs. Ruth Litt, the wealthy suffragist, has turned over her 135-acre farm for cultivation, the work to be done entirely by women. The photograph below shows Mrs. Litt, Mrs. Grace Homer, Mrs. George Baxter, Jr., and Mrs. Charles Gould at work



Photos © Int. Film Serv.

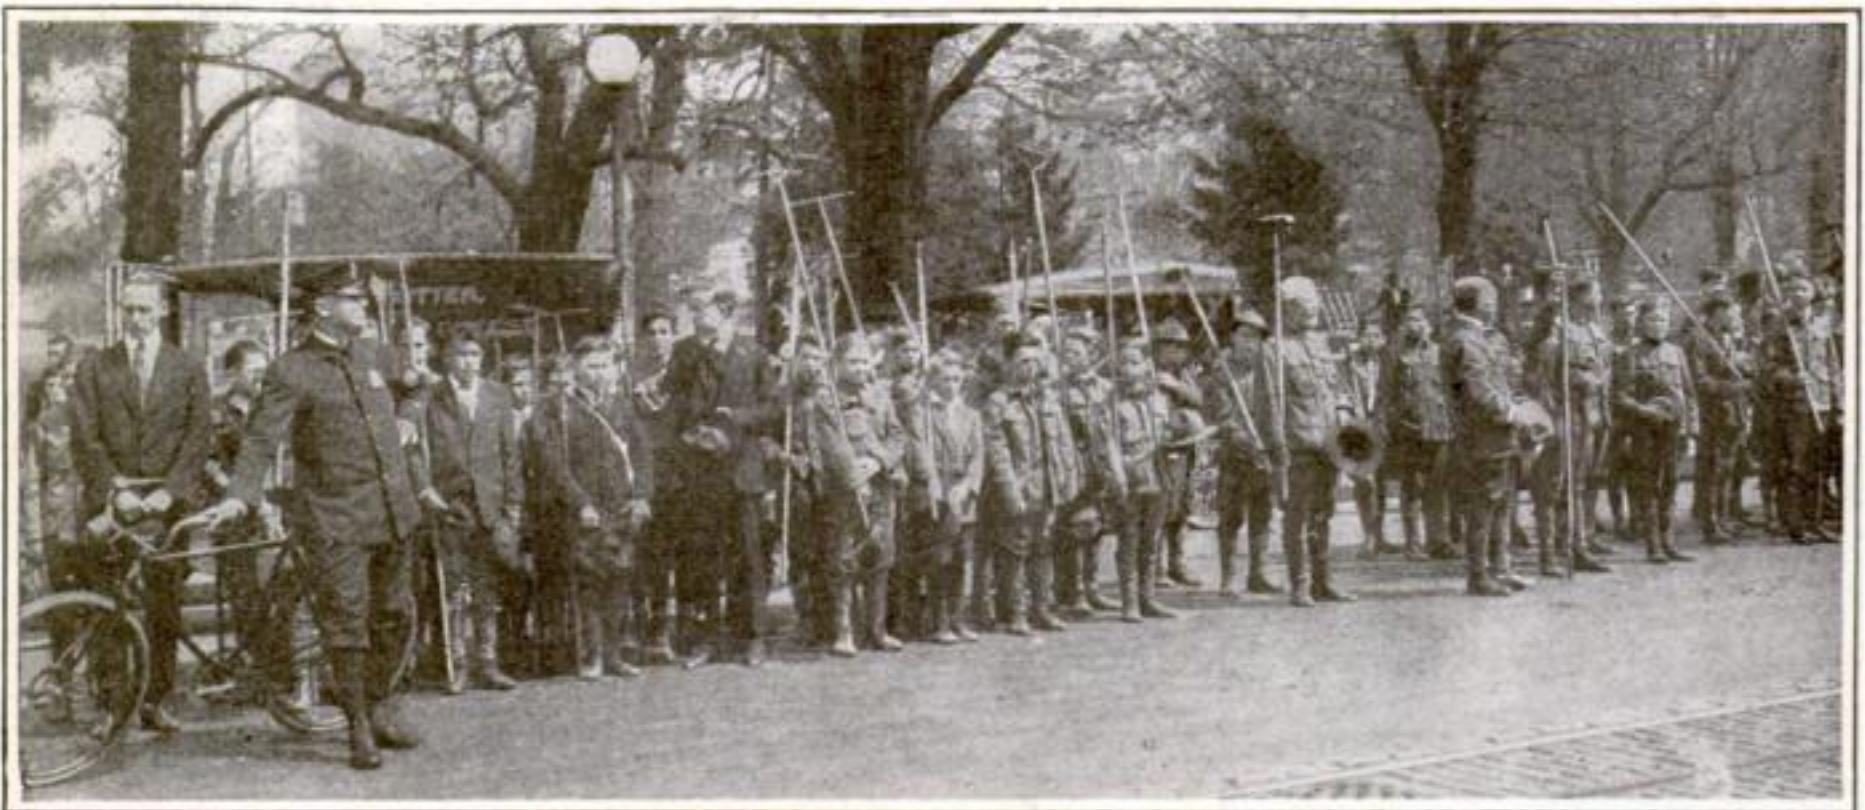

Three hundred acres of land in East Potomac Park, Washington, were given over entirely to the Boy Scouts Brigades by the Government to be cultivated as a vegetable garden

of War for America and Our European Allies




Photos ©
Int. Film Serv.

Picture continued from opposite page. Citizens of Nyack, New York, leave their rifles at home temporarily and go forth to wage war against the soil with farmer's implements. The men are shown preparing the ground for garden products



A Chicago girl doing her farm bit to back up the nation's fighters. With six other girls she was transferred from her employer's office to his farm

The Rockland County Patriotic Society on their way to charge a ten-acre plot and convert it into a vegetable garden. They believe that the spade is as valuable as the rifle

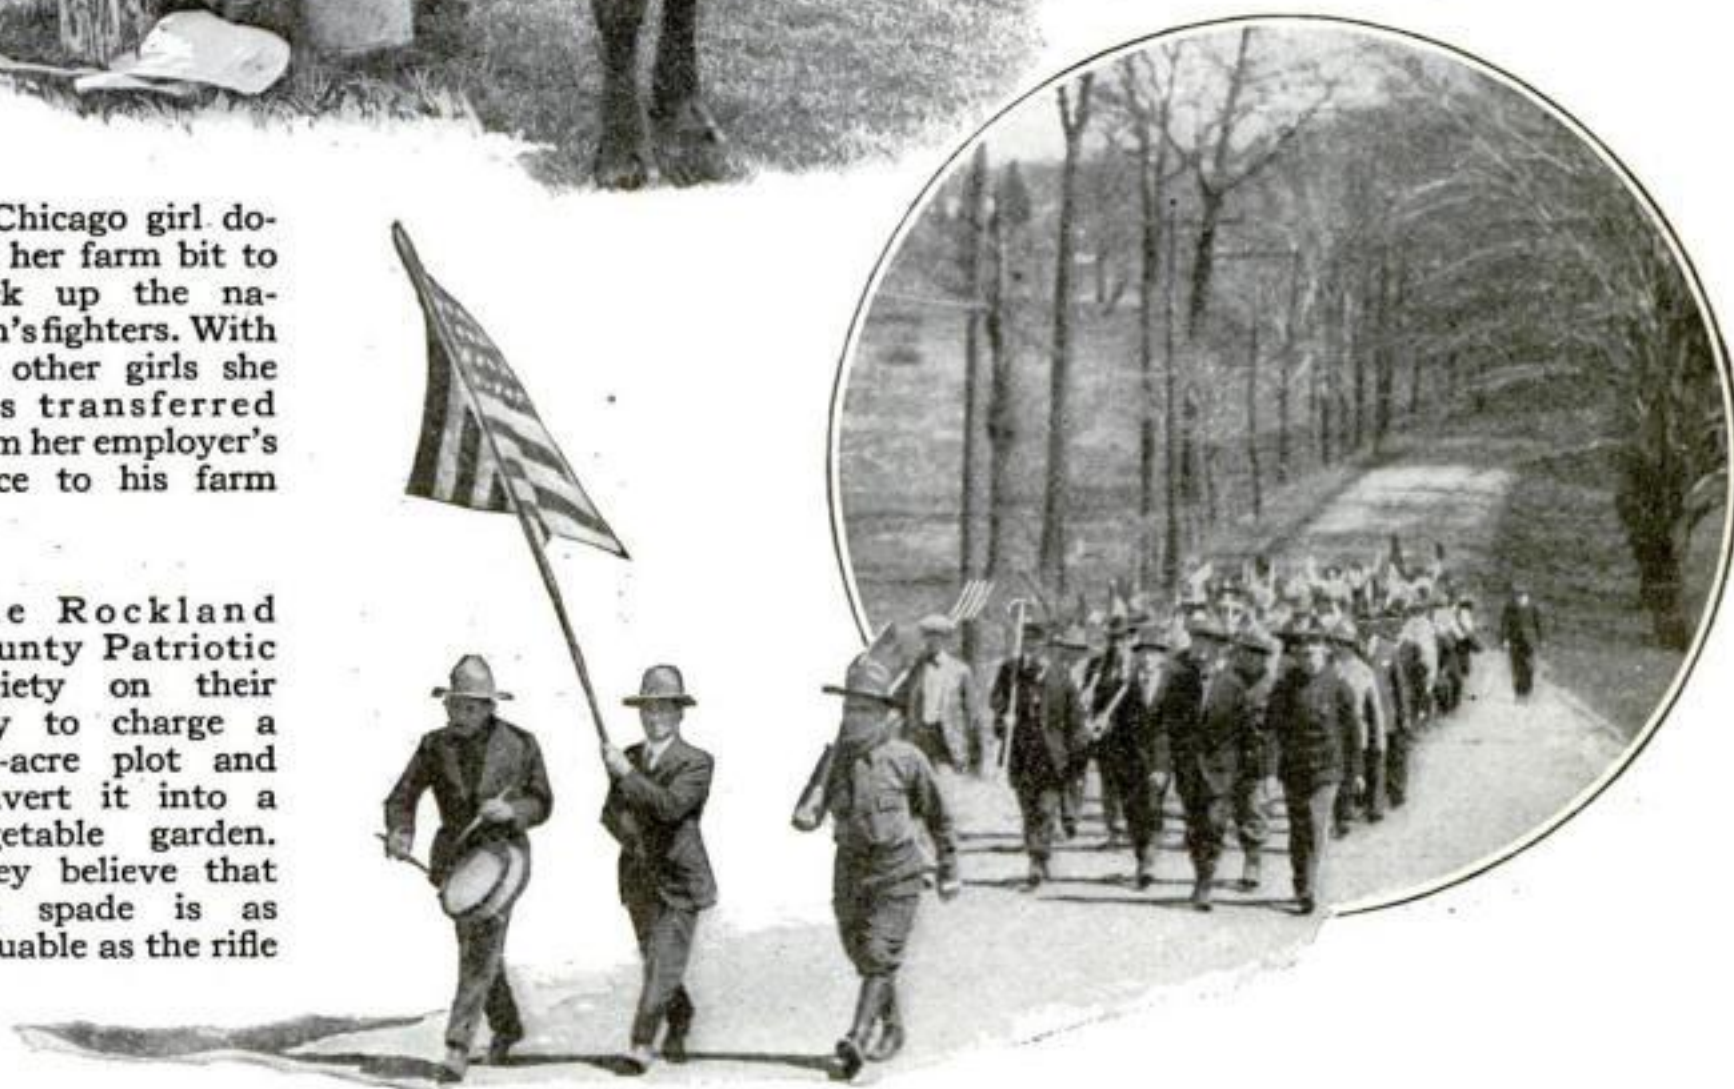



Getting ready for a "hold-up" picture. The blackness of night is genuine but the lights are brought from the studio.

Making "Night Scenes" for the Motion Pictures

THE Limited is held up! Light from a switchman's lamp or from the highwaymen's bull's-eye illuminates the harrowing scene. Or so it appears on the screen at the motion picture theater. As a matter of fact the light is supplied by a semi-circle of flaming arcs such as are used in the ordinary studio for "close-up" photographs. The only necessary feature which the studio cannot supply is the darkness. In order to get the realistic impression which marks the success of a picture, a night scene such as the one described must be taken in the genuine blackness of night.

The accompanying illustration shows the director of such a motion picture lining up his characters and adjusting the lights preliminary to taking the picture. The arcs are fed from the dynamo of the car. The light is very brilliant and is exceedingly hard on the eyes since it has to be flashed directly into the faces of the actors. For this reason such night scenes are not as popular with the performers as with the spectators.



Joe, our office boy, posing with the largest straw hat in the world

The Poison Gases That Kill Men in Trench Warfare

WE do not know definitely the composition of the gases used in trench fighting. From the appearance, odor and effects on the men it is believed that a mixture of chlorine and bromine is employed with the possible addition of sulphur fumes or formaldehyde gas. Germany produces chlorine and bromine in large quantities. These gases attack the eyes, the lining of the mouth, throat and nose. One part of bromine or chlorine in one thousand parts of air produces almost instant death. The gases first cause a violent cough, followed by spitting of blood.

The Largest Straw Hat in the World Is Yours If It Fits

IN the display window of a large hat manufacturing company in New York city the hat in the photograph below was recently placed on view, bearing the placard, "The Largest Hat in the World. If you can wear it it is yours." Immediately one of the editorial family of the *POPULAR SCIENCE MONTHLY* became interested. Perhaps he needed a new straw hat. He was too modest, however, to take the company at its word and step right in and claim the hat by right of head dimensions.

Not so the editor's mascot—the office boy. He was not absolutely sure that the hat would fit but he was unwilling to let it pass without a trial. Boldly he went inside and tried it on, finding to his surprise that it covered not only his head but his shoulders and a goodly portion of all the rest of him. Thus convinced against his will, he nevertheless, proved his ability to wear the hat long enough to pose for a photograph in it, or under it, though it required both hands for the task.

How Fast Is Your Typist? This Ingenious Machine Will Time Her

INVENTORS have tried for years to put a counter on the typewriter to estimate the speed of the typist, but the efforts have always been confined to a count of the words written. A recently patented device, called a cyclometer, counts every stroke which the typist makes on the keyboard. It is fastened to the escapement wheel of the typewriter. This wheel does not move when the carriage is shoved backward and forward.

One firm employing fifty typists found that its work was below normal by cyclometer count and later that it had some very rapid typists and some very slow ones. The rate of pay had always been based on the number of years of service, and many of the slow ones were being paid for the work done by the rapid operators. This of course was quickly adjusted.

The Grave-Digger Beetle—Nature's Sanitary Policeman

WHEN an animal dies in a garden or in the woods and decomposition begins, carrion bugs come from far and near. A dead bird, a mouse or a harmless snake wantonly killed by some wanderer provides a banquet for hundreds of insects. Among these the "grave-diggers" are found, embracing forty-three species, twelve of

which are found in Europe, the rest in America.

You can identify these beetles by the two jagged yellowish-red or reddish transverse bands upon their black wing-covers. Their scientific name (*Necrophorus*) means no more than "buriers of the dead." As undertakers, the insects have legs especially adapted for digging.

A grave-digger beetle has a most extraordinary sense of smell. He can detect the peculiar odor of decomposition a long distance away and flies to the dead thing as straight as an arrow. His remarkably keen nose is situated in his club-like feelers.

As a rule several grave-diggers are found near a dead body. They crawl under it and scratch the supporting earth away, so that the body soon lies in a hollow. Gradually the body is lowered until it sinks below the surface. Then it is

covered with earth. The female lays her eggs around the interred form, thus insuring for the newly hatched larvae a plentiful food supply.

It is interesting to note that these grave-diggers can produce a curious creaking noise, by rubbing the fifth abdominal ring, which has two longitudinal projecting bars, on the under edge of both wing-covers. This noise is only made when the bug is attacked; it has therefore been considered an expedient to frighten away its enemies.

Nature further fortifies the beetle with a general musk-like odor and by a particularly strong smelling juice which it exudes like a skunk if touched. This odor serves as a protection from human beings, especially, as it is peculiarly unpleasant and penetrating. If the beetle is handled it requires several washings to remove the odor from the fingers.

The grave-diggers are among the most useful of beetles. They have been designated Nature's sanitary police.—DR. E. BADE.



The timing device records not only the number of words written but the number of strokes made



The beetles dig the earth away from under the dead body so that it sinks into its grave. Then they cover it over

How Scientists Capture Mosquitoes Alive for Experiment and Study

OCCASIONALLY it is necessary to do something else with a mosquito besides swatting it out of existence. In order to study the best methods of annihilating it, scientists, health officials and entomologists find it necessary to classify the insect, dissect it and experiment with it. For these purposes it is necessary to collect the mosquitoes without crushing them.

A collecting tube of any size may be used, but the one most approved is a glass or celluloid tube about five inches long and one inch in

When making a catch, the trap end of the tube is placed over the resting mosquito, which in attempting to escape selects the only way out, toward the light. This leads through the glass cone into the large collecting tube. The average time required for a catch is about three seconds. When the collection is made for laboratory use, not more than ten specimens should be taken in the tube at one time, lest the captives injure one another.



Above is shown a collector using the mosquito trap to catch live specimens. At left is the tube, natural size



diameter. When in use one end of this tube is closed with a cork stopper and the other with a specially designed trap, the invention of Dr. T. H. D. Griffiths, of the Public Health Service, of New Orleans, La.

The trap consists of a cork stopper to fit the tube. Into this a one-half inch central opening is bored to accommodate a small somewhat tapering glass tube, the outer end of which is one-half inch in diameter, diminishing to three-eighths inch in diameter at the opposite, or inner end.

A Japanese Invents a Curling Iron

KANJI TANAKA, a Japanese residing in Seattle, Washington, has invented a curling iron, which is designed to make the hair-curling operation not only easier but more expeditiously performed. With it the hair may be curled and

the iron taken out without the usual unwrapping process. This is supposed to leave the curl in better form.

By pressing a kind of button the curling is done almost automatically. By another pressure the parts are unlocked so that they can be slipped out separately. Another advantage which Mr. Tanaka claims for his curling iron is that only one hand is required for the operation.



This curling iron is in two parts so that it can be slipped out of the curl in separate sections



Attacking Mail-Car Robbers with Deadly Fumes

IT would be a sad gang of robbers who tried to break into the railway car invented by George W. Meyers, of the United States Army. They would be greeted with clouds of poisonous gas fumes.

Meyers' robber-proof car works with extreme simplicity. Two tanks, in which fumes of cyanide of potassium are stored under pressure, are fitted inside of the car at each end. These are connected with a perforated pipe which extends all around the door of the car, just in back of the outer framework. Should the train be held up, the locomotive engineer would telephone the guards within the car, who would immediately open the valves of the tank. The fumes would stream out through the pipe perforations and into the robbers' faces. The door being gas-tight, the deadly gas could not penetrate into the car.



The overhead trolley system and the fastener keep the cow's tail from annoying the milker

Making the Cow's Tail Behave with a Trolley Restrainer

JOSUA AERNI and Joseph O. Venden, of Guler, Washington, have come to the rescue of the legion of tail-flogged milkers, with a device which makes the cow's tail behave.

Briefly, the device consists of a clamp, which holds the tail and an overhead trolley system which permits the holder to be moved from one cow to another. As the drawing shows, a rod is attached to the wire track


in such a way that it can be readily moved and held in a rigid vertical position at the same time. At its lower end it is joined to the tail fastener by a flexible cord. The inventors do not take the trouble to describe their fastener, but it is evidently designed so that a strong spring grasps the tail.

Guinea Pigs Were Once Raised Like Chickens for Food

THE cavy (guinea pig) is typically a pet animal, and has no other excuse for existence than the pleasure he gives those who appreciate his good qualities. . . . But it is to the undeniable edibility of the cavy that we owe the existence of the cheerful little squeaker of today.

"The Incas of Peru long ago domesticated the wild ancestor of the modern animals—a small, tailless, unicolored member of the genus *Cavix*, the exact identity of which is a matter of some doubt. These creatures were allowed to run freely about the homes of their owners, whose object in breeding them undoubtedly was for their food value.

"The time which must undoubtedly have elapsed since this domestication was first begun is evident from the entirely changed color of the present-day cavy." (*Pets*, by Lee S. Crandall. Henry Holt & Co., New York.)

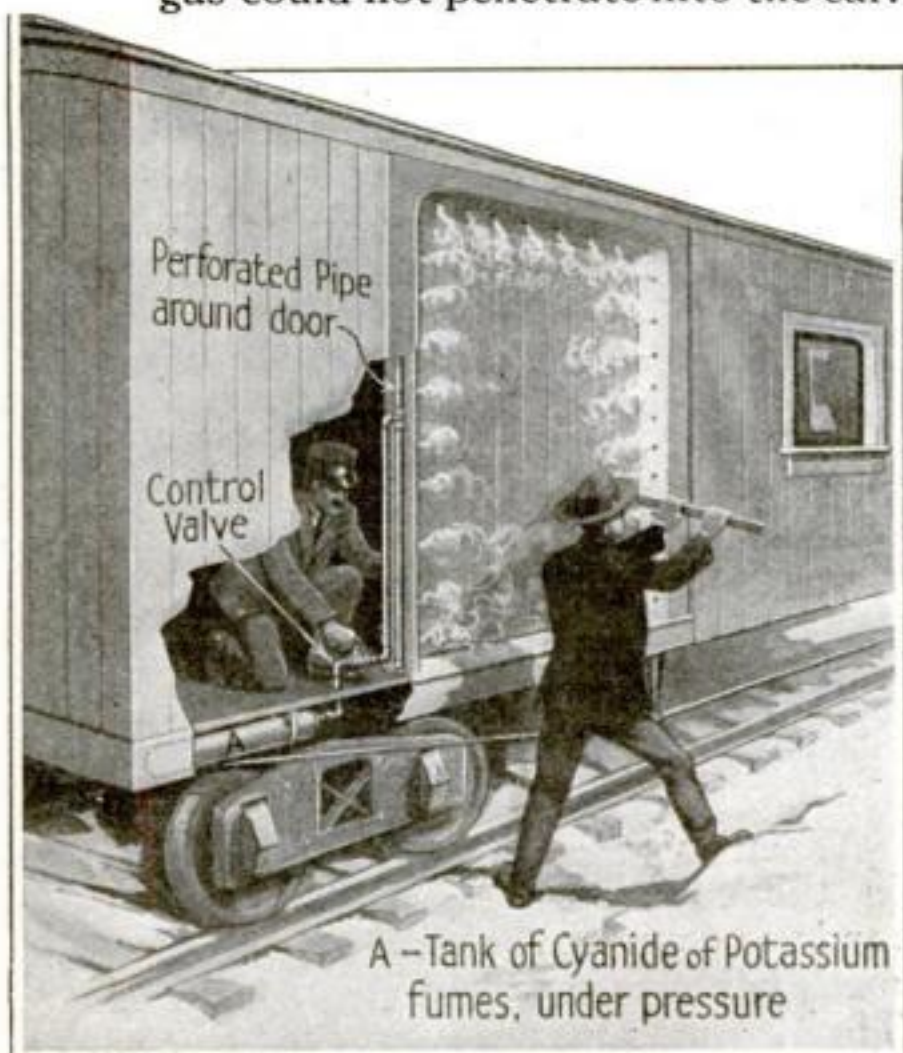

A—Tank of Cyanide of Potassium fumes, under pressure

The deadly fumes are turned on from their tanks through the perforated pipe around the door

"Silent Music"—A Hospital Recreation

A wireless system conveys the melodies to those who want to hear without disturbing those who don't



Suffrage reports by wireless. The contrivance on the left is the receiving set with a few feet of "aerial"

Below: The telephone sending station. By throwing a switch a voice transmitter is cut into the system to allow the operator to announce the record titles



A CHICAGO concern has come forward with a "silent music" contrivance that is designed to furnish recreation to inmates of hospitals. With this system installed in a hospital, a continuous and *noiseless* program of music can be furnished. Each patient may decide for himself or herself whether or not to listen, and if the decision is against such recreation, the patient is not disturbed in any manner.

Briefly stated, the mechanism consists of a phonograph attached to a telephone transmitter, which in turn is hooked up to an electrical wiring system that reaches each private room and each bed in the wards. At each wall outlet a watch-case telephone receiver is wired in. The patient desiring to hear the musical program simply lifts this receiver to his ear.

The sending station equipment is located at the office or in any convenient room, and consists, as stated, of an ordinary phonograph, electrically driven, holding the turntable, which carries any disk record. Attached to this machine is a special music transmitter, consisting of a combination of a telephone transmitter with a vibrating diaphragm and needle. The needle, following the groove of the record, energizes the diaphragm of the transmitter, which in turn energizes the telephone attached thereto.

Beside the transmitting apparatus is a control box, containing electrical resist-

ances, which energize the transmitting apparatus properly, and binding posts for all connections.

By throwing a switch, a voice transmitter is cut into the system. This enables the operator to announce the names of the records about to be played, to give baseball scores, recitations, war news, and whatever other items may be of interest to his telephone clientele.

Except when this voice transmitter is being used, there is no noise of any description connected with the sending apparatus beyond a light scratching of the needle, for no tone arm or horn is used.

When installing this system in hospitals in the course of erection, the wiring is made to connect the sending station equipment with outlet jacks at the bedsides. These outlets are all connected in multiple on a single pair of wires, carried along with the regular telephone or signal system.

Dickory, Dickory, Dock, the Mouse Ran up the—Clock

WHERE are the creepy spiders, the mechanical beetles, and the spring-operated bugs which used to be the delight of the office boys and the terror of the stenographers? And surely the mouse has lost none of its effectiveness as a scream-producer.

A Frenchman has devised a magic wand with a celluloid mouse attached which is capable of great activity. It is worked by the action of a concealed magnet, so that the mouse appears to run up or down the wand in a mysterious way. The wand is a square tube of light wood covered with silk. The celluloid mouse has a small piece of iron on the bottom which is attracted by the magnet. When the wand is turned up a small lead weight on an endless cord falls and draws along the magnet which, in turn, takes the mouse with it. When the rod is tipped the mouse climbs up realistically.


In the photograph the silk covering of the wand is broken away to show the interior mechanism.



These Magnifying Glasses Are Worn Like Spectacles

THE field of usefulness of the binocular magnifier, shown in the illustration on the right, includes the scientific laboratory, the medical office or hospital, and the workrooms of botanists, metal workers, watchmakers, etc. An elastic headband fastens it on so that both hands are free. The eye-pieces of vulcanite are fitted with lenses in such a way that the fields of view are brought within small divergent angles.

A small incandescent lamp fitted with a reflector and condensing lens may be fastened over the top, current being supplied from a battery carried in the pocket.

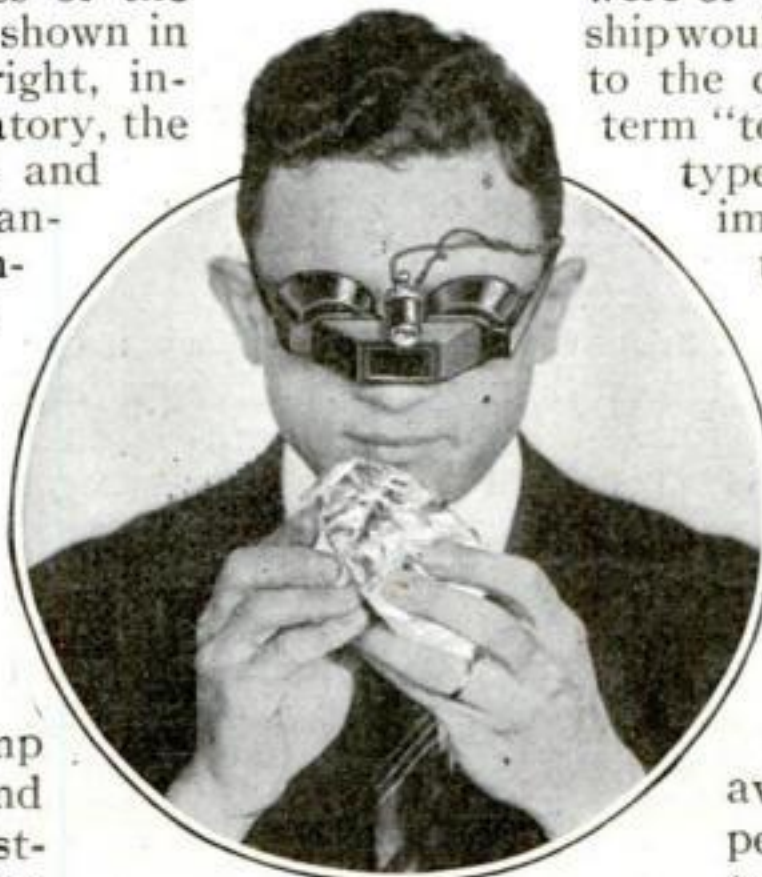

Both eyes are used with this glass, so that the object examined is seen in natural perspective

Why You Can't Compare Ships According to Tonnage

THE different uses of tonnage terms when speaking of ships are causes of confusion to the lay mind. For example, steamship companies in order to impress upon the traveling public the size, and consequent relative safety of their craft, will advertise the sailing of a certain steamer of twenty-thousand tons, meaning, of course, gross tons. The company's agent, in entering her at the custom house, will take great precaution to certify that she is of only 7,340 tons, when paying tonnage taxes. He then is referring to her net tonnage, and in fact that standard is used only when paying dues or taxes.

Displacement tonnage is almost exclusively applied to warships as they do not carry cargoes. Strange to say, the tonnage of a battleship varies almost hourly, as coal or other weighty objects are used or taken on board. The tonnage of warships is, however, fixed; they are referred to in terms of the fixed tonnage.

A statement that a ten-thousand ton battleship sank a ten-thousand ton merchant ship does not mean that the ships were of equal size. The merchant ship would be much the larger owing to the different meanings of the term "ton," as applied to the two types of vessels. It is absolutely impossible to give rules for the relations of these terms, as the conditions vary too greatly. Generally speaking, the gross tonnage of a ship is from fifty to one hundred per cent greater than the net tonnage. Tons displacement are always in excess of tons gross; dead-weight tonnage is on an average from thirty to fifty per cent greater than gross tonnage.—CAPT. C. A. McALLISTER, Engineer-in-Chief, U. S. Coast Guard.

Differentials for Motor Vehicles

Comparisons which illustrate the merits of various types

By Marius C. Krarup


THE Bailey is the name of a new differential gear for motor vehicles. It transmits power to both driving-wheels when these can rotate at the same speed, but only to one wheel when the other runs faster. The power is divided at the rate at which the wheels can utilize it for traction if the wheels have the same speed but one is inclined to slip. Traction from one of the wheels is thus sacrificed on all curves, whether the going is good or not, in order to concentrate power and traction on one of the wheels when traction from the other is lost for lack of friction with the road surface from slippery mud or snow.

The casing is rotated by a bevel gear or worm drive, as usual. To the casing are secured two heavy pawls, of which one holds the left and the other the right wheelshaft by engaging notched disks fixed upon the ends of the shafts. The pawls are pressed against ball-pivots by coil springs. Their seats in the disks are shaped so as to make the engagement hold in either direction of movement, for backward as well as forward driving; but if one of the disks is forced around by the road contact of its wheel faster than the casing and the pawl are rotated by the power, this movement is permitted by means of a cam plate that lifts the pawl out of its seat. This action seems to be as follows: The pair of cam plates is mounted on a sleeve as a rigid unit that turns around with the casing, and opposite to each pawl one of the plates has a semi-circular recess that limits sideways turning of the pawl on its ball pivot, while the other plate here has a straight-line contour passing obliquely under the active end of the pawl but coming to a point directly

before it. This gives the lifting action.

When both pawls drive, they stand at right angles transversely, balanced one against the other, but when one of the disks, actuated from the road, begins to push its pawl, the latter begins to turn a little on its pivot, allowing the disk the same small movement, and thereby the relatively immovable cam plate gets a higher point of support under the pawl, raising it and permitting the disk further unhindered rotation.

A comparison with other differentials illustrates the merits of each. In the ordinary balance gear differential of the type still used in a majority of motor vehicles the four small bevel pinions revolve on the plan of freely balancing the pressures on all teeth engaged. The engine power turns the casing which carries with it the two pivot pins on which two of the pinions are mounted. The two wheelshaft pinions, each in mesh with both of the power-transmitting pinions, can conform with the turning of the casing by revolving, taking the wheelshafts with them. If one wheelshaft resists as much as the other, one side of the actuating pinions is resisted as much as the other, and these pinions remain balanced and unmoved in relation to their pins. The teeth engaged become mere lugs gripping the wheelshaft pinions and forcing them to follow, by revolving. But, the moment one wheelshaft resists more than the other, from any cause whatsoever, the pressure on the teeth on one side of the actuating pinions becomes greater than that on the other side. These pinions are no longer

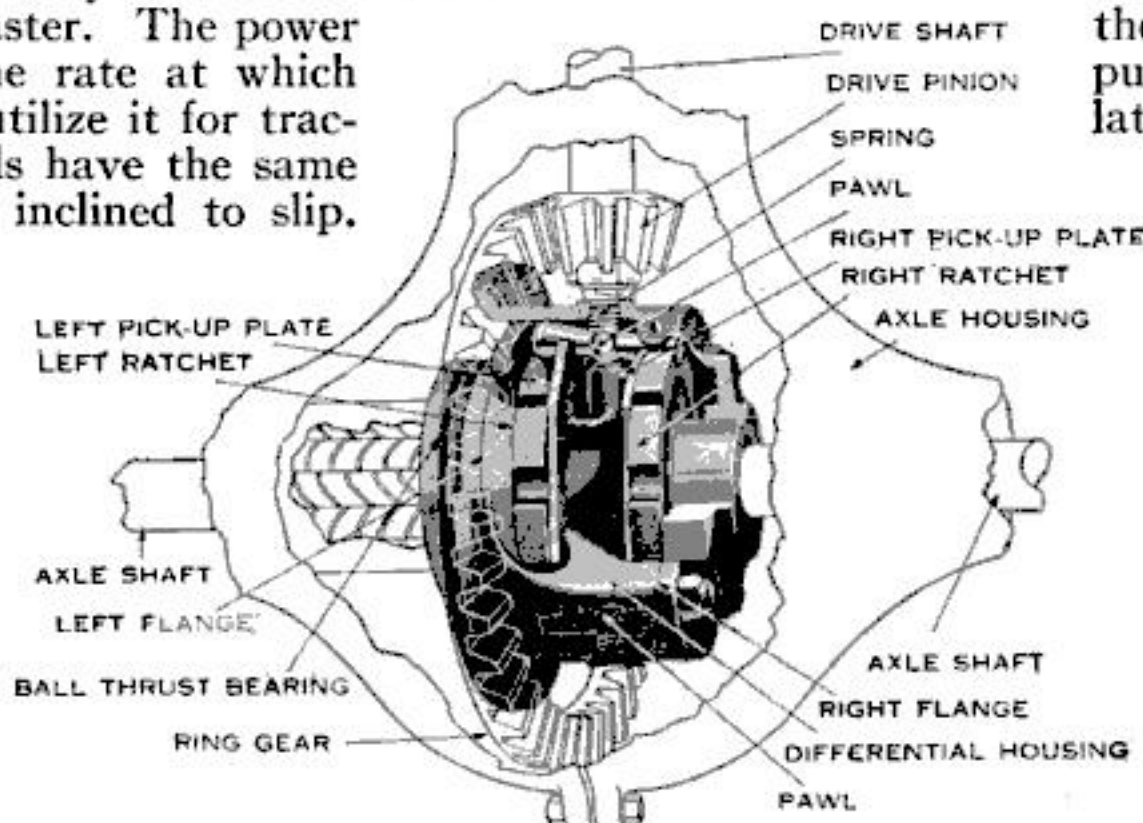


A differential which concentrates power on one wheel when the other has lost traction on a bad road

balanced. They begin to revolve on their pins, toward the low-pressure side. The high-pressure side of them no longer carries its wheelshaft pinion around unyieldingly. It lags till pressures are equalized, the wheelshaft with the higher resistance turning more slowly and the other wheelshaft more rapidly in the same proportion. The total of power utilized remains unchanged, except that a portion of it is spent in overcoming the friction of the revolving pinions.


As friction adds tooth pressure on both sides, it may be purposely increased

turned on. Suppose, further, that one wheelshaft resists very little and does not equalize tooth pressures until it is revolved eight times as fast as the other. Then the differential works four times as much as before and the value of the friction rises rapidly, perhaps from 2 to 8. The power is consumed. By arranging the friction on a less drastic scale, however, one can have a shaft which offers a rather small resistance under small differential action, yet equals the resistance of the other shaft

as soon as its rotary velocity becomes only two or three times as high, after which no greater difference in shaft speed can be produced. The power is then divided somewhat on this plan: 2 for the slow shaft, 1 for the small friction identified with its side of the differential action, 4 for the friction of the rapid shaft and 1 for driving it. If the wheel of the rapid shaft has no traction, there is still a net power of 2 for driving.

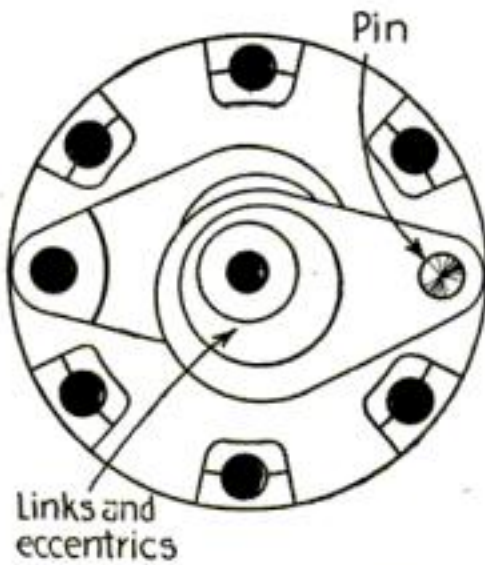

An eccentric can drive a link in and out but cannot be rotated by turning the link around

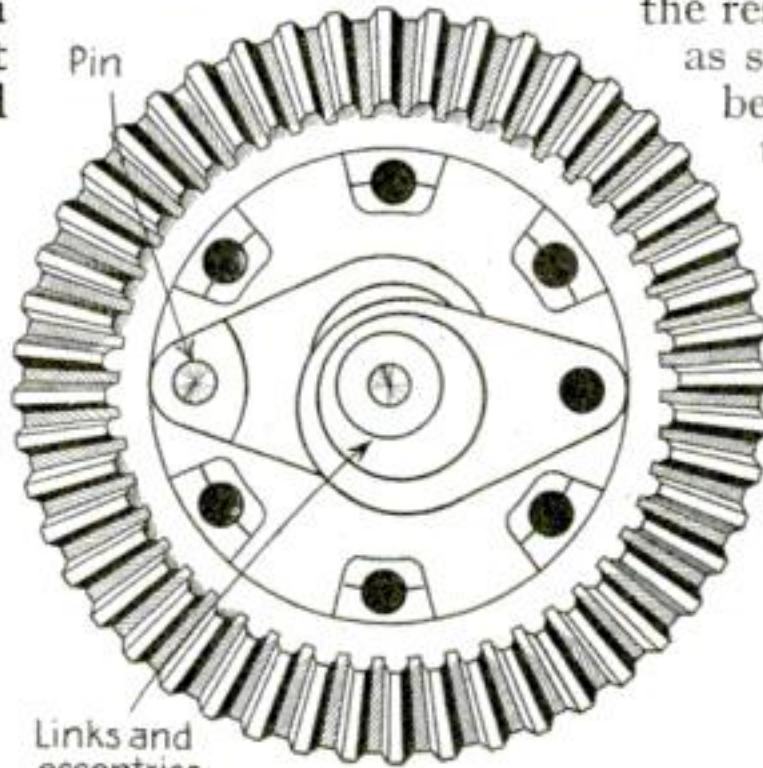

It is built strong enough to resist the stresses that arise in its operation

to modify the action of the differential. For example, if the power delivered to the casing has a numerical value of 8 and the resistance of each shaft against rotation at a certain velocity is 4, no friction in the differential arises. But when road contact interferes and one of the shafts produces increased resistance at this velocity but only 4 at a velocity $33\frac{1}{3}$ per cent higher, while the other shaft produces 4 at a velocity $33\frac{1}{3}$ per cent lower, such as may be the case when a vehicle is made to turn on a fairly sharp curve, one shaft is turned twice as fast as the other and a certain friction is produced. In the ordinary differential this friction is negligible; but suppose it is made to have a value of 2, then there is only a power of 6 available, and there is less than 4 for each wheelshaft. The vehicle speed is reduced or more power must be

A Refrigerator Basket for the Picnic Outing

ALL the luxuries of home are now at the disposal of the vacationist starting off for a picnic at the beach or in the woods. The increasing vogue of automobile touring trips has also created a demand for portable creature comforts. A refrigerator basket is a refrigerator in miniature, which keeps the butter hard,

the meat fresh and the milk sweet. It consists of a rust-proof metal food container with a smaller ice compartment partitioned off at one end. Around this shell is a layer of insulating material to keep the cold air in and the warm air out. Externally the carrier is a reed basket with convenient handles and straps to bind the lids down. Separate lids are provided for the two compartments.



The refrigerator-basket is the picnic party's ice-box. In it all perishable food is preserved

The Strength of Human Wings

One hundred and twenty-two people can stand on the wings of a big biplane

IF the men who lost their lives in the early years of the flying machine's development could come back to life and gaze upon the picture which accompanies this article, they would first gasp in astonishment and then they would approve enthusiastically the construction which made it possible for sixty people to crowd upon one-half of a huge biplane's wings without breaking them. For, let it never be forgotten, that some of the early martyrs who dropped to a terrible death from great heights, went to their doom because the builders of their machines had no conception of the structural strength required to buffet turbulent winds at high speed.

Study the picture well. Note that the wing section of a biplane here depicted is supported from a heavy wooden frame and not from the floor. The wing section is held only on one side and extends freely from that side into the air. Judging from their size, the wings are those of any

enormous flying yacht. Although the supporting surfaces of this yacht could evidently sustain the weight of some one hundred and twenty-six passengers, they have not, of course, that amount of lifting power. The crew of the vessel probably amounts to four. Hence, the weight for one hundred and twenty-two people is available for the boat body, rudders, engines, propellers and supplies, something like over eight and one-half tons. Moreover, the human freight here pictured clearly does not overstrain the wings.

The picture is an object lesson in reserve strength. The stoutest storm-sails of an old-fashioned sailing ship were never subjected to such strains as those which must be endured by that fabric of linen, wires, and lattice-work of which the wings of a modern flying-machine are composed. A sail needs strength to resist mere tearing alone. A flying-machine's wings must in addition be so rigid that they will keep its shape in the worst hurricane. Only the pilot of an airplane knows how his wings are strained when he drops at a steep angle from a height of five thousand feet in a swift downward glide for home. It must bend no more than if it were made of cast iron. To this stiffness the modern airplane owes its superior stability.

Testing the wings of the great biplane by crowding upon it a maximum human load



Lost in New York? Consult an Electrified Street Directory

THE man from Oshkosh or Paducah can easily find his way around New York city if he happens to stop at one of the thirteen hotels there which have installed the electric directory.

He can find the location of any building, street, or carline by pushing an electric button on the keyboard, for the location he is seeking will be illuminated by a little six-volt incandescent lamp.

The directory board is sixteen square feet in area and the map is divided into fifty-six sections for the city of greater New York. The current for the board is furnished by storage batteries.



When the right button is pushed the desired location flashes into view

connected with the phonograph. The receiving station may be located some distance from the actors and camera, so that as the people move about the stage their distances from the radio receiver will remain relatively unchanged and their words will always be heard at about the same strength.

An oscillating vacuum tube will supply the necessary high frequency current, and the batteries used to run it may be made of very small size. A ground connection is secured through contacts placed on the soles of the actor's shoes and arranged to touch a metal plate on the stage; the diminutive aerial required may be constructed of a few thin wires projecting upward a foot or


two above the actor's head, or may merely be a sheet of thin metal foil fastened across his shoulders under his coat. The microphone transmitter which his voice operates need not be visible, for it has long been known that the vibrations of one's chest are amply strong enough to operate a telephone transmitter held over the lungs.

The wireless waves sent out by each actor's radio telephone transmitter pass over the space separating the stage from the receiving station, which may be several thousand feet away, and there affect a very sensitive wireless detector.

This instrument converts the speech waves into telephone currents, which are carried back to the recording phonograph by a wire telephone line. The sound-recording instrument may be either a magnetically controlled wax cylinder phonograph or a "telegraphone," which latter uses a thin steel wire instead of a soft cylinder or disk, and makes its sound records magnetically. Whatever type of recorder is used, it is mechanically connected with the moving picture camera.

Taking Records of Sounds by Wireless for Talking Motion Pictures

THE problem of making talking motion pictures has been attacked by many inventors, but no more ingenious suggestion than that of Mr. William B. Vansize has been brought out. According to Mr. Vansize's plan, each actor is equipped with a tiny wireless telephone transmitter, and his speech is sent through the ether by "radio" to a receiving station which is

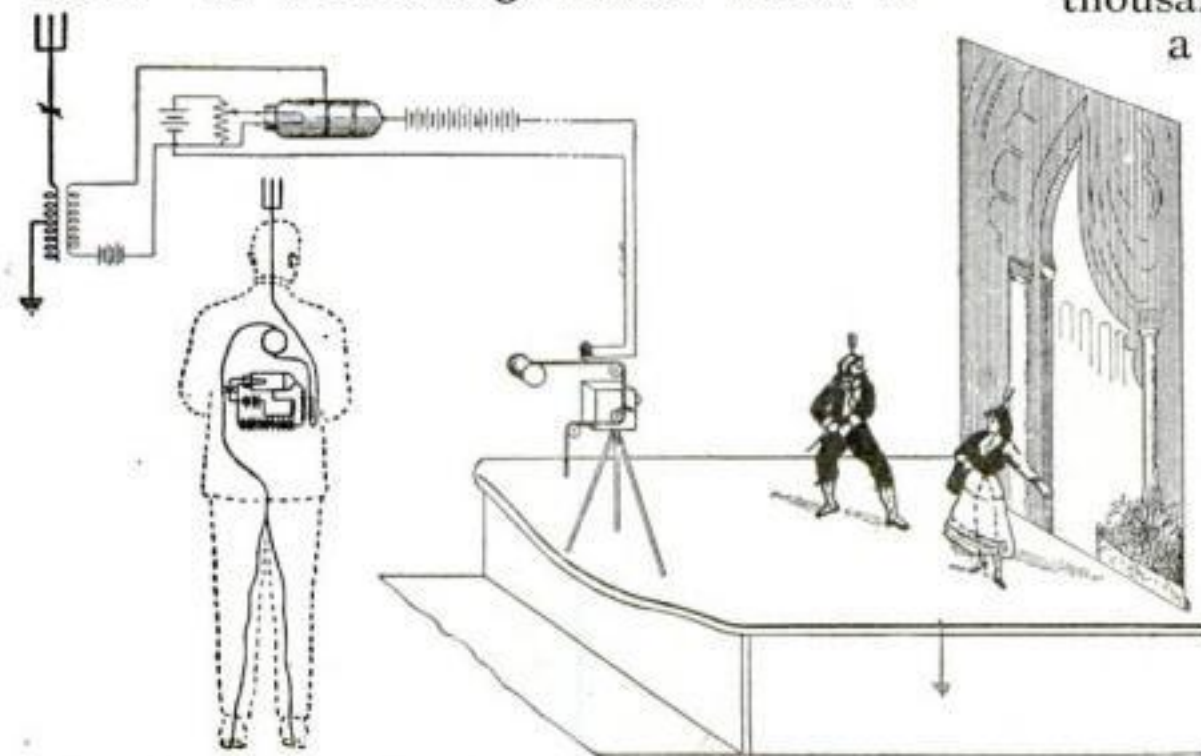

The wiring diagram of the apparatus which is worn by the actor. An oscillating vacuum tube supplies high-frequency current

The Newest Automobile Conveniences




A new shock absorber which takes up shocks before they reach the car springs and the body of the car



The man who is pressed for time has his car fitted up with a disappearing desk and typewriter





A plate or truss which provides a temporary repair for a broken spring. It supports the break longitudinally

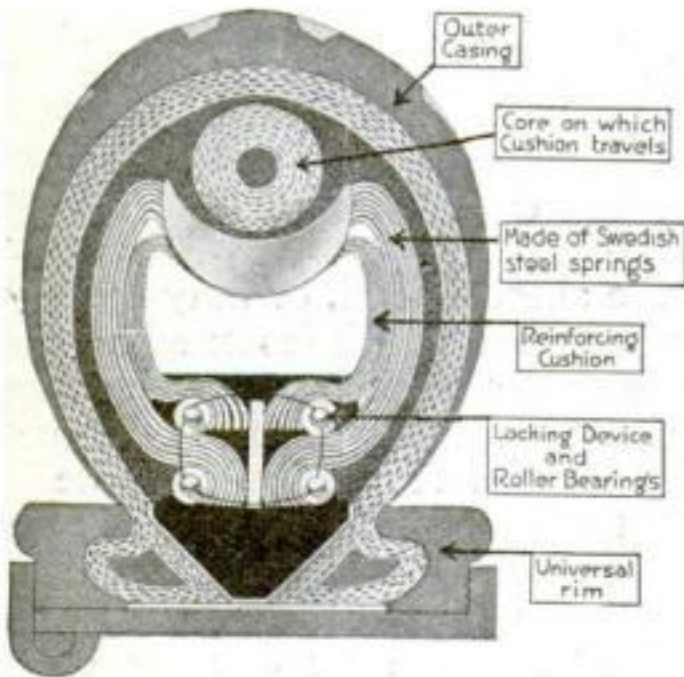


A spring cushion tire to eliminate blowouts. The inner tube is a series of heart-shaped springs

A convenient luggage carrier strapped to the rear of the front seat. It is about three feet long

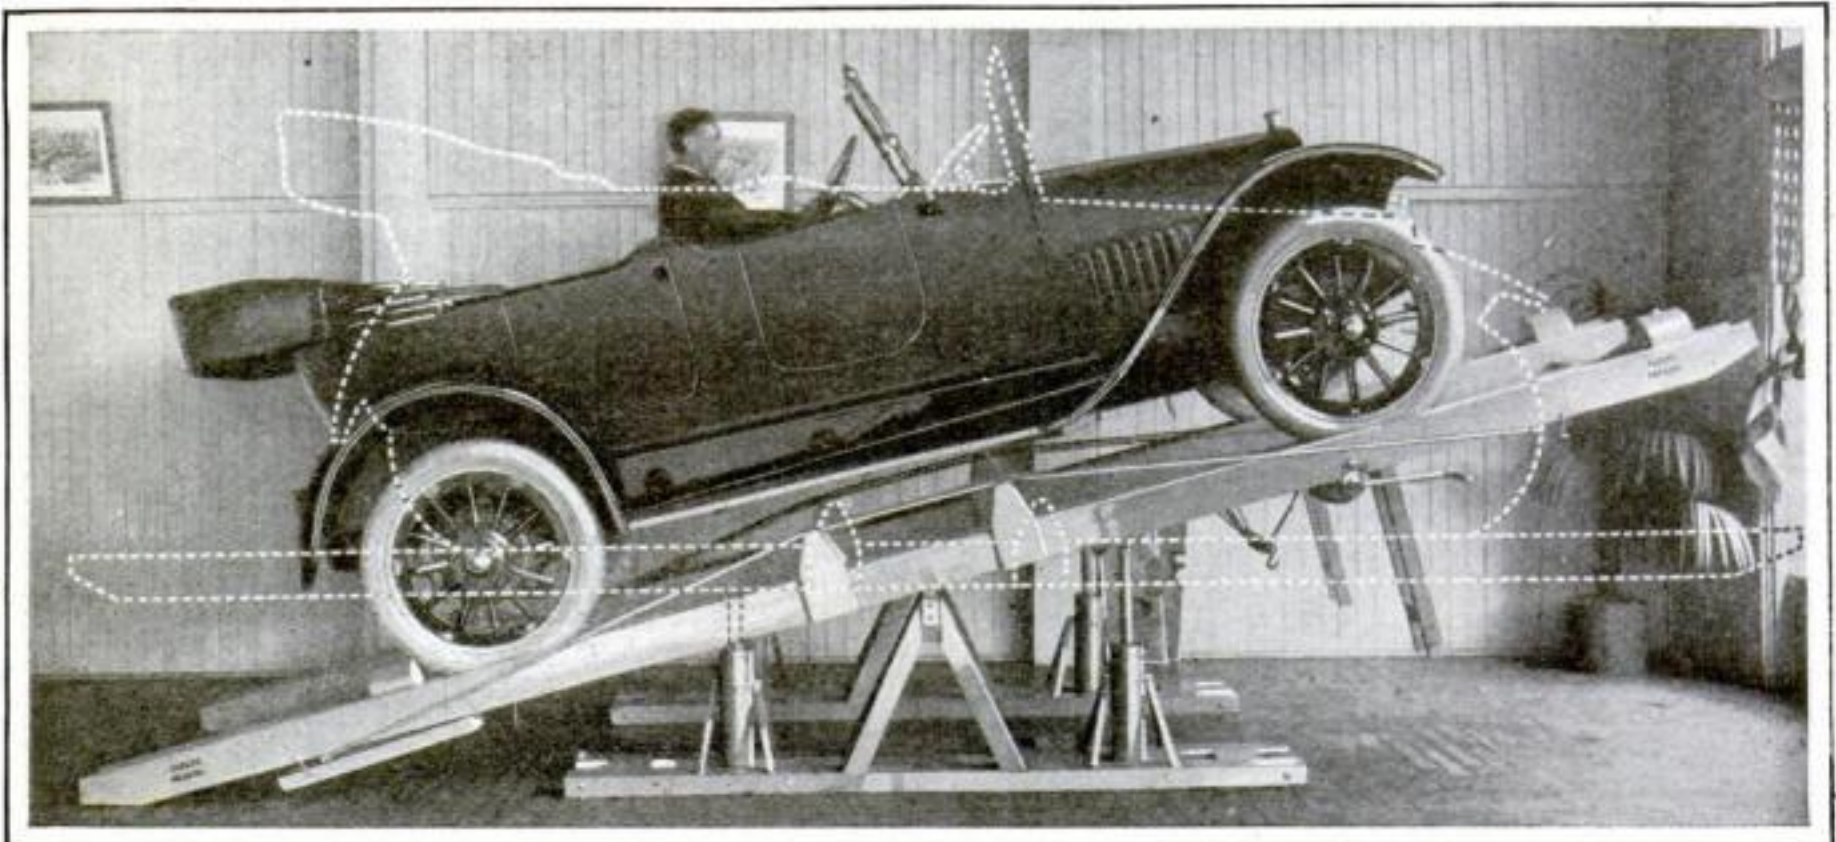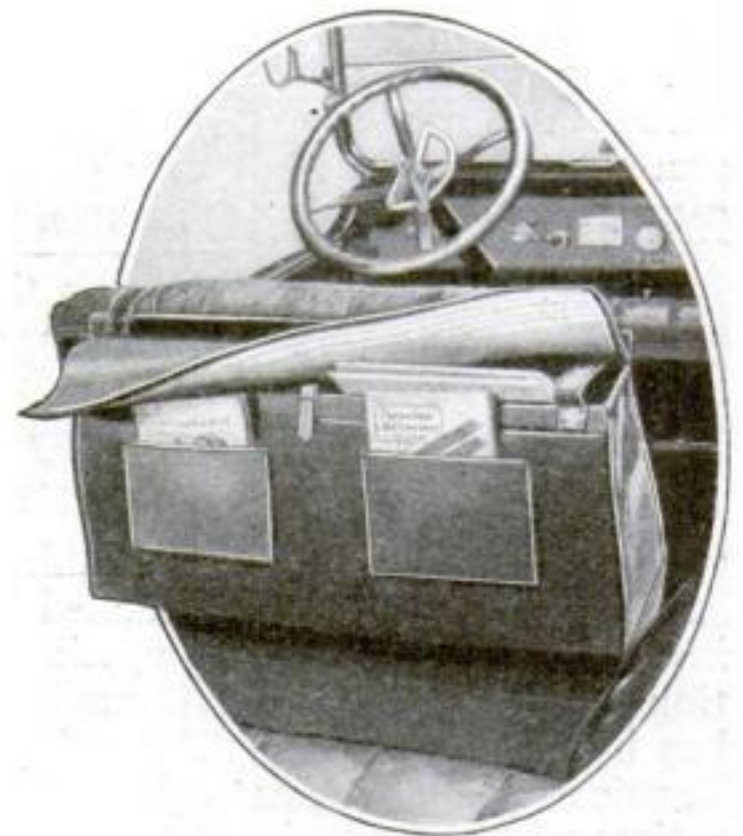

An automatic lift which enables the autoist to "get out and get under" without lying on his back. The car is run on to the lift under its own power. The lift is both demountable and portable

Labor-Saving Automobile Attachments

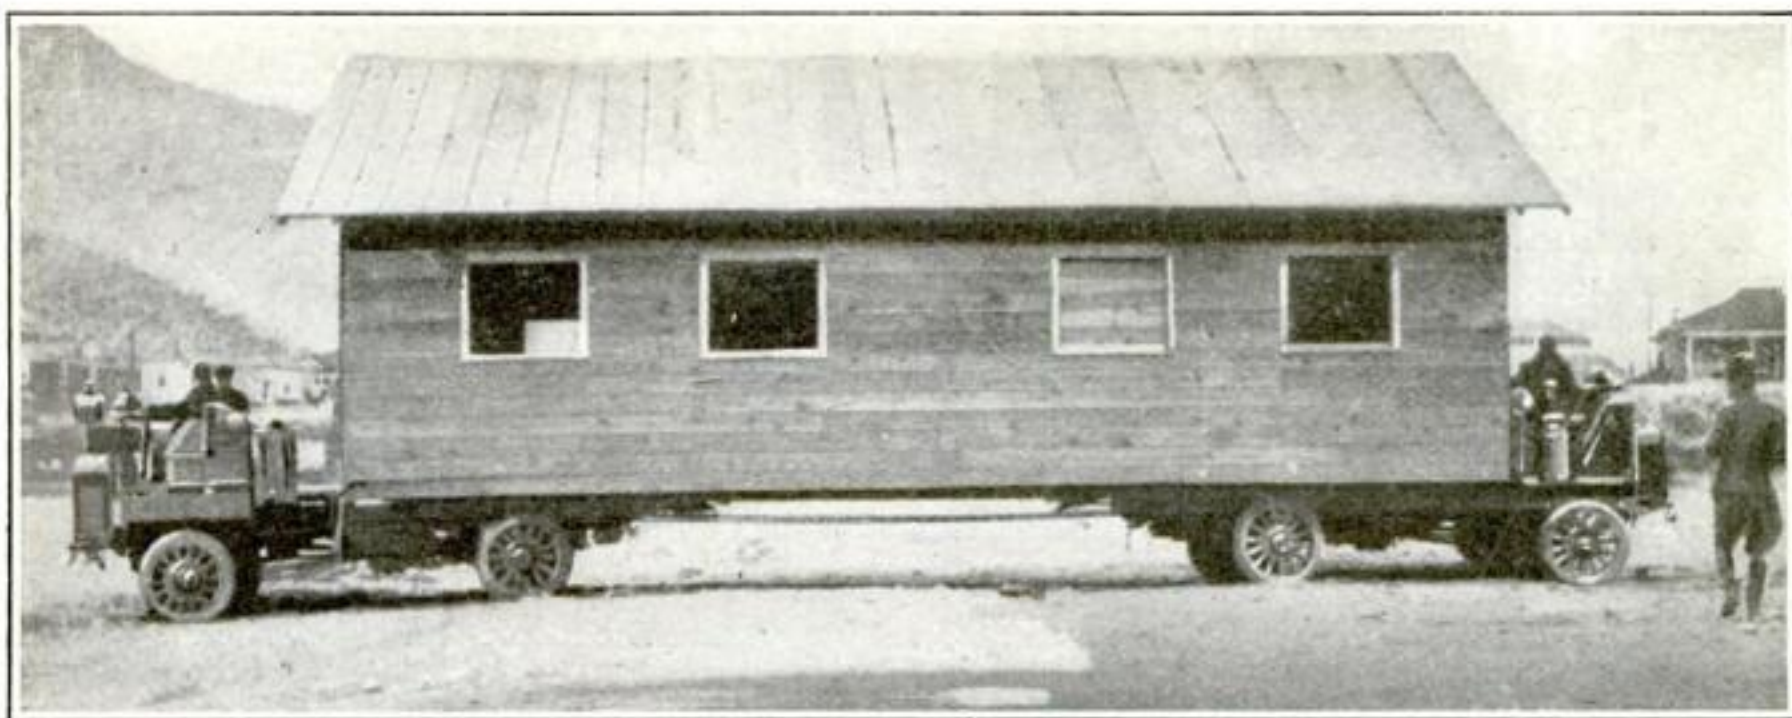

Two trucks, one backing up while the other went ahead, moved this house seven miles across country in a few hours. By old methods of house moving the job would have taken weeks




An attachment by which a Ford is converted into a six to twelve horse-power stationary engine




A spark-plug cleaner which makes it unnecessary to take the plug apart to scrape off the carbon



Lifting a 1000-pound wheel to the hub of a motor-truck with a strong portable crane

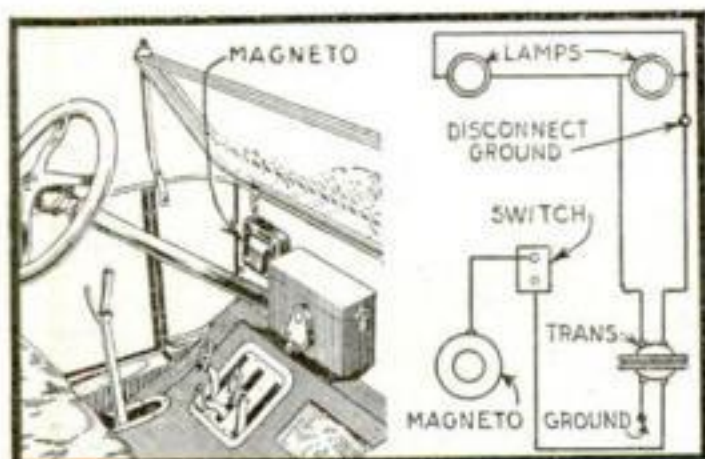

A small transformer, wired as shown, gives steady-burning electric lights on a Ford car

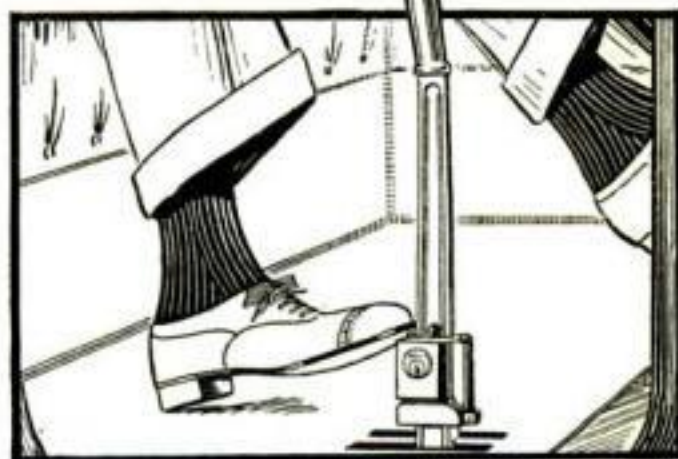

Pressed down with the foot a slot-block locks the gearshift lever, thus foiling thieves

Measuring Motor-Truck Loads Automatically

A dial registers the readings from all four wheels as the load is distributed



Overloading is one of the greatest dangers which the motor-truck owner fears. It is a question of correct weight distribution

OVERLOADING of motor trucks would be entirely eliminated if all such trucks were fitted with the novel load-measuring device shown in the accompanying illustrations. The apparatus makes use of the relative motion between the axles and springs of a vehicle as loads are applied. The varying deflection of springs for loads of different weights is allowed for by calibrating the dial scale on which the loads are read.

The device differs from most others of its kind in that the weight carried on each wheel is recorded on the dial as the load is distributed, and not only that on the rear wheels. The proportions of weight over the truck body must be the same as when the device was calibrated or else the reading will not be a true one. This makes it possible for the load to be properly distributed over each wheel.



The readings are obtained through the use of four vertical racks, each carried rigidly on a strap round each axle near the ends, the rack revolving a spur gear mounted on the frame and driving a longitudinal shaft inside the frame channel through a

bevel-gear unit. The revolution of the shaft is transmitted to the reading dial placed on the dashboard of the truck in sight of the driver by means of a flexible shaft.

As the load is put on the truck, that portion supported by each wheel forces the spring carrying that wheel down and causes the spur gear on the frame to revolve about the rack nearest that spring, simultaneously turning the corresponding longitudinal shaft and the flexible shaft registering the relative motion between the spring and the axle on the reading dial. The weights carried on the other three wheels are registered in a similar manner.

The registering dial is a clever piece of mechanism which consists of a cylindrical casing with a central fixed stud carrying loosely four gears of like diameter

Detail of the rack which revolves the spur-gear mounted on the frame

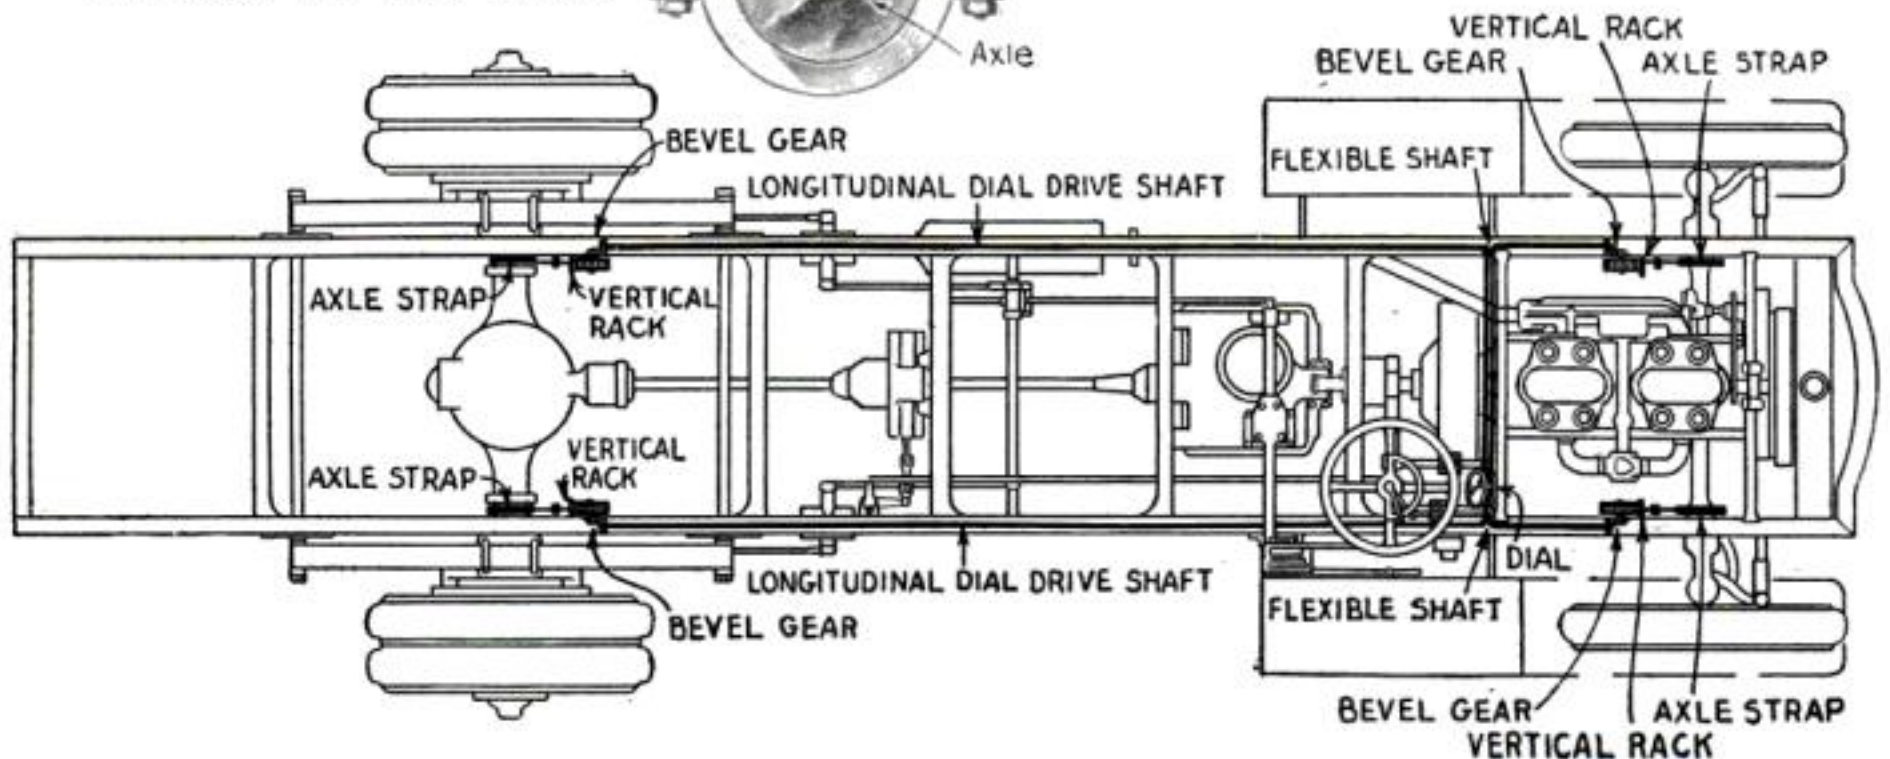
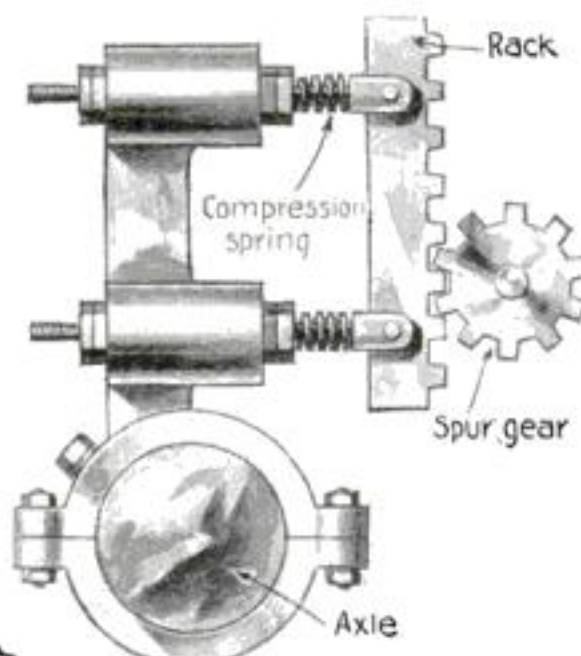


The readings are obtained through four vertical racks, each carried rigidly on a strap round each axle near the ends and each revolving a spur gear driving a shaft through a bevel-gear unit

spaced along its length on telescoping journals. Each journal carries a hub to which are attached curved radial arms or spiders of similar contour but of varying sizes. At their outer ends each set of spiders carries a concentric ring in the same plane and these together constitute the face of the registering dial.

These rings are moved to the left or right of an assumed zero load line drawn from the center stud to the circumference of the casing by means of spur gears on the end of each flexible shaft which extends through the back of the casing. The spur gears are within the casing and are arranged as planets around the central stud and in mesh with the corresponding gears carried on it. This gearing is so arranged that the movement of the rings clockwise in reference to the zero line refers to the loads carried on the two right wheels of the truck, looking toward the front, and the counter clockwise turning of the alternate rings refers to the loads on the left wheels. Calibrations on each ring enable the load on the corresponding wheel to be read directly in multiples of 100 pounds or fractions of tons as desired.

With the dial mechanism remaining the same, the movement of the registering rings may be accomplished in two other ways in one of which a piston attached to the vehicle frame works in a cylinder substituted in place of the vertical rack on the axle to force a fluid to a second cylinder having a piston whose rod carries a rack turning the end of the flexible shaft leading to the measuring dial. The latter cylinder may be provided with a small

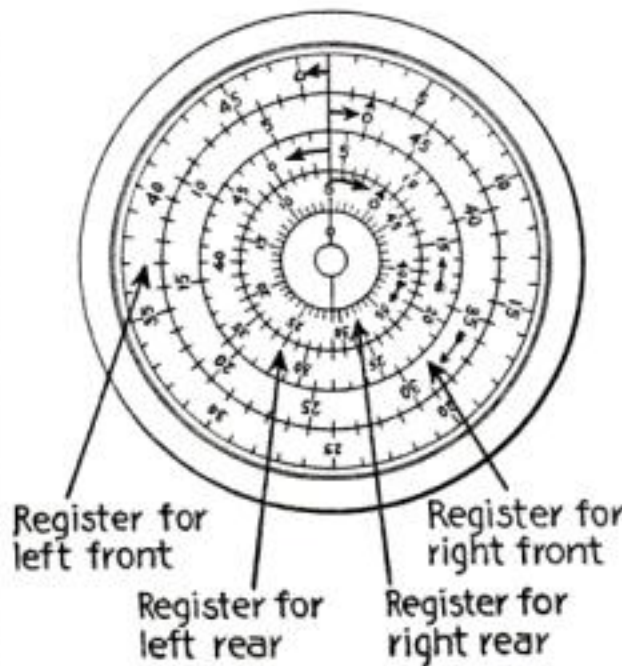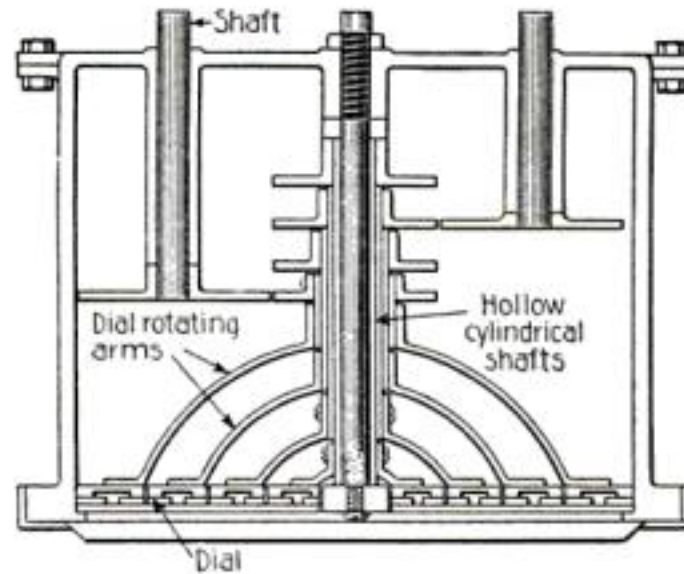

The load carried on each wheel is given on the dial. Above: How the revolution of the shaft is transmitted

fluid well with a screw-in piston by means of which the compression of the fluid may be varied for calibration purposes.

Still another method employs a steel tape attached to the top of the axle near each wheel and carried over a roller on the vehicle frame and thence to a take-up wheel with a spring coiled around its axle and its outer end made fast to the frame.


Not Even the Space Under This Desk Is Wasted

HENRY J. WILLIAMS, of Brookline, Massachusetts, has patented a filing rack which utilizes the space under the desk beyond the reach of the knees. The rack slides forward when the letters are being filed; then a push by the hand sends it back out of the way. The desk is thus as comfortable as before, while expensive floor space otherwise wasted is made use of.

The rack consists of a platform which is supported upon waxed strips for guides. The platform can always be reached by the foot and drawn forward when wanted. A light chain on the platform is attached to the rear of the desk so that the rack cannot be pushed too far forward and the letter files be spilled.

Two bars are provided in front, which when brought together and locked, prevent the files from being removed.

The most popular office desk of the present day is the flat-top style. Under it there is an unusual amount of space which could easily be utilized to advantage by the installation of such a cabinet or rack as the one described. The material or books are kept free from dust.

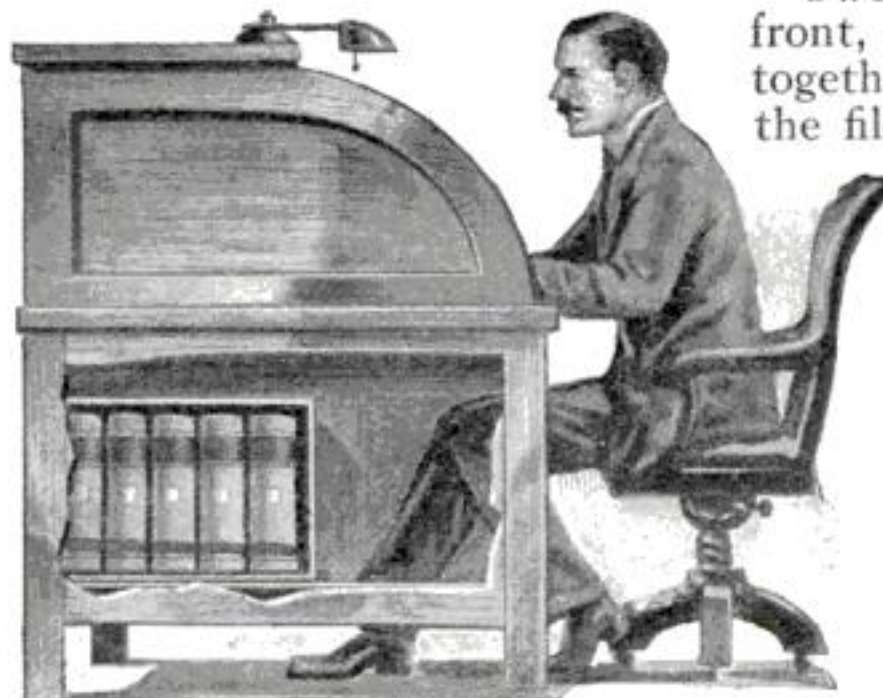

A sliding letter rack utilizes the waste space under the desk. This is locked into place

Our Big Guns and How They Are Made

It is the most powerful thing on earth, is a great gun, but its actual firing life is not as long as the life of a butterfly

Illustrations by Kadel and Herbert

IT is not easy to understand what the power of a gun really is—its penetrating and destructive power. What we call a 15-inch gun—which means one whose muzzle or hollow part is 15 inches in diameter—will hurl a shell right through a plate or wall of the hardest steel 12 inches thick seven miles from the muzzle. The power of the very largest land guns ever made—the German howitzers or 16.5-inch guns—is such that one of their missiles cracks open a steel and concrete fort as if it were a nut.


"Built-up" and Wire-wound Guns and What They Are

There are two classes of guns—naval guns and army or land guns. Because they can be manipulated more easily than those of a ship, land guns are the heavier. From eight to ten miles is the greatest distance that a gunner can cover successfully at sea. The largest naval gun is the 15-inch English gun on the famous super-dreadnought, and the largest land gun is the German howitzer. Of the two the naval gun fires a shell weighing over half a ton, while the other fires a projectile a ton in weight. But the new giant 16-inch

guns of the United States defending the Panama Canal and New York at Sandy Hook shoot projectiles weighing 2,370 pounds, which is over a ton. These immense steel guns can sink a ship before it has really come into sight on the horizon, the location of the battleship having been determined by airplane or tower.

How are these huge pieces made? The first step is the making of the pig iron from iron ore in large furnaces like towers, called blast furnaces. Then the pig iron is melted with other steel in large steel furnaces called "open hearth," until it is freed of its impurities and converted into steel.



The melted steel, thin as water, is run from these furnaces into big iron molds where it is allowed to cool into large solid cylindrical or corrugated blocks. After cooling these are reheated and reduced in size by pounding them with big steam hammers and squeezing them in rolls until at last the steel is pressed into a long barrel-like mass, the embryo of a real gun. This long skeleton of the inside of a gun must be bored out from one end to the other on immense lathes, some over

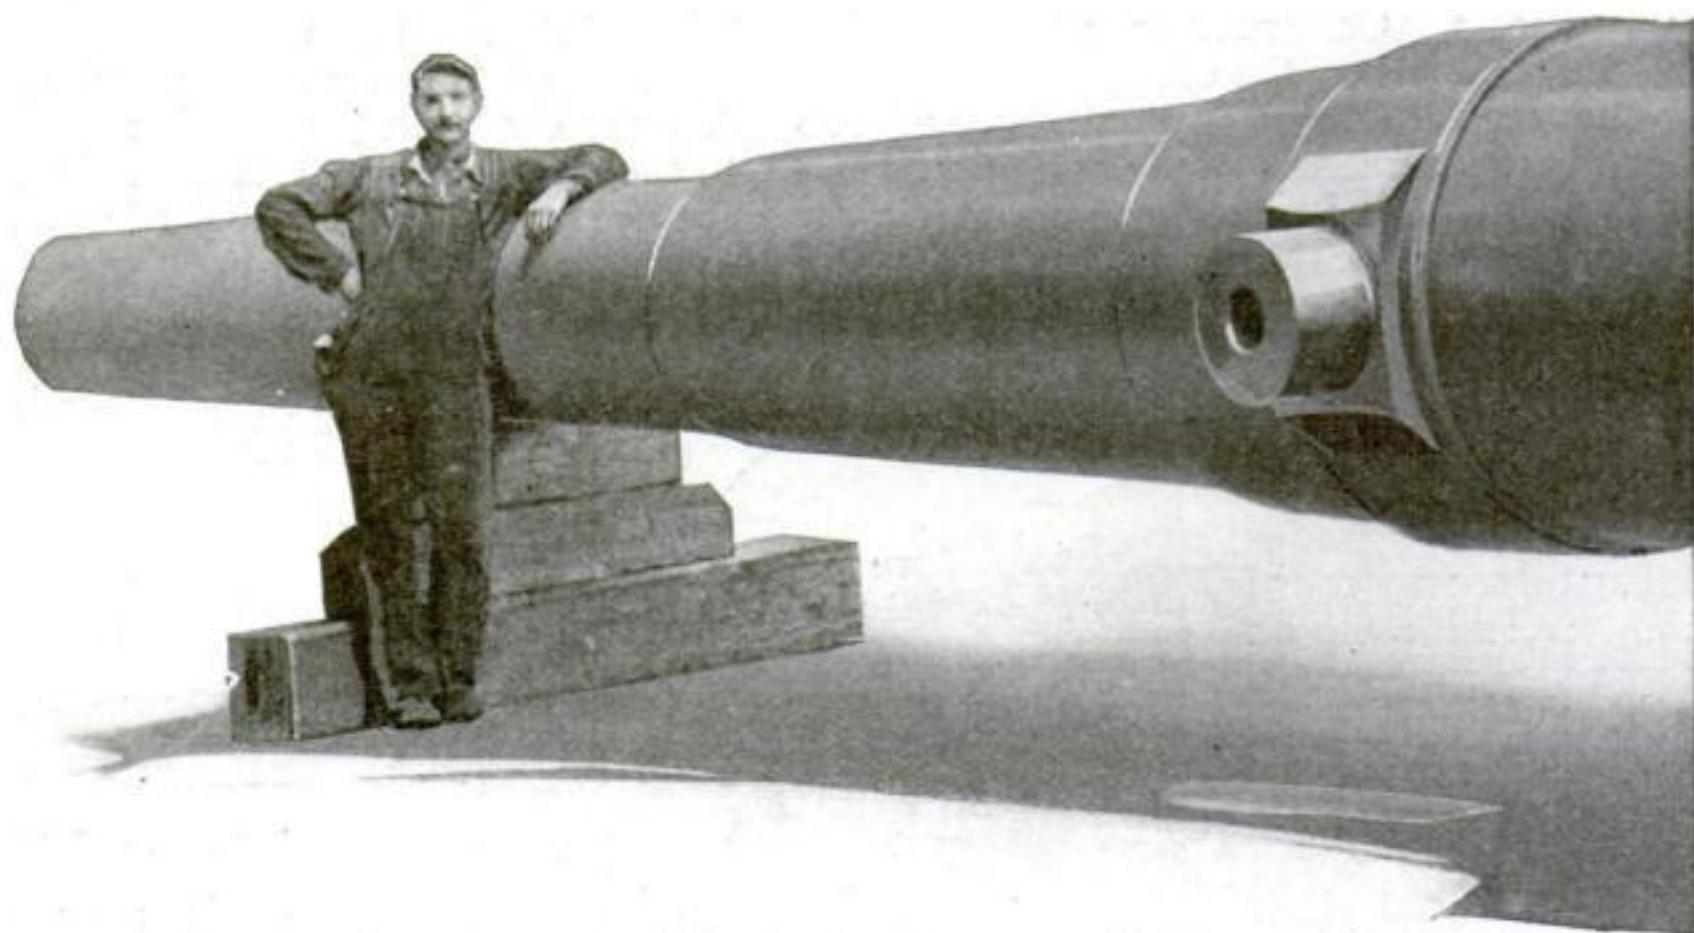

The man is leaning against his completed work—an immense steel gun—the most powerful product of his skill. The various hoops that go to make up such a weapon are easily picked out—large steel bands which are put on one after another as described in the article. It is impossible to determine whether this is a built-up or wire-wound gun. The breech is clearly shown

Stages in the Making of a Big Gun

At the top, a glimpse of one of the big gun-heating furnaces. The huge steel ingots or blocks are heated before they are worked or forged to a smaller size, just as a blacksmith forges down a tool. Big cranes handle these heavy steel pieces by means of some of the mechanism shown and insert them into a furnace or draw them out with the utmost ease. These heating or soaking furnaces, as they are called, are fired by gas, oil or coal. Steel, to be worked or kneaded like bread, must be at a white heat

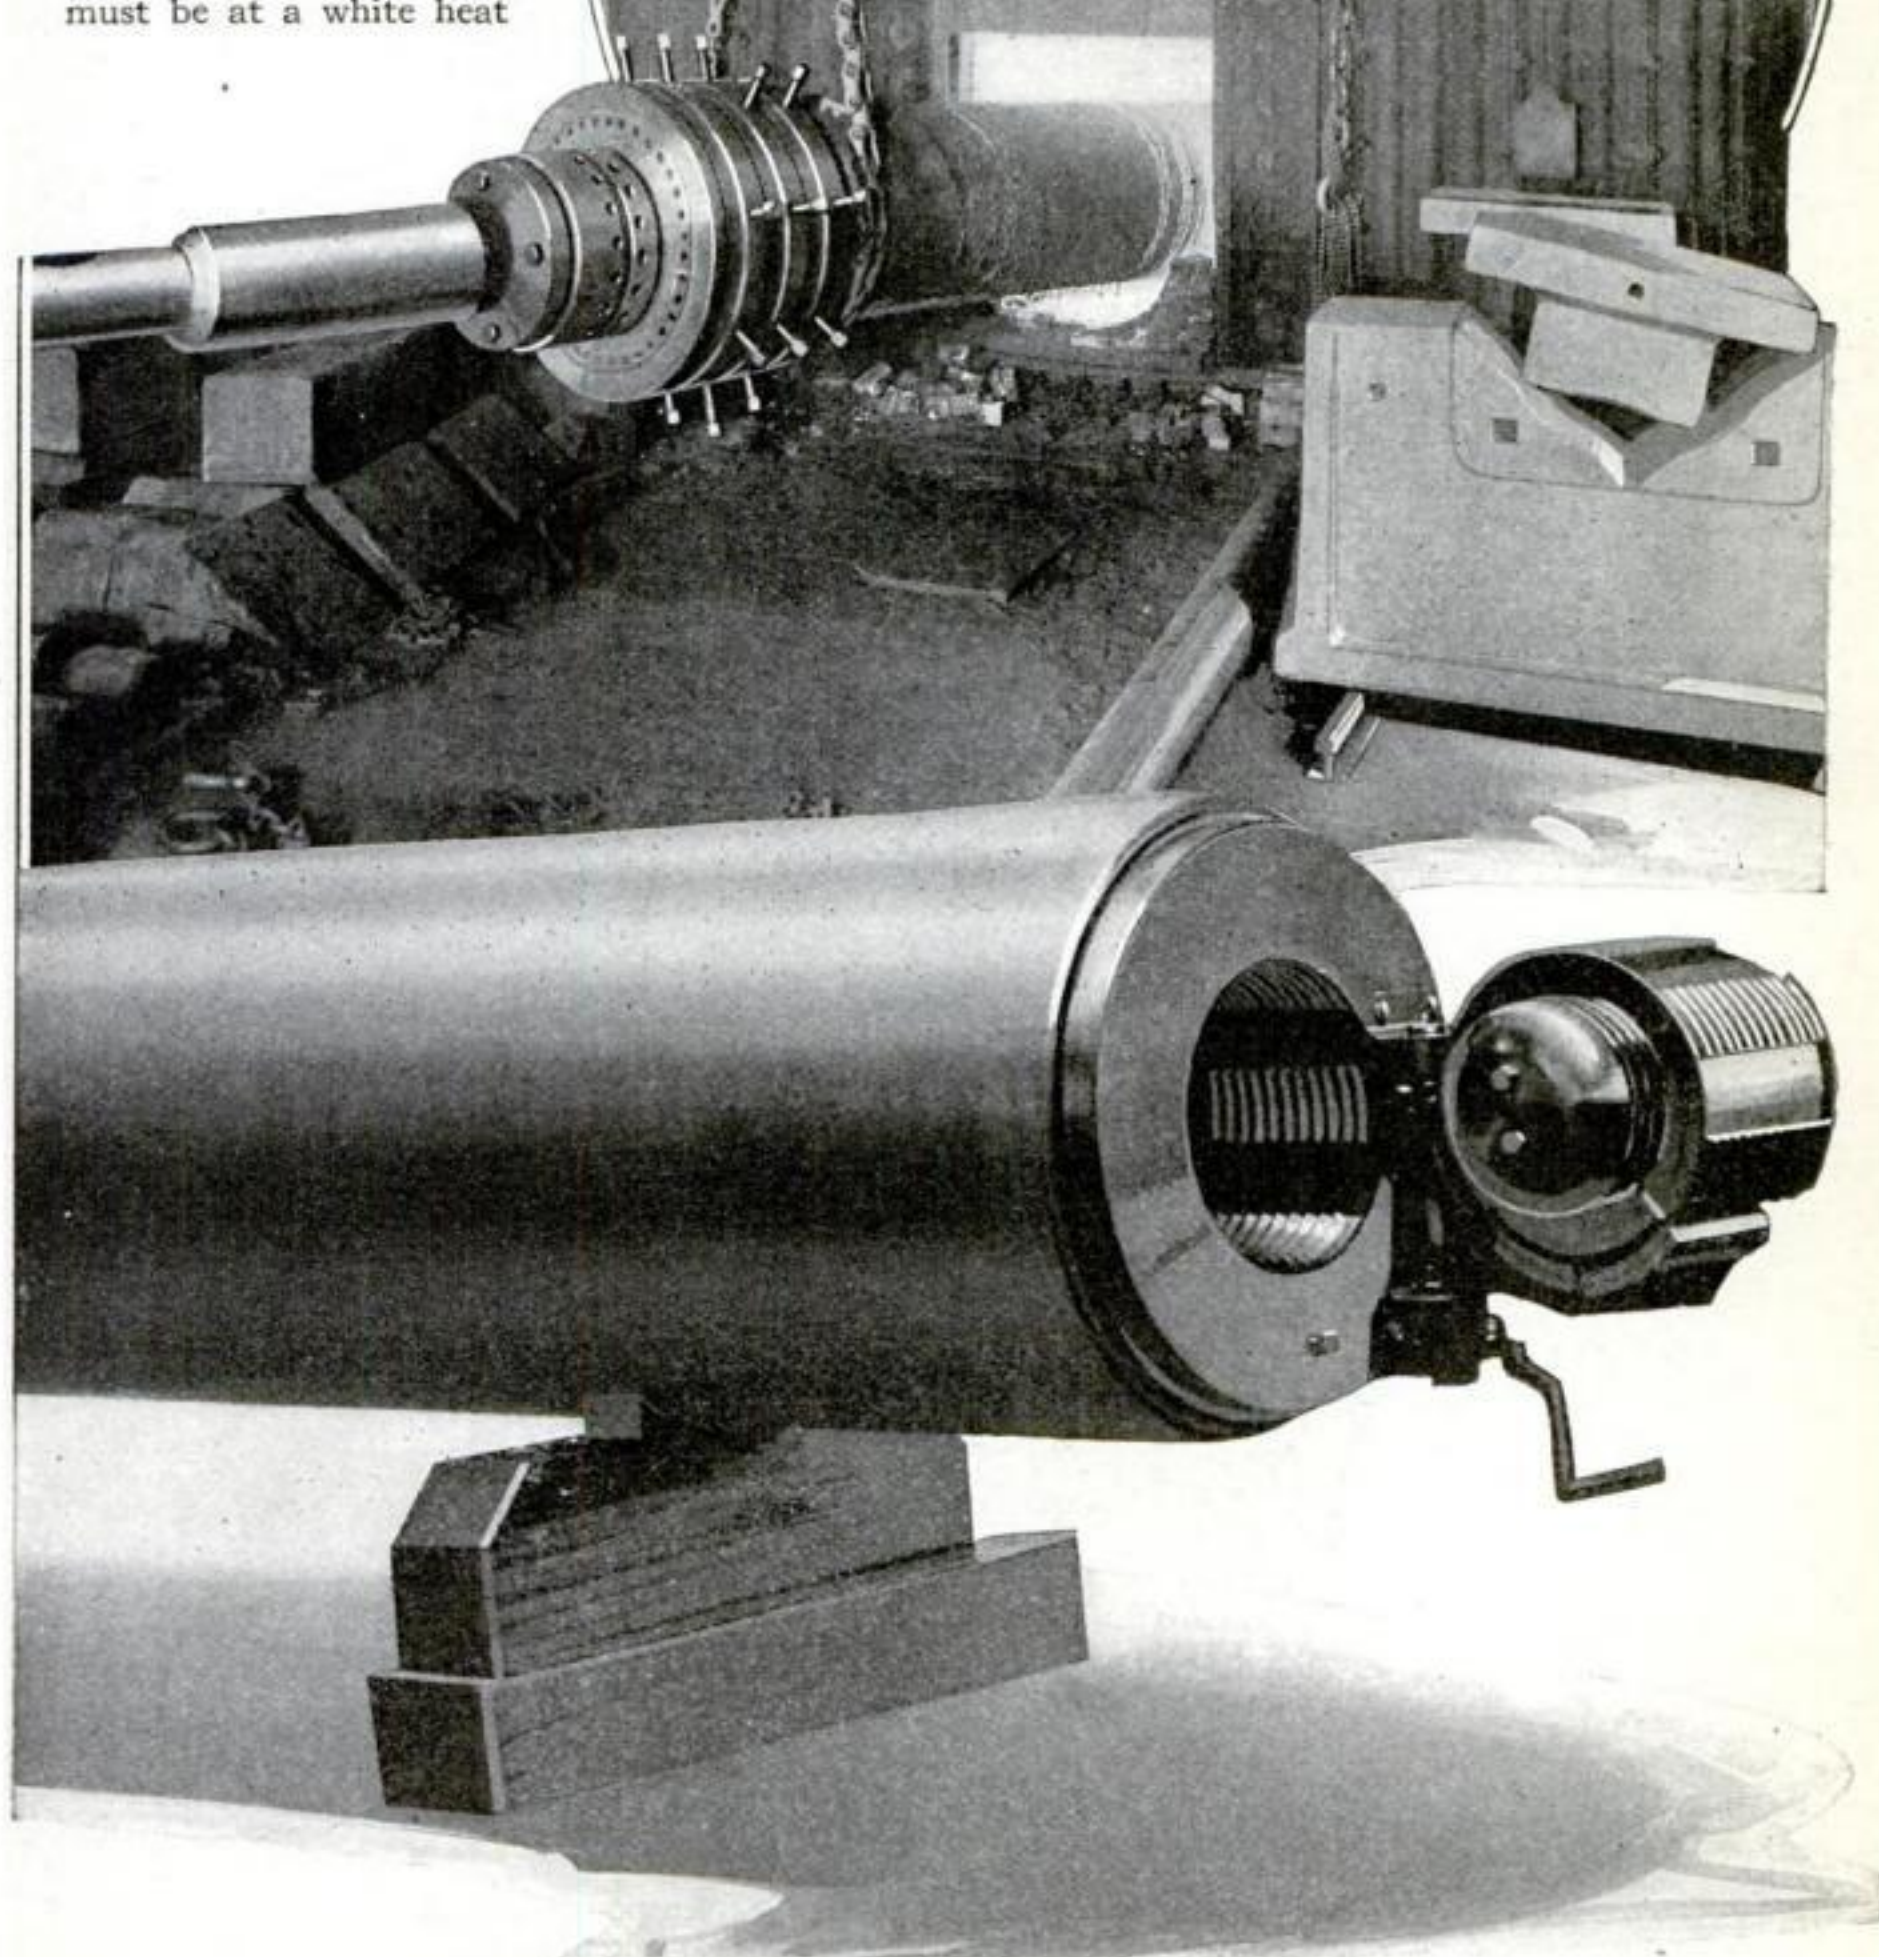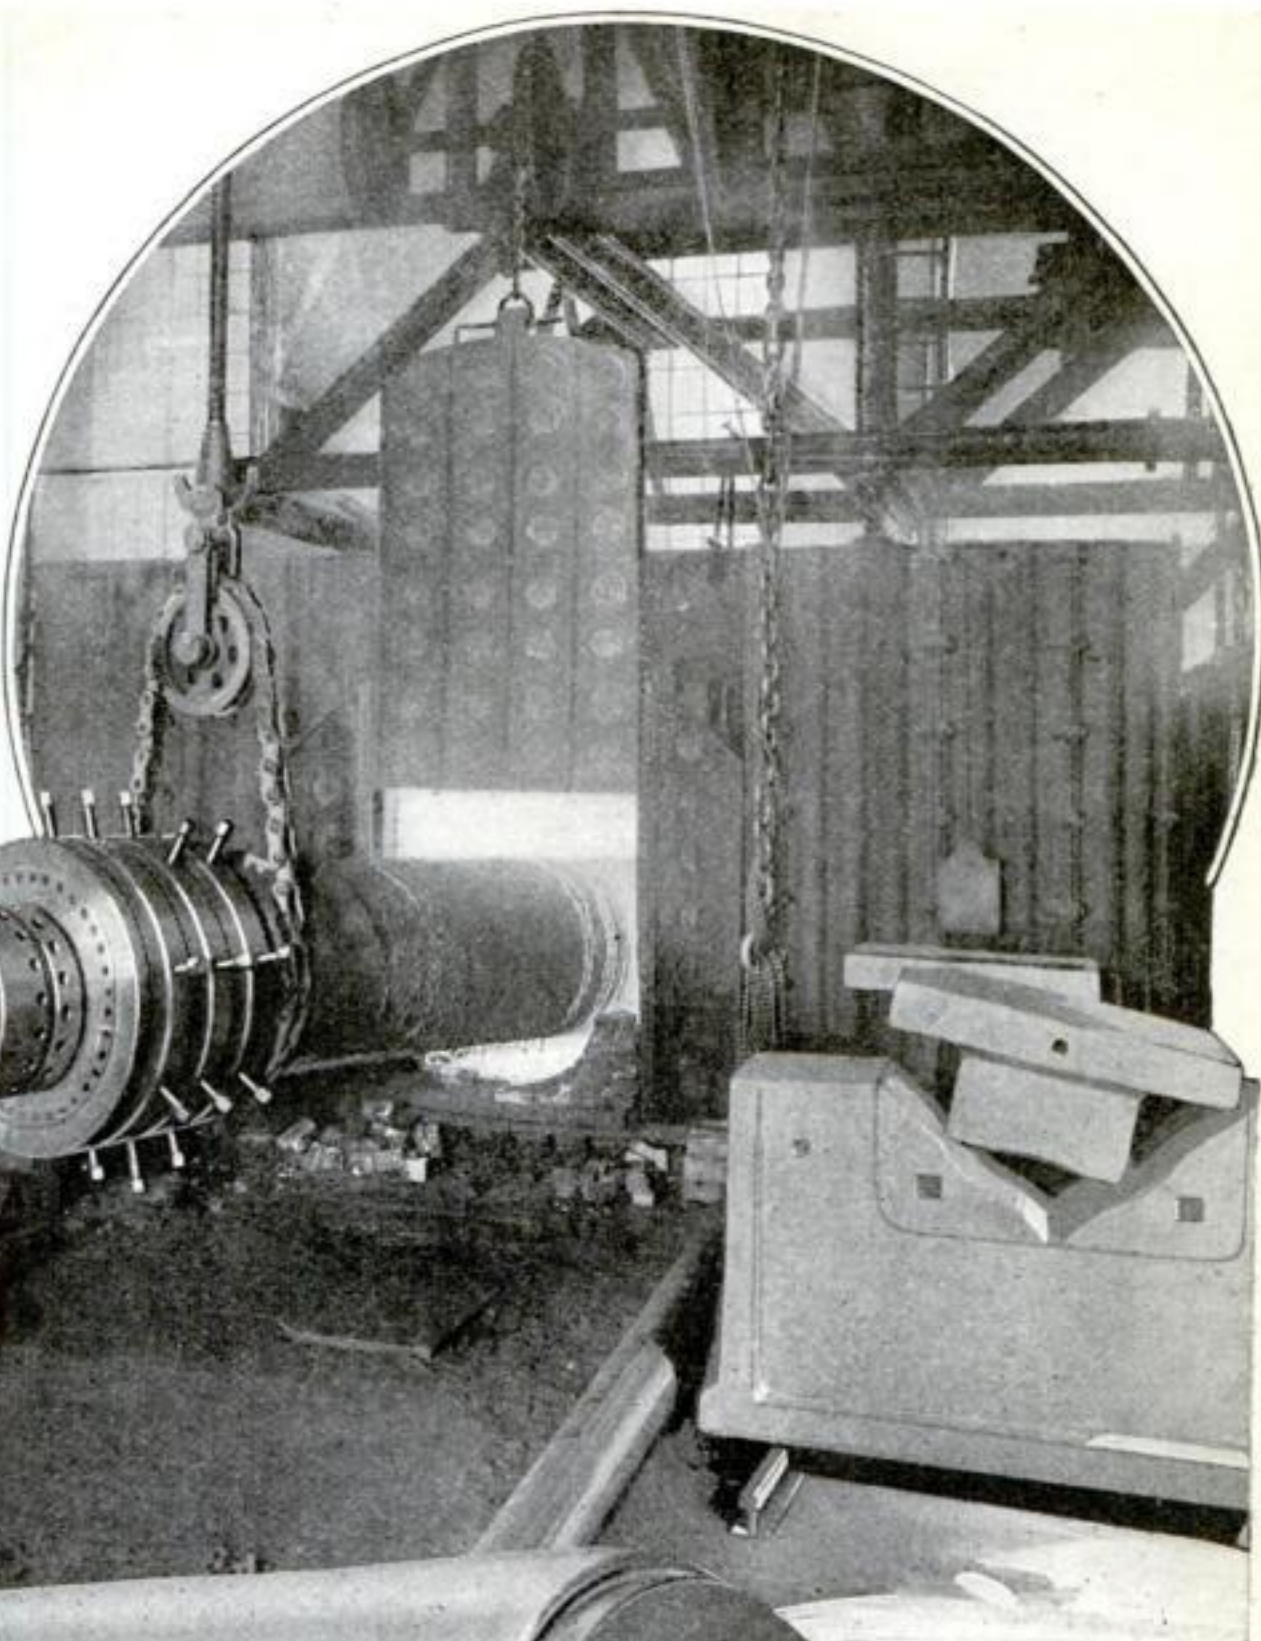


90 feet long. Heavy as the mass is, a huge lathe turns it around as easily as a body turns a spool.


After the inside has been rifled or scored to form an inside surface that gives the shell a twist before it leaves the muzzle and causes it to fly straight, the lower or muzzle end of the gun is made larger. This may be accomplished in one of two ways. Either additional shorter steel tubes are placed over the main inner tube, or the main tube is wound with wire and finished with an outer tube. The wire-wound guns are usually the heavier and are used on board ship.

Why the Wire-Wound Gun Is So Strong

The gun bound with wire is really stronger than the one built of bands or rings of steel, one on another; for the wire reinforces the gun tube so that it will safely withstand the tremendous strain which is constantly put on it when it is fired—said to be as much as seventeen tons pressure on each square inch. This means a pressure on every little space inside the gun as big as a domino of over 38,000 pounds. No wonder that a gun

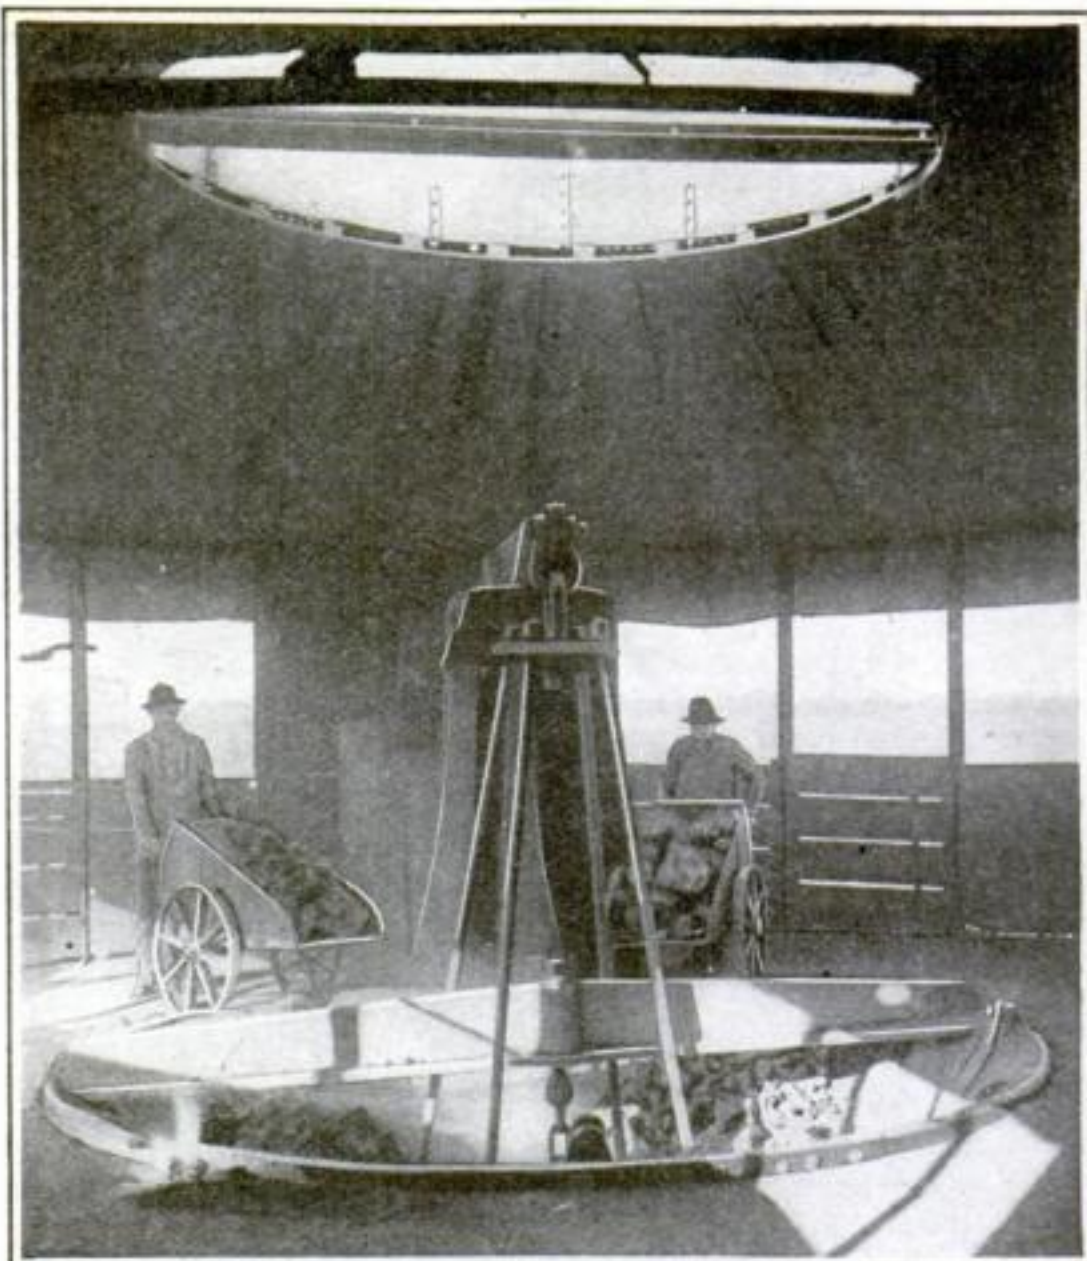


The upper portion of a blast furnace in which pig iron is made—the first step in making steel. These men are dumping iron ore, coke and limestone into the large hopper. The materials are allowed to fall at intervals into the inside of the furnace where the intense blasts of hot air cause them to melt, mix and fuse together until they are tapped out at the bottom

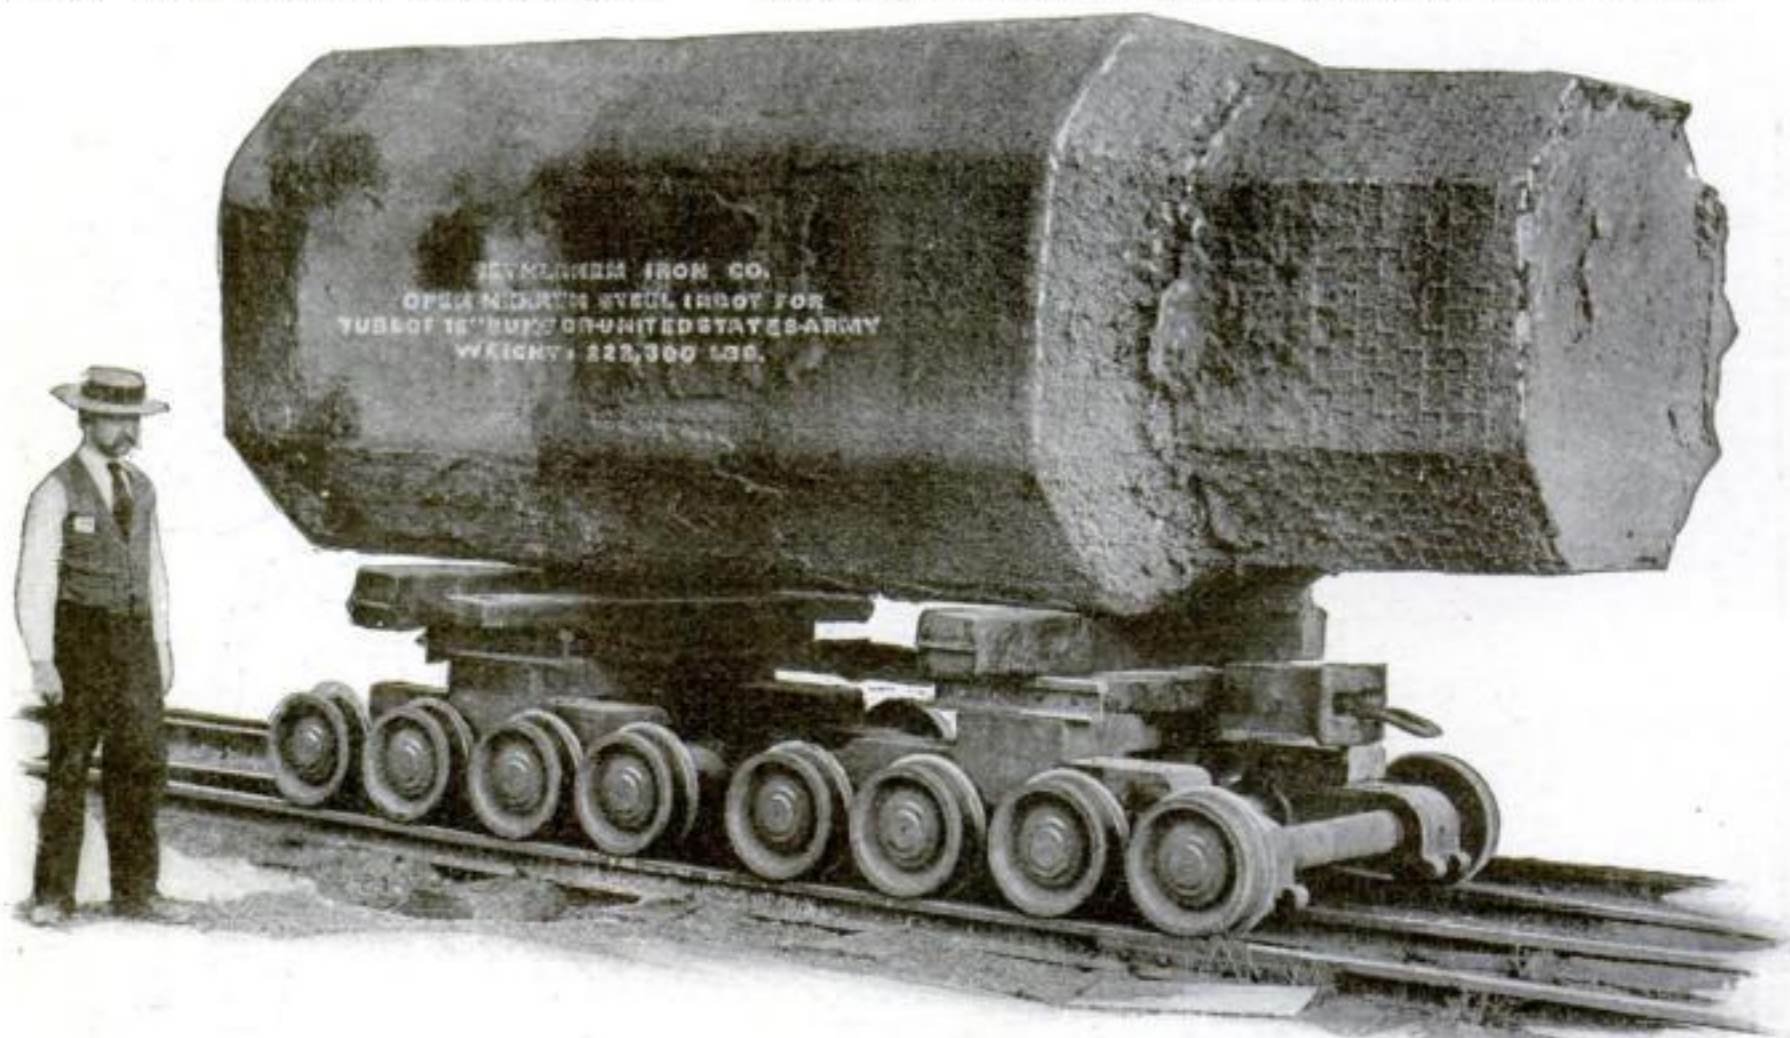


This is a steel ingot. It is the large block of steel resulting from pouring the hot liquid steel into a large mold and allowing it to cool. After it is cold the ingot is taken, in the manner here shown, to the large forge shop for conversion into a big gun. This block weighs something over 111 tons

Charging the Furnaces with Iron Ore

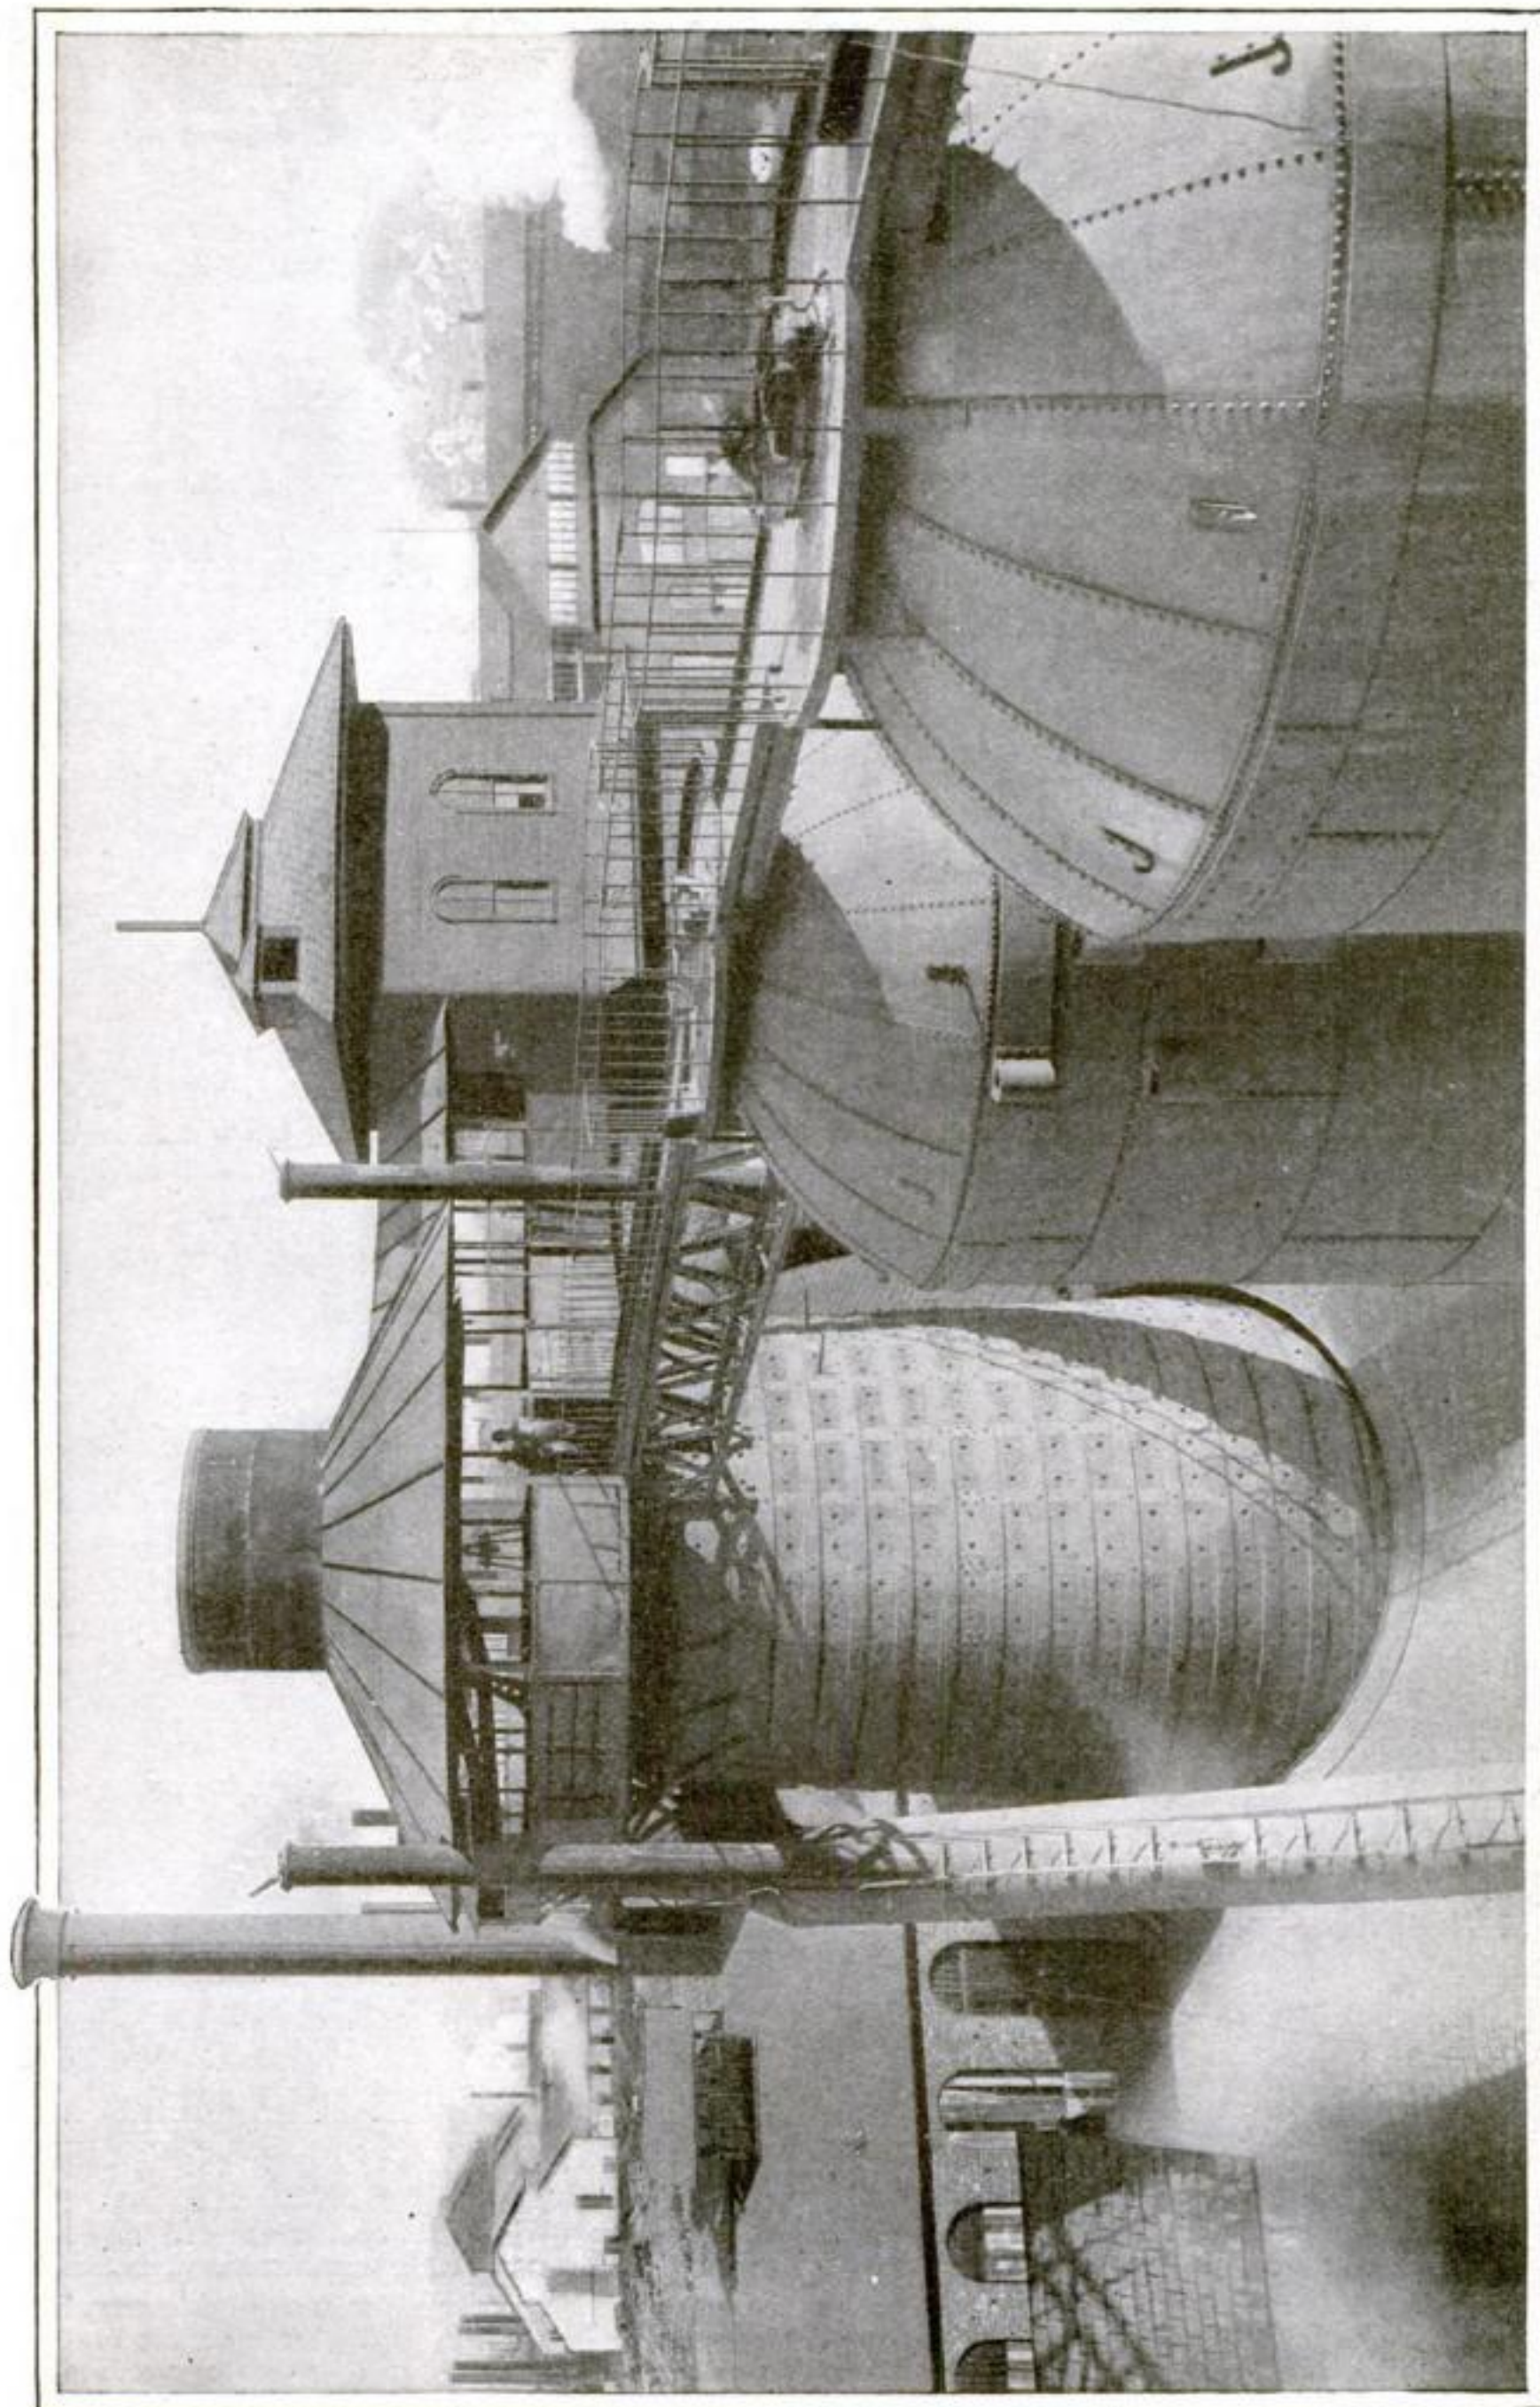


Another view of the top of a blast furnace where the same two men are charging or filling it with iron ore. These furnaces are high and resemble stacks. In fact they are more like giant chimneys, the gases ascending and the ore and fuels descending. Part of each furnace or stack is visible. The two dome-like objects, nearly as high as the blast furnace, are two of the three stoves always necessary for running such a furnace. These stoves heat the blast to a high temperature which is the principal factor in converting the ore into iron in the blast furnace itself

A Great Modern Gun-Shop Where the Giant

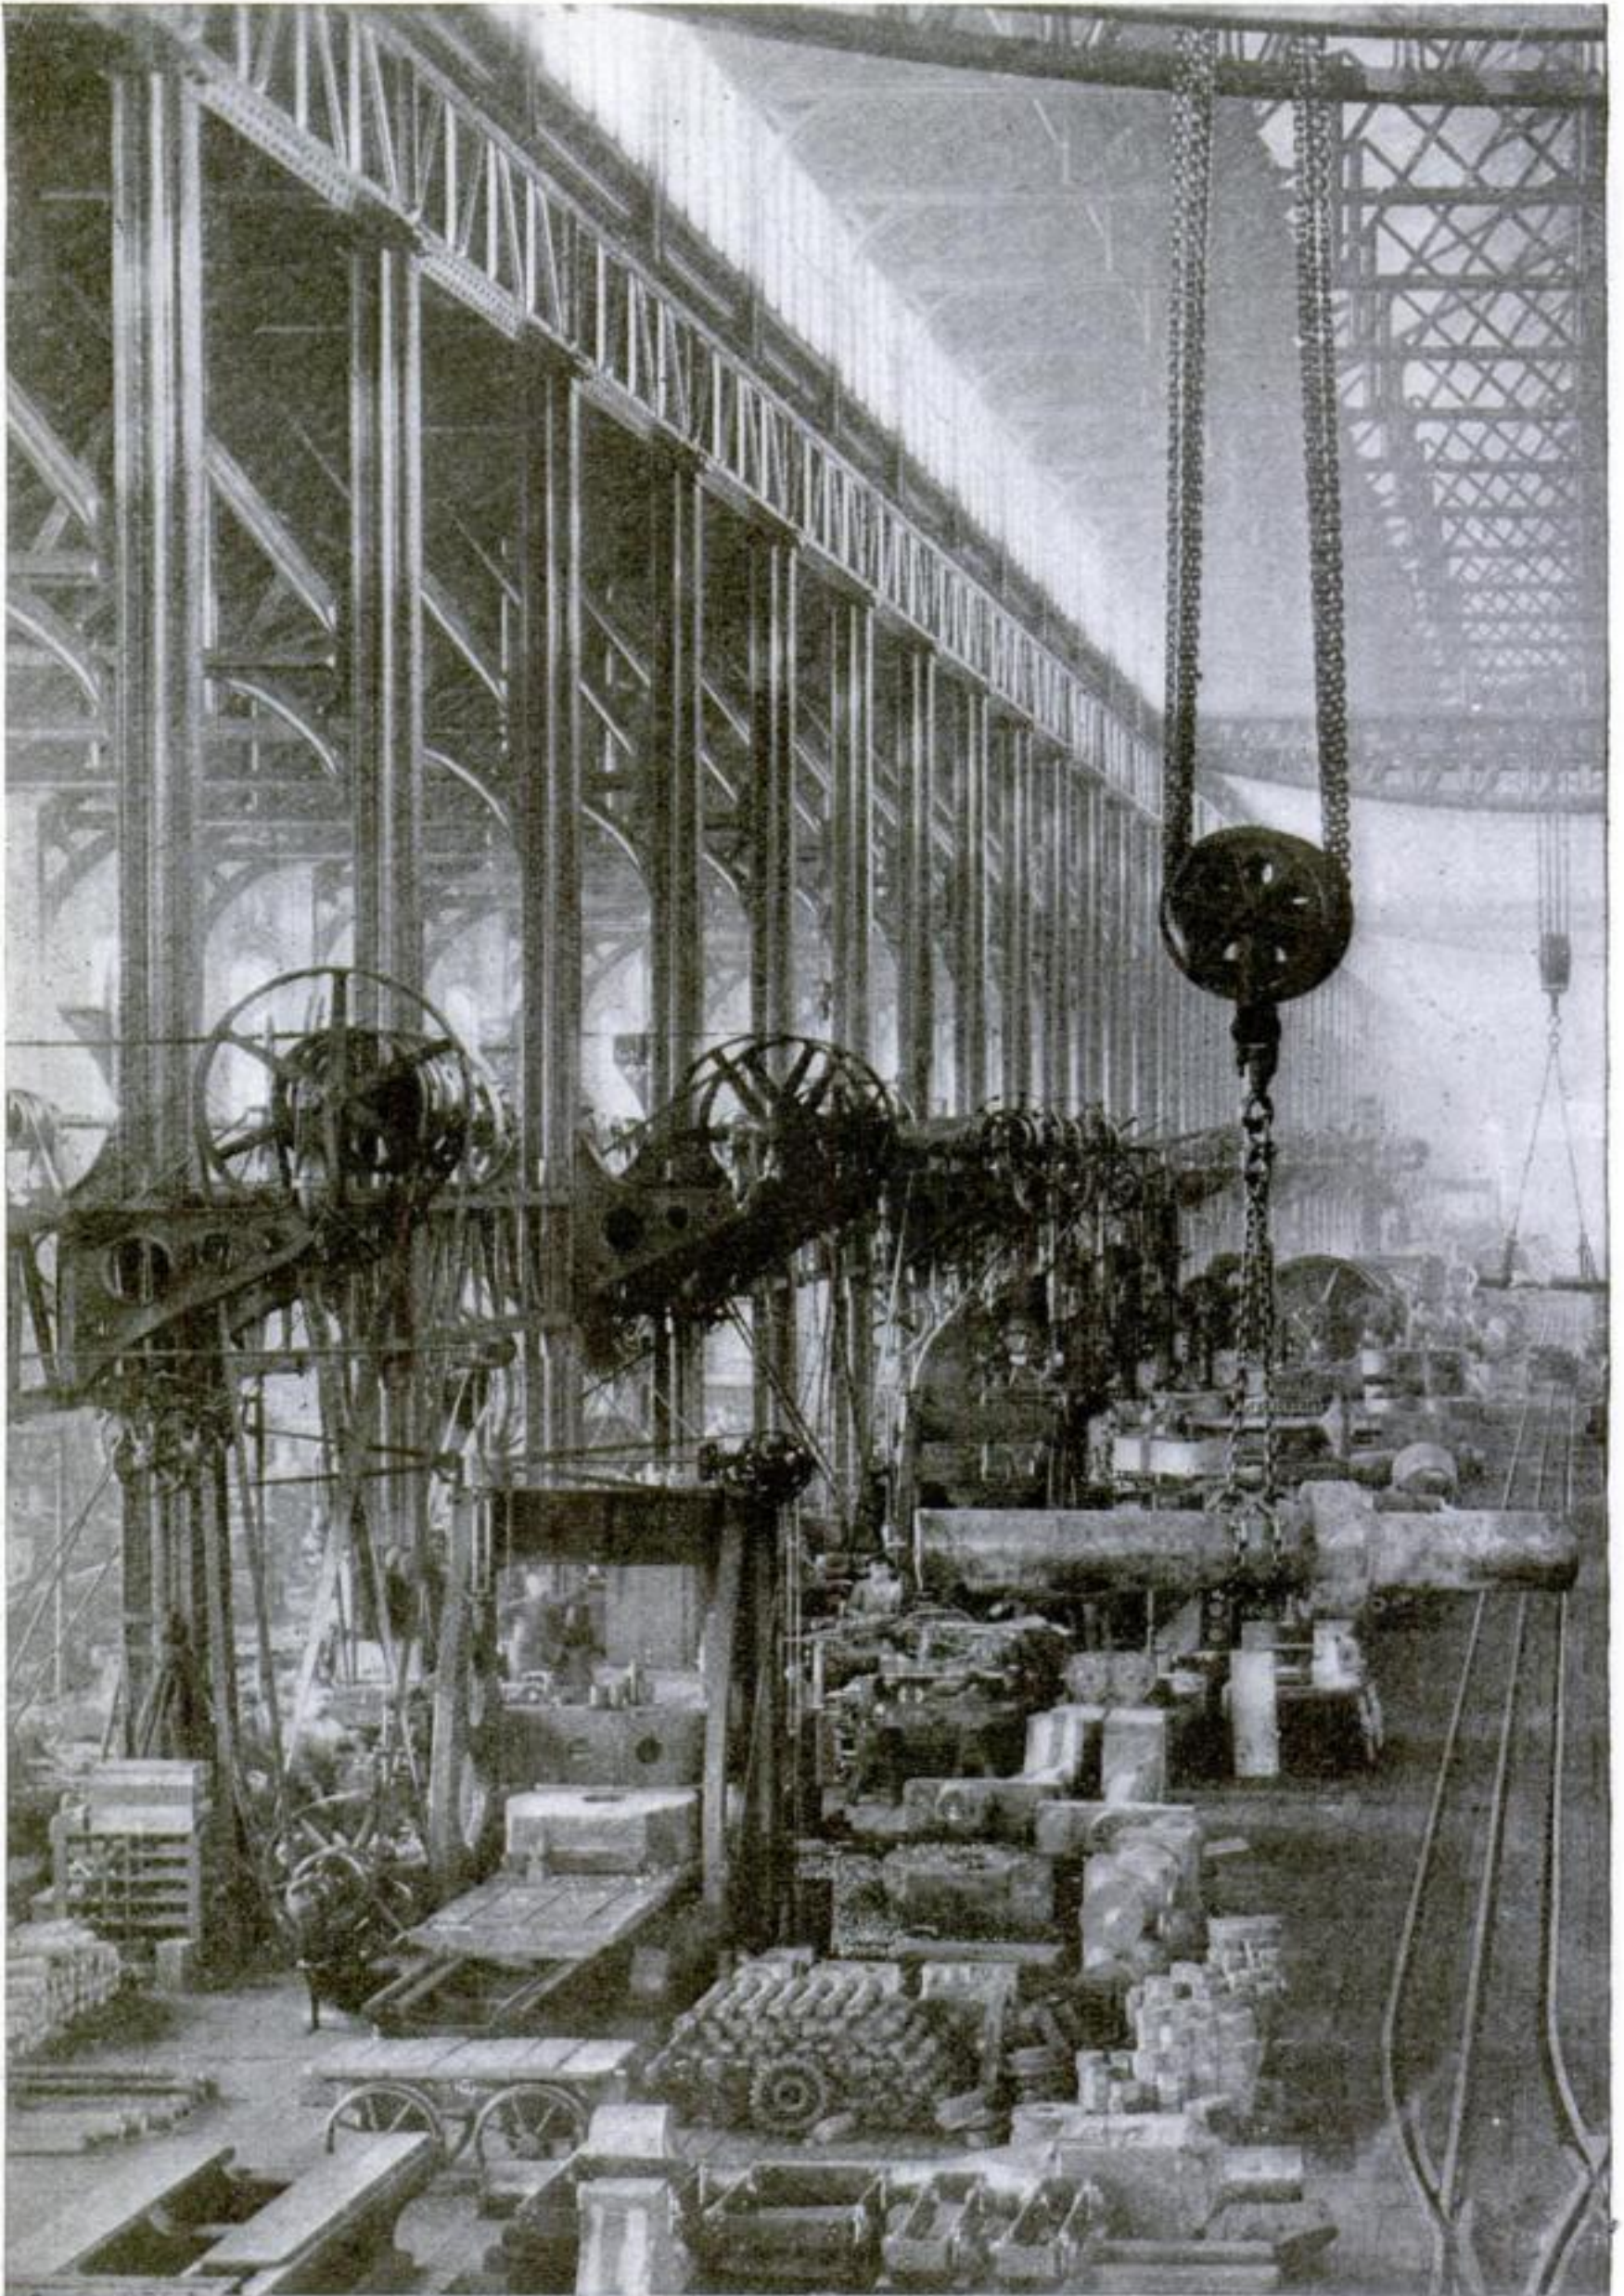


The immense machine shop of one of the largest American steel companies making big naval and army guns. The sides of this vast building are lined with machine after machine and lathe after lathe for cutting off and reducing to accurate size sections of steel for various purposes. Extremely accurate and skilled work is done here by experienced mechanics.

Tubes of Guns Are Machined by Lathes

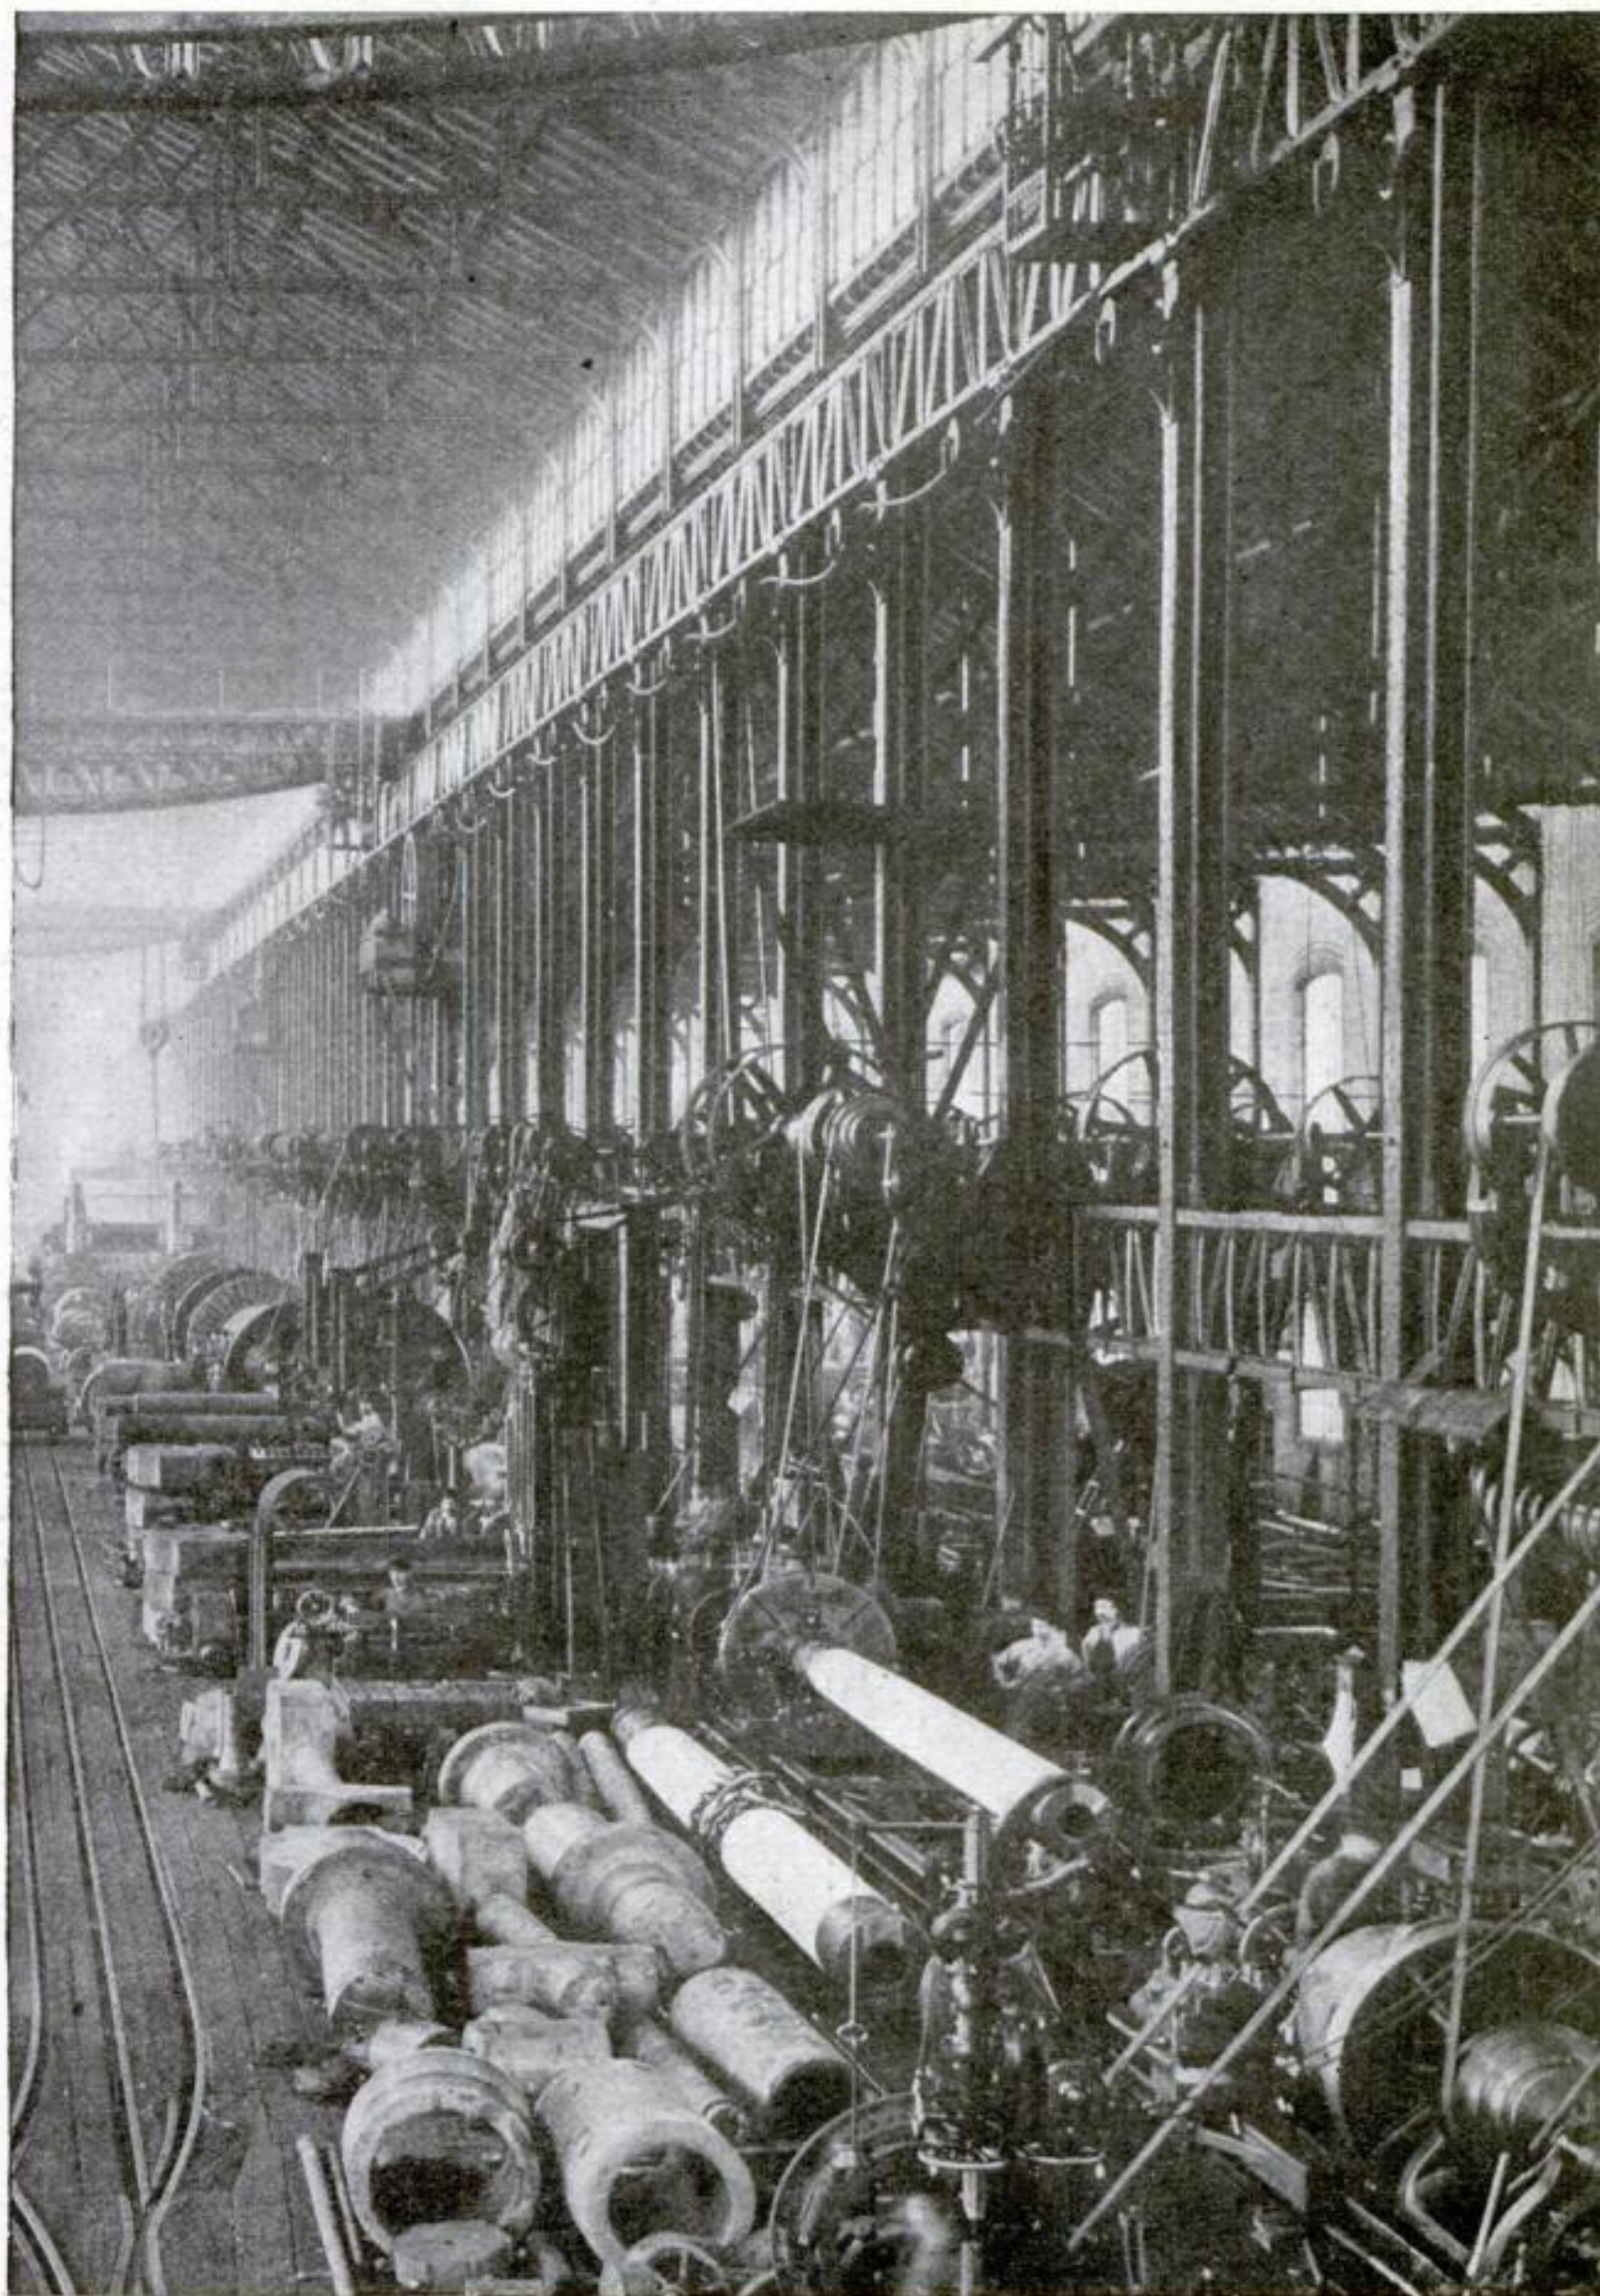

In the near foreground of the picture above can be seen the barrel of a big gun that is being bored or cut out hollow on its inside by a big lathe. Some of these lathes are very long. In the section of the picture on page 42 one of the guns in a crude shape is being carried by a big electric traveling crane to a large lathe where the first paring or cutting is to be done

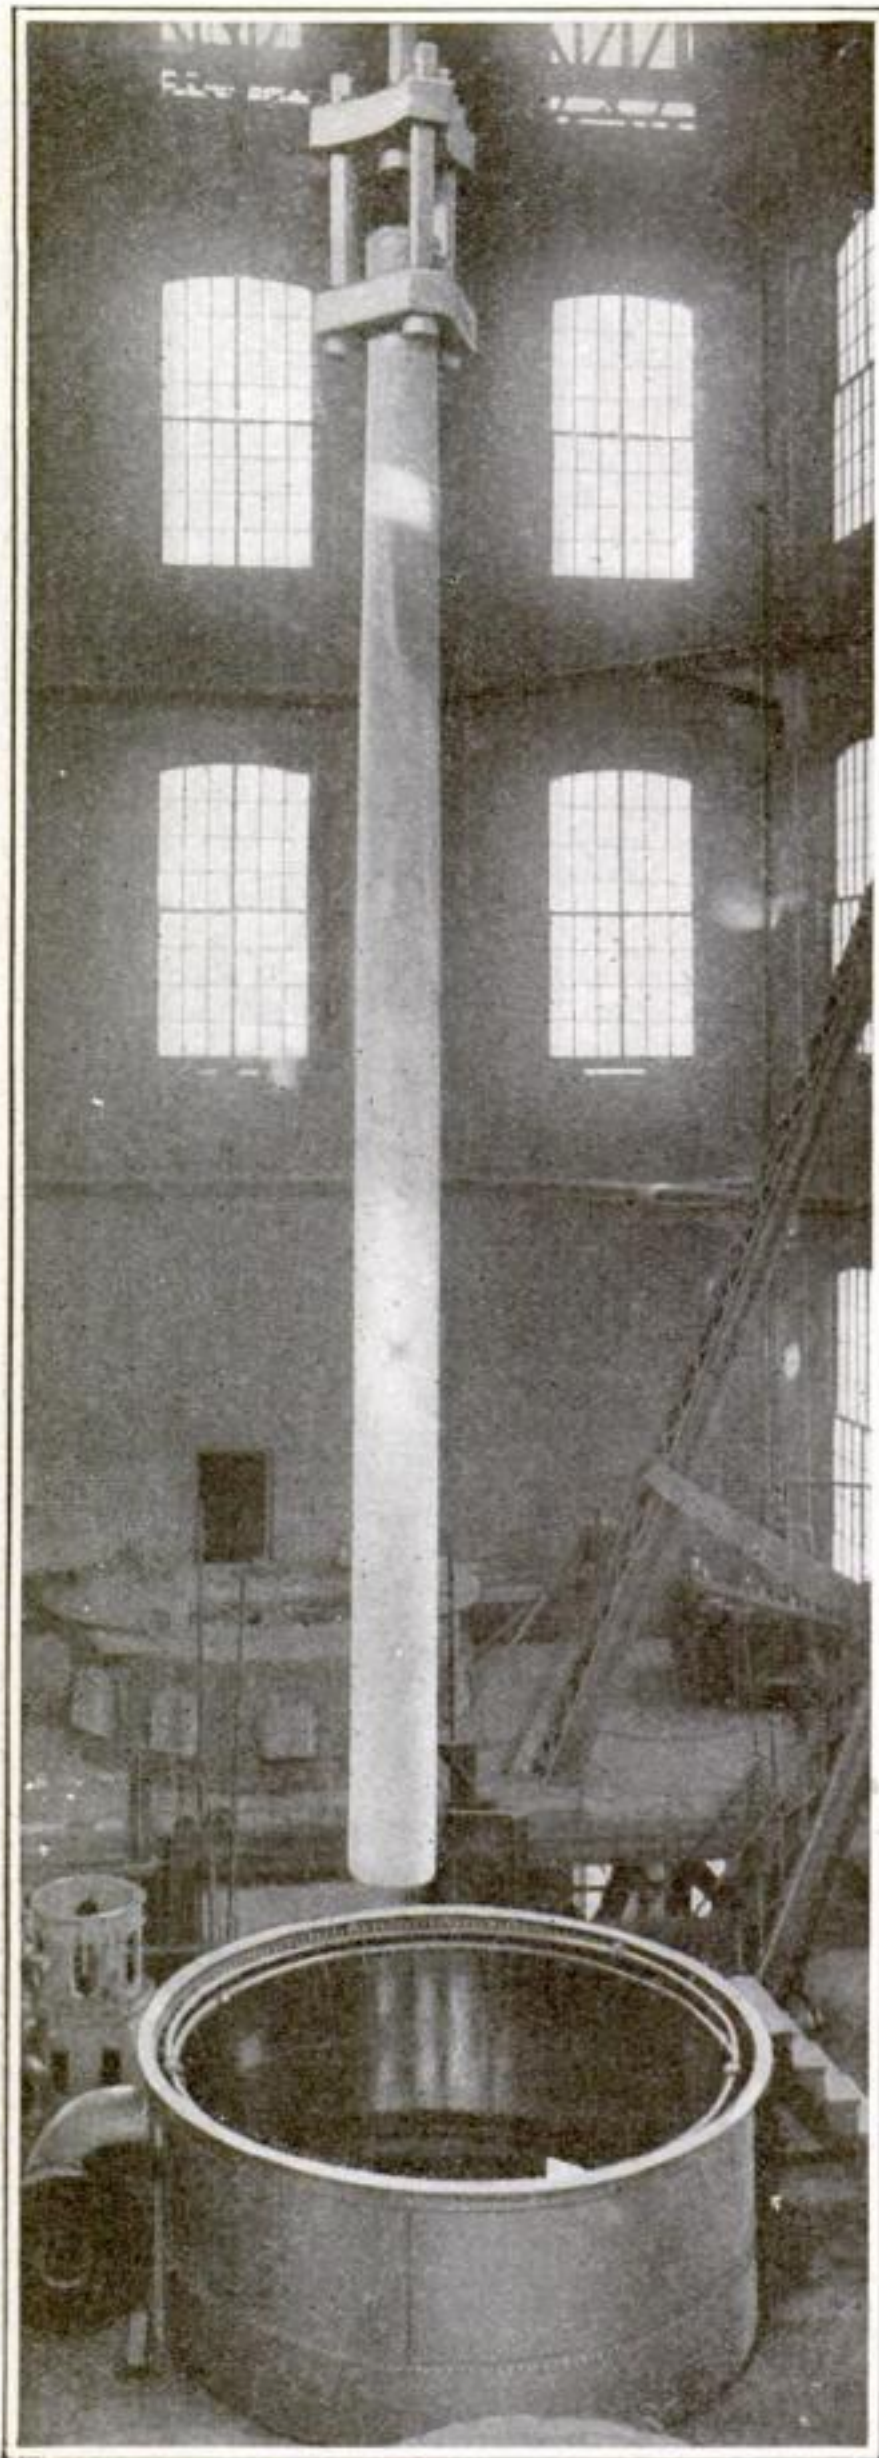

The red hot steel about to be plunged into the oil tank for what is known as its "heat treatment." The tank extends down into the ground. The plunging of the hot steel into the oil suddenly cools it and hardens it and refines its grain or texture. After this it must be heated up again to temper it

must be strong and that its life is short!

In the case of a "built-up" gun, as it is called when made of hoops or bands of steel, the outer tubes or rings are shrunk or sweated on—that is, they are heated so that they expand or swell a little, as all steel does when heated, and then while hot they are fitted over the inner part and allowed to cool and shrink, or contract. In so doing they fit very tightly on to the main tube. In making a wire-wound gun, the wire is wound or coiled around and around until more than one hundred miles of it has been wrapped around the big cannon. A 12-inch gun requires 117 miles of wire weighing about thirteen and one-half tons. Although the strength of the wire is such that it gives great resisting force to pressures exerted sideways, it does not bestow strength lengthwise. Therefore an extra thickness of metal must be put on the muzzle of the gun where the vibration caused by the shell leaving the gun is the greatest.


The breech or back end of a gun is a very important part. Here the shell is inserted in a specially built chamber. After the shell is in place, the breech is closed by the shutting of a very complicated and strong door. It is fastened or fitted in the gun by extremely strong screws so that the charge will not burst the gun open at the back when it is fired.

Sometimes a shell explodes in the barrel of the gun. In a wire-wound gun the wire tends to prevent a grave disaster; it hinders the steel tubes from bursting into many pieces and flying in every direction. The solid gun is wholly built of tubes, while in the wire-wound gun there may be one or two tubes over which the wire is wound with the jacket tubes shrunk over the wire. A bush for the breech-ring is screwed into the rear end, which is also reinforced by a breech-ring outside.

Heat Treatment and What It Means


With all these precautions to make a big gun strong enough to withstand pressure, the result would not be successful except for the extreme care in making the steel and its "heat treatment." Steel in its crude state, or when originally cooled from its molten or liquid condition, is one mass of crystals relatively large and intimately knit together. But when these crystals are large the steel is not as strong as when they are small and fine. The object of heat treatment is to render all

Forging a Great Gun

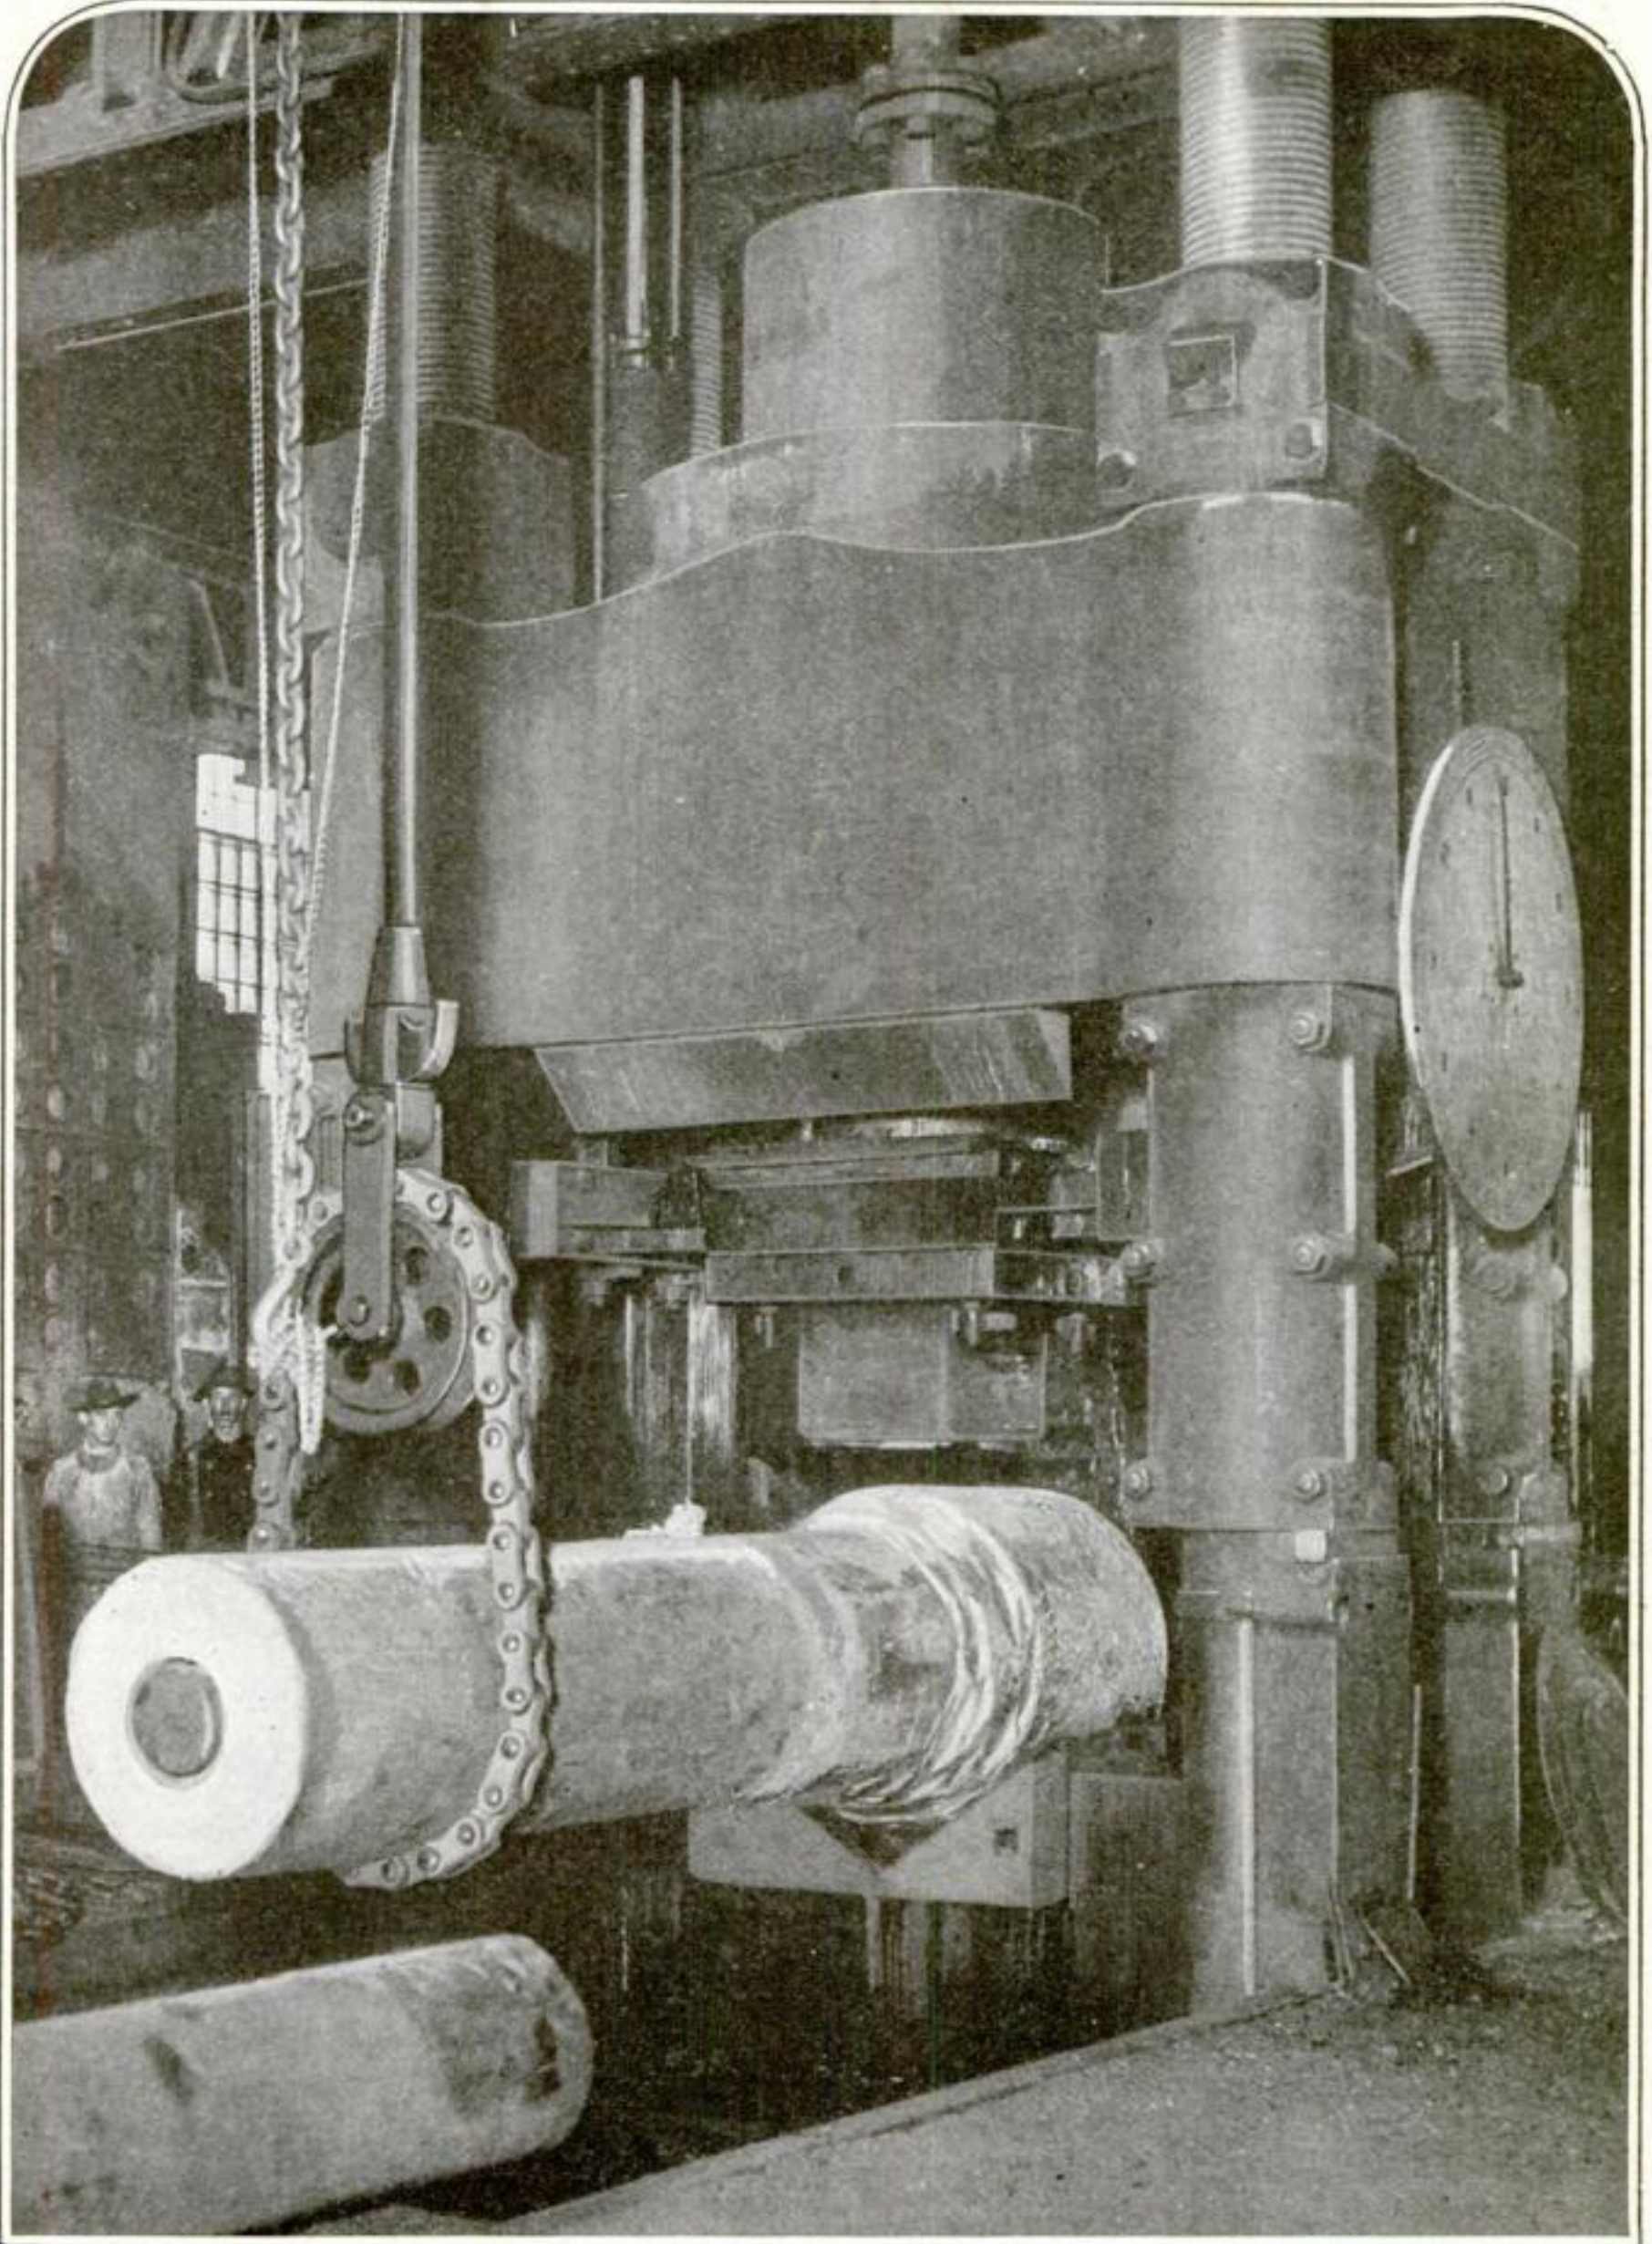


One of the tremendously powerful "mechanical blacksmiths" or hydraulic presses which work down to smaller sizes the white hot large steel blocks or ingots. Gradually they are thus converted into long cylindrical pieces, the embryo or starting point of the gun itself. These immense presses are worked by levers which cause the ram in the center to obey the will of the operator. Cranes and mechanical apparatus, as shown, can turn this red hot block over and over at will

Cooling the Steel Under Pressure

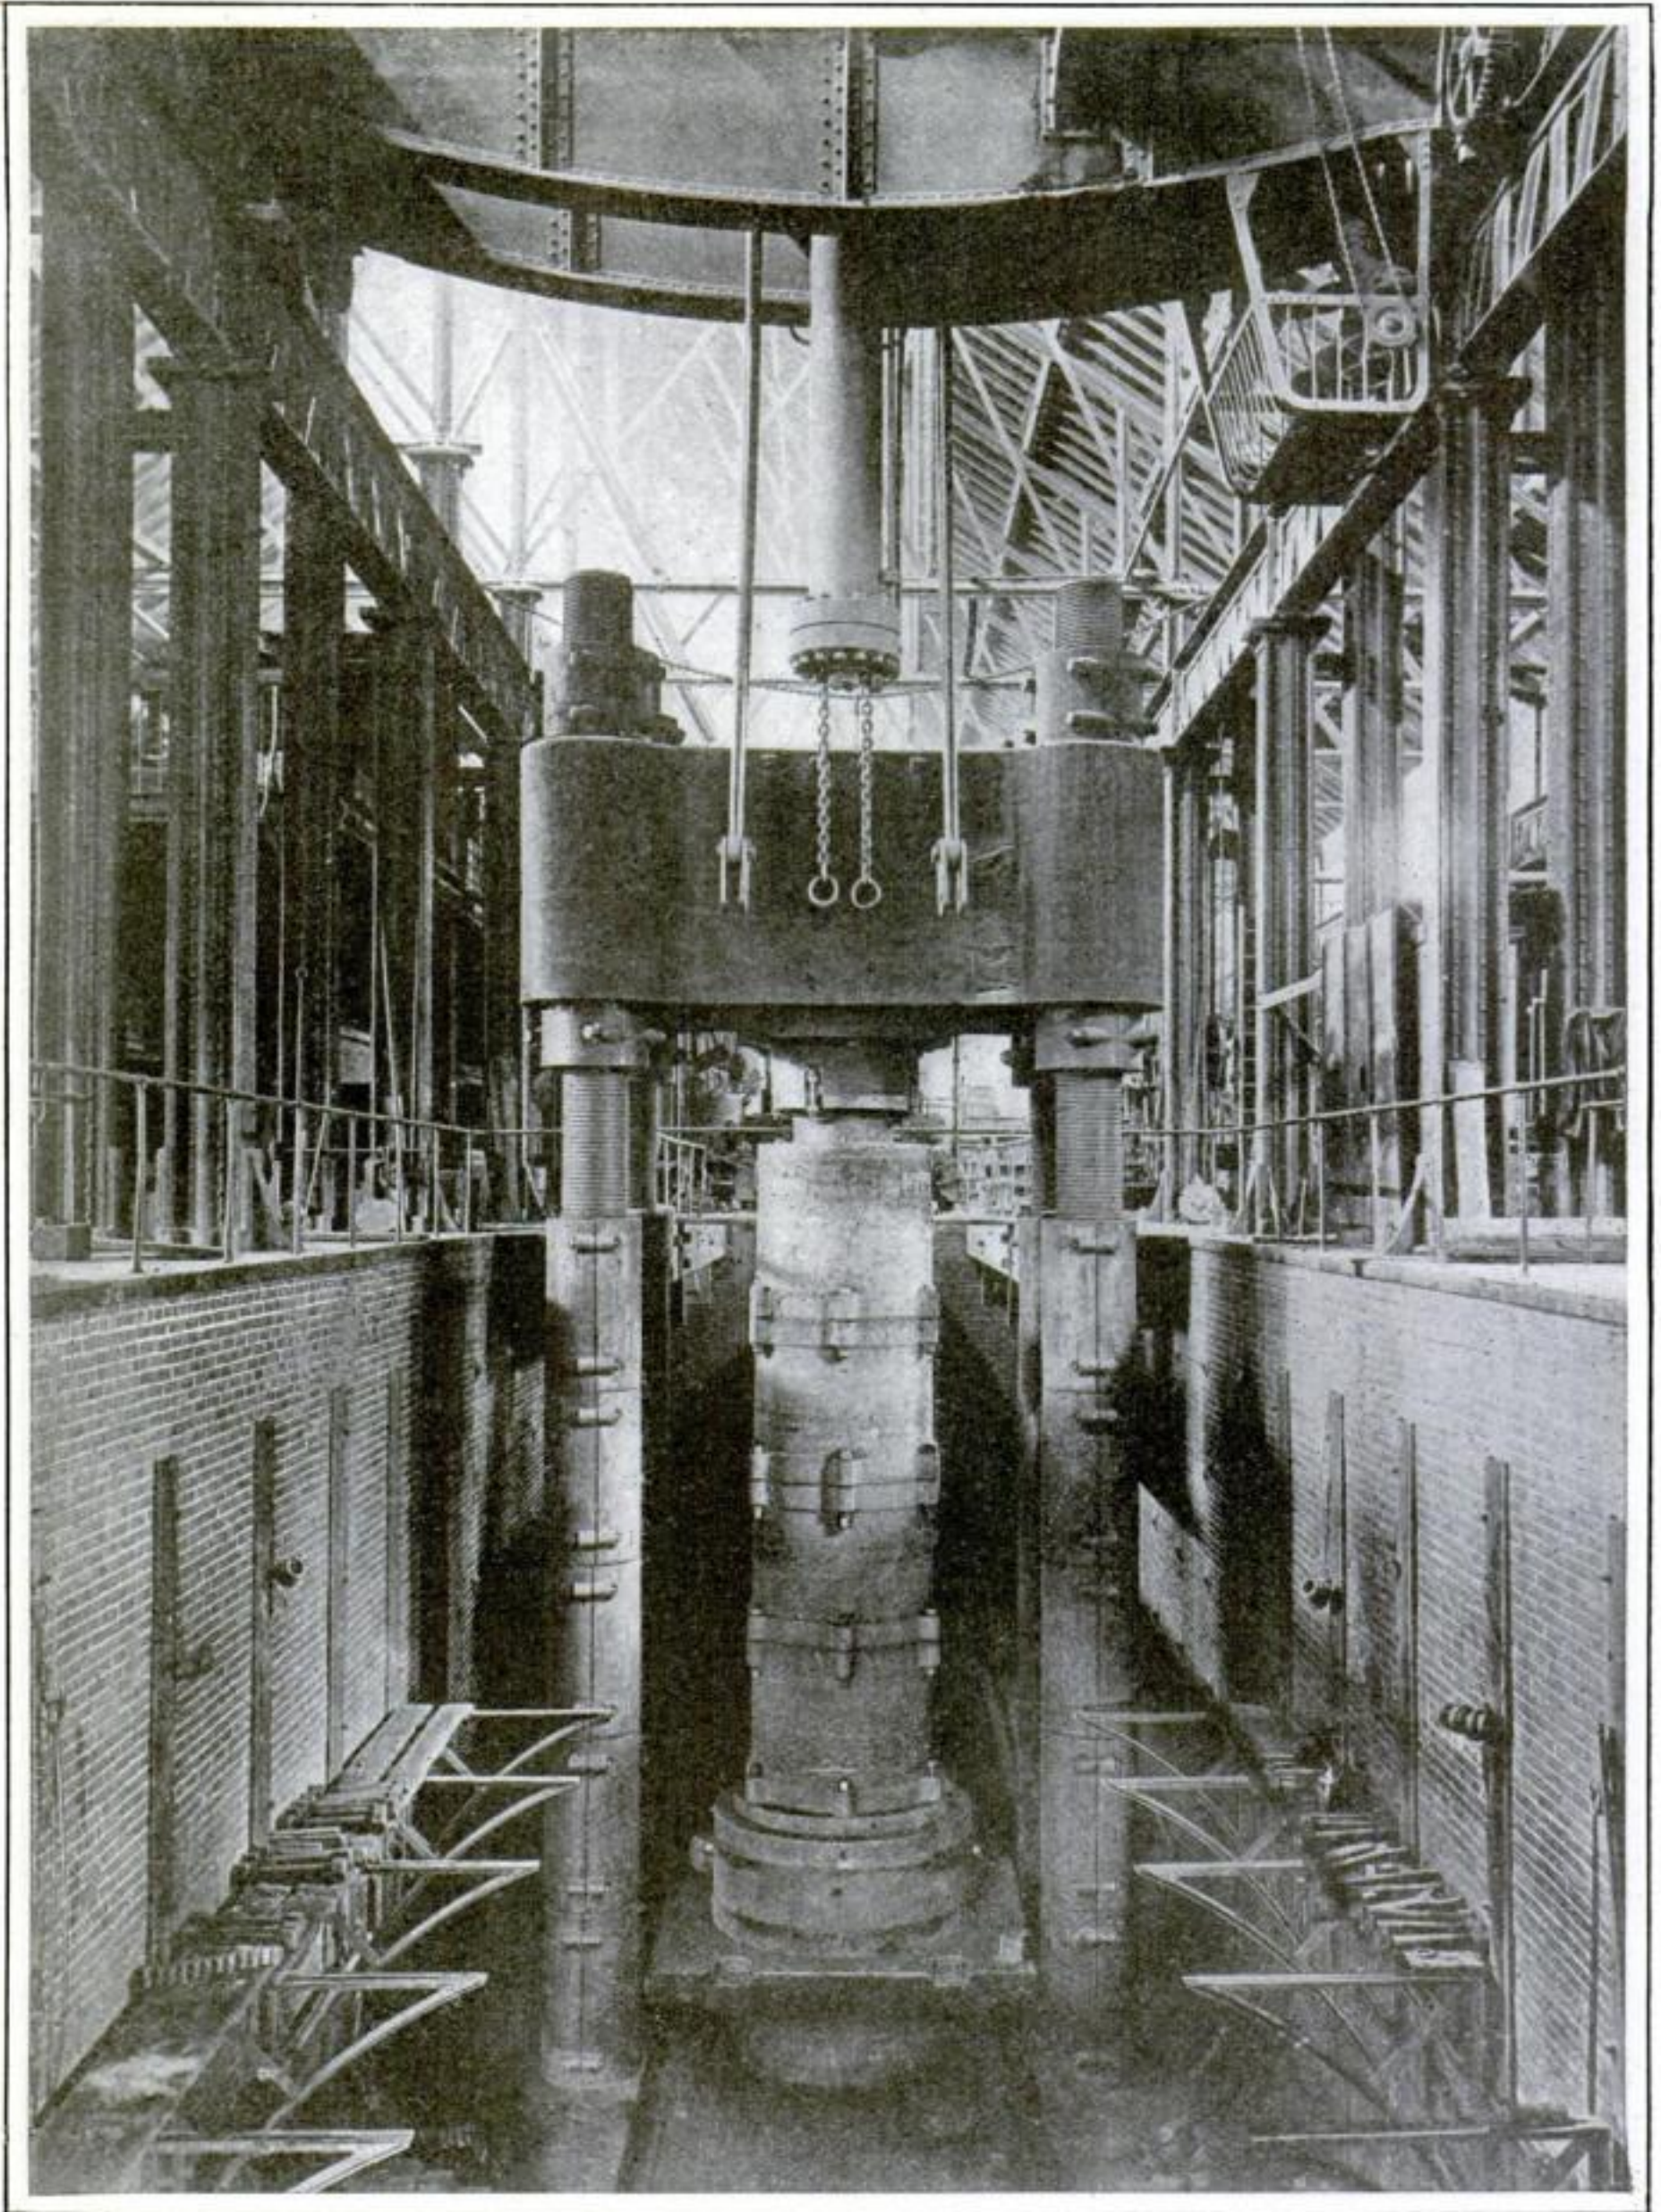

Steel, when it cools, contracts to such an extent that a hollow space is always left in the center of the upper part of a large body of metal. The extent of this cavity, or "pipe," is greatly reduced under pressure so that this natural contraction is taken up or prevented and a solid block obtained. The picture represents what is known as a fluid compression plant or press in which hot steel can be allowed to cool under a constantly increased pressure

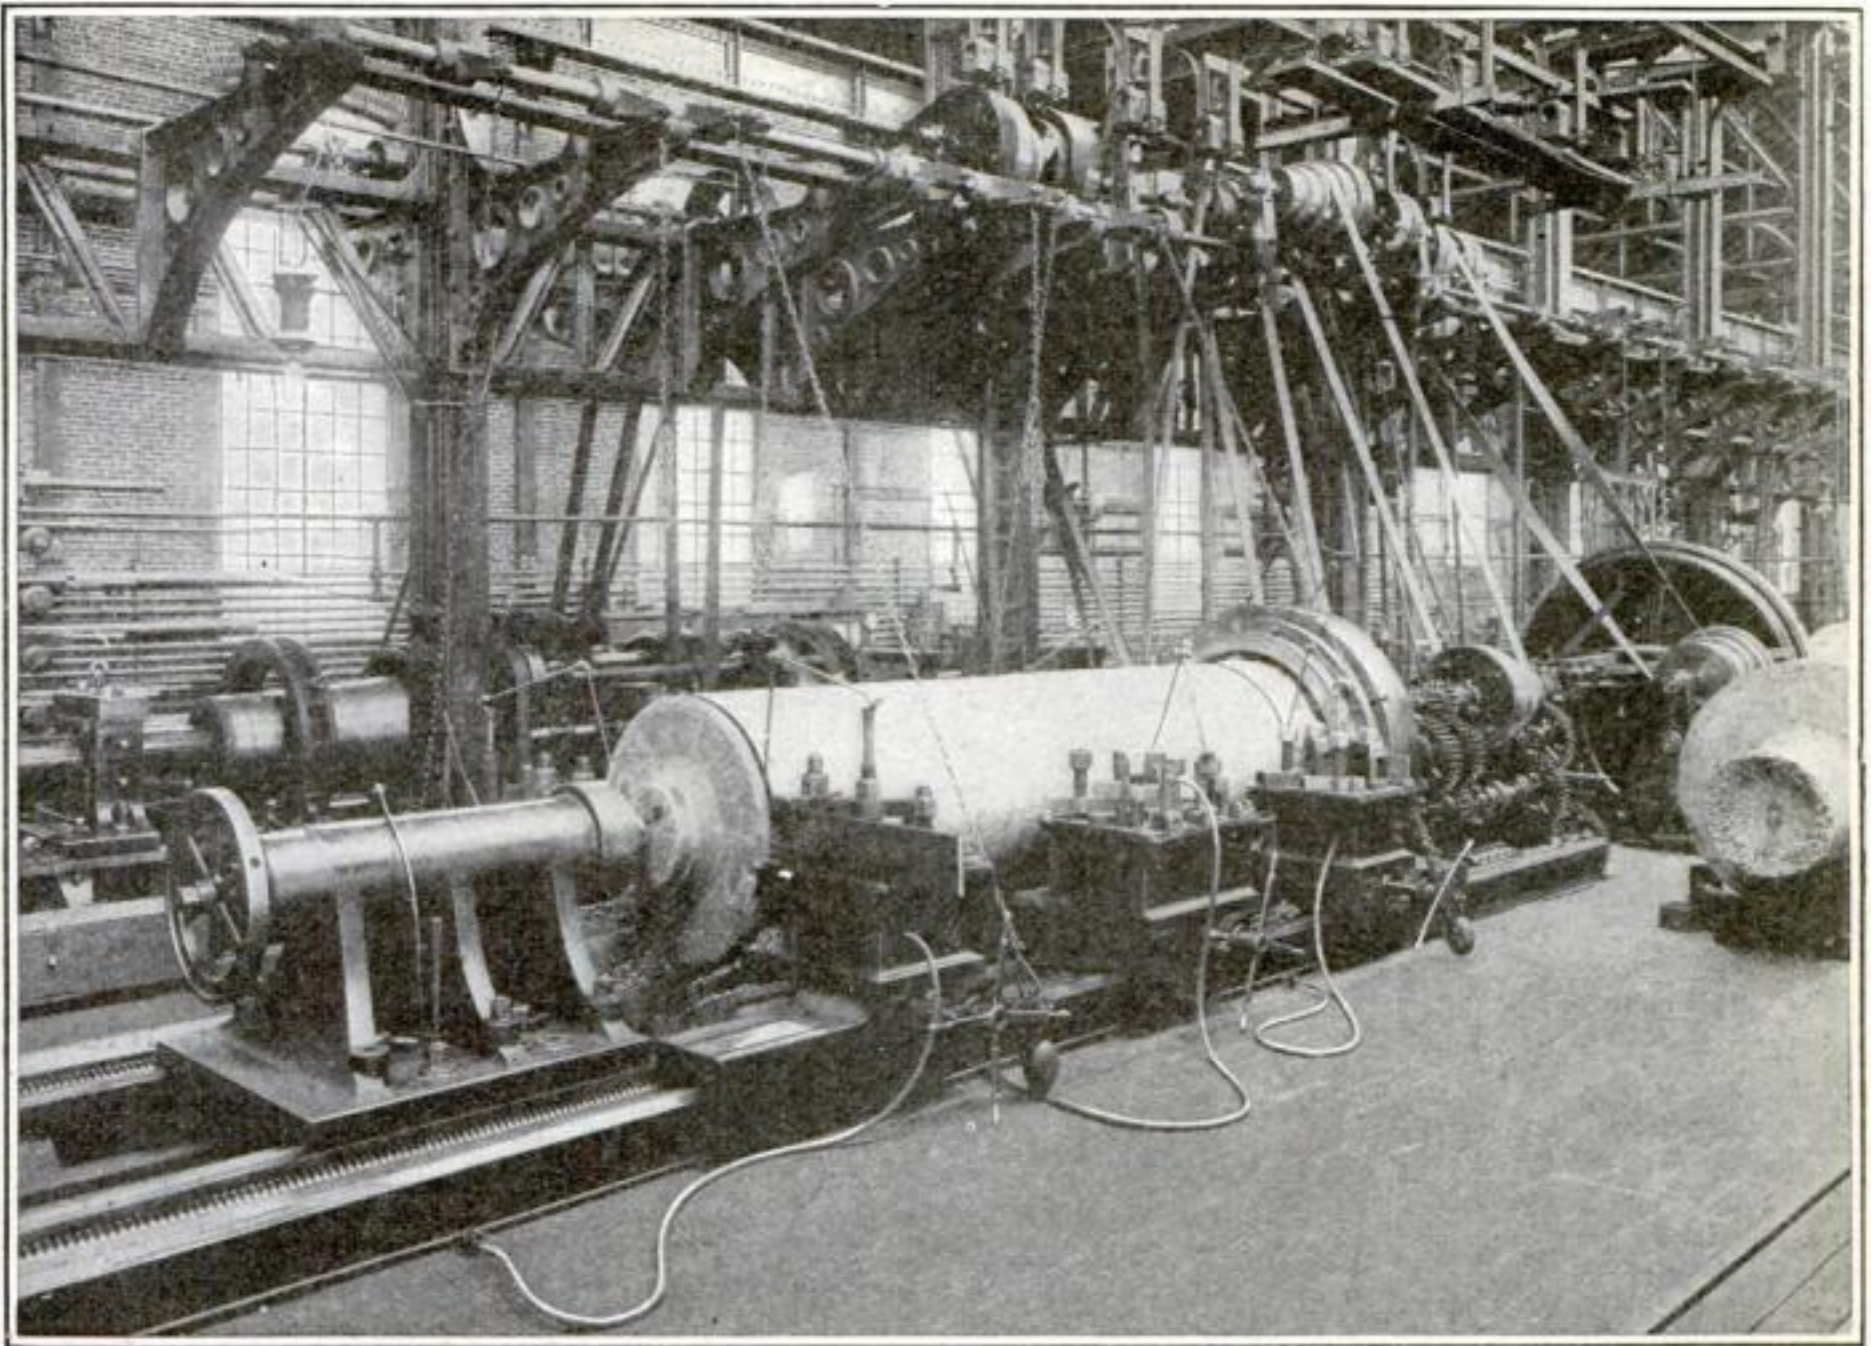

Making the first cuttings from a large round forged steel block which is to become part of a big gun. The work is being done on a large lathe in the machine shop plant. Another steel ingot or block can be seen just at the edge of the picture. Powerful cutting tools are necessary

the crystals fine or to "refine the grain" as it is called. To do this the steel gun in one stage of its manufacture is heated until red hot throughout. In this condition it is suddenly cooled by lifting it high in the air and lowering it with a big electric crane down into a big tank of oil. It is thus suddenly cooled and the crystals made very small.

But the gun in this condition is so hard that it has to be tempered or annealed. This is done by heating up the steel again to a lower temperature and cooling it slowly. This operation greatly toughens and strengthens the steel.

There is something wonderful and also mysterious about the flight of very heavy shells and the energy that makes them go. It is, of course, the charge of powder in the back end of the gun that does the work. An electric spark explodes the charge, which is usually a nitro-glycerine compound. If gunpowder increased in the requisite quantity, the gun itself might burst before the shell was driven out; modern smokeless powder burns more

gradually. You can light a cigar with it, so slowly does it burn. The principle of the phenomenon is that the explosive is, when ignited, at once changed to a gas which, confined in a tiny steel chamber, must find its way out. As it does, the shell is forced out by the only opening left.

The life of a big gun is surprisingly short. The powerful explosive, such as cordite for example, creates an intense heat on the walls of the cannon. This gradually melts at each shot a little of the inner surface, constantly wearing away a thin layer of the steel. It is sometimes called the erosion of a gun. This erosion, or wearing away, is so persistent and gradual that the very big guns can be fired only a limited number of times. It is said the actual life—that is the sum total of the time consumed in the firing of the shots as long as a gun lasts—is really in some cases not more than a second or two. After that a new steel lining is put in.

Many things have been tried to reduce erosion, for the cost of one large gun runs into many thousands of dollars.



Two thin coatings of plaster of Paris are washed lightly over snugly fitting jerseys

The cast comes off in sections and is then filled in on the inside with papier mâché



wash of plaster of Paris is applied to the outside. When this is partially dried another coating is applied. After this second coating has dried a little, the tapes connecting the two portions of the jersey are untied, and the two parts, front and back, are taken off separately and allowed to dry thoroughly. The shape is then filled in on the inside with *papier mâché*. It requires only about an hour to make the form, which is less than is often required by the modiste for one fitting of a fashionable expensive garment.

Casts of the arms may also be made and attached to the form, so that the figure is complete.

The mold may be used on any lay-figure standard or it may be set on a table or stand of convenient height. The only objection to it is that it is not adjustable. If the stout woman makes up her mind to reduce and accomplishes her purpose she will have to order a new dress-mold in consequence. Similarly, the too-slender woman should not use her dress-mold after she has been through a building-up course of treatment, until she has had its lines altered.

Making a Second "Self" for Dressmaking Purposes

FITTING is the hardest and most tedious part of dressmaking. Many a woman could make her own clothes and save a good percentage of her pin-money if she were sure that the garments would have the proper "set." There are various kinds of dress forms on the market to meet this need. One of them, recently invented by Wayne T. Sachs, of Los Angeles, Cal., is cast on the lines of the living figure to be fitted.

To make it, two jerseys are fitted snugly over the body. The outer one is made in two sections connected by strips of tape. After the jerseys are adjusted, a thin



The little automobile is a single-passenger model, but it is capable of accommodating a trailer

The Youngest Manufacturer of Automobiles

ALTHOUGH only twelve years old, Clarence Suttcliffe, of Aurora, Ill., has constructed a real automobile which makes record time for its size. His materials were obtained mostly from scrap heaps. His one purchase was a one-quarter-horsepower gasoline engine.

The machine is belt-driven and will make a speed of fourteen miles an hour.

In the absence of a clutch, the young manufacturer shuts off the engine by means of a foot-lever. When

rounding corners he presses down on the lever; this shuts off the spark. The car is called "G-3."

The Laundry Keeps Pace with the Fashions. It Irons Stockings

THIS is the day of conspicuous and elaborate hosiery. The laundering of stockings and socks has had to keep up with the fashion. Formerly it was necessary only to smooth out the wrinkles, regardless of any "shine" that might be imparted by the iron. In home laundries the queen of the washtubs often considered it unnecessary to iron the hosiery at all.

Now, however, a fine stocking can be laundered in such a way that it will look exactly as it did when new. A stocking ironer has been invented which employs forms over which the wet stockings are drawn after they have been washed and rinsed. The steam heat is turned on and the stockings are dried and ironed at the same time from the heat inside the forms. In this way the original shape and luster of the stocking is retained and any embroidered design is brought out in relief.


The ironer is intended principally for use in large laundries having steam power, although it can be adapted for the home laundry. The forms are of all shapes and sizes. They prevent shrinking of all-wool stockings, also.

Forms on which stockings may be dried and ironed like new at the same time by steam heat



An Alarming Alarm for the Burglar. He Could Never Turn It Off

AN entirely new burglar alarm which prevents a burglar from opening your window stealthily at night has been patented by William Connoly, of New York. Once the window is started upward, the noise of the alarm will upset the nerves of the burglar himself.

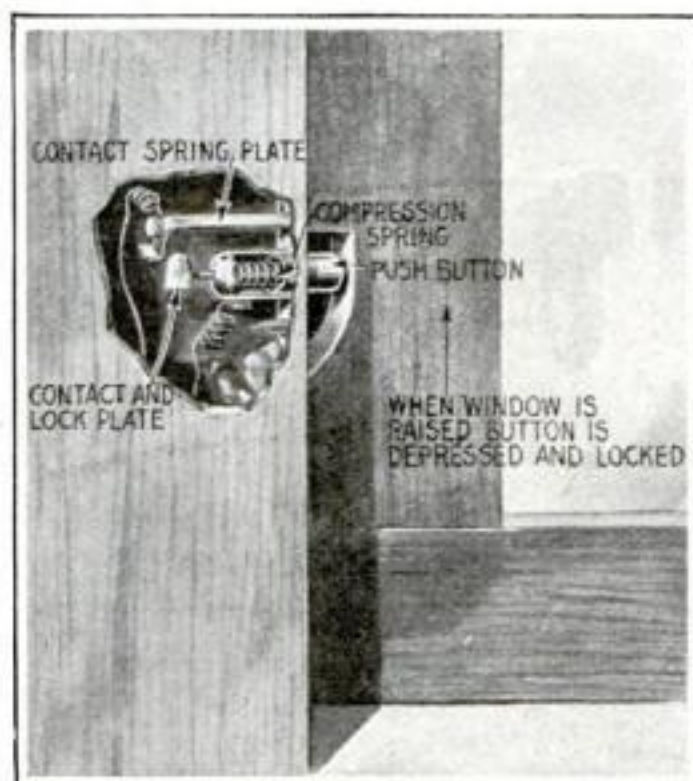

Raising the window pushes in the button, closing the alarm circuit

The alarm is extremely simple. An automatically locking push-button fits into the window frame just above the lower window. A flat-head bolt is screwed in back of this push-button and makes contact with the iron mounting in which it slides. The bolt and the button are normally pushed in their outermost position by a spring inside the mounting.

Should Mr. Burglar jimmy the window, the button is pushed in as the window is being raised. Immediately the head of the bolt passes a contact finger. The bell circuit is thus closed through the bolt and the finger. Thereupon the righteously indignant landlord reaches for his gun. The iron finger prevents the button from being brought back. So if the burglar supposes he can turn off the alarm before anyone inside hears it, he will be horribly disillusioned.

Only a person familiar with this alarm can turn it off. The flat head of the bolt contains a slight notch. By turning the button in a certain position, the notch will come opposite the finger, and the bolt-head can slide through. Simple though this is, the burglar would never think of doing it; neither would he have time enough to do it if it should flash across his mind; for there is nothing faint-hearted about the alarm. Its evident intention is to arouse not only the members of the household but the policeman on the beat and all the neighbors on the block or in the vicinity.

Fighting the Big Guns from Balloons

Why the observation balloon still plays a part in war despite the airplane and the dirigible

By Carl Dienstbach



The sausage balloon is provided with a wind bag which keeps the balloon nose to the breeze. Steadying cones are also fastened to the rope, kite-tail fashion

THERE never was a time in the history of fighting when a general did not envy the birds. If he could only hover over his enemy and see for himself what was going on! Since he could not do that, he used such makeshifts as he could devise. But the first real spying on the enemy came when the balloon was invented.

Someone asked Benjamin Franklin what he thought of it. "It is a newly born child," he replied. That was non-committal; also prophetic. At all events, the French revolutionists, daring adventurers in war as well as in politics, adopted the balloon at once as a superior substitute for the old watch tower. They held it captive by a rope, quite in the best Twentieth Century way, and used it very effectively in battles to drive home revolutionary truths. Their "aerostiers" even dropped their messages on long streamers of paper weighted with lead.

When the dirigible and the airplane came, it was popularly assumed that the observation balloon was to become as extinct as the dodo. Indeed, in the early days of the present war, observation balloons were never mentioned in the despatches as were the dirigibles and the airplanes. But as the war developed, as weapons changed their character and became even medieval, as all Europe was converted into one huge fortress, as warfare changed into a continuous siege, as guns of unprecedented size and power were brought into action, lo and behold, the old captive balloon came into its own again with a vengeance! It came back with other discarded and ancient weapons—with steel helmets, and with



hand grenades thrown from trenches.

Battles of to-day are won by the most terrible of systematic artillery bombardments. The captive balloon, connected as it is with a battery by a telephone wire running through the holding cable, renders it possible to correct the range instantly, and therein lies its advantage over a constantly moving airplane. The balloon is at a disadvantage because of its distance from the enemy—a distance dictated by considerations of safety. But that disadvantage is compensated for by supplementary information gathered by the airplane.

An active enemy rarely permits an observation balloon to stay aloft for even an hour. But as a rule the balloons are so far behind their own lines that they may stay up for a whole day. During the recent engagements around Arras, Sir Douglas Haig reported that he had shot down every German balloon over a front of perhaps twenty-five miles. Such wholesale destruction of observation balloons is possible only under exceptional circumstances. Ordinarily the ranges are too great. But artillery is not the only dread of the balloon. Small, wasp-like airplanes darting in and out with bewildering rapidity, throw firebrands on the thin bladder filled with gas, which explodes even more easily than dynamite. Threatened either by bursting shells, or by these firebrands, the observation officers in the baskets of the balloons, must jump for their lives.

The peculiar sausage-like captive balloons which are now used by all armies, were invented in 1894 by two German army officers. In Germany they are known as "kite balloons." A kite balloon consists of an elongated gas bag with an arrangement by which the wind, caught in internal air compartments by check-valves, distends and stiffens the balloon against itself. A regulation kite bridle is used. The balloon is provided with a fin, consisting of an appended air bag, like a modern kite, and even with a regular wire-tail consisting of a rope having a series of steadying cones.

War-Time Uses of the Old-Fashioned Balloon

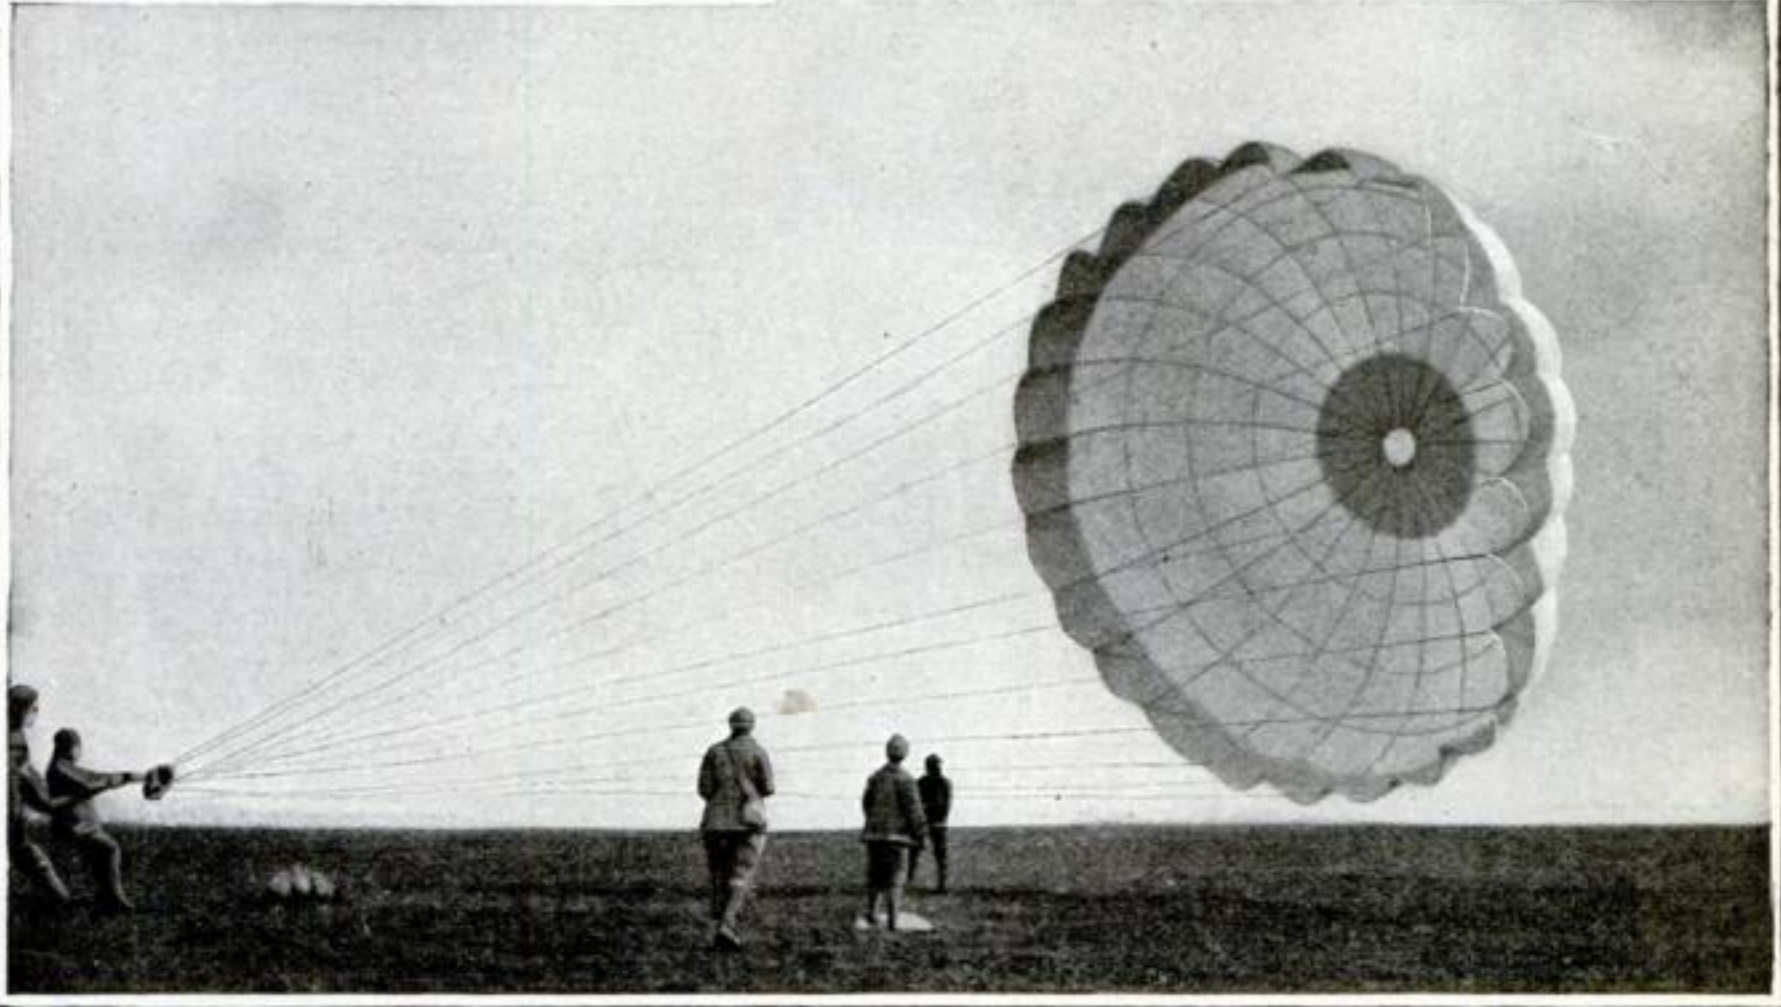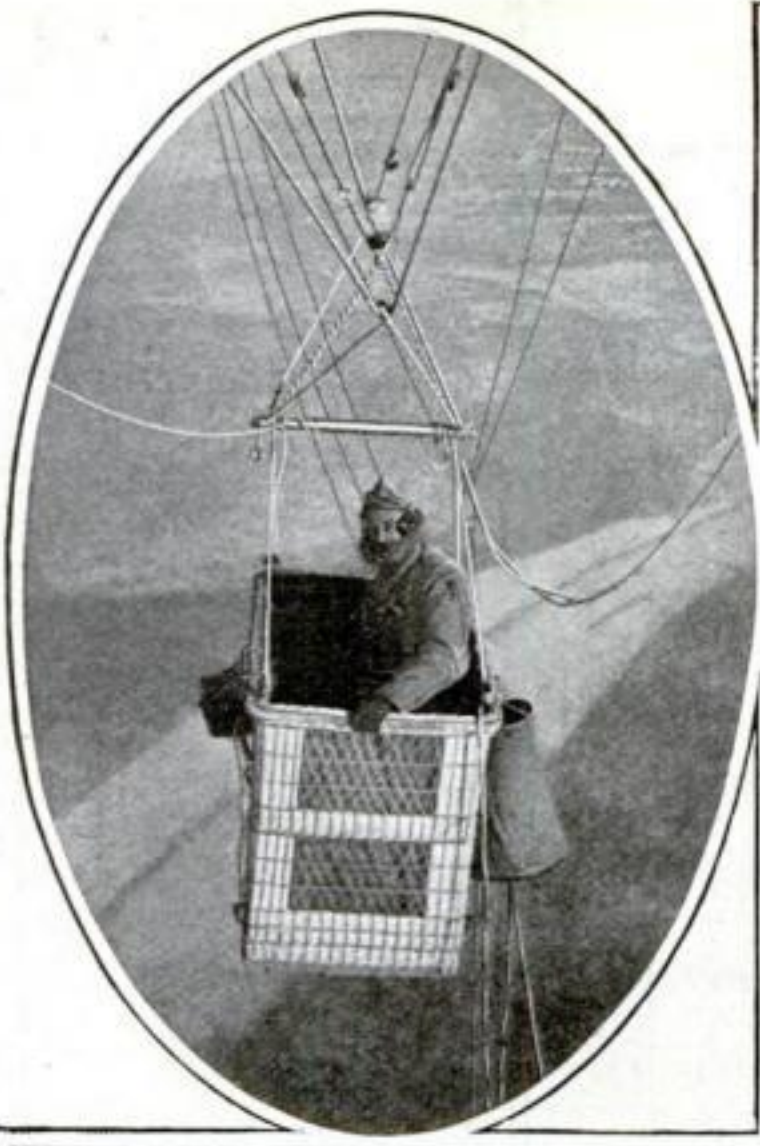


Photos © Int. Film Serv.

In the oval: An officer in the basket of a sausage balloon. Telephone receivers are strapped to the officer's head. The wires run down through the rope to the ground. By means of the telephone he communicates to the battery the effect of each shot. Upper right hand picture: The man who is sent aloft often in the observation balloon becomes a far more daring parachute artist than any man who ever risked his neck at a county fair. The parachute was intended to serve as a safety device. In the whole history of aerial navigation, it never saved a single life in a cross-country journey. War, alone, justifies its existence. The war parachute is of the ordinary type made familiar by the county fair as seen in the bottom picture. Half an hour after an officer has dropped to the ground to save his life, he is up again in a new balloon

Housekeeping Made Easy



A beater attachment on the ordinary potato masher which adds greatly to its usefulness

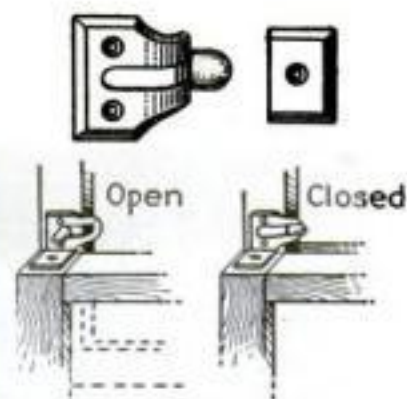

A permanent fixture for holding windows open for ventilation and preventing them from being opened further by intruders



With one revolution of the crank a seed is removed from a cherry without losing any of the juice. The seed is dropped through an opening in the bottom of the tray into a separate dish from that which receives the pulp



Here the brush of the dish washer is in use. There is a soap compartment just above the bristles. The hot water passes down through the soap to the brush and plate surface



A dish washing device which has a small opening like a nozzle through which clear hot water may be thrown on the dishes by means of a thumb-operated valve. A brush at one end completes the cleaning process expeditiously



Kettle made in aluminum having a double bail with handle so arranged that it is self-tilting. The contents may be poured out or liquids drained off of vegetables without removing the lid

The usual difficulty of directing the breeze from an ordinary electric fan in the larger sizes is easily obviated by the ball joint in the stand. The fan may be set and clamped at any angle



Housekeeping Made Easy



A crate for shipping dogs in safety and comfort without danger to the expressman and porters who must handle it on the journey




Food is put into the dog-crate shown at the left, through a small door in front



A neat appearing and sanitary dog kennel made from a barrel. There is a shaded resting place under the frame support



A circular cloth with draw string through six brass rings makes a convenient bag for odds and ends

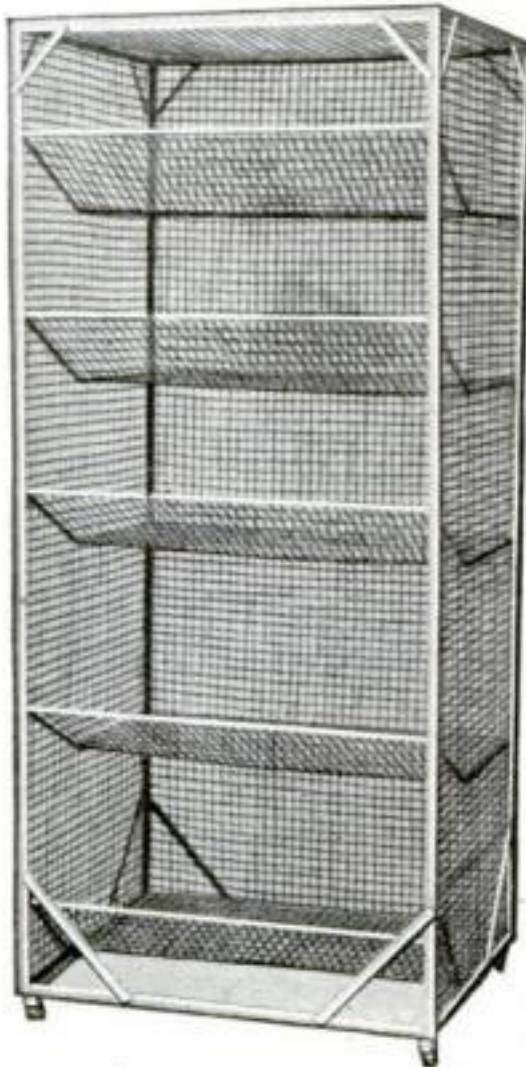


A shelved wire mesh rack for conveniently keeping the different vegetables separate and where air can circulate through them to prevent decay



A hanging or counter display stand for grocers and fruiterers. It permits free air circulation on all sides



A hat protector made like an envelope. It may be carried in the pocket or handbag as a "preparedness" measure to be used in case of sudden rain

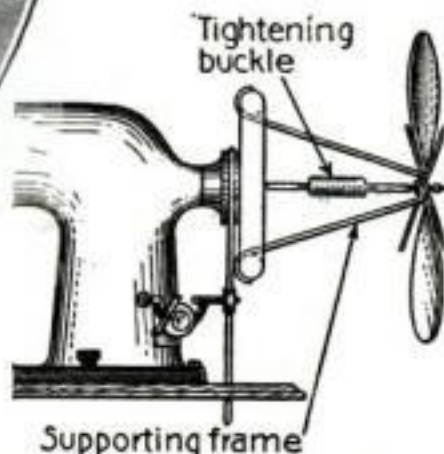

A light detachable fan for a sewing machine flywheel



A deodorizer of ornamental design for hanging on a wall of the sick room or to counteract the mustiness of a room that is to be kept closed a long time

Home-Made Paper Motion Pictures

A safe and sane method by which you can make the pictures and exhibit them to your friends

By Max Fleischer



This motion picture camera is smaller and lighter than the professional machine and requires no tripod. It is aimed from the shoulder through an open finder. The substitution of a motor-drive for the hand crank makes it possible to follow the movements of an object. Current is supplied from batteries in the pocket

WHY is the phonograph in every home, but not the motion picture? Chiefly, because celluloid films are highly inflammable, because rooms must be darkened, because screens must be set up, in a word because elaborate preparations must be made. The making of motion pictures is hardly within the possibilities of the average amateur. In professional motion picture photography, extremely accurate mechanisms are employed at almost every step. Perfect results depend on the accuracy, judgment and experience of experts.

The expert camera man is not called upon to develop his film. Developing processes are often as unfamiliar to the photographer as photography is to the developer. Fixing and drying the film is a separate branch of the process. Printing of positive film from the negative requires the attention of skilled mechanics who may be entirely ignorant of camera work or developing.


Projection of the completed film is a mystery to almost the entire productive force; for some knowledge of electricity and arc-lighting is necessary. The operator must be alert and cautious. He must

be entirely familiar with his machine and its dependent devices. Thousands of feet of highly combustible film must be driven directly across the path of the blazing arc-lamp's concentrated rays. The speed of the film itself is all that keeps it from being instantly consumed. Failure of the drop-shutter, as the film slows down, would result in a blaze. The operator must be specially trained. As a rule, theater projection machines are quite safe—that is, safe in the hands of an experienced operator.


In view of all the knowledge and experience required to go from A to Z in the production and projection of motion pictures, considerable credit is due Mr. Hartwell W. Webb of New York, inventor of the home projector and camera, for his success in simplifying and reducing the cost of the process. In addition to making its operation safe, he has practically succeeded in leveling the complete apparatus to the home basis of the phonograph.

Mr. Webb has produced not only a motion picture camera which is almost as simple in operation as the kodak, but also a projector which requires little more knowledge to operate than the magic lantern. All fire danger has been eliminated by the perfection of a paper film. Incidentally, he has found the paper film to be far more durable and economical than the celluloid.

His camera, which

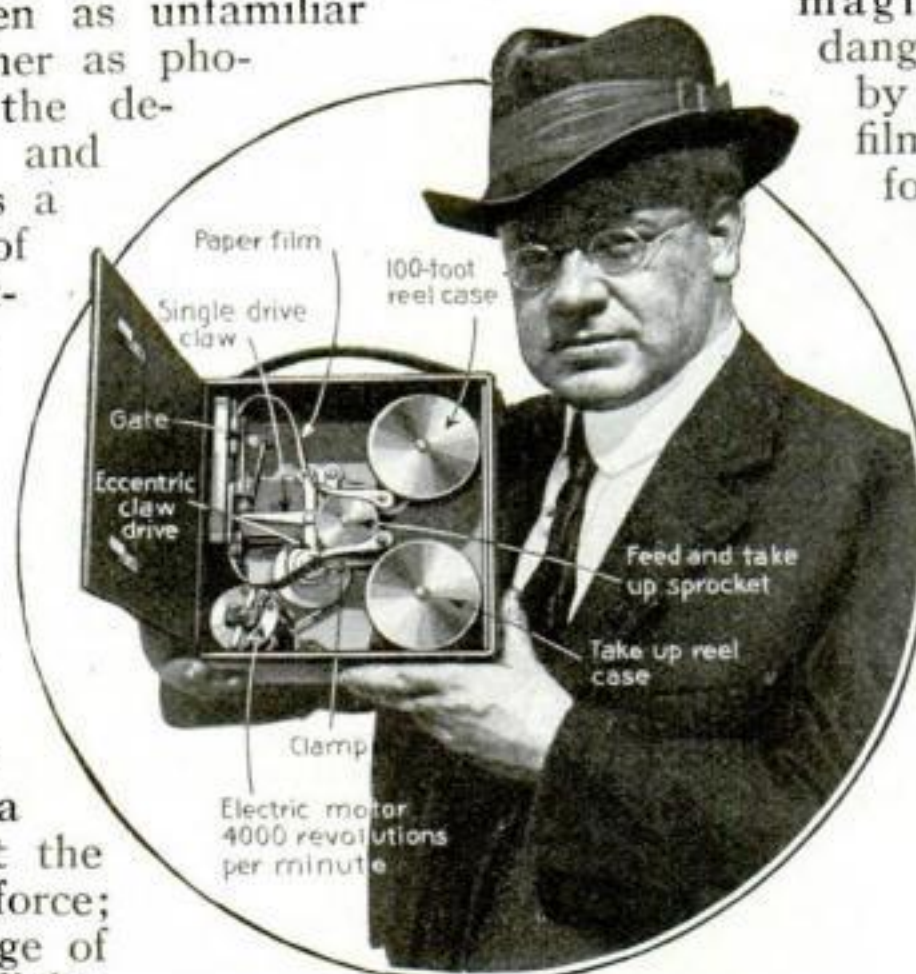

Interior of the camera. The feed magazine will accommodate 100 feet of film which is advanced by means of a single claw drive

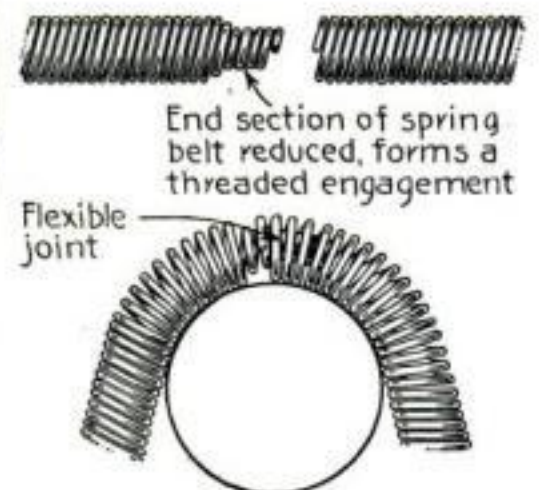


A spring belt, reduced at one end to fit the opposite end of the belt, makes a threaded flexible engagement

weighs about fifteen pounds, is considerably smaller than the professional machine and is operated by a small electric motor. A cell of dry batteries carried in the operator's pocket supplies the necessary current. The

been perfected in which the negative is chemically converted to a positive with remarkable results. One solution removes the silver nitrate from the negative; another bleaches the shaded and dark portions leaving the film blank. On exposure to light, the color values are reversed, the most delicate tones and gradations being retained in the color reversion.

Developing the film in the form of a coil reduces the quantity of solution required. About three quarts of solution will develop 500 feet of film

Below: Method of coiling the film over a wood core for immersion. A frilled celluloid strip is used as a separator between the layers of coiled film

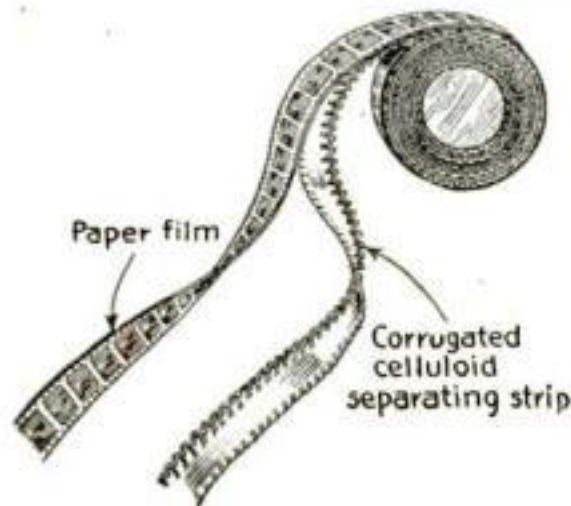

camera can be loaded in daylight. No tripod is necessary.

The amateur photographer who has developed his own films will require no ad-

ditional knowledge for developing the paper motion-picture film. The film is wound around a wood core together with a celluloid strip frilled on the edges. The frill acts as a separator between the layers of the film and at the same time allows the developing solution free access to every part of the surface. The film is rinsed, fixed and washed in the usual manner. It is dried on a collapsible wooden drum.


An important feature of Mr. Webb's process is the production of the positive film. The paper negative film is not transparent; therefore a positive film cannot be made by contact. Even if it were possible to do so, it would not prove practical for the amateur, because motion picture film printing by contact is necessarily done by machinery and entails the additional expense of another length of film. A much simpler method has

ments, a number of experiments have been made with the half tone or engraving process as a printing medium. In this process, the positive film is reproduced on a sensitized copper surface and etched with nitric acid to produce printing plates. In this manner an unlimited number of positive prints could be produced for circulation purposes, paper and ink being the only material required for the work. As the initial outlay for the half tone plates would be large, this method would prove practical only for quantities running into the



At right: The projection principle of the cabinet explained. The reflecting mirror is disposed at an angle of 45° under the lid

At left: The screen on which the picture is thrown is in a shadow box

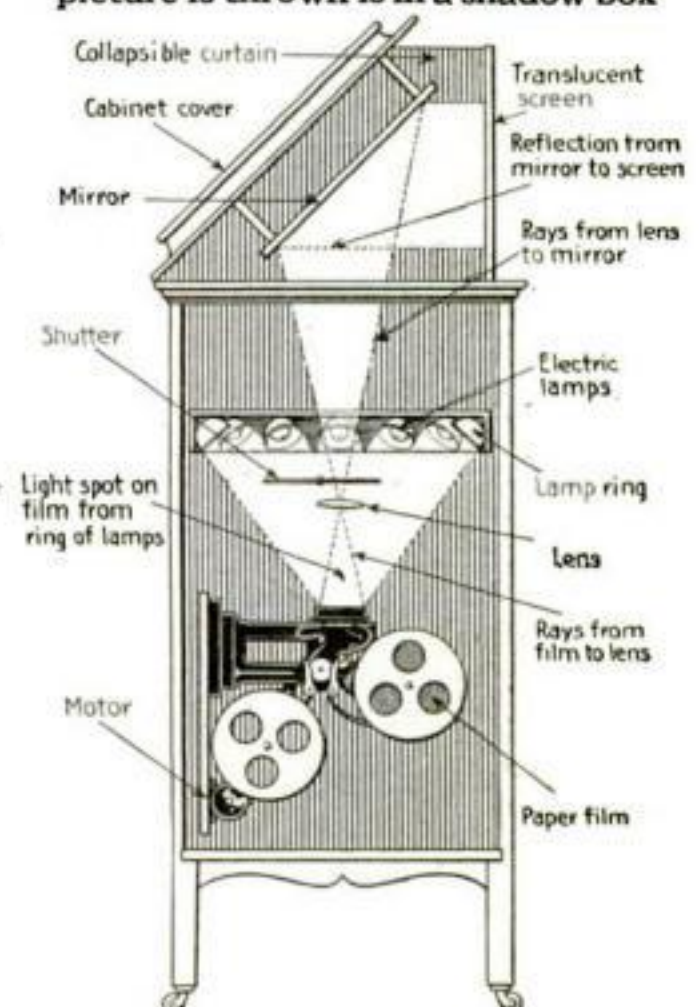

thousands. One hundred feet of film could then be sold for a little more than the cost of the paper, or rented for much less.

Two types of projectors have been made. One model is intended for use in schools and churches, while the other is suitable for home use. The operating principle of both types is the same; there is a difference only in the range of focus.

The home model is built into a cabinet, resembling that of a phonograph. In fact, phonograph cabinets with slight interior alterations are at present being utilized to assemble the home projector.

Paper film being opaque, it must be reflected, rather than projected on the screen. In carrying out this principle, the projection machine is placed in the lower part of the cabinet with its lens directed upwards towards the lid. Fixed directly over the projector is a brace containing a ring of nitrogen lamps and reflectors which are arranged to throw their concentrated light on a spot over which the paper film passes. Since the nitrogen lamp is very cool, there is no danger of burning the film. The picture is reflected upwards


to a mirror disposed at an angle of 45 degrees and thence to the screen attached to the lid of the cabinet.

A small motor drives the projector mechanism, electric current being supplied to the motor and the ring of lamps from any convenient lamp socket.


In addition to the animated pictorial record that can be preserved of family and

friends and of interesting incidents of sentimental value, Mr. Webb proposes to establish a circulating library which will furnish by mail, at nominal cost, films of current interest occurring the world over. Judging from the popularity of the motion picture theatre, there is every reason to believe that the home picture cabinet will prove as popular as the music cabinet.

It can be made to harmonize with the surrounding furniture, and is as ornamental as the phonograph cabinet, with which it is identical in appearance except for the screen on which the pictures are projected. This screen is collapsible when not in use. It is set in an ornamental frame which serves as a shadow box, so that the pictures may be shown in broad daylight as successfully as they can at night or in a darkened room.

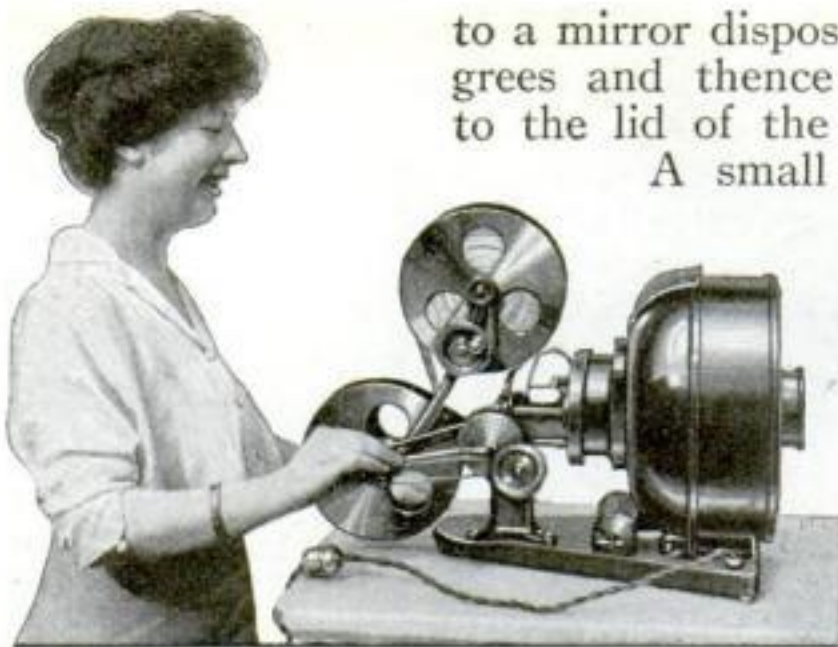

This form of projector is intended for small assemblages. It may be operated by hand or motor

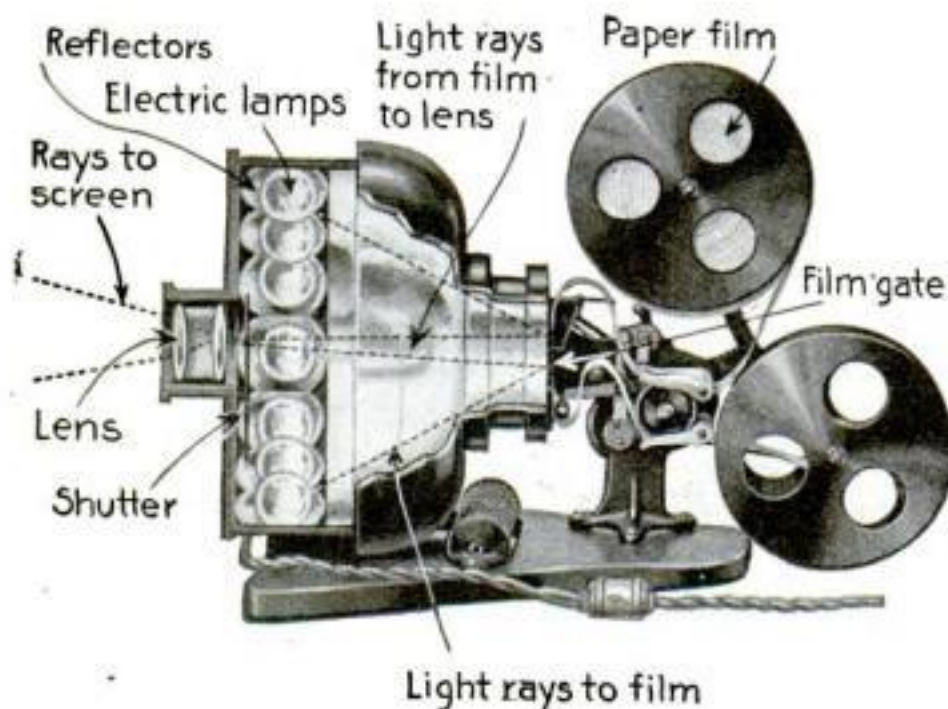

At left: Interior of the protecting mechanism

Circular arrangement of the lamps



A New Type of Caterpillar Motor-Truck. It Can't Stick in the Mud

THE novel commercial vehicle shown in the accompanying illustration differs from other forms of caterpillar tractors in that it has one caterpillar or track-laying unit in the rear and two wheels in front. It is substantially a three-wheeled vehicle with the track-layer as the third wheel. It has a much greater speed than a conventional track-laying tractor. Fifteen miles an hour is within its capabilities.

It is especially intended for hauling trailers over rough country roads, but it can run over improved state highways by reason of the rubber tires on its front wheels.

The front wheels are of steel with wide steel tires. The rubber tires are fitted in the center of the steel tire.

When running over good roads the front wheels are supported on the rubber tires, but when soft roads are encountered they sink into the ground. The wide steel tires then support the tractor and prevent it from being mired.

If any of the trailers should stick in the mud, a rope around the winch on the track-laying unit is employed to extricate them. Although this truck is equipped with the caterpillar unit it would not be possible for it to negotiate shell craters and deep trenches as readily as its predecessor, the British tank. Hence it is not designed for war service.


The Convalescent Soldiers Are Ingenious Toy Makers

THE war has indirectly been the cause of driving many erstwhile clerks and mechanics but now soldiers into the ranks of the toy makers. The invalid soldier finds not only employment for his enforced idle hours but a certain amount of recreation as well in devising original toys.

In order to make a really successful toy, one must needs have a more or less intimate knowledge of child-nature. The men who made the designs shown in the accompanying photographs must have had in mind a picture of some toddler leaving all the expensive toys that Santa Claus had left around the Christmas tree and going persistently back to mother's old dust-brush or broom.

The articles pictured, the work of maimed or blind soldiers, were exhibited at the Lyons Fair. Black and white paint and large shoe-buttons for eyes converted the long-handled brushes and brooms into individualities, while clever carving in conjunction with paint and shoe-buttons and wooden wheels made stands for other types of brushes, which immediately became fierce and wonderful animals with accommodating holes in their noses for strings.


But the toys do not lose their utilitarian quality permanently. When they are no longer needed as play-things they may be returned to their hooks in the kitchen.

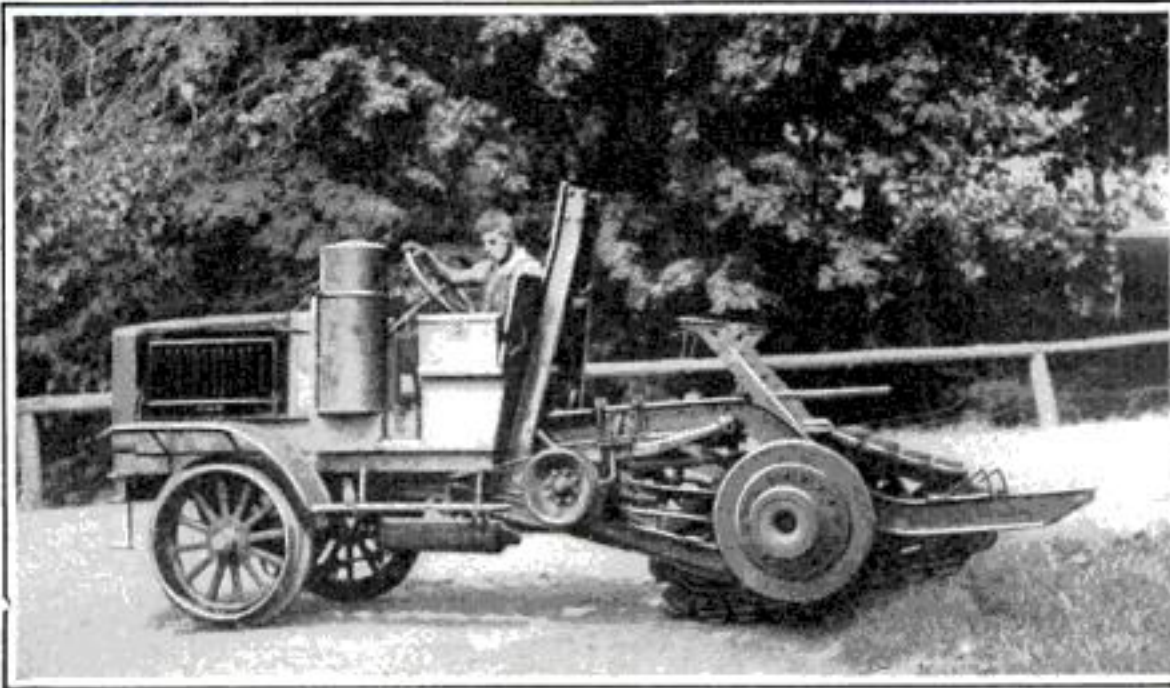

The track-laying caterpillar motor-truck is a three-wheeled vehicle, with the track-layer as the third wheel.



© Int. Film Serv.

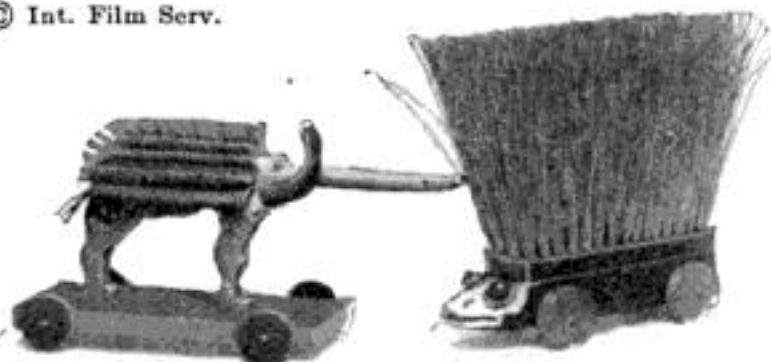

The long-handled brushes and brooms were converted into individualities by black and white paint and shoe buttons for eyes. They required some clever carving too.



A small quantity of the solution is forced into the tire. When the wheel revolves, the fluid spreads in a thin film over the pores of the inner lining



A Solution Which Promises to Solve Some Tire Troubles


A SOLUTION which is injected into the inner tube of an automobile tire through the stem is said to keep the tire at normal inflation and to make it practically puncture proof. The solution lies in a fluid state at the bottom of the tire, occupying only six per cent of inner space, except when the car is in motion, when centrifugal force carries it around the tire in a thin film, thereby sealing all porous places that cause slow leaks. The fifty or eighty-pound pressure forces the solution into every infinitesimal opening where air leaks out, and at once seals it.

According to chemists' reports the solution does not injure the inner tube in the least, but is, on the other hand, a preservative of rubber. Under-inflation is the cause of the majority of tire troubles. With the new solution the proper air pressure is maintained at all times in the inner tube.

On Land a Submarine Travels at Tortoise Speed

TO her great surprise, the U. S. Submarine H-3, of the Pacific division, woke up one day to find herself high and dry on the sands of Samoa Beach, California. It was not exactly the proper place for a perfectly respectable submarine, and plans were immediately devised to launch her. The best launching place was Humbolt Bay, nearly a mile distant, where the land goes down rather abruptly from the shore. So the submarine was jacked up and laid upon a wire cradle formed between two huge logs. The cradle and its burden, wheeled upon small logs as rollers, were then moved slowly forward by hauling on a block and tackle. This is the first authentic report of a bona-fide submarine taking an overland journey.

As a land animal, however, the submarine is not very spry—she makes about one hundred and fifty feet in an hour. Under water she travels at from six to eight miles an hour. Hereafter she will probably be more careful about keeping away from shore and out of the path of breakers and rushing tides.

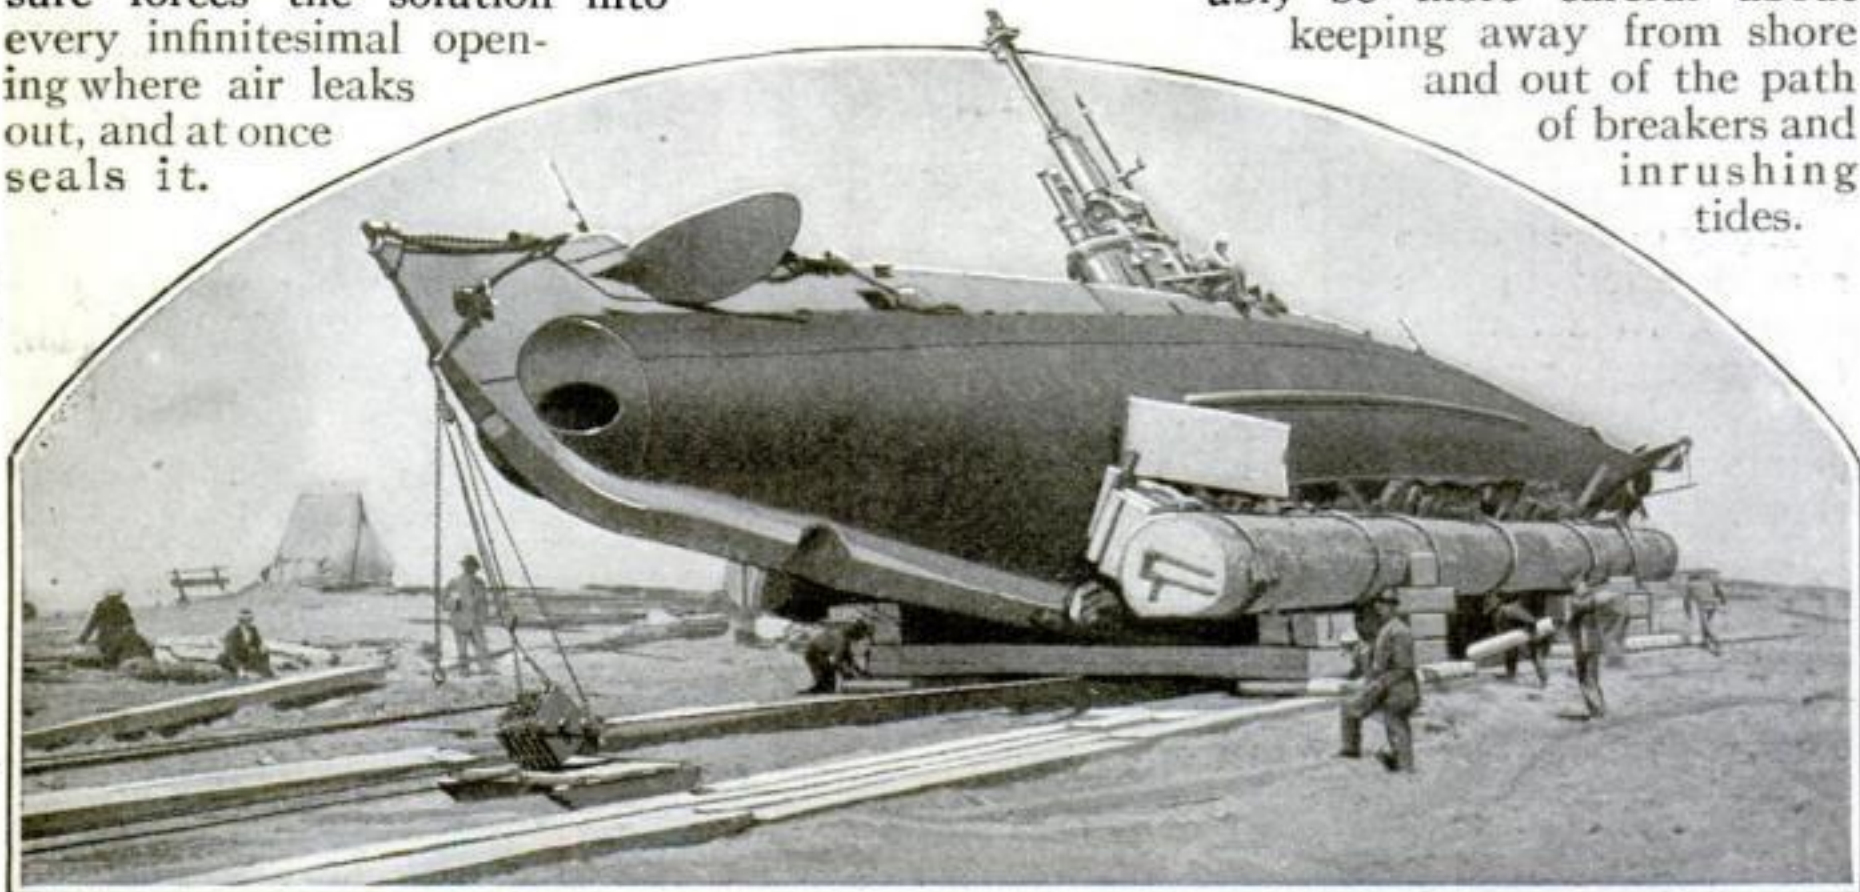

When the U. S. Submarine H-3 became beached, she had to be jacked up on a massive log cradle and pulled on four sets of huge rollers to a suitable launching place nearly a mile distant

Typewriting in Code on a Specially Constructed Machine


THE war has brought forth many devices for communication in code; and many different codes are used in the different departments, as well as among individuals. The invention of a typewriter which will print in code follows as a natural consequence; for time and speed cannot be sacrificed continually, even in the interest of secrecy and safety.

The code typewriter is a complete typewriter, standard keyboard, with nothing in its appearance to indicate that it is not an ordinary typewriter. On this machine a stenographer may produce the cipher writing with the same speed as though he were writing in English. It is the invention of Edward Hebern, of Oakland, Cal.

All the characters of a standard keyboard may be represented, in the cipher of letters. In placing figures and other characters not letters into cipher the shift key is not operated, but in order to translate them out of the cipher it is necessary to hold down the shift key in copying the cipher letters that represent figures and other characters.

For the receiver of a cipher message to ascertain what letters represent other characters than letters, he simply copies the whole of the message. The parts represented by figures remain in cipher. He then sets the shift key and recopies those portions; the result will be that the figures or other characters will be printed.

An unlimited number of different codes may be used. A change of code is effected without changing the position of the letters on either the keyboard or type. The code is changed by means of a small aluminum device called the "code bar," weighing about one ounce. It is simply withdrawn from a slideway and another bar, set in a different code, is inserted. The code bar contains twenty-six graduated letter blocks. By unscrewing a thumbscrew and moving the letter blocks to a different position a change is made.

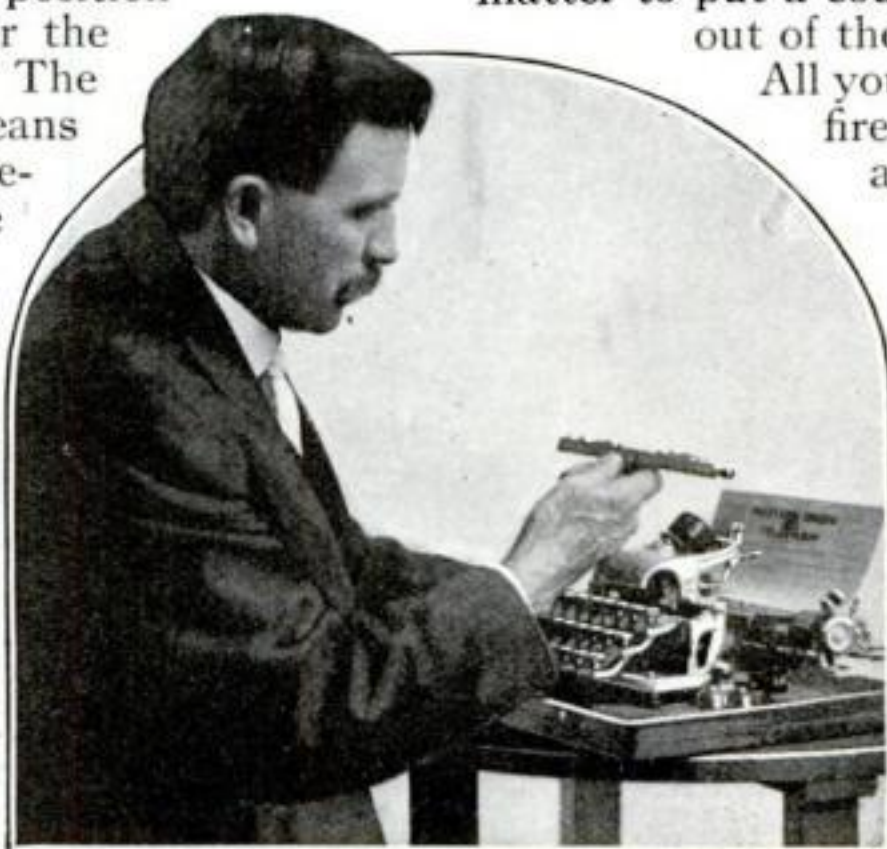

The code is changed by means of a small code bar having twenty-six letter blocks



A bunch of fire-crackers to scare away the malicious spirits of storms and submarines

Fire-Crackers: A Chinese Protection Against Submarines

THE Chinese are superstitious. They are constantly trying to slaughter the myriads of malicious spirits and sprites that are supposed to flutter everywhere, even under the bed or between the cracks of a floor.

Fortunately, it is a comparatively simple matter to put a couple of thousand sprites out of the way in one fell swoop.

All you need do is to explode a fire-cracker. The evil spirit and malicious sprite can't stand noise. It irritates them to distraction. If loud enough it kills them.

Consequently, when a Chinese crew makes ready to hoist anchor the first ceremony is to unpack the fire-crackers and slaughter the evil spirits with a five-minute bombardment. Nowadays great quantities of fireworks are carried.




The new life-guard boat which can not capsize. The man lying down is looking through the glass bottom to locate bodies

A Life-Boat That Cannot Capsize or Sink


A NEW life-boat built along the lines of a big surf board, has proved so satisfactory that it has been officially adopted by the city of Long Beach, California.

The boat, sixteen feet long, forty inches wide and fourteen inches deep, is non-capsizable and self-draining, and is the invention of A. M. Nelsen of Long Beach. It has many advantages over the skiffs now used by the municipal life-guard squad of that city. It can be put through the heaviest surf without waiting for a calm. It has air tanks on both sides, at the ends, and down the middle, and has a glass bottom through which bodies that may have sunk may be located. With one man paddling, and the other stretched at full length peering through the glass bottom, a body can be located in twenty feet of water and brought to the surface by means of grappling hooks or by diving after it.

The boat is propelled with double-bladed paddles by two guards. It can make a speed of six miles an hour, and will support twenty people.

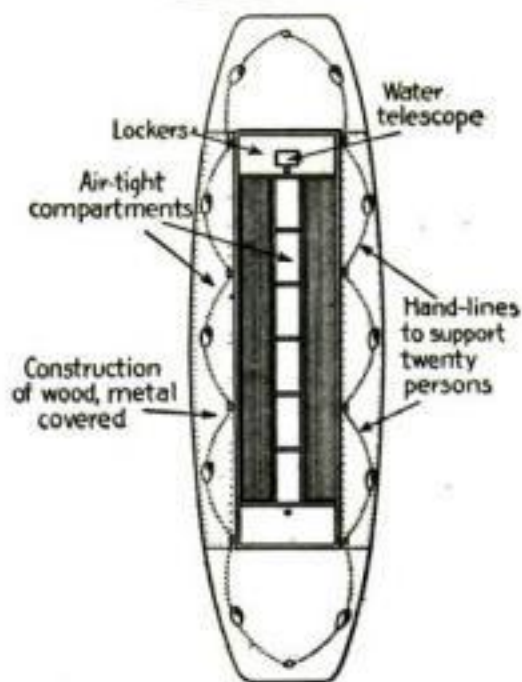

The buoyant air tanks are at both sides, at the ends, and down the middle. Above: Launching the boat in a heavy surf

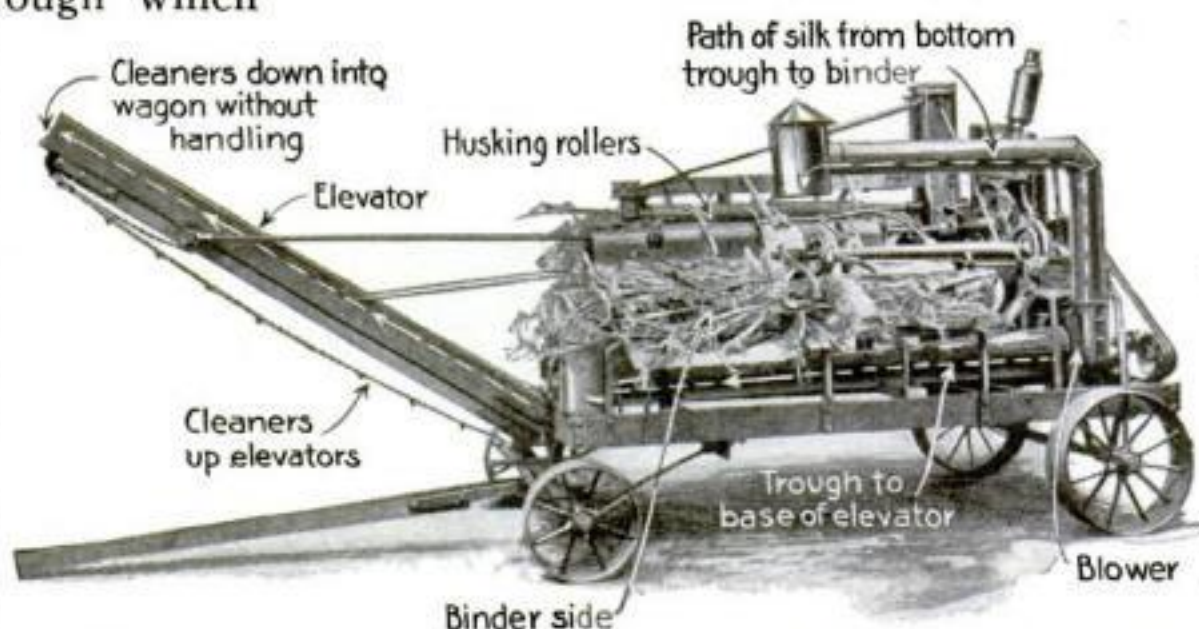

The bundles of corn are thrown on the feed board which carries them to a series of rollers which remove the husks

A New Machine Husks a Bushel of Corn a Minute in the Field

A NEW type of corn husker which promises to relieve the farmer of the tedious and disagreeable work of husking corn in the damp fields has just been completed by W. H. Tschantz, of Ohio. The apparatus is driven by a gas engine and not only husks the corn but deposits the clean ears in a wagon bin by means of an elevator forming a part of the device and binds up the husks and silks in bundles like wheat, eliminating all litter and loss.

The apparatus consists of a small four-wheeled wagon on one end of which are mounted the gas engine and a suction blower, with the husker and binder at the other.

In operation the wagon is drawn from shock to shock by horse or mule power. The un-husked corn is deposited on one side of the binder. The shock is first torn into small bundles and thrown on the feed board, which carries the bundles up to a series of horizontal rollers. Most of the husk is removed while passing through these rollers, and the ears are dropped on to a pair of rollers beneath the husking rolls. Here the silk is removed, after which the clean ear drops through a trough into the base of the elevator, which deposits them in a wagon or other waiting receptacle.



French Official Photo

Millions of shoes worn to all degrees of disrepair, waiting to be sorted, patched and soaked in oil. Scraps of leather are passed through an ingenious cutter and converted into boot-laces

The "Shoe Hospital" of the Allies. Not an Inch of Leather Is Wasted

IN a recent issue of *The New Republic*, W. M. Meredith makes the following reference to the shoe-repair shops of the Allied Armies.

"Entering another shop we find huge stacks of worn-out boots in every degree of disrepair. These are first sorted out like patients in a hospital, according to their various injuries. Those requiring new soles go in one direction, those which must have new toes or sides are passed on in another. Here the boots are re-fitted completely, and finally go into a bath of hot oil where they are thoroughly soaked. If any British soldier of the three million or so in France expresses a wish to have a certain pair of boots returned to him that fit him with comfort, he is certain of getting that same pair back." Think of that in connection with our photograph above!

Not the Latest Style in Hats—Just a Hair-Drying Frame


THE artist who made the "human interest" drawing of the hair-drying frame illustrated below is evidently a bachelor who has spent all his days in an Eden where there were no Eves to go about periodically in low-necked kimonos and wildly flowing tresses during the process of drying and airing the hair after a shampoo.

However, he has shown the frame clearly. It is made of wire netting, and buckles around the head with an adjustable band. The hair is drawn up tight to the crown of the head after the last rinsing and a perfunctory drying. Then the frame is adjusted and buckled around the head, and the hair is spread over it in all directions, so that the air can circulate through it thoroughly. To the professional hair-dresser, with an electric fan for the drying, such a frame should prove invaluable.




The hair-drying frame is of wire netting with an adjustable head band

A Drawbridge Gate Which Will Stop Any Automobile

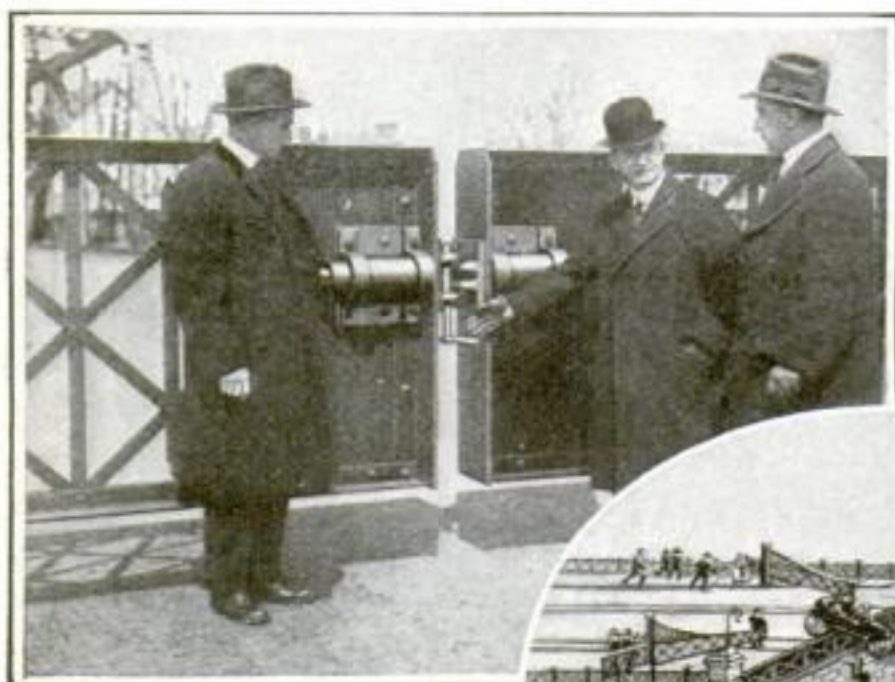

A runaway car striking against this gate would be stopped by the cushioning of the huge gate-springs in the cylinder

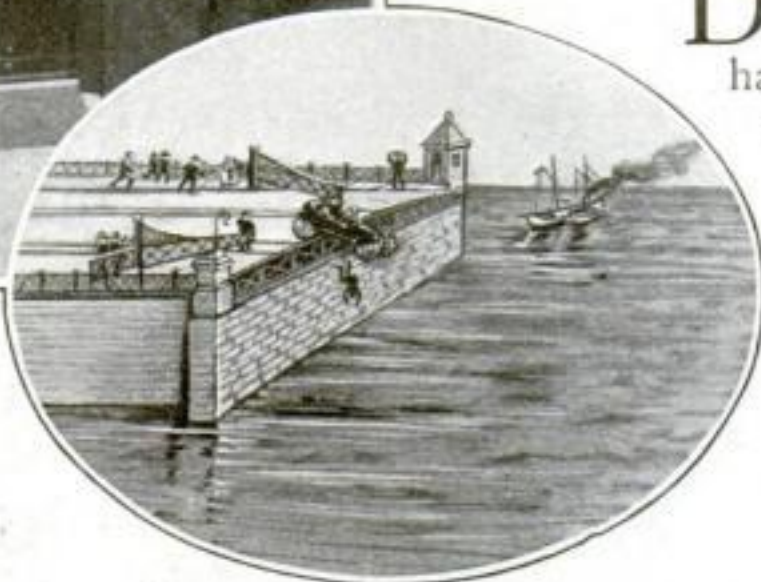

DESPITE even the massive iron gates that swing across a road when a drawbridge is opened, automobiles break through occasionally and plunge into the river below. Such accidents occur when the brakes jam.


Here was an opportunity for an inventor. It was seized by Jacob Harsen, a highway engineer of New York, who has invented a cushion lock for gates. Four huge "locomotive" springs are mounted inside of four cylinders at the ends of the swinging gates on each side. The cylinder plungers, which work against these springs, form one piece with the gate coupling, which is locked by the gateman when the drawbridge is about to be closed. When the automobile strikes the gate at high speed, the huge springs are slightly compressed; then the gate "gives" away gradually. The energy of the automobile's impact is

still further absorbed as the spring is further compressed. Before the car has gone a half dozen feet forward, all of its "push" will have been completely destroyed without producing any undue strains on the gate. The method could be relied upon to stop anything short of a railroad train!


The Wooden Hand Rammer — A Survival of the Fittest

DURING the last five years the electric chain rammer has disappeared from the turrets of modern warships. A short circuit on one of the battleships almost led to disastrous consequences. In other cases a temporary breakdown spoiled the turret's chances in record firing. Gradually the old hand rammer, which in principle has changed

little since Nelson's men rammed the round shot home in the muzzle loaders, has won back its supremacy. The turret of a Dreadnought is filled with other electrical devices, but the wooden rammer is the one bit of equipment that has survived from the days of wooden ships, so far as the turret is concerned.

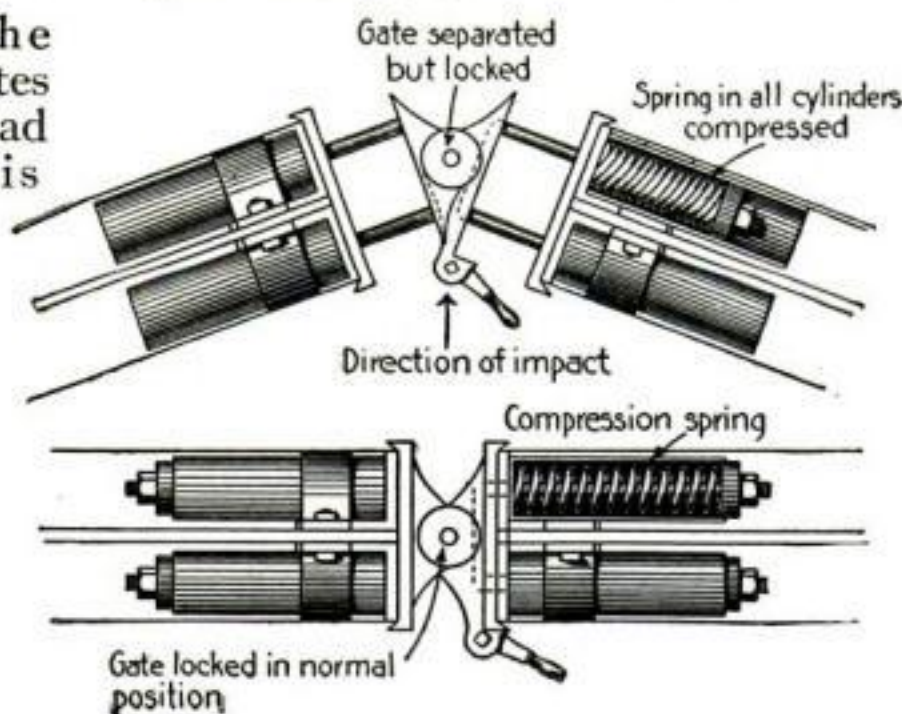

Detail of the cushioning spring. The cylinder plungers which work against these springs form one piece with the gate coupling

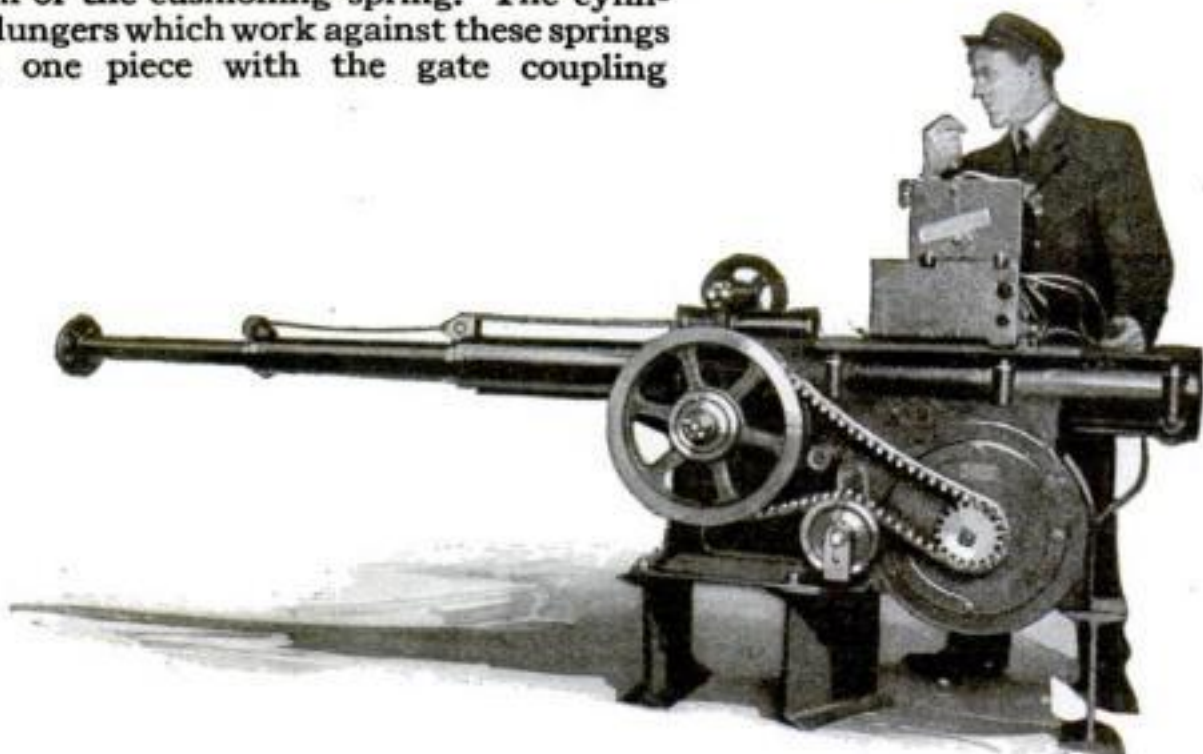

The electric chain rammer was placed directly in the rear of and parallel to the bore of the turret gun

Our Unsinkable Torpedo-Proof Cargo Fleet

The boats will be patterned after the ordinary
its hull divided into a dozen or more tight

oil-tanker with
compartments

By Joseph Brinker


UNSINKABLE? Yes, practically. That's the kind of ships it is now proposed to build for Uncle Sam's fleet of freighters to thwart the torpedoes of the German submarines. Of course no vessel afloat or to be launched in the near future will be unsinkable if a sufficient number of torpedoes are exploded against her sides. Even the latest battleship is not immune. But Uncle Sam's new boats will have no unprotected portions of the hulls, and it will take at least two and perhaps three well-aimed torpedoes to sink one of them.


The new type will be fully armed. It will be of steel construction and patterned after the present-day oil-tanker which is practically immune against single torpedo attacks except in the way of the engine and boiler rooms. If struck there she is done for and settles by the stern, with no power to proceed. The new boats will have fuel-oil tanks extending clear around the ship from main deck to main deck, from the front of the boiler space to the rear of the engine room. If a torpedo strikes her there and blows a hole in her outer skin, the inside of the tank will act as a new hull to keep her afloat until the submarine rises to view her prey. Then because of her armament, the ship has a chance to destroy the submarine. None of the oil tankers have been sunk so far in the war by one torpedo, unless hit in the engine or boiler space.

Applying the Lesson Taught by the Oil-Tanker


The bulk oil in the tankers is carried in a dozen or more separate tanks or compartments into which the hull of the tanker is divided by an oiltight longitudinal centerline bulkhead and many transverse bulkheads. This is why one

A billion dollars' worth of shipbuilding means that the proposed ships will entail the production of steel enough to make two Woolworth Buildings, each 792 ft. high

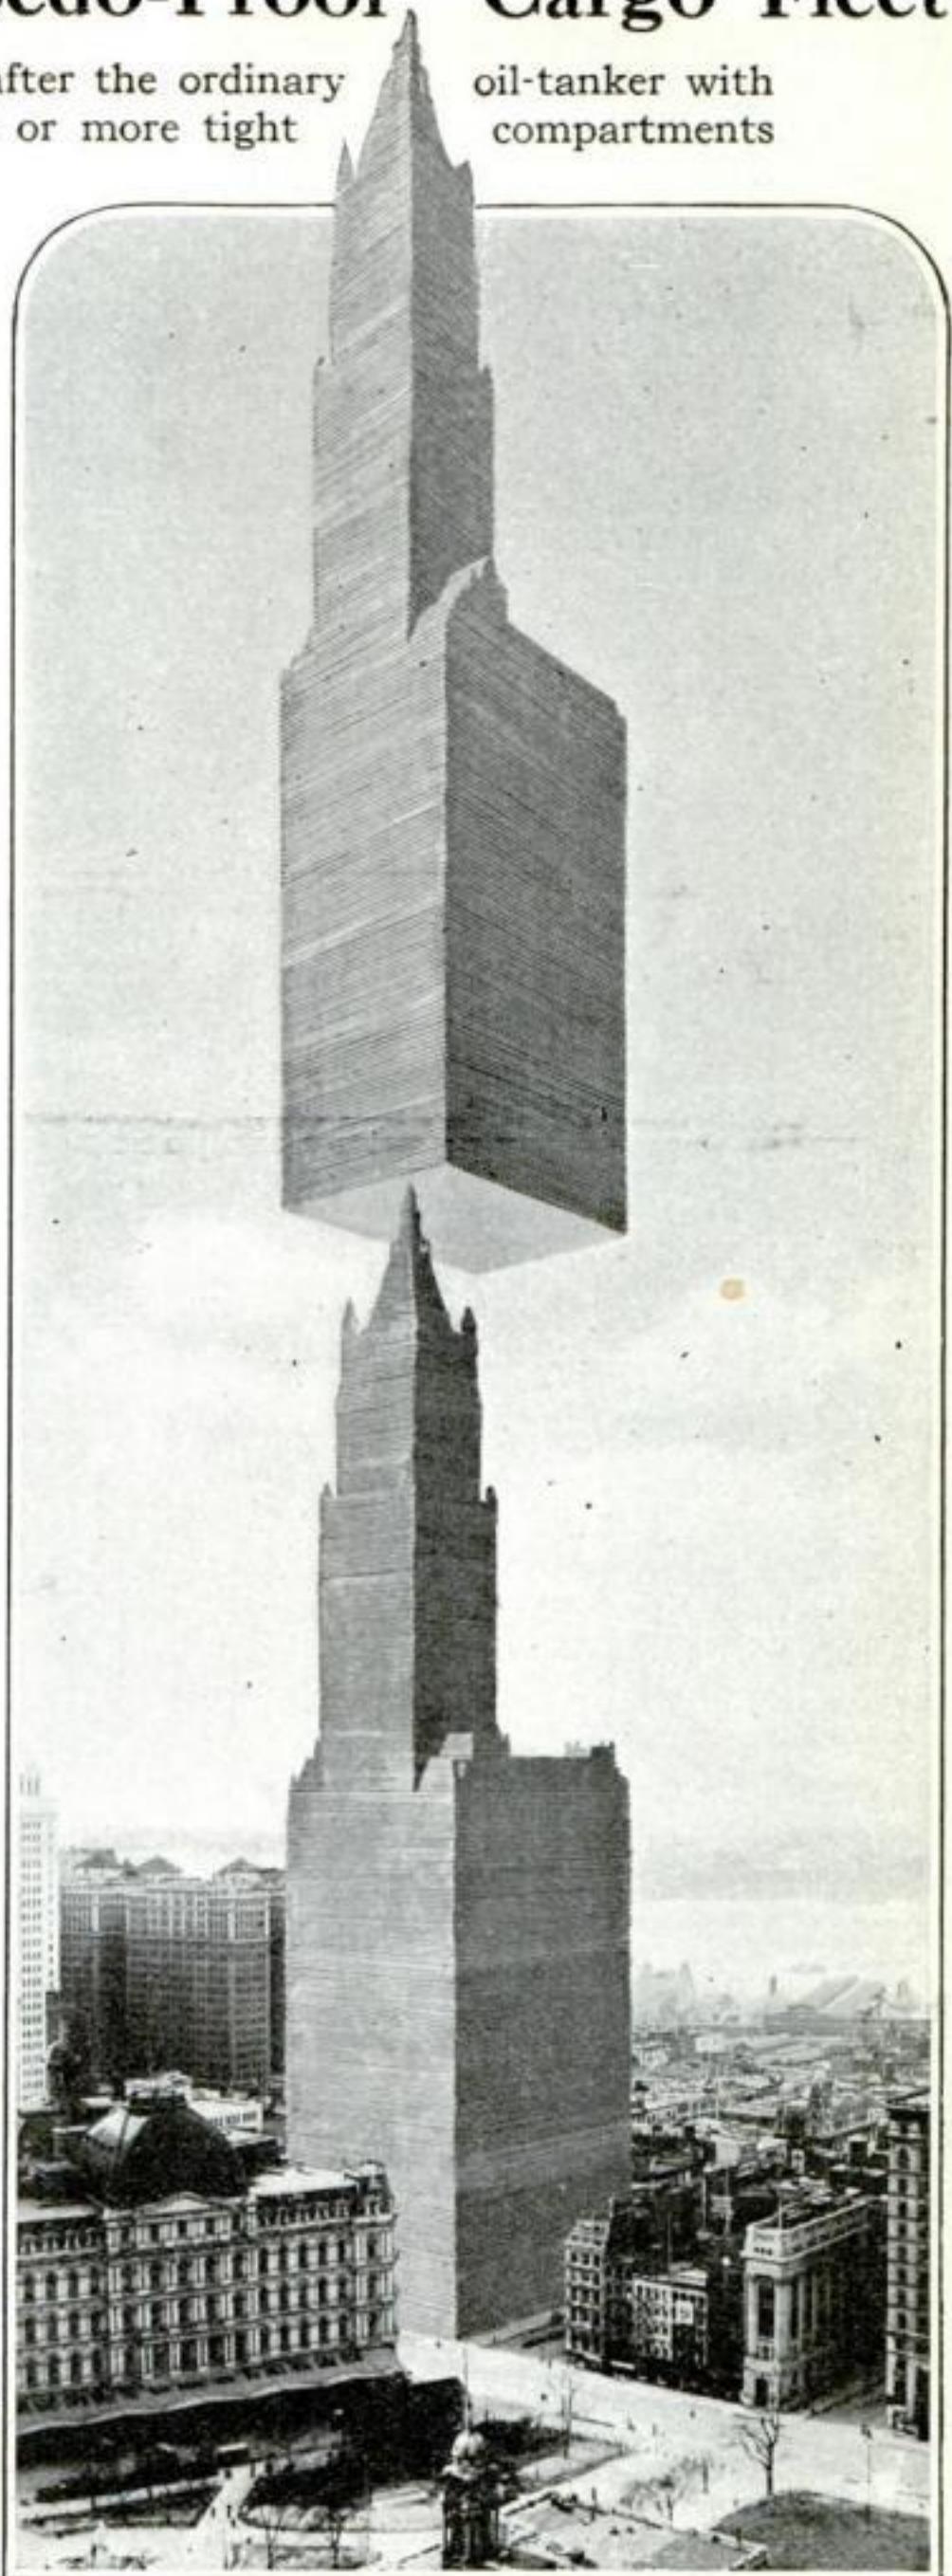

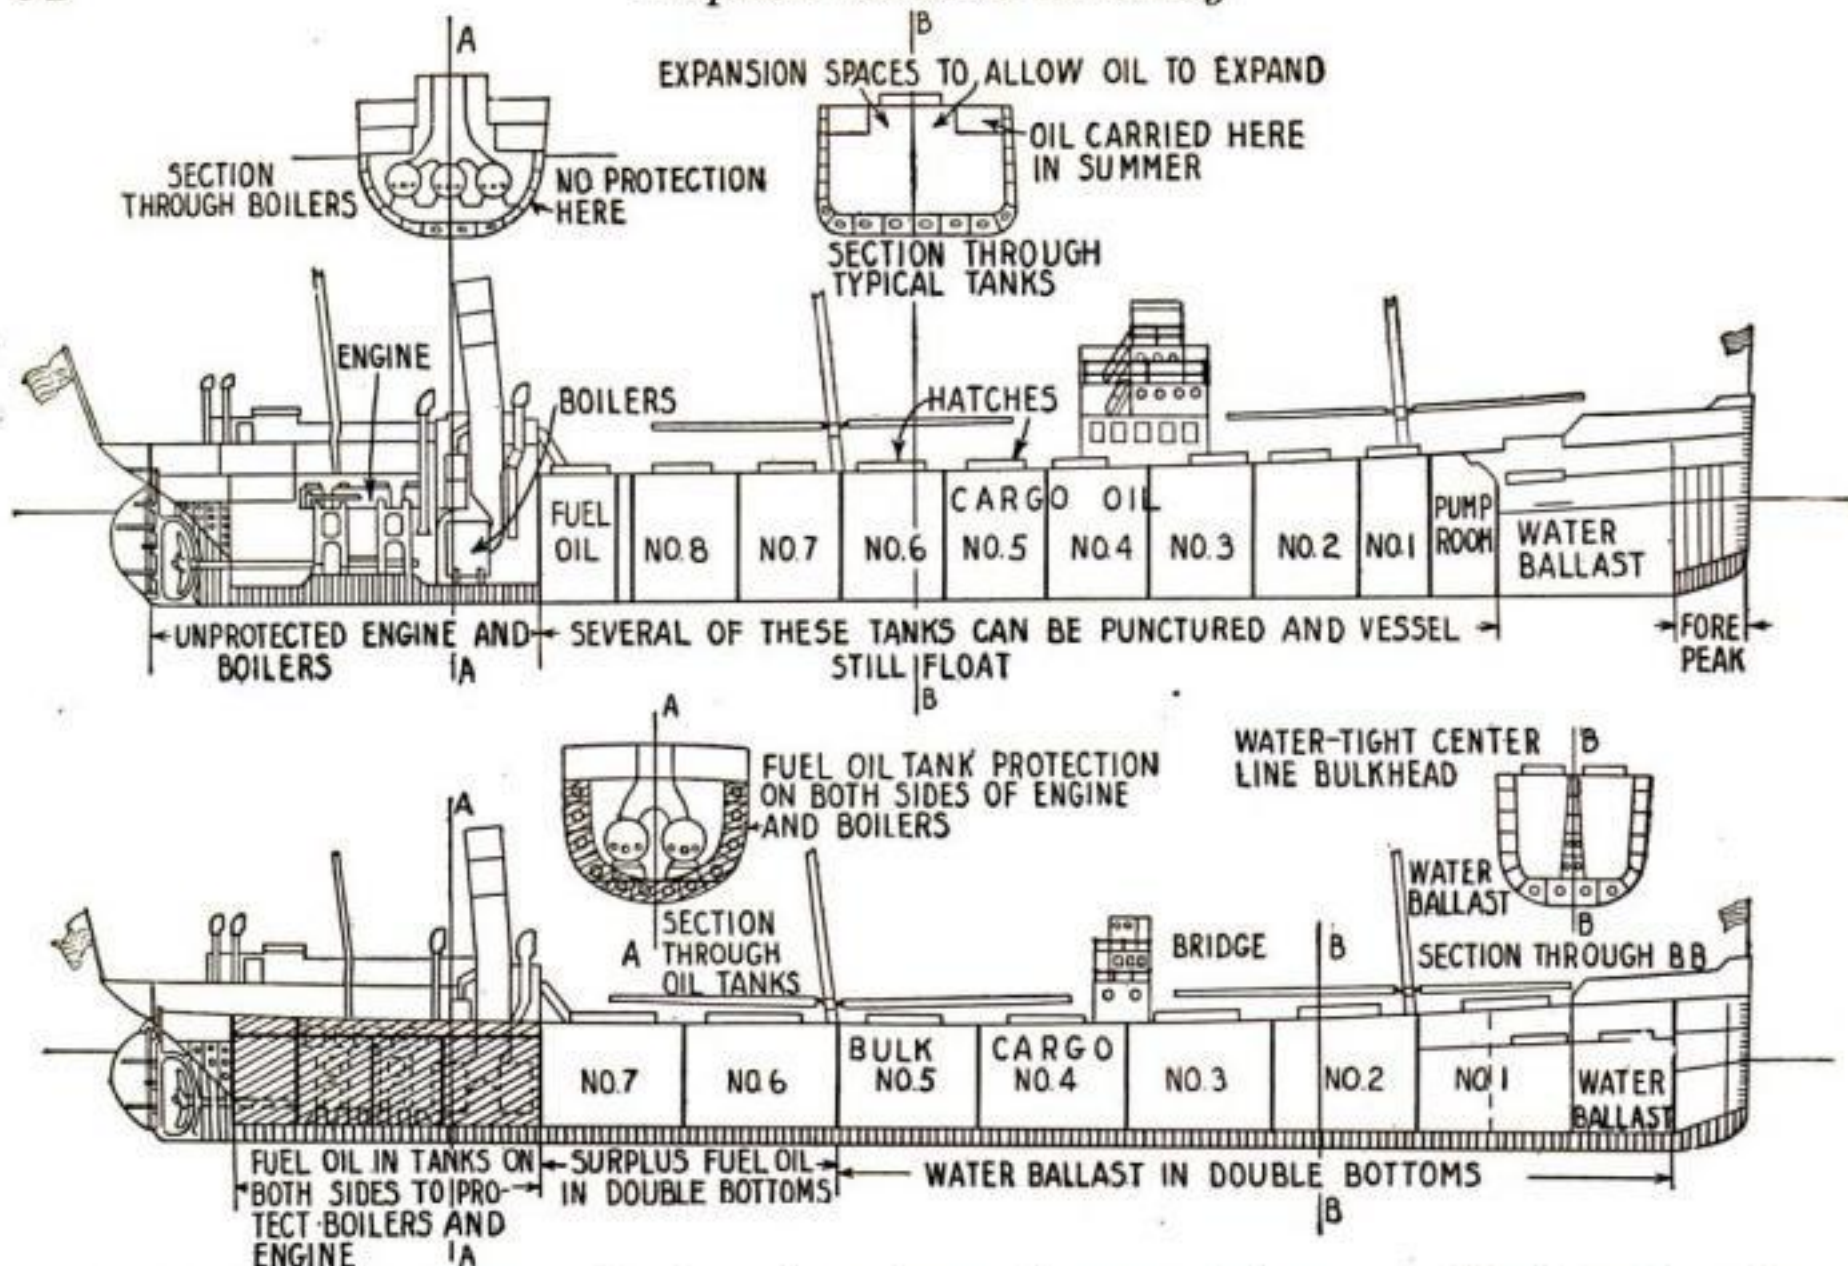

The typical oil-tank steamship shown in section at the top and the proposed freighter beneath it indicate the great similarity between the two types. The oil tanks are practically made over into cargo holds. The small transverse section of the boiler and engine room of the upper diagram shows its vulnerability to torpedo attack in that portion of the ship. The lower diagram shows how the vitals in a similar section of the proposed ship will be protected by means of fuel-oil tanks

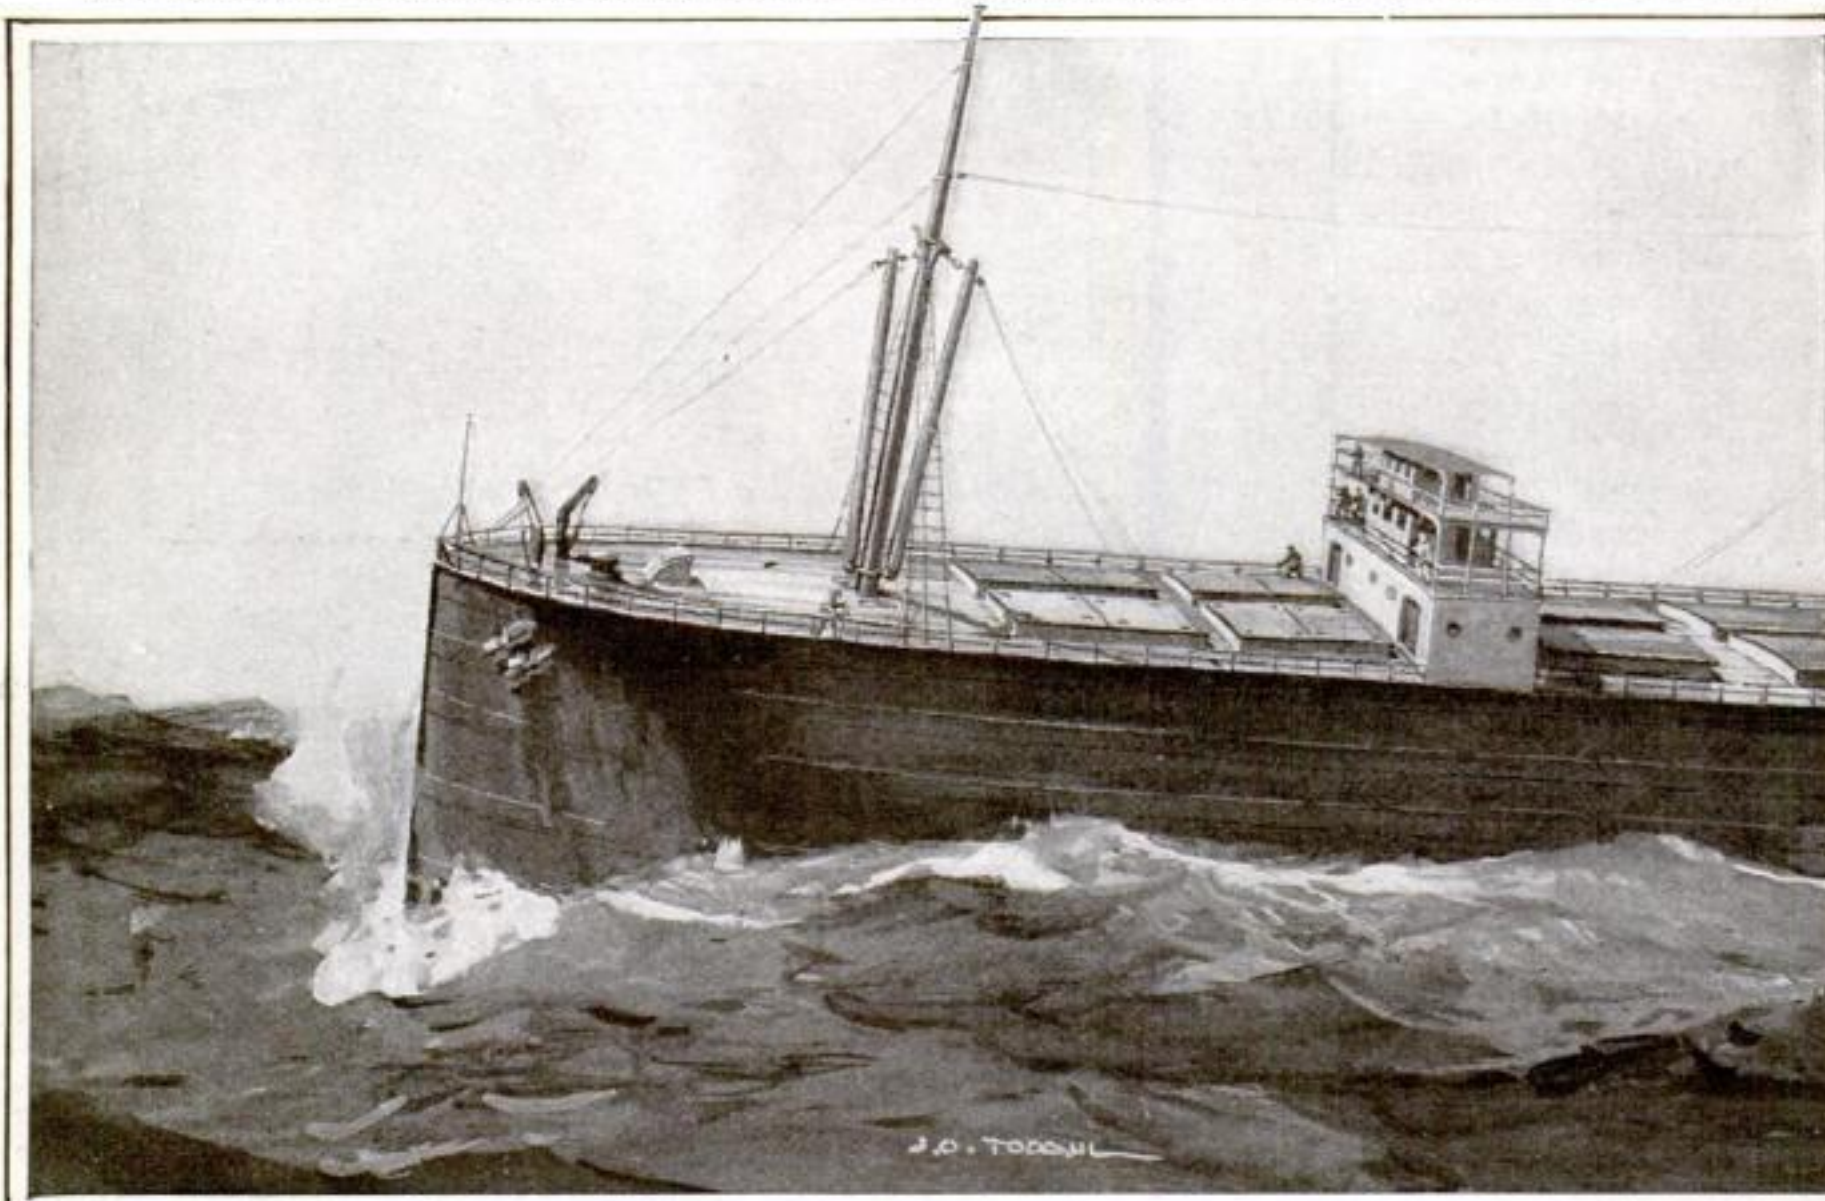

In the proposed freighter, the hull will be divided into a dozen or more small compartments and the engines and boilers will be protected by means of fuel-oil tanks extending clear around


torpedo will not sink her. A torpedo exploding against the hull of the ship and crushing one or two of these compartments does not sink the ship because of the relatively small size of the few compartments punctured, compared with the remaining dozen or more that are left intact.

The reason that one torpedo is not liable to break open more than two or three of these tanks is that a torpedo is in no sense an armor-piercing shell which passes through the boat from one side to the other or explodes inside, blowing everything apart. On striking a vessel's side it explodes and does its work by the rapid expansion and concussion of the gases of its charge.


The majority of the new boats will be of steel and not of wood as first planned,

and illustrated and described in the June issue of the POPULAR SCIENCE MONTHLY. They will be of steel because there is still some skepticism as to the practicability of the 3000- or 5000-ton wood vessel, because such a ship has never been built before. Questions have arisen as to the racking stresses and strains which would be set up

in a ship by the use of unseasoned wood and as to our ability to raise a sufficient army of shipbuilders to carry on the work. All of these arguments and the facts that wood ships would probably have shorter lives than

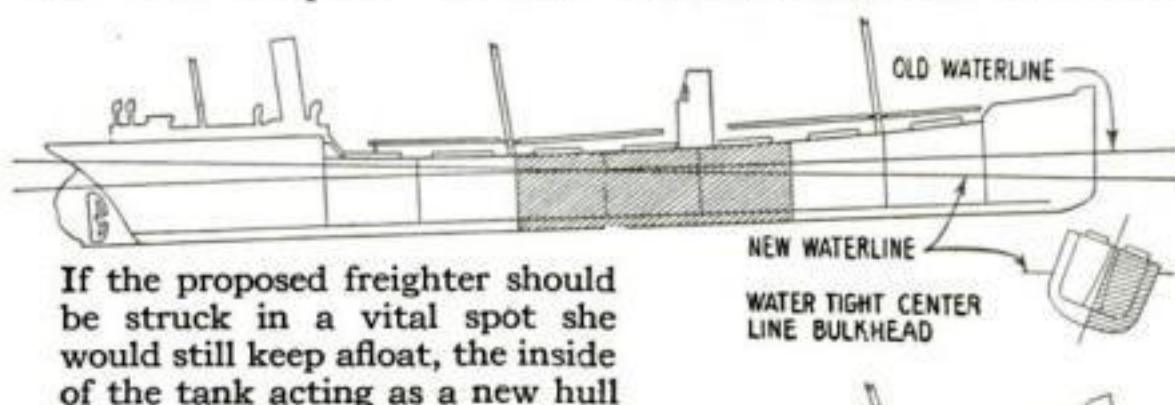


If the proposed freighter should be struck in a vital spot she would still keep afloat, the inside of the tank acting as a new hull

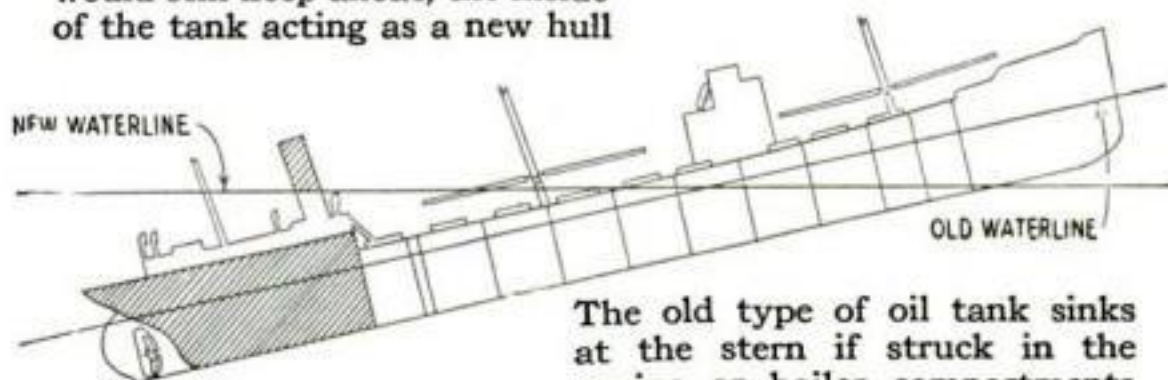

The old type of oil tank sinks at the stern if struck in the engine or boiler compartments—its only vulnerable spots

steel ones and be at a disadvantage in competing with the steel ships of other nations after the war, seem to have killed the wooden fleet proposition. Besides, there is no longer a shortage of steel.

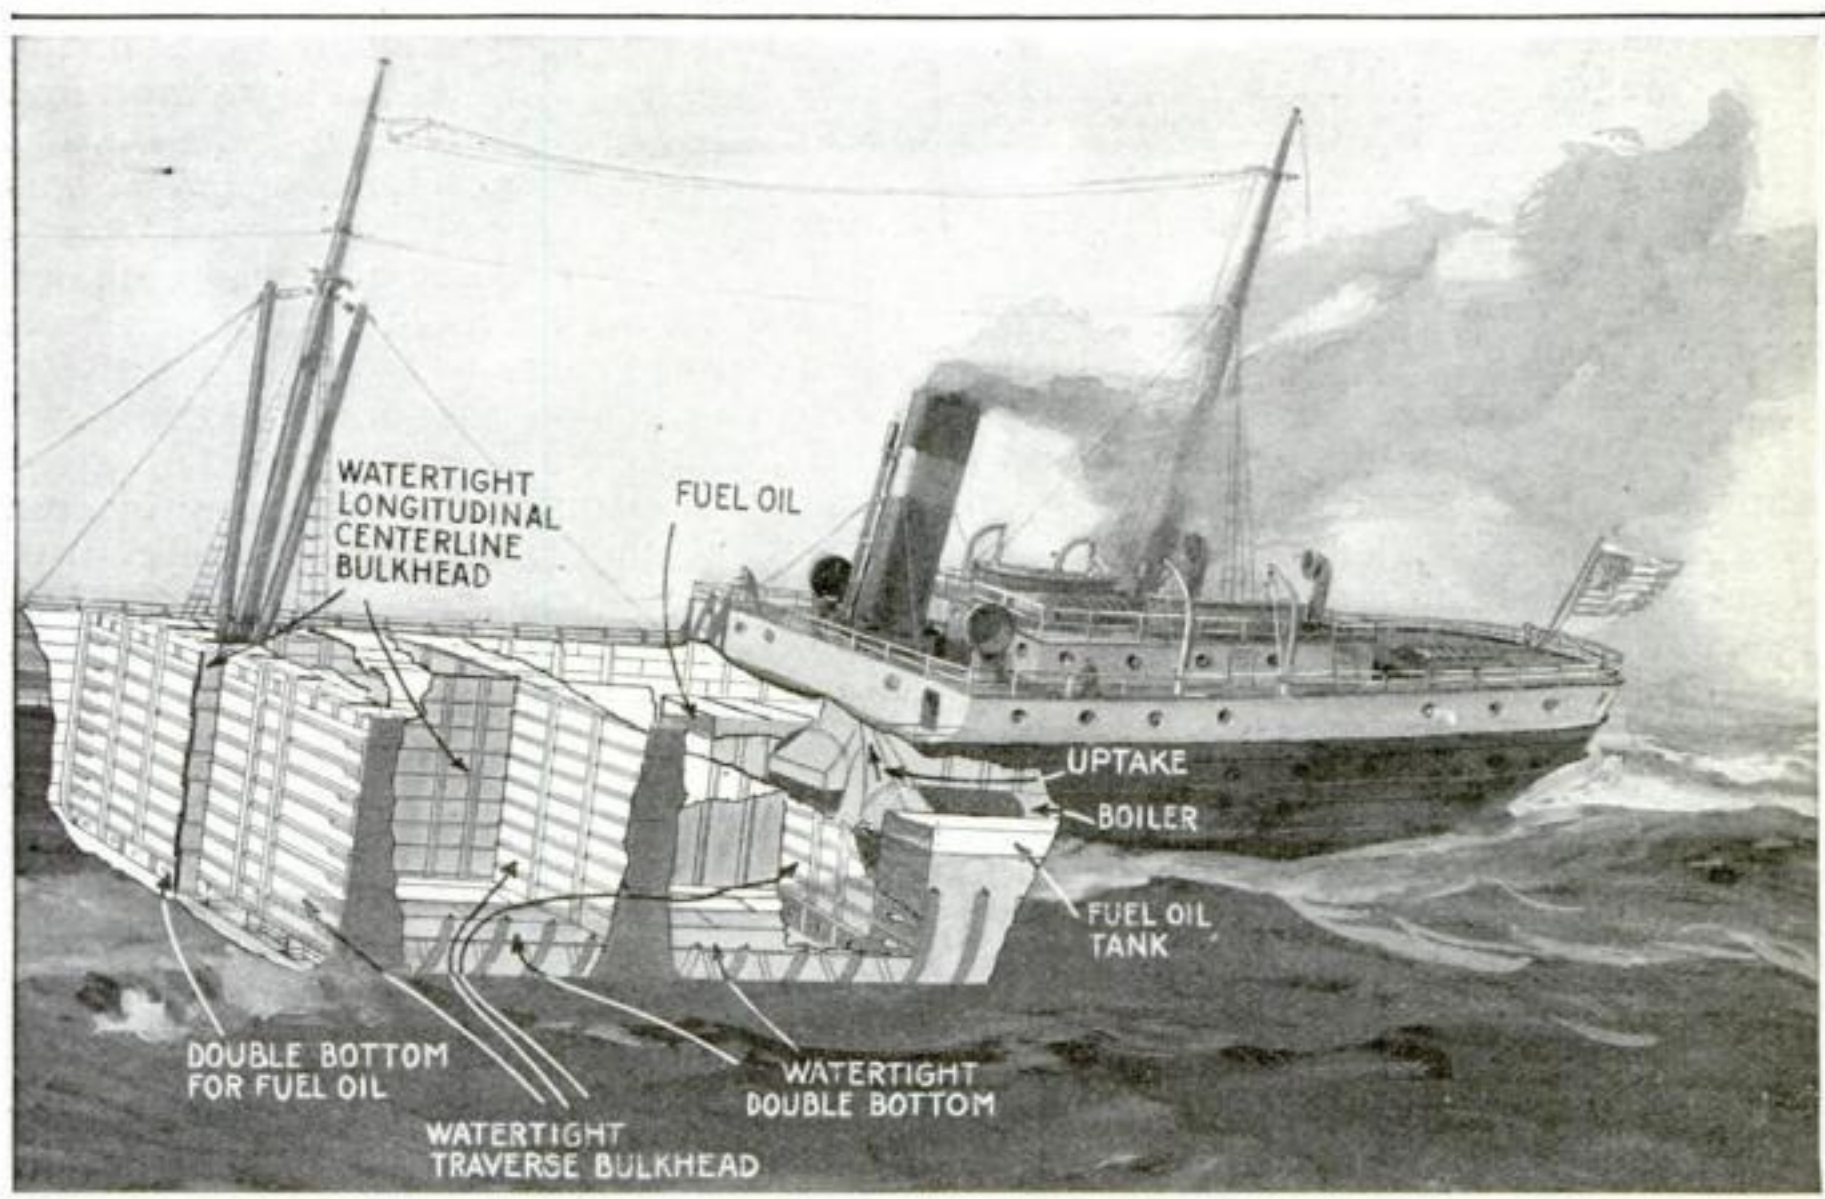

the ship. In the broken-away portion of the drawing the bulkheads dividing the space into compartments to reduce the crushing effects of the torpedo's explosion are very clearly shown

A German Medal to Commemorate the Torpedoing of the Lusitania

THERE came into the office of POPULAR SCIENCE MONTHLY recently a bronze medal in a leather case. It was one of the two medals struck off by the German Government in commemoration of the act that, more than any other, inflamed the American people against Prussianism, the torpedoing of the Lusitania. To further celebrate the event the school children of Germany were granted a half holiday and the commander of the submarine was decorated by the Kaiser.

One medal (not shown here) depicts Neptune seated on a submarine shaking his fist at a sinking ship. On the opposite side is a bas-relief of von Tirpitz. The second medal, which is reproduced here, shows, on one side, the Lusitania sinking, and on the other the figure of Death selling tickets at the office of the Cunard Line.

The three German words above the sinking ship stand for "No Contraband On Board." Examine the illustration and you will see that a cannon and an airplane occupy the deck. Although the Lusitania carried rifle cartridges on her fateful trip, it has been indisputably proved that she carried no weapons of defense or offense. Needless to say, the cannon and airplane are pure inventions. Translated, the legend beneath the ship reads: "The steamer Lusitania sunk by a German submarine May 5, 1915." Note that the date is given as the fifth of May instead of the seventh. Is the error a deliberate one?

At the top of the lower illustration appear the words,



Full-size illustrations of one of the German medals which commemorate the sinking of the Lusitania



"Business Above Everything."

One person is shown reading a newspaper, evidently the advertisement inserted by Count von Bernstorff, warning Americans and other neutrals to keep off vessels flying the British flag. Note the man in the rear with the menacing finger upraised; also the care-free attitude of the two men in front of him. Beneath the window, in which Death is selling tickets, appear the words, "Ticket Office."

In all, 1,198 passengers and crew lost their lives on the Lusitania. In this number are included 124 Americans and 94 children.

An Automatic Tea-Making Machine


"BR-R-R-R! ting-a-ling! Wake up! Your tea is ready. Br-r-r-r! Time to get up!"

This is practically what the automatic tea-making machine does every morning.

It brews a cup of good tea, and then it calls its master. It was invented by a young Englishman, George Weddle, of New York, and was designed especially to call him and serve him with his morning bracer.

The machine consists of an electric stove, kettle, alarm clock, electric bell, battery and tea cup on a tray eighteen by ten inches. With these it brews the cup of tea, pours it into the cup and rings a bell until the master wakes up and takes his tea. Should coffee be preferred, there is an

attachment to be screwed into the kettle that will act as percolator. There is also an attachment for boiling eggs, so that an automatic breakfast, cooked and served at your bedside, seems quite possible. The machine may be easily taken apart and put into a small hand bag or traveling case.

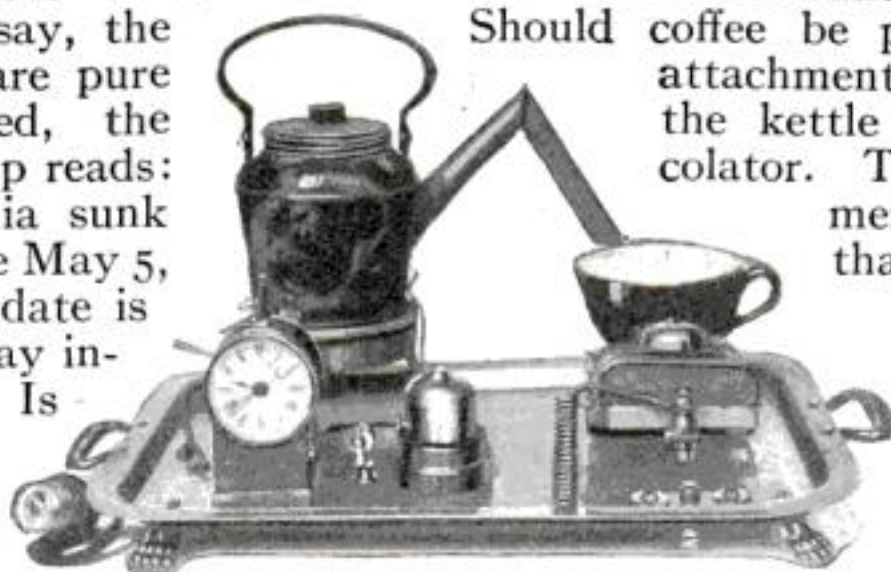

The tea-making machine brews the tea, pours it into a cup and rings an electric bell

California's Conception of a "Tank"

It was designed for aid in recruiting

PATTERNED somewhat after the famous British tanks pictured and described in the May issue of *POPULAR SCIENCE MONTHLY*, the California-made tank shown herewith is like its famous prototype in only one particular, that of a track-laying propelling means. There the similarity ceases, for it has not the large upswept track-laying framework in front that has made possible the almost incredible hill-climbing feats of the British tank. Instead it has two track-laying members of the kind used on farm tractors and a small guiding wheel in front.

Formidable as it looks in armor and with the guns sticking out of its turret, a heavy rain would render it useless in actual service. The small wheel in front would bury itself in soft ground on a shell crater, which its foreign rival could negotiate with ease. The large bearing area of the caterpillar shoes makes it possible for the British tank to traverse soft, muddy ground. The pressure is said to be less than three pounds to the square inch with the caterpillars thirty inches wide and with about fifteen or twenty




A company of infantry using the track-laying tank in sham battle on the outskirts of San Francisco

feet of length in contact with the ground all of the time.

Obviously, then, the truck illustrated would be a failure in the land of shell craters between the trenches in warfare as carried on to-day. However, it served a useful end in acquainting our California infantry with its adaptability as a war instrument and in arousing the martial spirit. The regular army used the tank for recruiting purposes. It is here

shown in a sham battle in rough country in the vicinity of San Francisco.

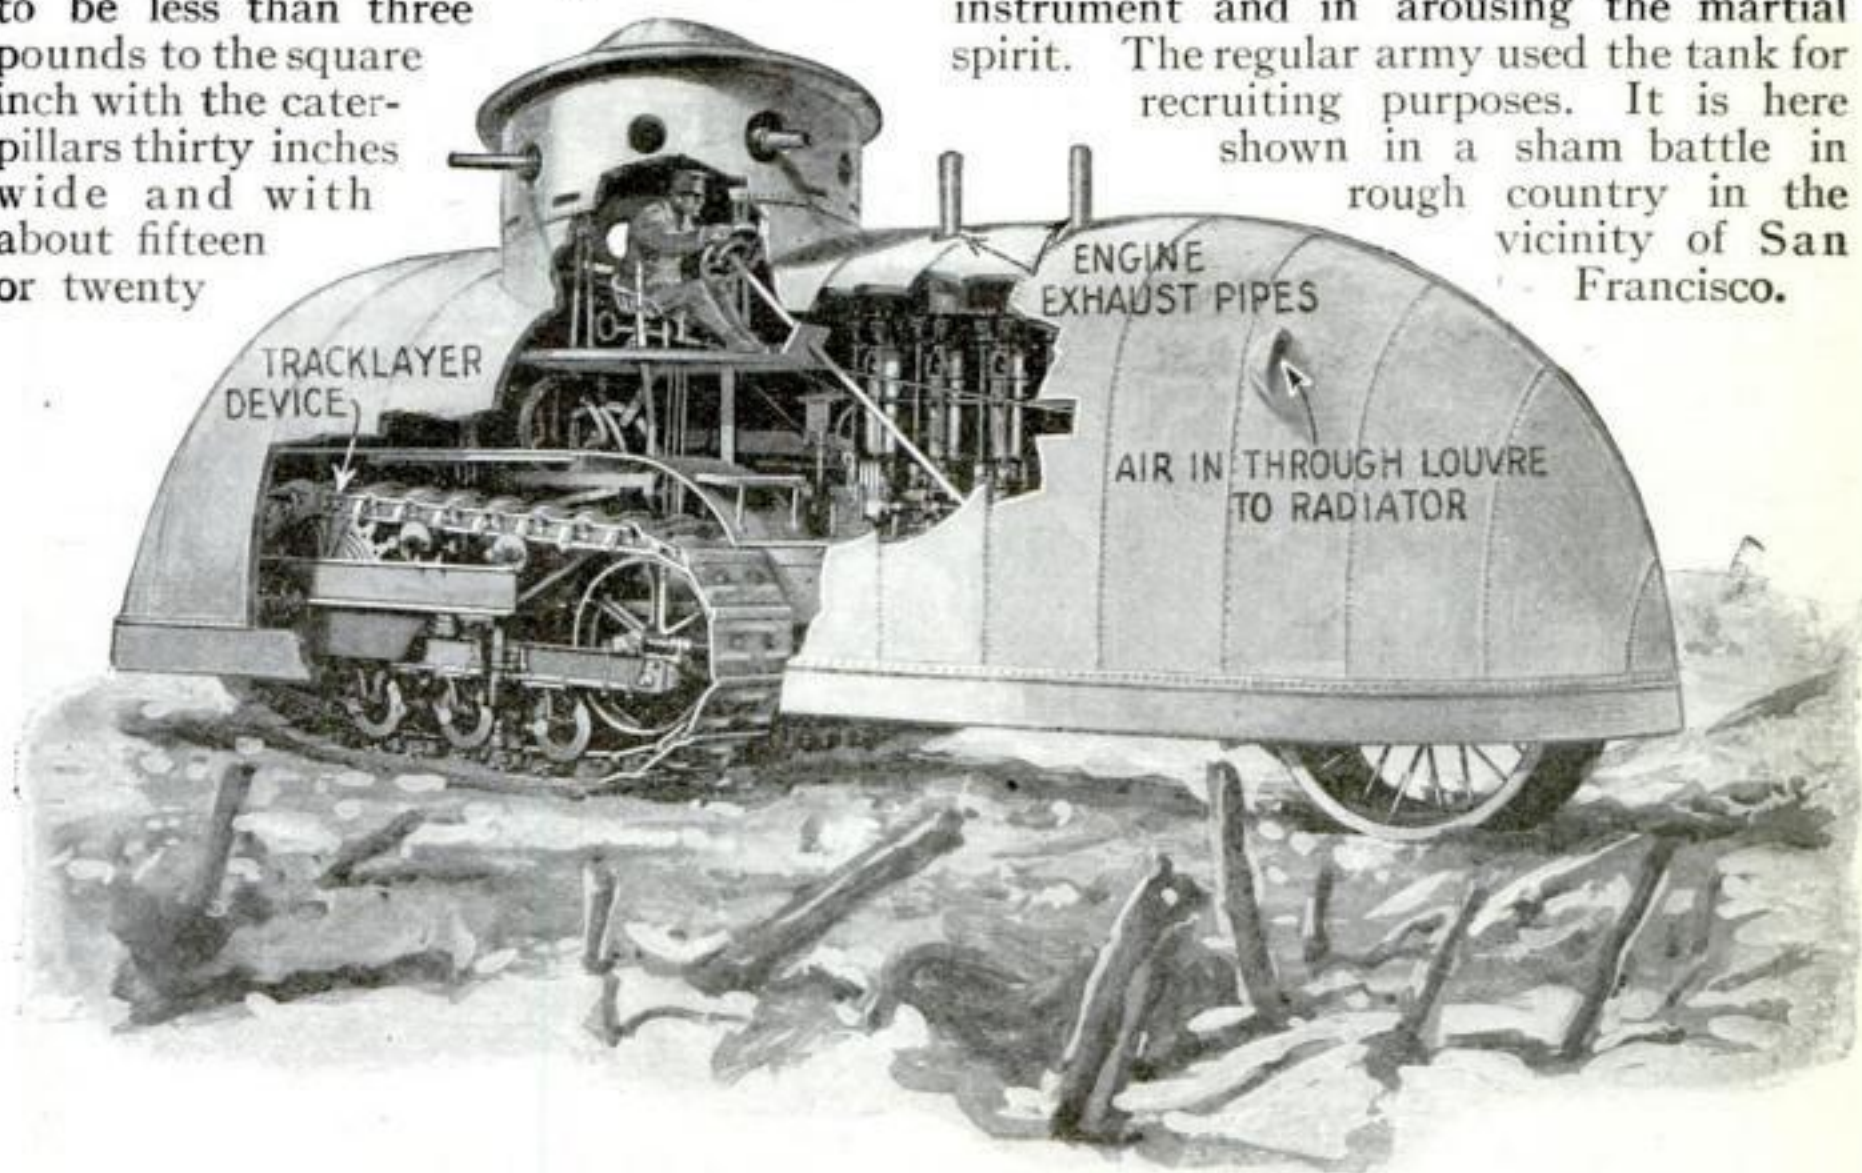

Because of the small wheel in front, the tank could not travel in a land of shell craters and muddy ground. It is, therefore, not in the fighting class, however formidable it may appear



Portion of a motion picture taken through periscopes at the bottom of the sea in the crystal-clear West Indian waters

Seeing the Wonders of the Ocean Through an Inverted Periscope

AS is well known, the periscope enables the submarine, while submerged, to see above the surface of the water. Why not invert the periscope, attach it to the side of ocean liners, and thus enable the passengers to study marine growths and fishes? Provided there was sufficient light beneath the water, the inverted periscope might even be used to search for sunken treasure!

This is exactly the use to which it is put in the latest underwater motion picture film of the Williamson Brothers, "The Submarine Eye." It will be recalled that the thrilling underwater scenes in "Twenty Thousand Leagues Under the Sea," were photographed by the Williamsons. In "The Submarine Eye," the new under-sea thriller, the inverted periscope, as shown in the illustration above, is used to locate a safe containing treasure. In the crystal-clear waters of the West Indies the audience is shown the marvels of Nature at the bottom of the sea where the light from above is reflected from the dazzlingly white sand. Finally, after a series of harrowing adventures many fathoms under water, the safe is located by the inverted periscope.



Importing Japanese Mosquitoes for Bird Food

THE delicate vocal organs of song birds respond magically to special care bestowed upon the diet. For this reason birds that are cultivated in captivity are fed specially prepared foods designed to furnish maximum nourishment with minimum labor of the digestive organs.

A food which has been found especially valuable to bird-breeders has for its principal ingredients Japanese mosquitoes and ants' eggs. It is prepared by George Jenkins, of New York city, an expert on the care and feeding of birds. The nationality of the mosquitoes is not supposed to make a difference in the taste or digestibility of the food. The reason the insects are imported from Japan is that the Japanese have a method of catching them in large quantities which as yet Americans have not discovered.

In the photograph below, Mr. Jenkins is shown inspecting a shipment of twenty-eight pounds of mosquitoes. The food is intended for soft-billed birds that do not feed on seeds. Among these are the thrushes, mocking birds, nightingales, tanagers and many others. In the oval photograph an American thrush is shown feeding her nestling with the prepared food. She


takes the food on her bill and thrusts it far down the youngster's throat.



Twenty-eight pounds of Japanese mosquitoes to be used as an ingredient in the bird-food

Shall Personal Vanity Prove a Handicap to the Government?

BECAUSE Dame Fashion, in one of her capricious moods, has decreed that platinum jewelry is the fashionable thing to wear, that metal has steadily advanced until to-day it is worth five times as much as gold. As a result all chemical laboratories and institutions throughout the country are greatly handicapped by its scarcity. For producing sulphuric acid, which is an absolute necessity in the production of high explosives, platinum is essential. To relieve the present condition the American Chemical Society suggests that the loyal public refrain from purchasing platinum in the form of jewelry and discourage the use of the metal for ornamental purposes. This would be in line with economy, also.

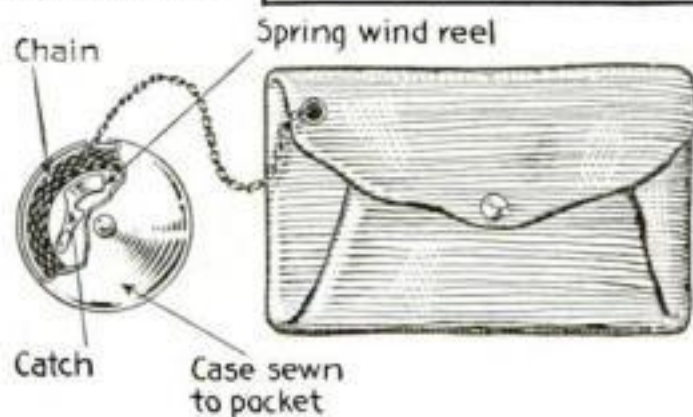

This safety chain can be used for securing a wallet to a man's pocket or to a lady's handbag

The steel chain is wound up on a spring-revolved drum when the wallet is pocketed

The Many-Sided Bathing Cap. Change It to a Suit-Bag When You Travel Home

THE convertible bathing-cap of a New York merchant has many virtues. Inflated, it serves as a waterwing or a football. Deflated, it becomes a wrapper in which to carry your bathing suit.

The cap is made from strips of waterproof material sewed together to a football's shape. It can be folded in half lengthwise by pushing one end down into the hollow of the other end. When this is done it will conform to the shape of the head and it will be ready for use as a cap. Straps are attached to the side for securing the cap under the chin.

A circular bladder can be placed inside this same piece of goods and inflated to change it into a ball for playing on the beach. With a bladder of different shape placed inside it, it can be used as a waterwing with straps to fasten it around the body.



This cap when opened out forms a bag for the bathing suit. When inflated it is a rubber ball


At Last!—The Safety Chain for Frustrating the Pickpocket

FROM sad experience, many a man has learned that placing his wallet in even an inside pocket will not prevent it from being stolen. But if the wallet is attached to the safety chain invented by Lawrence R. Delaney, of Gage, Oklahoma, a pickpocket could not remove it without taking the coat along, too!

A fine steel chain connects the wallet with the coat pocket.


When you pocket your wallet, this chain is wound up on a spring-revolved drum in a very thin casing which is sewed to the bottom of the pocket. The chain, which has its free end secured to your pocketbook, is about a foot long, so that you can draw it out conveniently.

When you return the wallet to your pocket the chain winds up automatically. Should a pickpocket attempt to rob you, the tug on the chain would betray him.

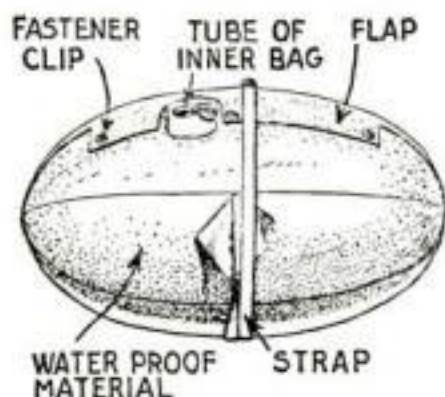

Fifty Million Shots to Win a Line of Trenches

Nearly nine million pounds of artillery projectiles were hurled at the Germans in a single engagement

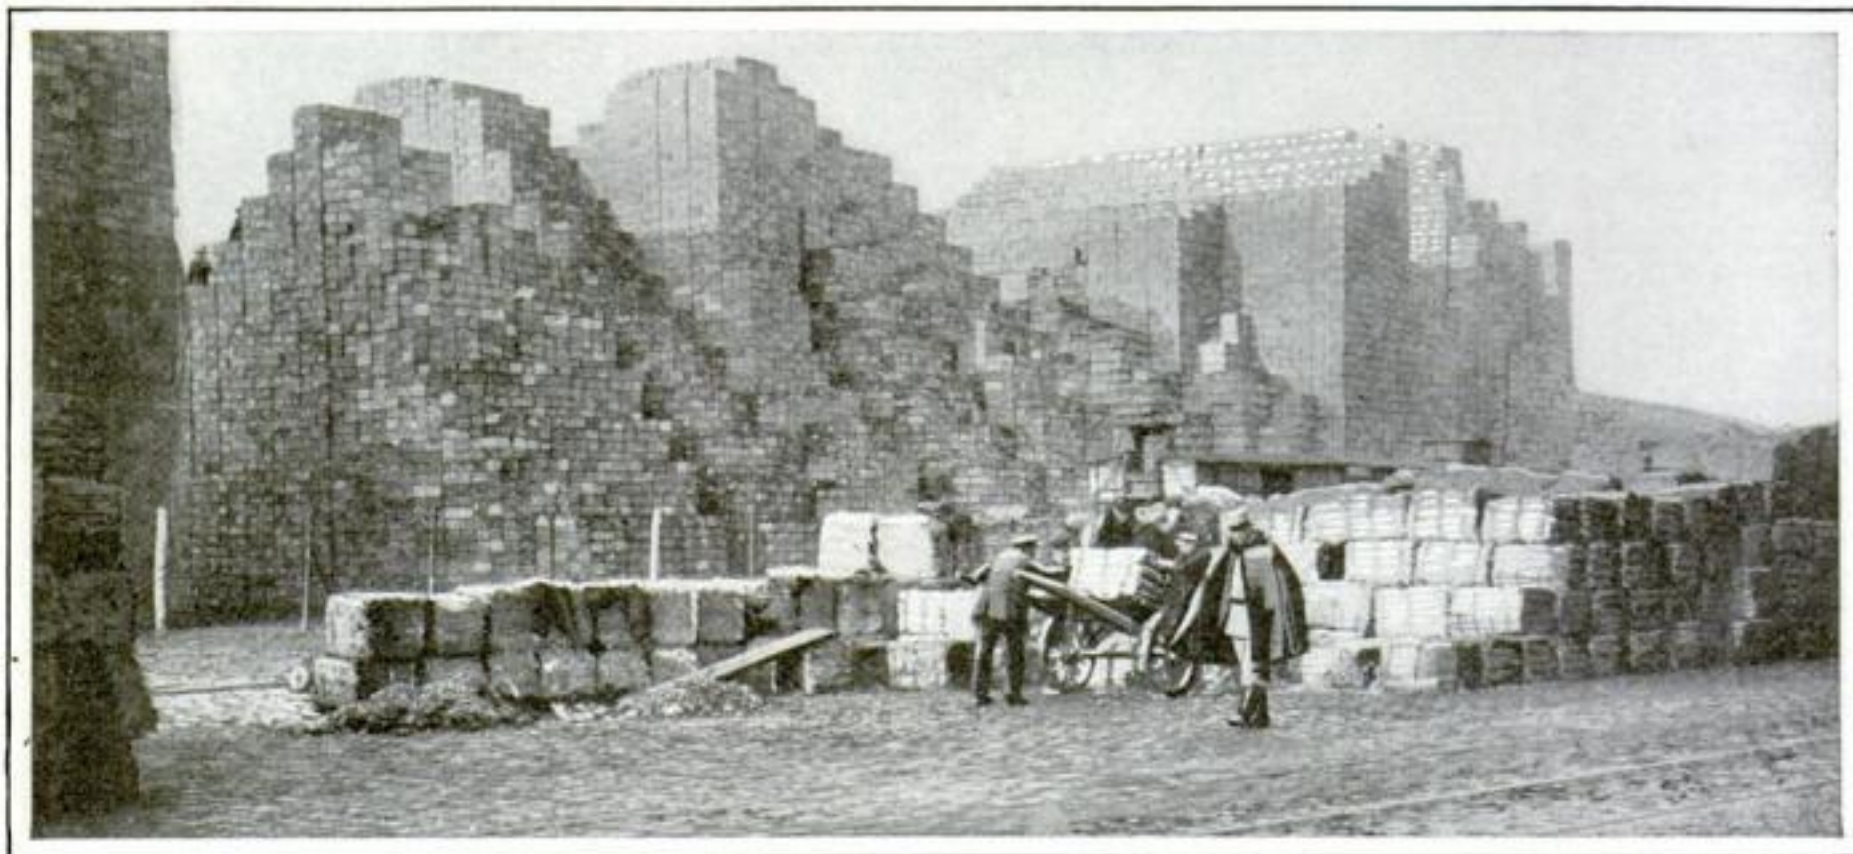

French Official Photos.

Thousands upon thousands of cases of shells are unloaded at the artillery depots of the various armies, after which they are transported in smaller lots to distributing stations

IN the early days of the war, when the Germans were turning out 250,000 shells a day, the British were producing 2,500 in high explosives and 13,000 in shrapnel. Before the war, Germany held an average stock of 3,000 shells for each gun, while France had 700. When the war began, France estimated a daily expenditure of 13,500 shells, but before a year had elapsed, she was firing 100,000 a day.

According to an official report of the French Army Headquarters, the French artillery north of Arras fired 300,000 shots within 24 hours, the total weight of which would be 8,901,000 pounds. During the great French offensive of September, 1915, in the Champagne, the French fired at the rate of 900,000 shots an hour—a total of 50,000,000 shots in three days on a twenty-five-mile front.

The cost of ammunition, considered in the light of its wastefulness, is appalling. A year ago, Canada had contributed \$350,000,000 worth of shells. The United States had exported ammunition, explo-

sives and firearms worth a half-billion. It is needless to state that the last year has been the most productive of all, not only in the United States and Canada, but in European countries as well. Figures of shell production run into unthinkable billions. For this the tremendous capacity of the guns used is largely responsible.




The shells are housed in rough portable shacks arranged in rows along narrow-gauge tracks which lead to the fighting front

Cutting Forty Soldiers' Uniforms At One Time

WITH the aid of an electric cutting machine one tailor can cut forty soldiers' uniforms at one time, and in one day do the work of one hundred men working with shears. Were it not for the many labor-saving machines in the tailoring business our soldiers might be obliged to wait long for their uniforms.

At the present time there are many big tailoring establishments filling rush orders for suits for the Government. They are working twenty-four hours a day, with two shifts of workmen, in order to turn out the work on time. The suits are made according to standard measurements and there is no chance to deviate from the regular sizes.

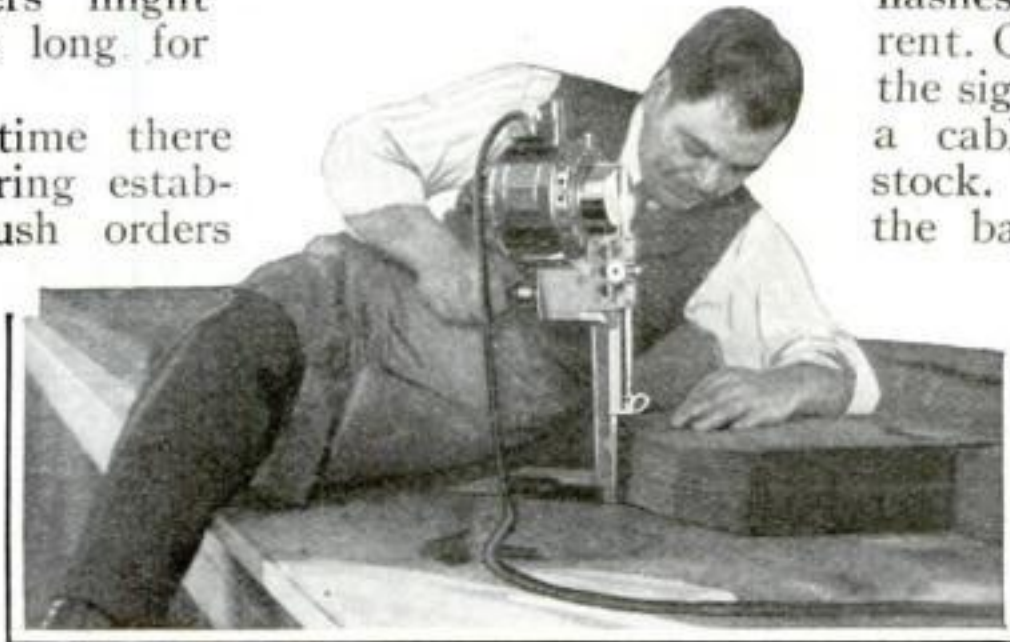

A tailor operating the electric cloth cutter which cuts out the pattern of forty uniforms at one time

Flashing Signals from Electric-Light Guns

A NOVEL signal gun has been devised by the United States Navy to transmit visual signals between ships in a fleet of war vessels that are running without lights, and yet not betray their presence to the enemy. Signals flashed by it are visible only to the ship at which it has been aimed or one in line with it.



© N. G. Moser

"Shooting" signals with the signal gun. The flashes are visible only to the ship at which the device is aimed

It resembles the crude weapons used in the early days of gunpowder and is operated from the shoulder. It has a barrel in the form of a tube about five inches in diameter, at the base of which an incandescent electric light is located. It is fitted with a stock and there is a trigger which connects with a switch that

flashes on and off the current. Current is supplied to the signal gun by means of a cable that enters the stock. On the top of the barrel are sights for aiming the gun. Signals are flashed by the dot and dash system, short flashes indicating dots and longer ones, dashes.

Visual signaling between ships at night is usually

done by means of lights hung from the masthead, but their operation betrays the presence of the fleet to enemy ships that may be near by. The flashes from the signal gun are only visible to the ship at which the device is aimed or one that may be in line with it either closer or further away from the ship from which the signals are sent.

Even though no lights may be showing, one ship knows the approximate location of every other ship when they are in fleet formation and the signal gun may be aimed in the direction of any one of them.

When the signal gun is used it is not necessary to "call" a vessel before sending a message. Knowing that the flashes are not visible to any other ship in the fleet, the men on watch on the bridge of the vessel at which the gun is aimed are in readiness to record the message as soon as they perceive the flashes. The very fact that they see them proves that the signal light is directed at them and that their ship is the one for which the message is intended.

The light located within the barrel of the gun is one of great power and its flashes can be seen for a number of miles at sea, even in cloudy weather.

Utilizing Your Player Piano as a Vacuum Cleaner

THERE is no better vacuum cleaning pump than the air pump of your player piano. So thought Max Rothfeld, of Philadelphia, who has patented the dust-filtering attachment which will change your piano into a vacuum cleaner. You need only to disconnect the air pipe leading from the piano bellows, from the air motor. Insert the attachment in this, have somebody work the pedals, and proceed with your parlor cleaning. The inventor also suggests that should the air-mechanism of your piano become clogged it can easily be cleaned with his device.

The device is nothing more than a flexible hose having a wire filter mounted across a small dust chamber near its end.


Conserving the Wheat Supply with Alfalfa

A SHORT time ago alfalfa, the clover-like plant which grows so abundantly in the West, was considered fit only for feeding cattle. Thanks to the researches of the industrial chemist, it is now destined to become one of the most important articles of human food. The present problem of the world's shortage of wheat—that well-balanced and so essential food—may even be solved with the aid of this form of "cow fodder."

Elizabeth C. Sprague, head of the department of Home Economics at the University of Kansas, has found out how a most wholesome flour can be made from the

ground-up leaves of the hay of alfalfa. By replacing the all-too-scarce wheat flour with a considerable percentage of this alfalfa, a bread can be made which is far more nutri-

tious than that made from plain wheat. The high percentage of both body-building and bone-building elements in the alfalfa makes this new bread a practically *complete* article of food. The benefits of its use will therefore be two-fold: the present supply of wheat can be "stretched" to feed a far greater number of people, and a more ideal war food can be gained.

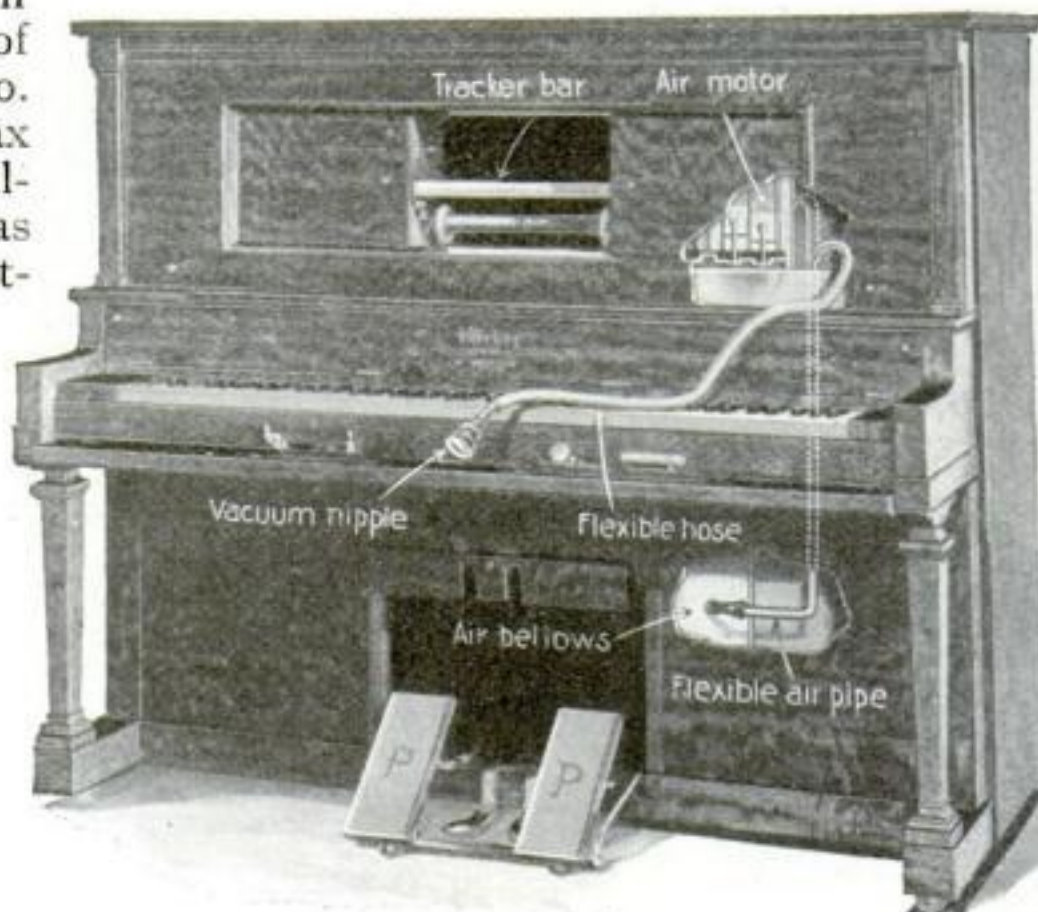

A dust-filtering chamber fits in the end of a long flexible hose leading from the piano bellows. The suction created by the piano pump draws the dust into the filter

Making Bad Whiskey out of Good Jam and Potatoes


SOME German prisoners in the Holdsworth Internment Camp, in Australia, rigged up a still of kerosene cans, bottles, tin tubes and other receptacles and made whiskey out of jam and potatoes! It was efficient enough to meet the demands of the drinkers. Perhaps it was too efficient, for the intoxicated Germans themselves gave the secret away.

This odd collection of cans and bottles formed an illicit still which was built and secretly operated by German prisoners




Transforming a Roadster into a Truck

A device which makes it possible for a one-passenger automobile to haul three trailers

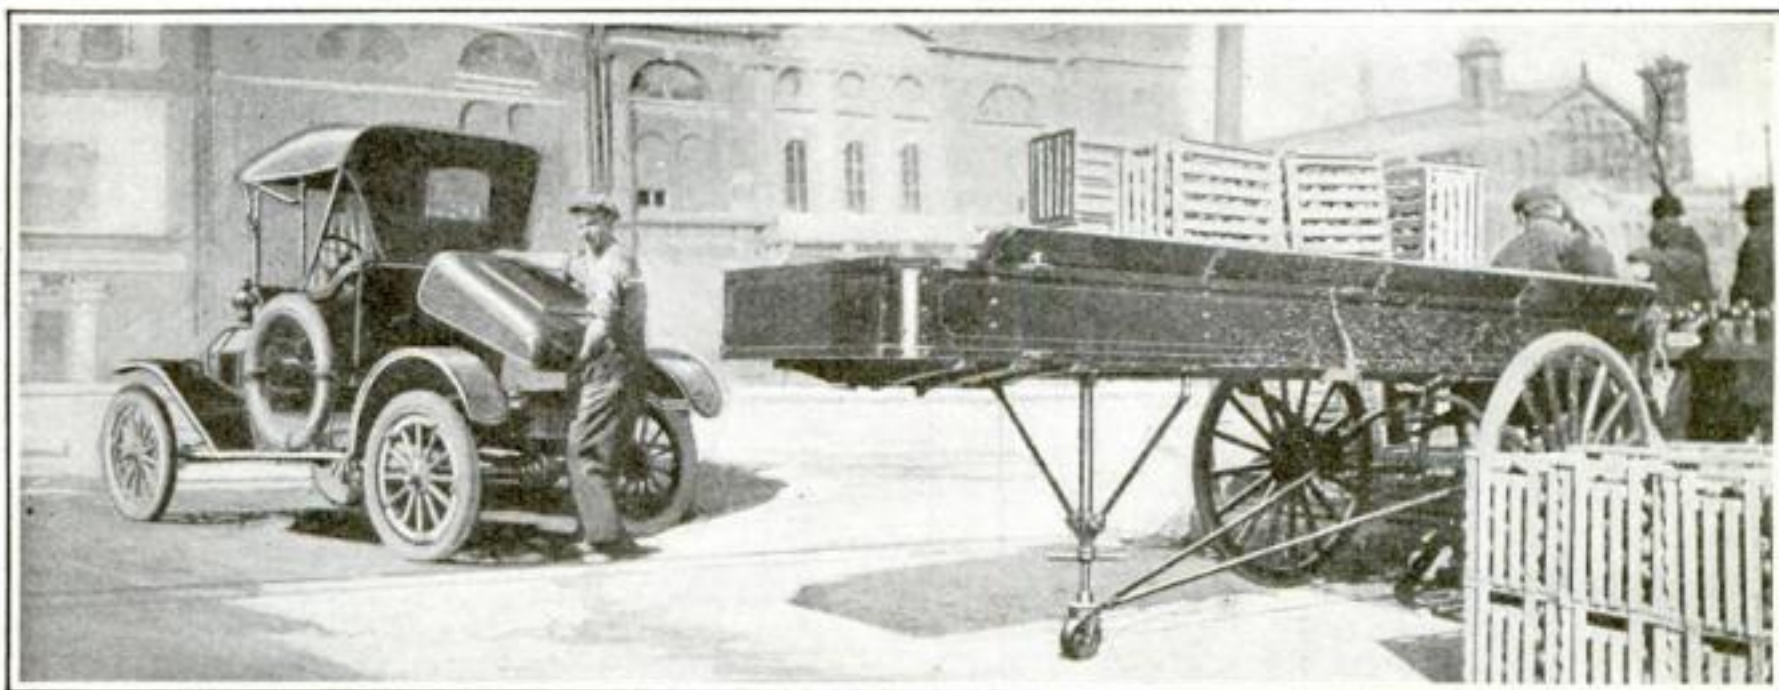

The pleasure car can be changed into a one-ton truck and back again into a passenger car in five minutes

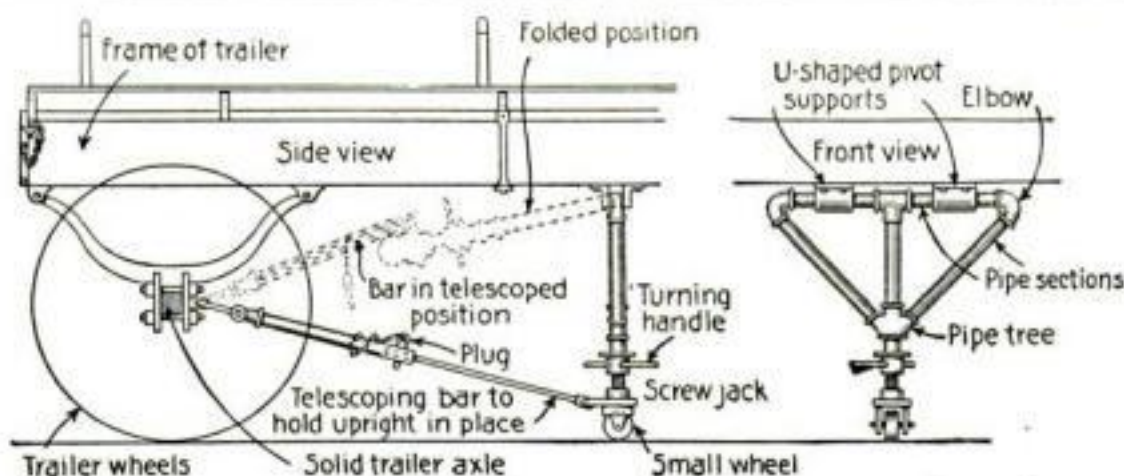

At left: The various parts of the wagon-like trailer, showing the relation of the small wheel to the body parts

THE conversion of a roadster automobile into a one-ton truck and back again into a passenger car in five minutes has been made possible by the use of a patented fifth-wheel device to be set on the rear deck of the car to support the front end of a wagon-like trailer. Both trailer and fifth-wheel are now being made as a unit by a New England manufacturer to enable the owner of any roadster to change his car into a work vehicle and back again as often as desired.

The fifth-wheel device is mounted on the framework of the car with but six bolts after the rear deck or luggage carrier has been lifted off. The device consists of two wheels of the same size which rub together, one above the other, through lubricating grease. One wheel is mounted on a rocking shaft and frame attached to the car, and the other bolted to the underside of the front end of the trailer.

To connect the trailer with the car, its front end is simply lowered down on to the wheel on the car. Conversely, it may

At right: The fifth wheel device mounted on the framework of the car




be removed by simply lifting it up by hand, if empty, or by a jack device if loaded. The fifth-wheel device, which can be lifted easily by one man, is then taken off and the rear deck replaced. The car is then ready to take the owner's family out for a pleasure trip.


The trailer may be fitted with any type of body, according to the class of goods to be carried and principally differs from the ordinary wagon in that it has rubber-tired wheels mounted on roller bearings. These enable the car and trailer to travel at speeds of twenty miles per hour or more and eliminate the trouble caused by the overheating of the plain iron bearings such as are used on slow-speed horse wagons.

The jack device for lifting the front end of the trailer consists of a triangular-shaped framework made of pipe sections. It is pivoted to the underside of the trailer and has a telescoping bar attached to the trailer axle to keep the framework upright when in use. This eliminates the wooden horse formerly used and permits the trailer to be moved from place to place for loading and unloading.


Do It With Tools and Machines

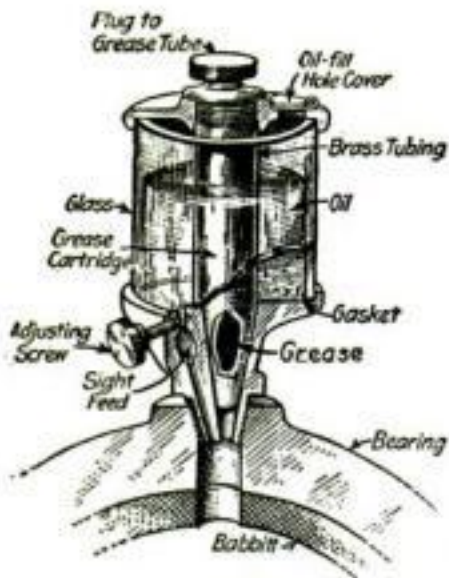


A convenient oil and grease cup in which the grease is retained for an emergency. The object of this cup is to prevent the overheating of the bearing should the oil passages become clogged or the attendant fail to start the oil cup feed or neglect to fill the oil cup promptly

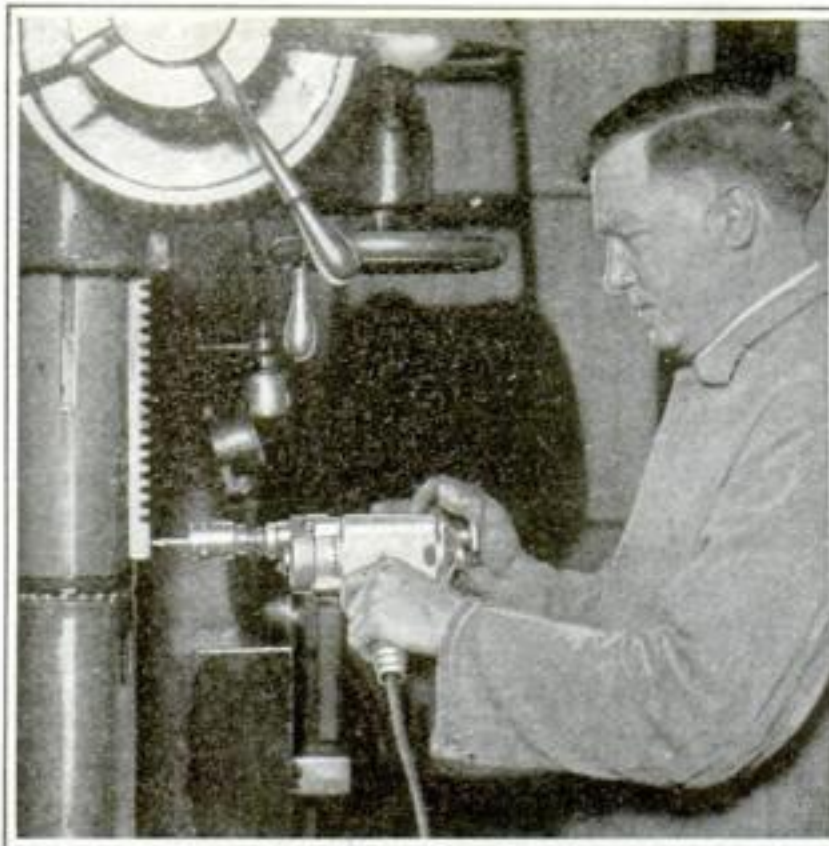

With this electrically driven screw-extractor a broken screw may be removed as quickly as a new one without waste of time. It is made similar to the portable electric drill

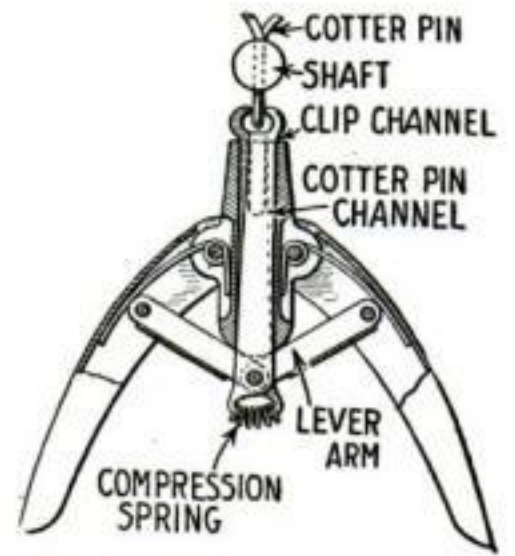

A cotter pin extractor that not only draws the pins but straightens the shanks so that they may be used again without any special operation to permit their reinsertion in the opening of the bolt or shaft from which they were taken. The clip for drawing the cotter is worked by a pair of arms between the closing handles

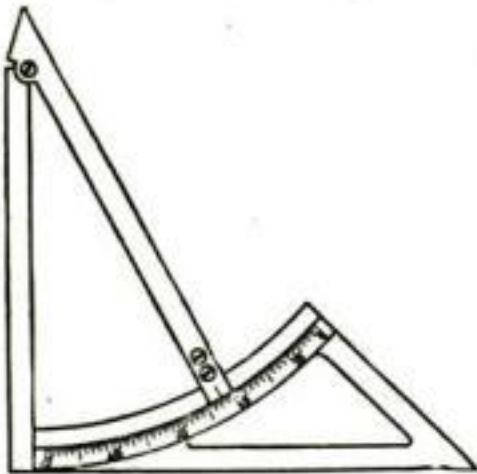


A triangle that can be used alone for drawing any kind of an angle or series of parallel lines directly and easily




A light inclosed electric hoist that may be operated from a distance and used in a manner similar to the hoisting unit on traveling jib or wall cranes. The addition of an operator's cab adapts this hoist for high speed intercommunication



A handle like a saw grip to receive the shank of an ordinary file of any size

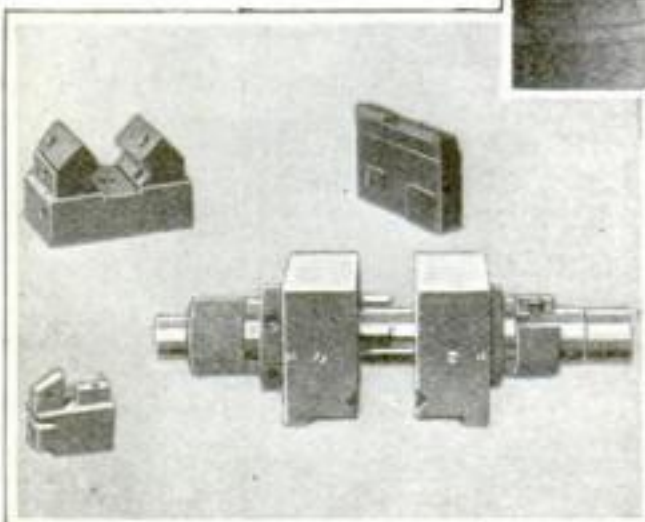

A vise for use between milling machine centers which saves much of the time of the usual set-up

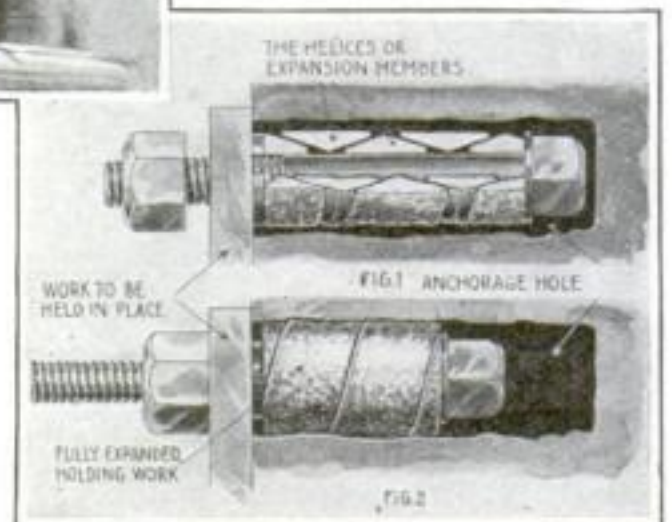


An expansion bolt shown in detail in Fig. 1 and fully expanded in hole in Fig. 2

Do It With Tools and Machines




A hook made of strong wire with a snap having a tempered steel tongue at one end is very handy for holding a paint bucket or fruit pail on a ladder rung

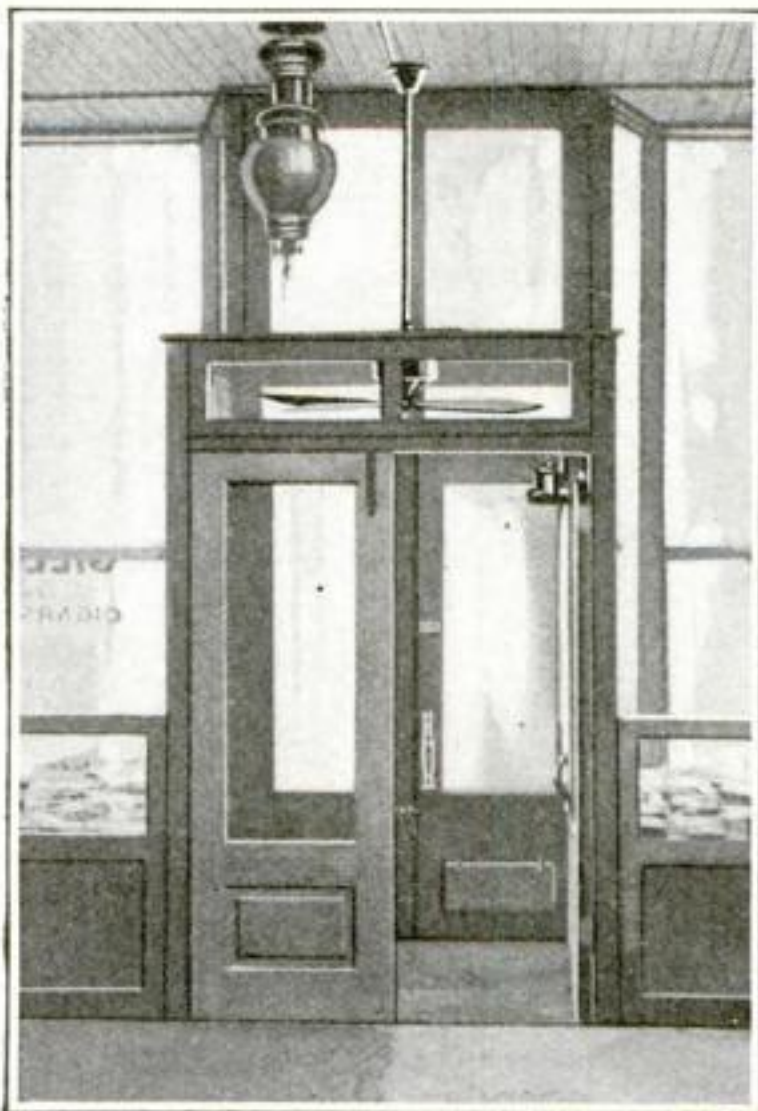


An ordinary electric ceiling fan is kept running in this vestibule and when the outer door is opened the air is driven outward so swiftly that very few flies, if any, will be able to effect an entrance



By changing the form of the interior bore of this anchor for a screw the maximum expansion is given where the greatest frictional contact occurs, which increases the holding capacity

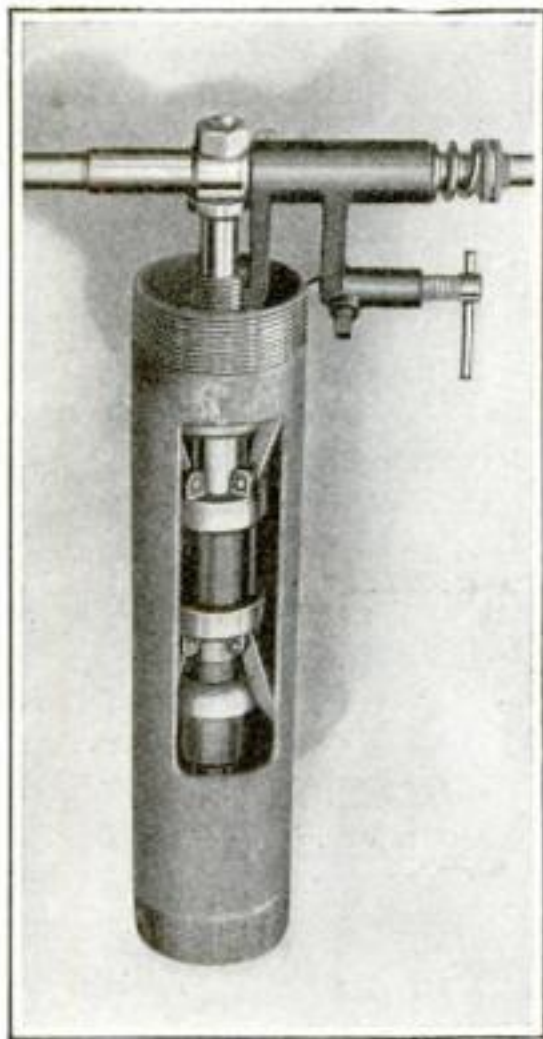


The usual method of cutting the larger sizes of pipe on a lathe is improved upon by the use of the hand power threader illustrated above. It may be taken to the job

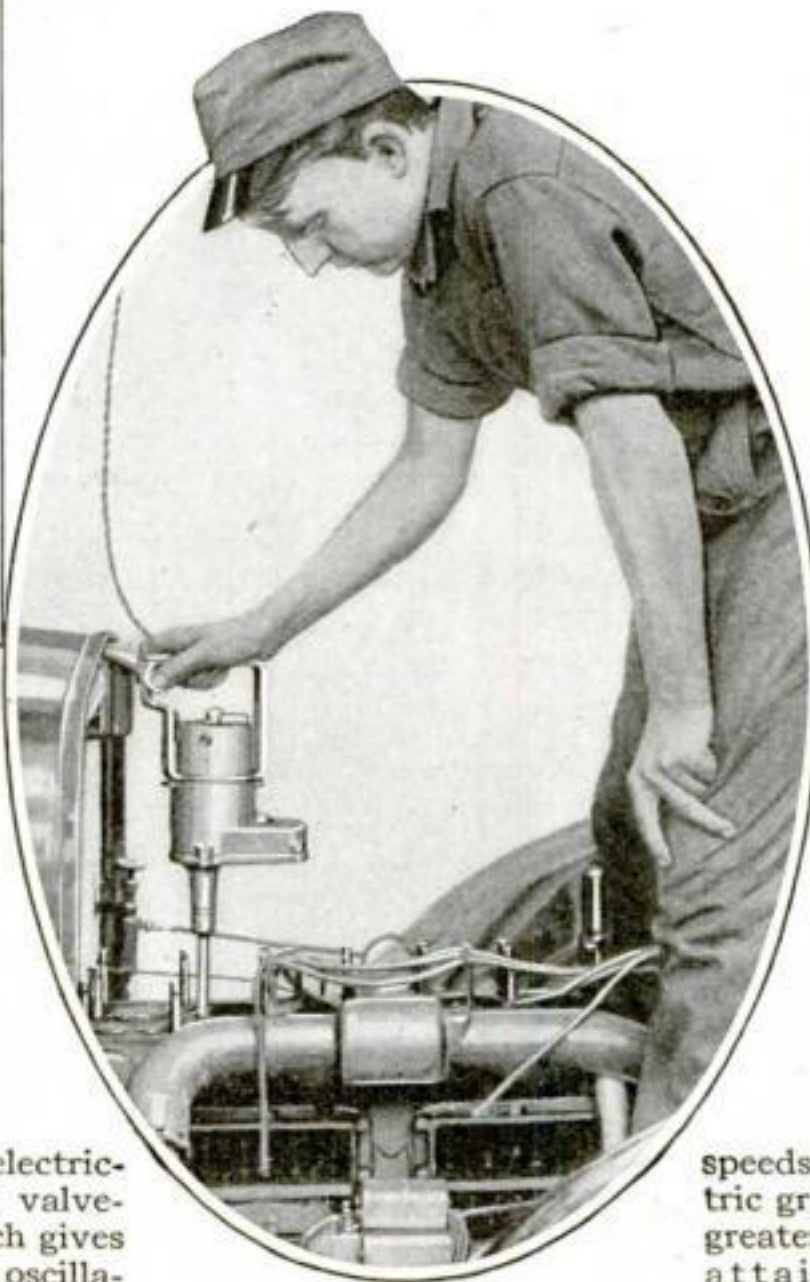

A portable electrically driven valve-grinder which gives the familiar oscillating motion. The

speeds of the electric grinder are far greater than those attained by the hand method

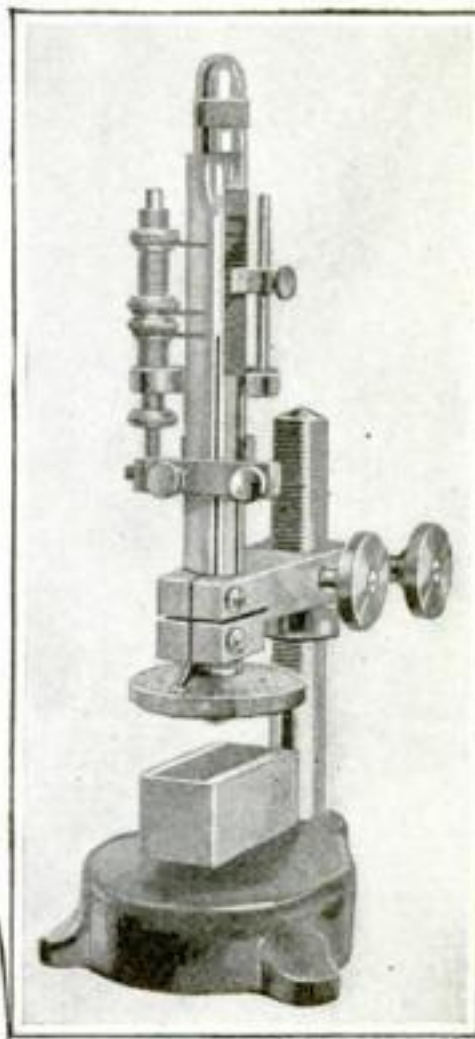

A measuring gage using a fluid against a flexible diaphragm to obtain readings in ten thousandths of an inch or closer to determine the thickness of stock

Fighting in the Air

The new machines that have been evolved and
the way they fight four miles above the ground

By Waldemar Kaempffert

(The following article is based upon facts which have been kindly supplied by Major W. L. B. Rees of the British Commission. Major Rees was sent to this country as a member of the British Commission to give to our army officers the benefit of the British experiences on the battlefield with flying machines. He is an officer of the Royal Flying Corps who has seen active service in the air and who, single-handed, brought down ten German flyers.—Editor)

THE General Staff of every European army knew five years ago that the airplane would prove a potent factor in war. Germans, English, French, Italians, all had tried to evolve a system of air-scouting in their annual maneuvers. The Italian campaign against the Turks in Tripoli and the Balkan wars had proved clearly enough that a man in the air could see more than could a man on horseback.

And yet all the European generals entered this war without even a dim realization of the terrible demands that would be made of aircraft; of their utter dependence on a handful of dauntless men ready to vault into the air and brave not only the unseen whirlpools and maelstroms of a turbulent atmosphere, but bursting shells hurled from the ground and the machine-gun fire of an adroit enemy air-fighter; of the inadequacy of the airplane as it was built before that fateful month of August, 1914, when all Europe was plunged into carnage; and of the frightful wastage of machines and lives. Even the Germans were unprepared.

New Types Had to Be Evolved for the Exigencies of Battle

Every army had machines—the French and Germans hundreds of them. But no one knew that airplanes would have to be built for very special military purposes; that the same machine could not be effectively used for scouting and fighting; that the acrobatic performances of Pégoud and his imitators in “looping-the-loop” and diving tail-first would be elevated to the dignity of military tactics with which every fighting airman would have to be familiar. In two years the whole art of airplane construction has been almost miraculously improved, and the art of flying, too. Before the war, some effort was made to adapt the machine to the man; now the man must adapt himself to the machine. Where are the elaborate, automatic stabilizing devices with which all governments

experimented before the war? Where are the machines advocated for their inherent stability? The machine of 1917 is only outwardly identical with the machine of 1913.

About six types of machines have been developed as the result of war experience:

1. There is the fighter—a 150-mile-an-hour, single seater, which is armed with a machine gun; which has limited fuel-carrying capacity, and which serves to find, fight and destroy the enemy.

2. There is the two-seated fighter. It carries a fixed machine-gun at the front and a machine gun on an “all-around” mounting for the observer in the rear. It is not so fast as the single-seated fighter. It also finds and fights the enemy; but it also escorts patrols into the enemy country and protects machines engaged in fire-control. It has more fuel-carrying capacity than the single-seat fighter, because it must stay up longer.

3. The reconnaissance machine is armed like the two-seated fighter; but it is not so fast and does not climb so rapidly. For short distances over the line it is amply able to protect itself. If it goes far, however, it must be protected by two-seated and even single-seated fighters. It is equipped with a built-in stereoscopic camera. The pictures taken are studied by staff officers to note changes in enemy positions and to discover concealments.

4. The fire-control machine directs the batteries by means of wireless. A reconnaissance machine when fitted with wireless apparatus may be used for fire-control.

5. The bomb-dropper resembles the two-seated fighter, although bombs can be carried by various machines. Bomb-carriers, being weight-carriers, are large.

6. Night-flyers resemble either the reconnaissance machines or two-seated fighters.


All Europe Was Aëronautically Unprepared —Even the Germans

It was a very heterogenous collection of machines that took the air at the outbreak

Carrying the War into the Air

Captain Georges Guynemer, pictured below, is probably the most skilful air-fighter on the French side. Although he joined the aviation corps a mere boy, he has been rapidly promoted. He has a record of thirty-seven German machines to his credit. In the picture he is holding the battered, twisted remnant of a machine gun taken from a German battle plane that he brought down


Captain Boelcke, pictured below, was by far the best air fighter that Germany produced. He was killed at the Somme in a collision with a member of his own air-squadron. Boelcke was such an important personal factor that, although he had been sent home to rest by the Emperor, he was recalled when the Germans found that they were losing in the air alarmingly at the Somme

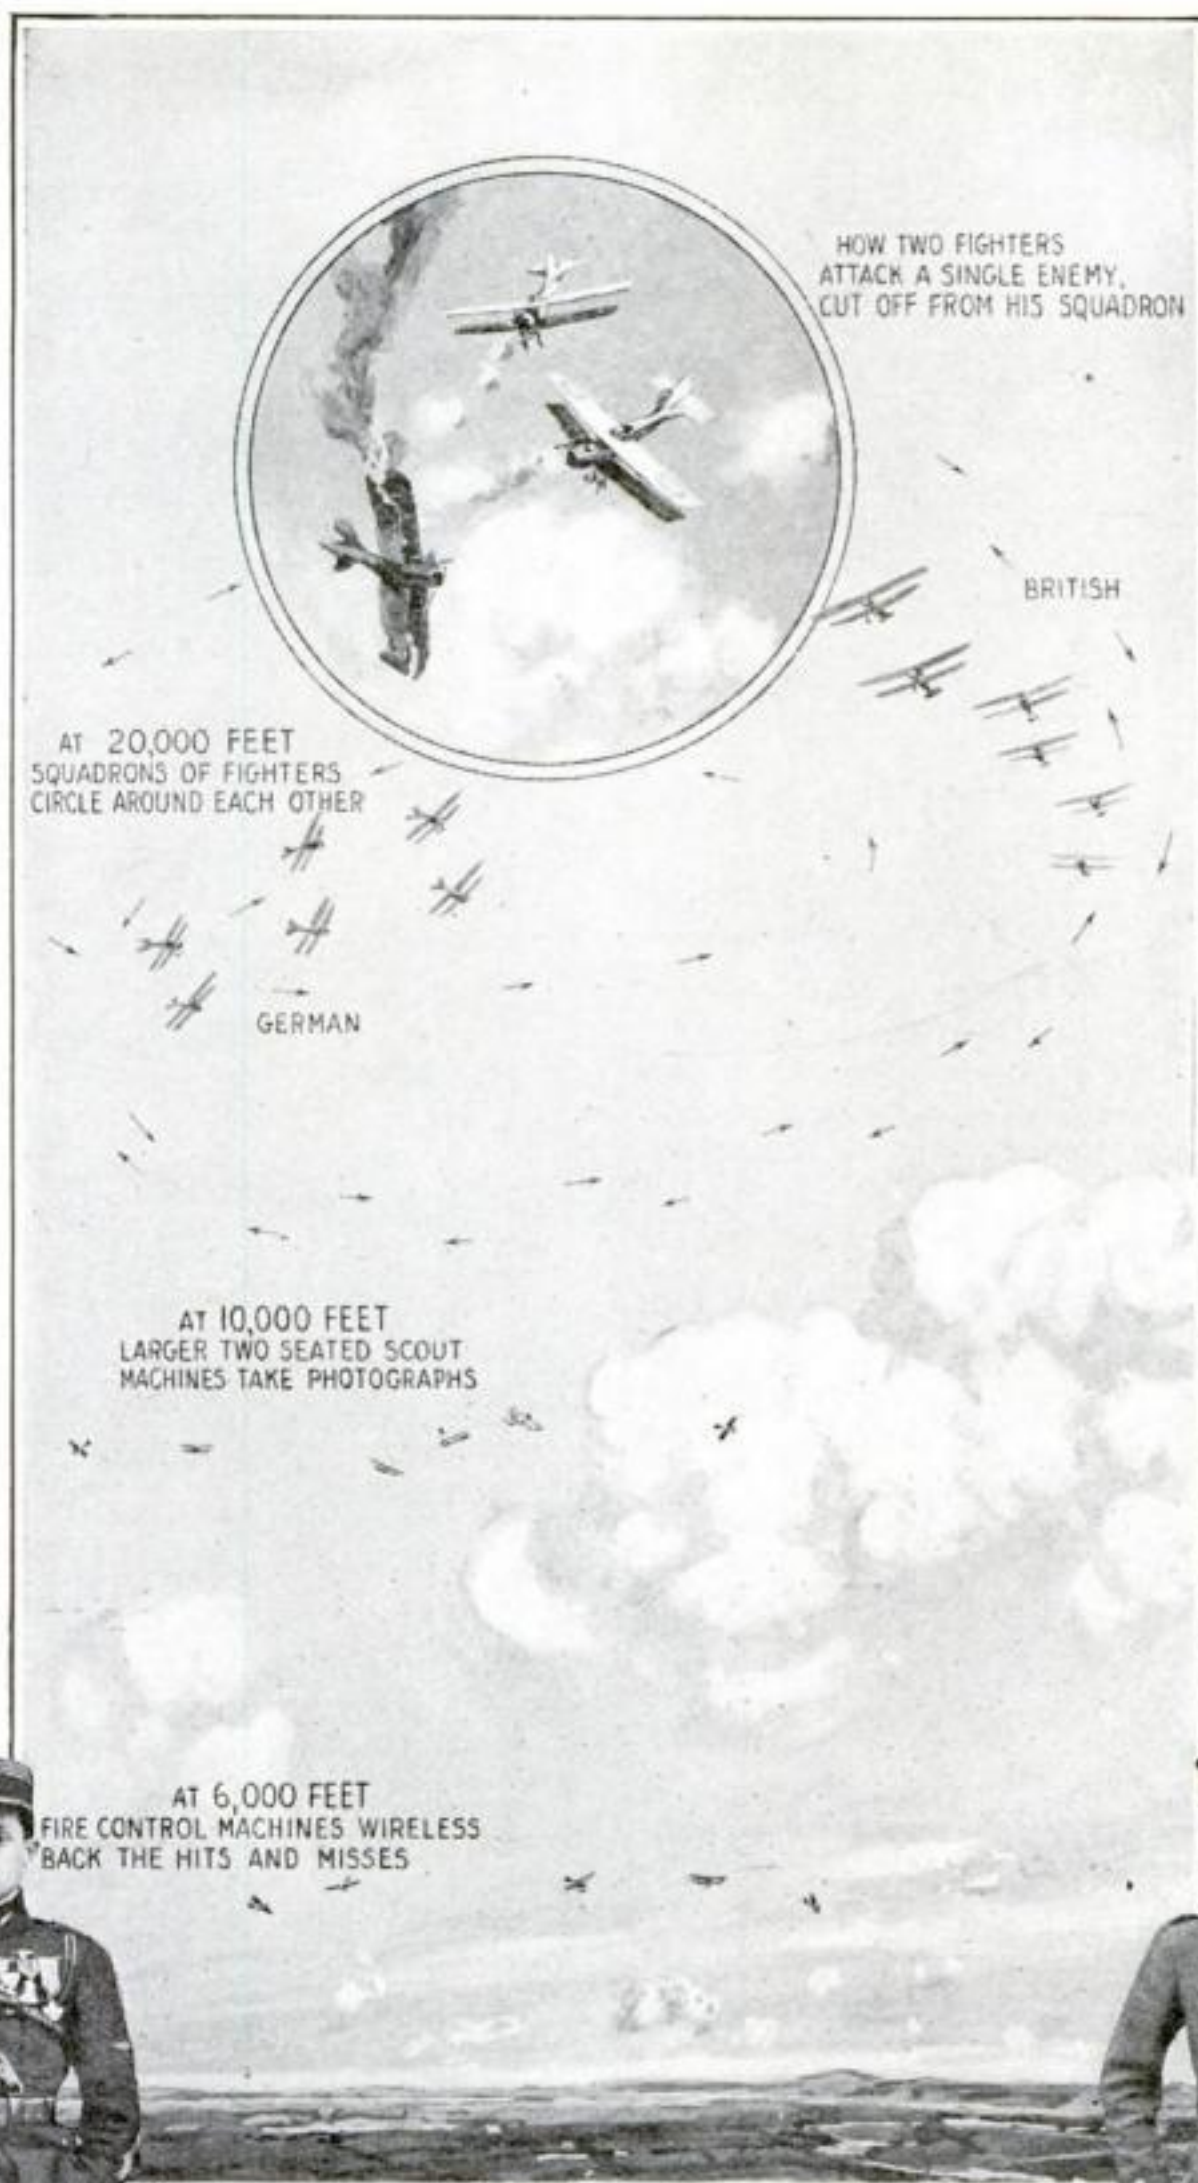

French Official Photo


© Central News Photo Serv.

The opposing squadrons watch and watch each other. Woe betide the man in a squadron who lags behind for a second, who manipulates his control a little too carelessly, who is not quite en rapport with his teammate in the machine beside him! Two enemies swoop down upon him. He is cut off from his fellows. He must fight for his life. Up and down, in and out he maneuvers, shooting when he can. But his enemies outnumber him. He has not a chance. There is a squirting of bullets. His machine drops—a sickening sight—three miles to earth

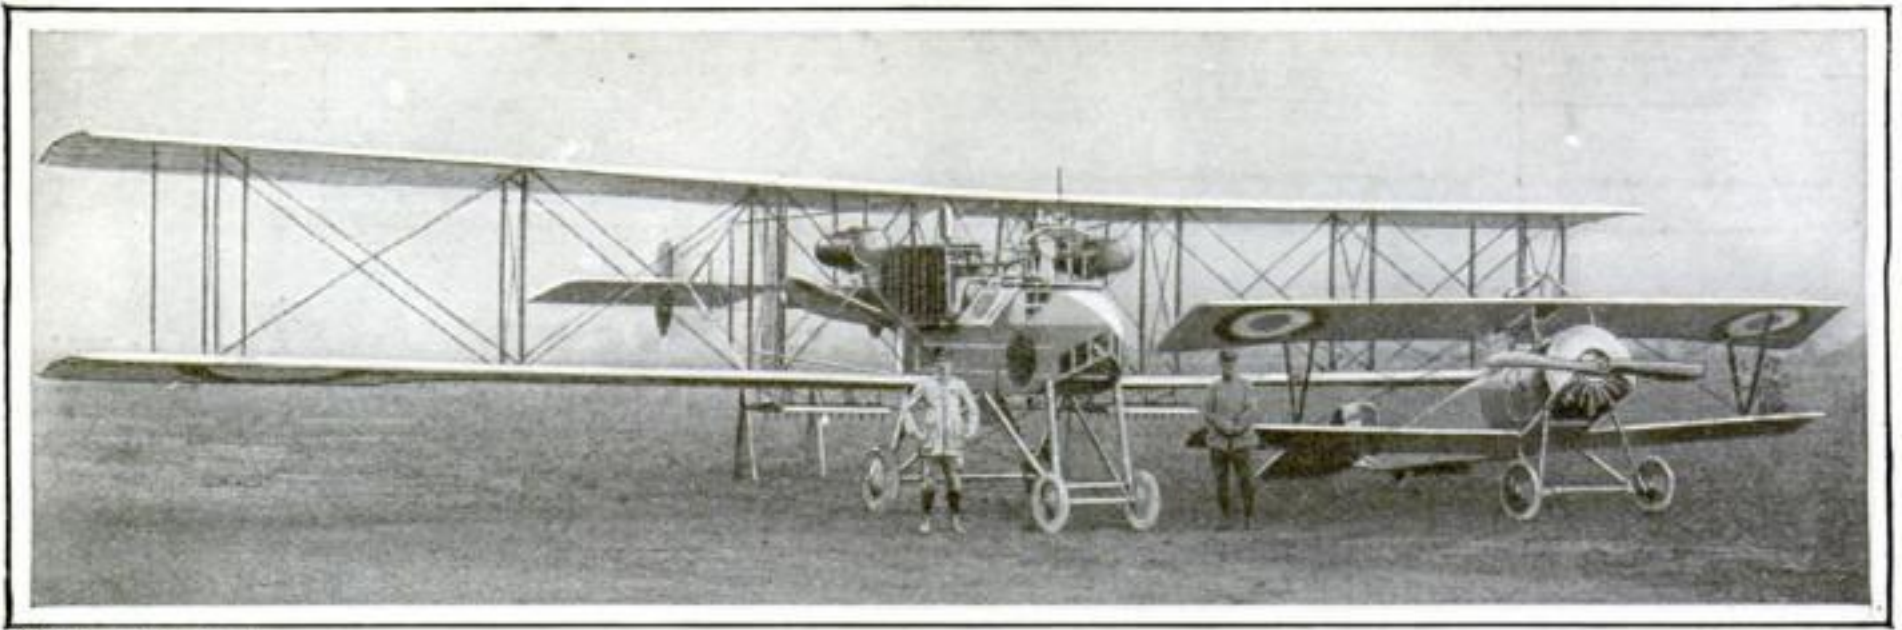

© Press Illus. Serv.

Two extremes in airplane types—the big bomb-carrier and the fast single-seated fighter. See key diagram below

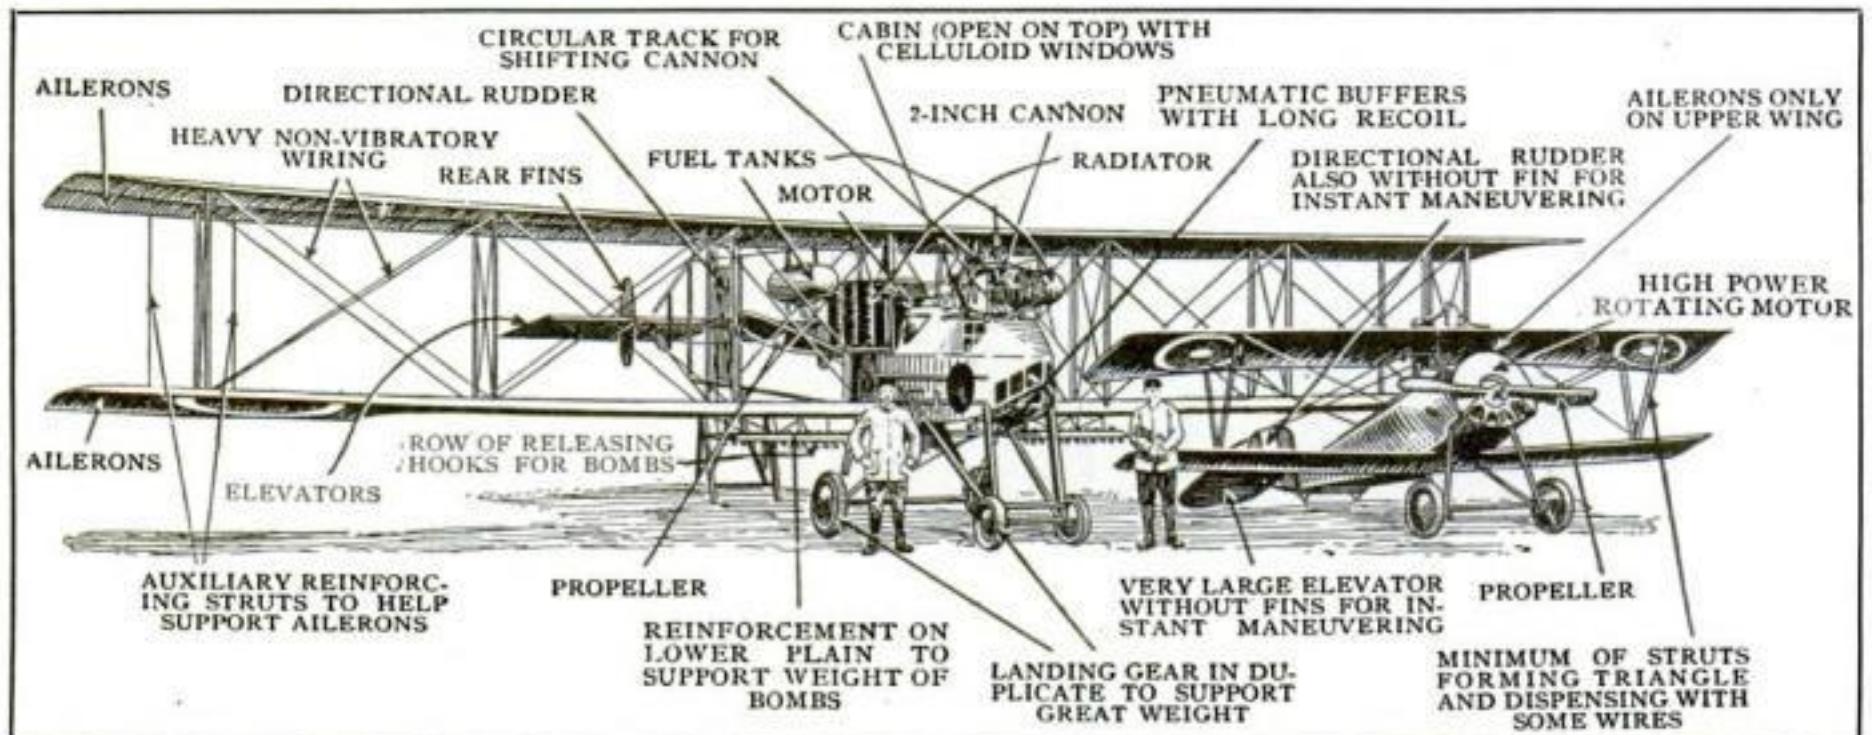

of the war—monoplanes with tractor propellers, biplanes with both tractor and pusher propellers, machines with and without streamline bodies, fast racers, and slow, cross-country flyers. One would suppose that the military brains of Europe would have foreseen that some effort would be made to beat off a prying airscout. That it was foreseen, the rather crude anti-aircraft artillery evolved before the war proves; but no one could foresee how combats at a height of ten and twenty thousand feet would be fought, or how a machine should be designed for effective fighting. Maneuvers in time of peace may teach much, but blank cartridges can never teach as much as cold lead.

First of all, it was discovered that for bombing raids, for reconnaissance and for fighting, different types of machines must be employed. Your bomb-carrier cannot be much faster than ninety miles an hour—slow as speeds go nowadays. Such craft must be protected by fast fighting machines during a long over-land flight to some hostile railway junction which is to be wiped off the map. Your scout andartil-

lery-fire control machine must stay aloft for hours; it must carry much fuel; therefore, while it may be faster than a bomb-carrier, it cannot be designed for high speed. Slow machines must be protected from attack on overland journeys by fast fighters. And so the fighting machine was evolved—a marvelously swift machine, making as much as 130 miles an hour and as quick as a dragon-fly in darting and twisting about.

Reconnaissance, artillery-control machines, fighters—all are armed with machine guns. But only the fighters, single and double seated, are built specifically for combat. The others fight only when they must—in some situation of dire necessity.

How a Difficult Problem Was Solved

There was no fighting in the air during the Tripolitan and Balkan campaigns; but in this war there was air fighting almost from the beginning. At first rifles and pistols were used. They proved worthless. A machine-gun alone could be used effectively, something that would squirt death like water from a hose. But the use of a

machine-gun implied the building of an airplane able to mount and fire it. Now it was soon found that the pusher type of airplane, which carries its propeller in the rear, is not so fast as the tractor, which carries its propeller in the front. It was also found that for fighting, at least, quick-maneuvering ability is highly essential, which implies a small, high-powered machine carrying only one man. Here was a very difficult technical problem to be solved: The fighting machine had to be a tractor for speed; the propeller in front necessarily interfered with the proper manipulation of the machine-gun; the officer in the pilot's seat had not only to keep his machine on an even keel but also to fight his gun. Had the military strategists of Europe been told before the war that these were the conditions that would have to be fulfilled, they would have dismissed them as absurdities at once. But by the middle of 1916, the requisites were so clearly recognized that they were met, and that with astonishing ingenuity.

The Fast Fighting Machine Appears

By the end of 1915 it had been discovered that of all the flying machines used by the Allies, the fast racing monoplane of Morane-Saulnier in France and the speedy biplane racers made by the two firms of Sopwith and Bristol in England were best adapted for air fighting, simply because they had speed and dragon-fly maneuvering ability. They were given more speed by equipping them with engines of one hundred and

fifty horsepower and even more, and they were strengthened so that they might withstand the enormous stresses set up in flight by engines so powerful.

Curiously enough, the problem of firing through the propeller had been solved before the war by some imaginative inventor with more vision than is given to academically trained generals, and curiously enough it was solved in both France and Germany simultaneously. The solution was this: The gun was rigidly mounted in front of the pilot, and it was mechanically connected with the engine. A propeller revolves at about 1,200 revolutions a minute; a machine-gun fires at the rate of 600 shots a minute. Let the engine fire the gun at just that fraction of a second when no propeller blade intervenes—that is the solution.

Because the gun is rigidly mounted, the air fighter must turn the entire machine toward his German enemy to fire it. The enemy does the same; for the German Fokker, an adaptation of the French Morane-Saulnier, is similarly designed and equipped with a fixed machine-gun.


When these fighters first appeared on the side of the Allies they drove everything before them. It was impossible for the slower Germans to cope with them. Then the Fokker appeared. The machines of the Allies were made still faster; the fighters became more skilful, more daring; fighting tactics were evolved. As a result, the Allies have not only caught up with each German improvement but have surpassed it.



© Central News Photo Service

See key diagram below

Fast fighting machines have engines of 150 horsepower and more, and are strengthened to withstand enormous stresses

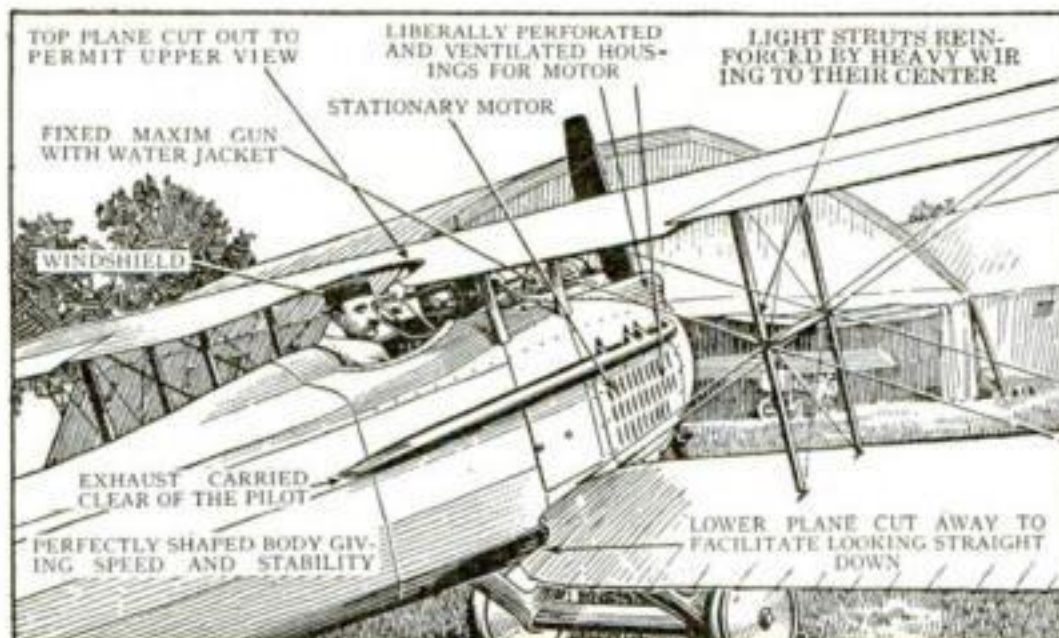

It is rarely that German machines—fighters or scouts—appear over the French and British lines; but the machines of the Allies are always over the German lines. That meant much at Arras.

When these fast fighters first made their appearance there were some single-handed combats. A German and British charioteer of the air would wheel about, jockeying for a position in which, for a few fleeting seconds, either might pour in a hundred bullets at his enemy. It was a favorite maneuver of the German flyer to rise very high, to plunge down on an adversary, and to fire as he came. But Boelcke and Immelmann were about the only flyers on the German side who were either skilful or daring enough to engage in frequent single-handed combats. As a rule, the Germans attacked a single British or French machine in twos and threes. The procedure may be attributed in part to the different temperaments of Germans and British and in part to military policy.

Like Flocks of Birds the Squadrons Maneuver

The result has been that fighting in the air is now undertaken, as a rule, only by squadrons. Six machines, sometimes more, constitute an aerial tactical unit. Their pilot-officers live together, sleep together, eat together. They know one another better than if they were brothers. Every mental and emotional characteristic is bared. So it happens that in the air, when the six machines are flying side by side in twos, the men know instinctively what they are to do. Have you not seen flocks of birds on the wing, circling about with a unanimity of understanding that makes it seem as if they were obeying a command? It is so with the air fighters of a squadron. They move as one, like a flock of birds, with never a word of instruction.

An engagement between opposing squadrons in the air is not like a battle at sea—a fight between fleets. Around and around each other the planes whirr, each team following the leaders with clock-like precision and automaticity.


The opposing squadrons watch and watch each other. Woe betide the man who lags behind for a second, who manipulates his controls a little too carelessly; who is not quite *en rapport* with the team-mate in the machine beside him! Two machines of the enemy swoop down. He is cut off from his fellows, like a bird from its flock. He

must fight now for his life. Up and down, in and out, he maneuvers with his foes. He shoots when he can—when a hostile machine is directly in front of him. But his enemies outnumber him. He cannot outmaneuver two machines. One, at least, must sooner or later swing around into a favorable position. Then there is a squirting of bullets. The machine drops, a mass of flame, three miles to the earth—a sickening sight even to those who have been steeled to the horrors of the most horrible of wars. A charred, twisted mass of metal and wood is picked up. Within it is a scorched, torn uniform containing an unrecognizable, mutilated mass, all that remains of a brave man who was not quite quick enough, or whose mechanism failed him for a fatal fraction of a second.

How the Airplanes Carry War Into the Atmosphere

Whenever that terrible artillery preparation takes place of which we read in the newspapers (the deadly hail of tons and tons of metal that precedes an attack with the bayonet) the fighting squadrons are high in the air—twenty thousand feet above the ground. Below them, at perhaps ten thousand feet, are the two-seated fighters and reconnaissance machines each patrolling a section of the enemy's line, taking hundreds of photographs. And below, at six thousand feet, are the machines that control the artillery fire—machines that watch each shot as it falls and that wireless back the signal "too short" or "too long." Without the reconnaissance officers the scouts and the fire-controllers could not perform their task; they would be attacked and annihilated by fast airplanes mounting machine-guns. To be sure, they are armed themselves so that they can keep up a running fight. But on the daring, fighting squadrons far, far above the battle line, on them depends the fate of an army; on them depends the possibility of gathering the facts that the heavy artillery in the rear must have to fire at a mark ten miles distant.

To the all-seeing eye in the air, nothing is concealed. It is that eye which has made it utterly impossible for either side to execute a flanking movement that would envelop a whole army and compel a surrender, that eye which has made it necessary for armies to burrow in the ground and face each other in a nerve-racking, soul-trying struggle.

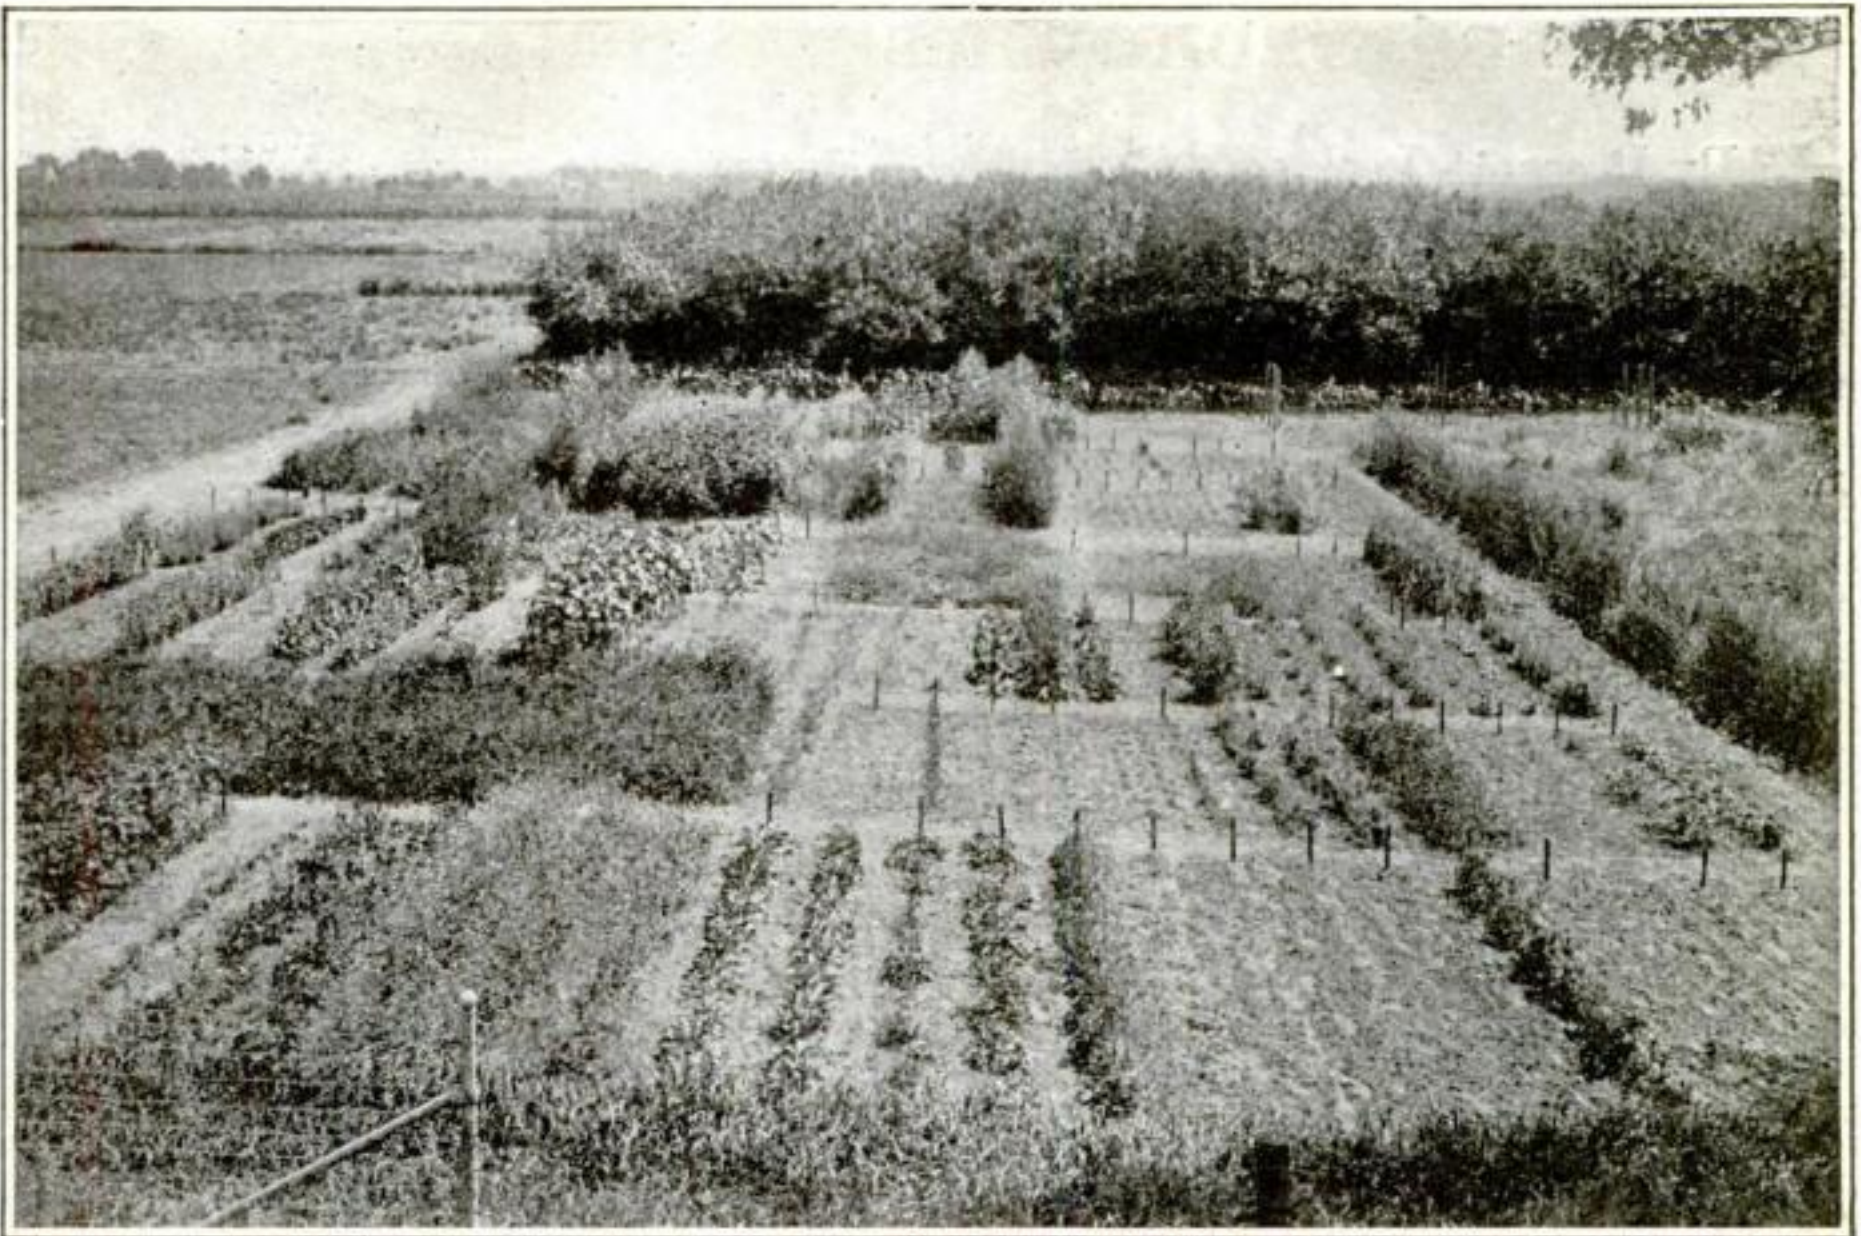

A garden in which nothing but weeds can find a place. It is the one spot in all the world, perhaps, where weeding means cultivation of weeds. Later on, various exterminators will be tried on them


A Garden in Which Weeds Are Not Only Tolerated but Cultivated

FOR every evil under the sun there is a remedy or there is none," says the jingling rhymster, and leaves it to the scientist to find out whether there is or not. To find the remedy for weeds, the bugbear of every farmer and lover of growing things, a garden was planted at the Agricultural Experiment Station of the University of Minnesota and 175 different varieties of the pests were given honorable lodgment in the perfectly good soil. They grew. They thrived. They bore abundant seed. They were classified and a collection of weed seeds was produced and listed. Then repellents and exterminators were tried out on them.

Taking Motion Pictures on the Road in a Queer Vehicle

THE motion picture director is a creature of weird fancies. If he were otherwise he would not be a motion picture director. He lies awake nights worrying about ways for doing something different. If he becomes hum-drum, if his ideas smack of the commonplace, his directorship is soon ended.

The quest for novelty partly explains the freakish caravan on rubber tires which the accompanying photograph shows. The purpose of the queer equipage is serious. It is seeking the right landscape for a background for a back-ground for a special comedy, and is transporting the camera and troop to the spot.

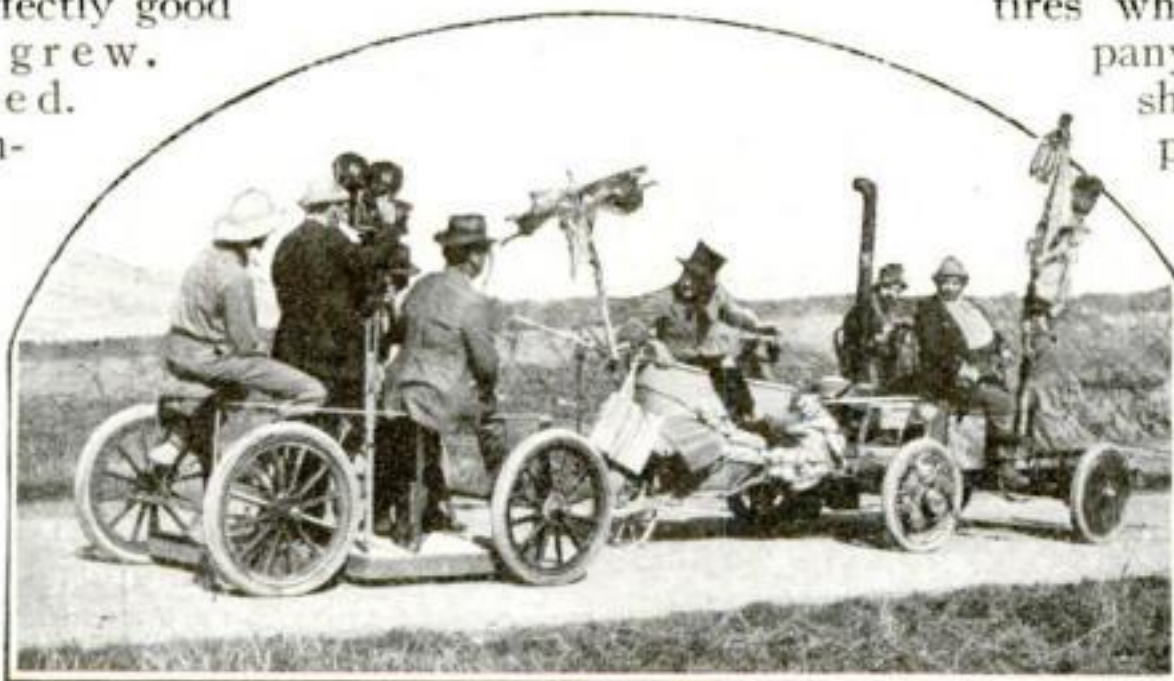


Film comedy has its queer moments, such as traveling in freak equipages and make-up in search of suitable landscape

Chasing Submarines with Motor-Boats

By Prescott Lecky

Boats for the purpose are built up in sections produced in immense quantities, like the parts of the low-priced, easily assembled automobile

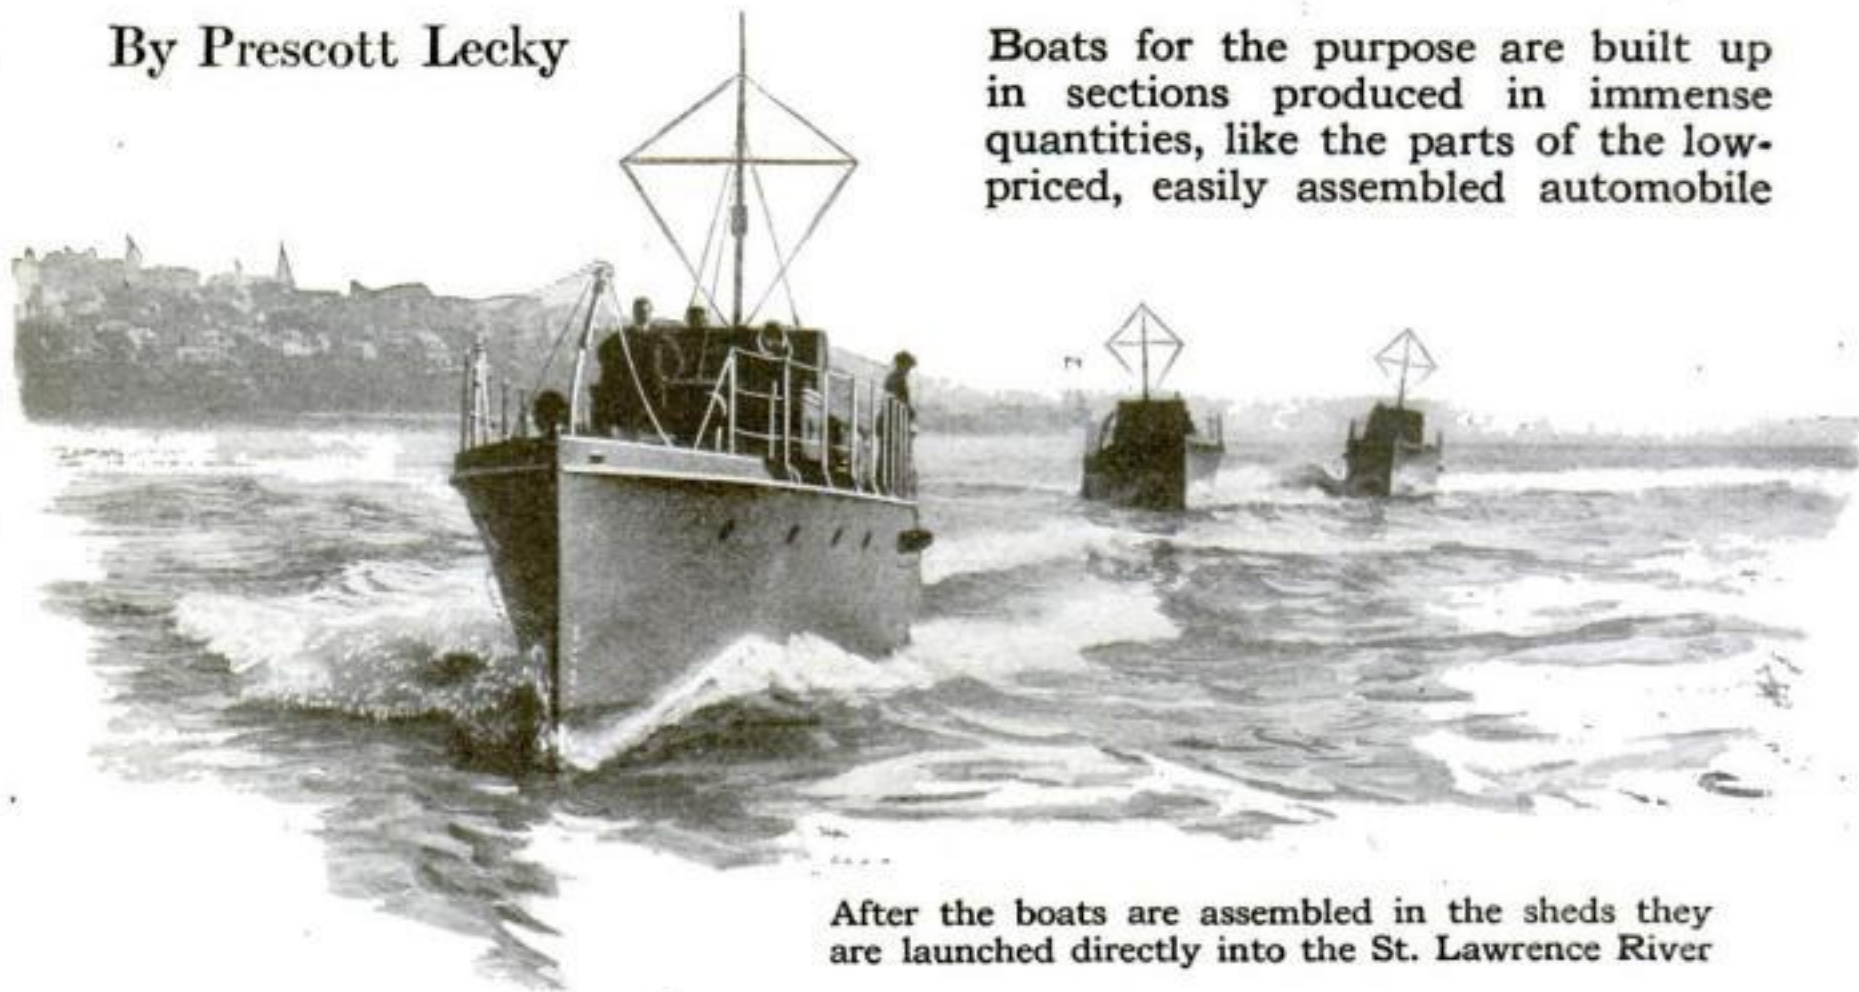

After the boats are assembled in the sheds they are launched directly into the St. Lawrence River

WHEN England found the submarine was a menace that threatened to destroy her paramount position as a maritime power and a maritime nation she cast about her for a means of combating the underwater terror. One of her purchasing agents visited the New York office of Henry R. Sutphen, an official of a boat-building company and a submarine company.

"Why don't you try motor-boats?" suggested Mr. Sutphen, and proceeded to outline the sort of craft he had in mind. The conversation resulted in a provisional order for fifty boats, given subject to the approval of the British Admiralty. Not only was this order confirmed, but a short time afterwards it was increased to five hundred and fifty.

The boat called for was to be 80 ft. long, 12½ ft. beam, 4½ ft. draft and of 32 tons displacement. Two standard motors of 220 horsepower were to drive her at a speed of fourteen knots for 850 nautical miles or nineteen knots for a distance of 700 nautical miles. The fuel capacity was to be 2100 gallons, and the gasoline was to be consumed at the rate of one pint per horsepower per hour. She was to carry a crew of ten men, including gunners to operate the 3-inch rifle mounted forward.

Applying Automobile Manufacturing Methods

Naturally it would have been impossible to construct so many boats of such a large

size in so short a time by the usual methods. The methods of the automobile factory were adapted to the shipyard. First, "the master boat" was built and every part that went into its construction was carefully measured and recorded on templates or wooden patterns. The templates were then sent to the shops and five hundred duplicate pieces ordered. Every one of these pieces was lettered and numbered on its arrival at the plant. Three machine shops were kept busy turning out the motors. Most of the woodwork was done in Bayonne, N. J. More than eight and a half million feet of finished lumber, sawed and dressed to the required sizes, was turned out by this shop.

When arrangements had been made for the material, new yards on the St. Lawrence River in Canada were about completed. The plant consisted merely of half a dozen huge assembling sheds, and it was here that most of the ships were made.

As the keels arrived they were put in their places along the floor, and the delivery of the various ribs, beams and parts was so timed that no storage space was necessary. Every effort was made to simplify operations and to avoid handling and carting the material more than once. For instance, as soon as the engine, anchors and chains arrived they were distributed immediately, an anchor being laid in front of each keel.

All told about fifty separate operations were necessary in putting these parts together; for each task there was a separate gang of workmen who did nothing else. It was not advisable to build a permanent plant of this size equipped with cables and roof pulleys.

Hence progressive assembling in the automobile sense could not be applied. Automobile-assembling practice was reversed. The boats remained stationary while the men moved along. Otherwise there was no essential difference. So rapidly were the boats com-

pleted by this method that the sheds were soon crowded, and extra keels were laid outside. Some of the boats were launched directly from the shed while others were placed on railroad trucks and carried to the ways. Every vessel was thoroughly tested by British Naval inspectors before it was accepted. The boats were shipped to England on the decks of ocean steamers,

four chasers being carried on one liner.

Since the war began, the production has increased from three boats a year to three a day. Five hundred and fifty submarine chasers, eighty feet in length, were completed in less than five hundred and fifty


days from the time the contract was signed. Perhaps

the most surprised witness of this accom-


plishment was the British Admiralty itself. And England, as everyone knows, is the greatest maritime nation of the world.

An idea of the tremendous amount of detail that had to be looked after in this under-


taking may be gained from the following brief list of figures: 550 gas stoves, 2,200 fire extinguishers, 2,200 sailing lights, 550 life boats, 550 searchlights, 25,000 incandescent lamps, 974,504 bolts and nuts, 3,850 oil lamps, 13,200 canvas covers, 22,000 storage batteries, 109,450 ft. of brass pipe, 611,000 ft. of manila rope, 33,200 running yards of deck canvas, 16,500 port lights, 1,650 sinks

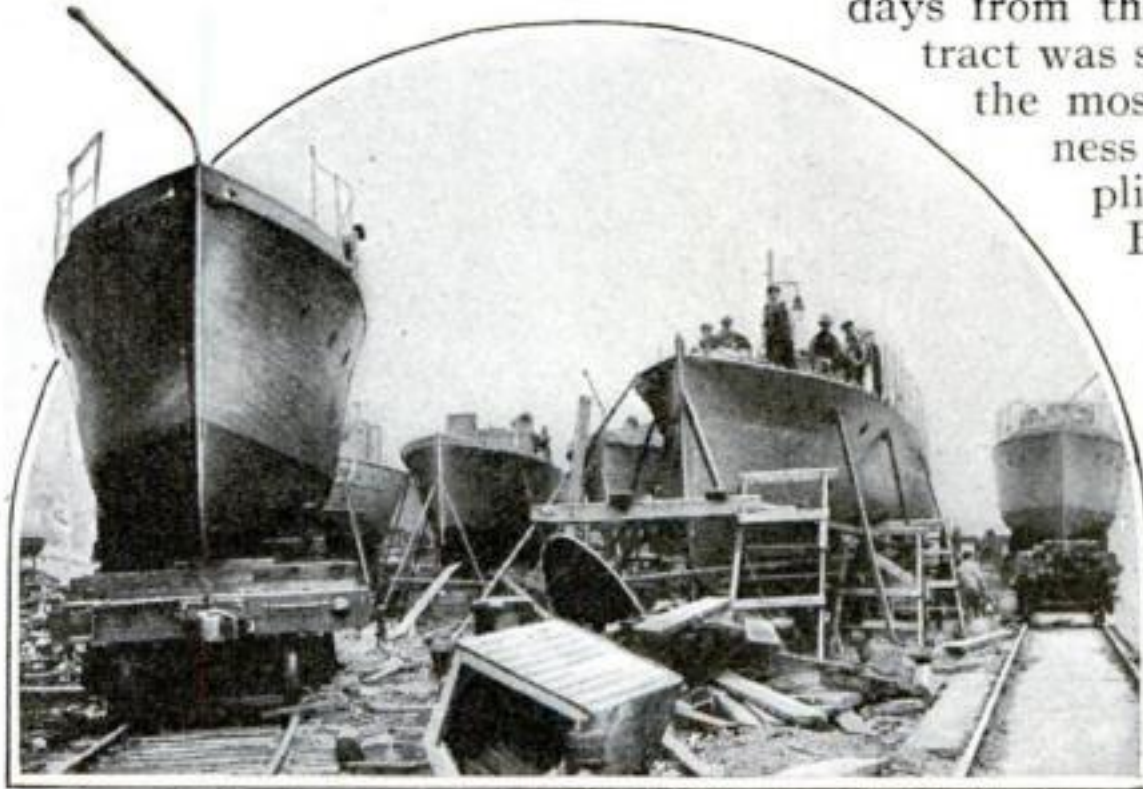

Some of the chasers were launched from the shed but others were made inshore and had to be brought to the ways by rail

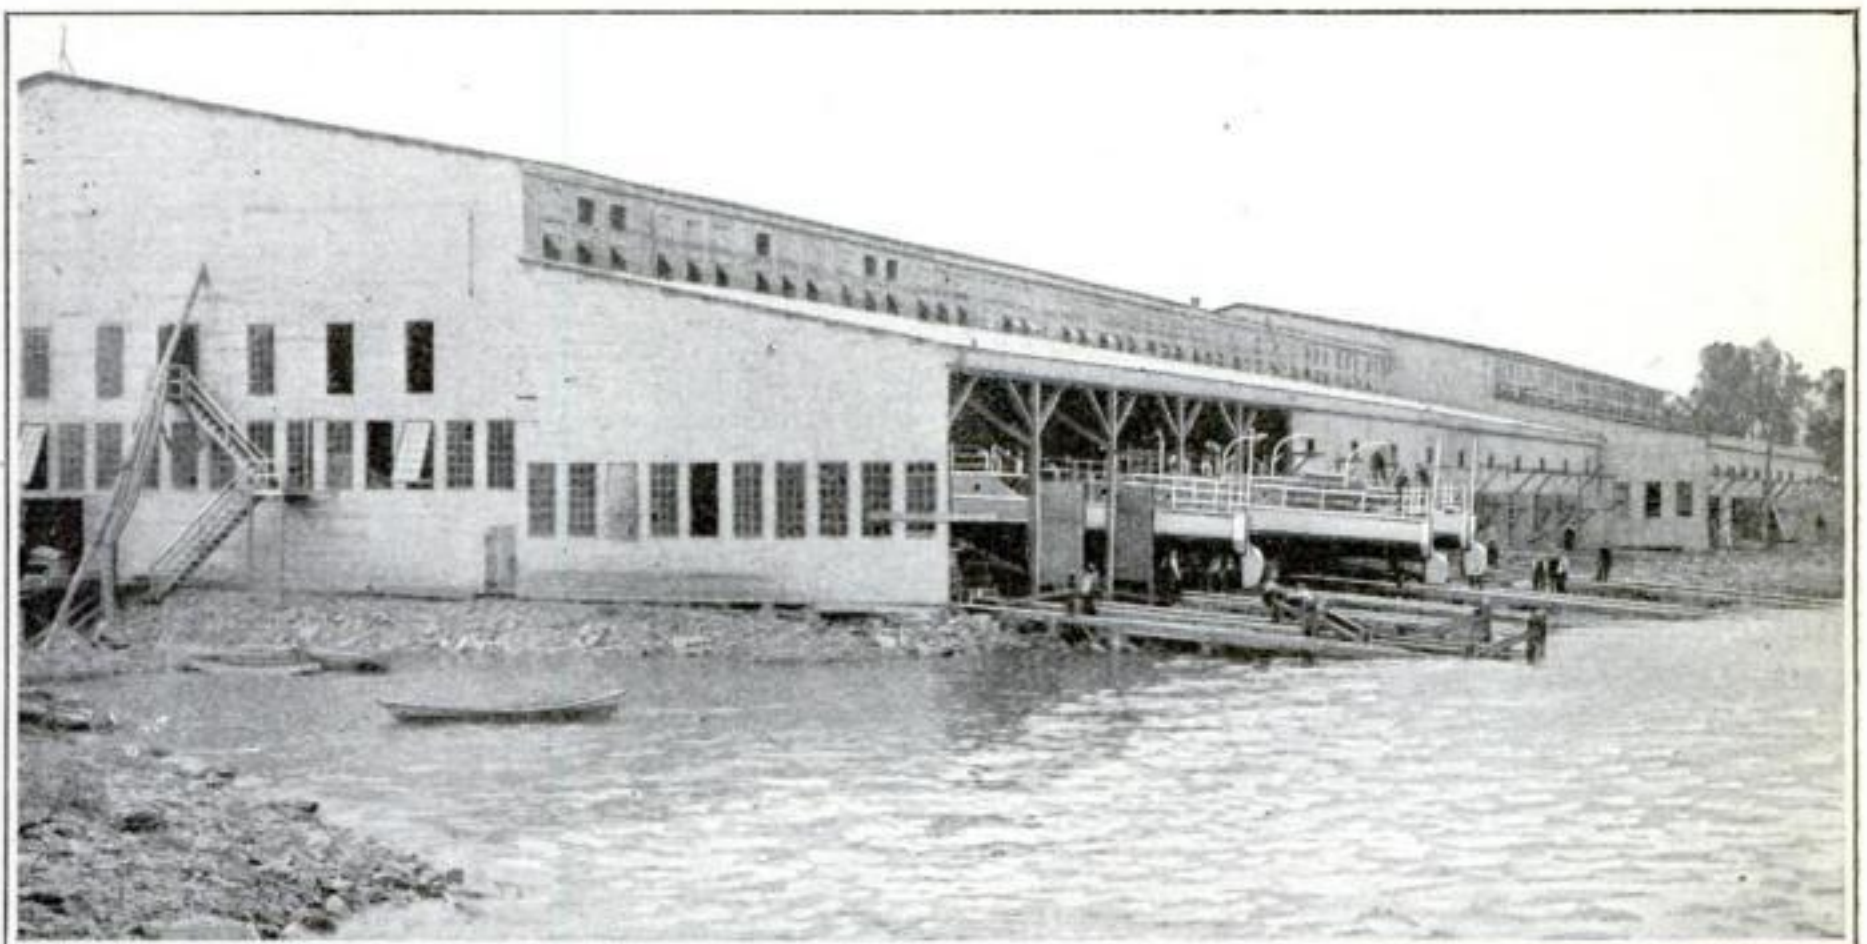

When the sheds in which the boats were assembled were filled, additional keels were set up outside. Here some of the boats are shown in an advanced stage, almost ready for launching

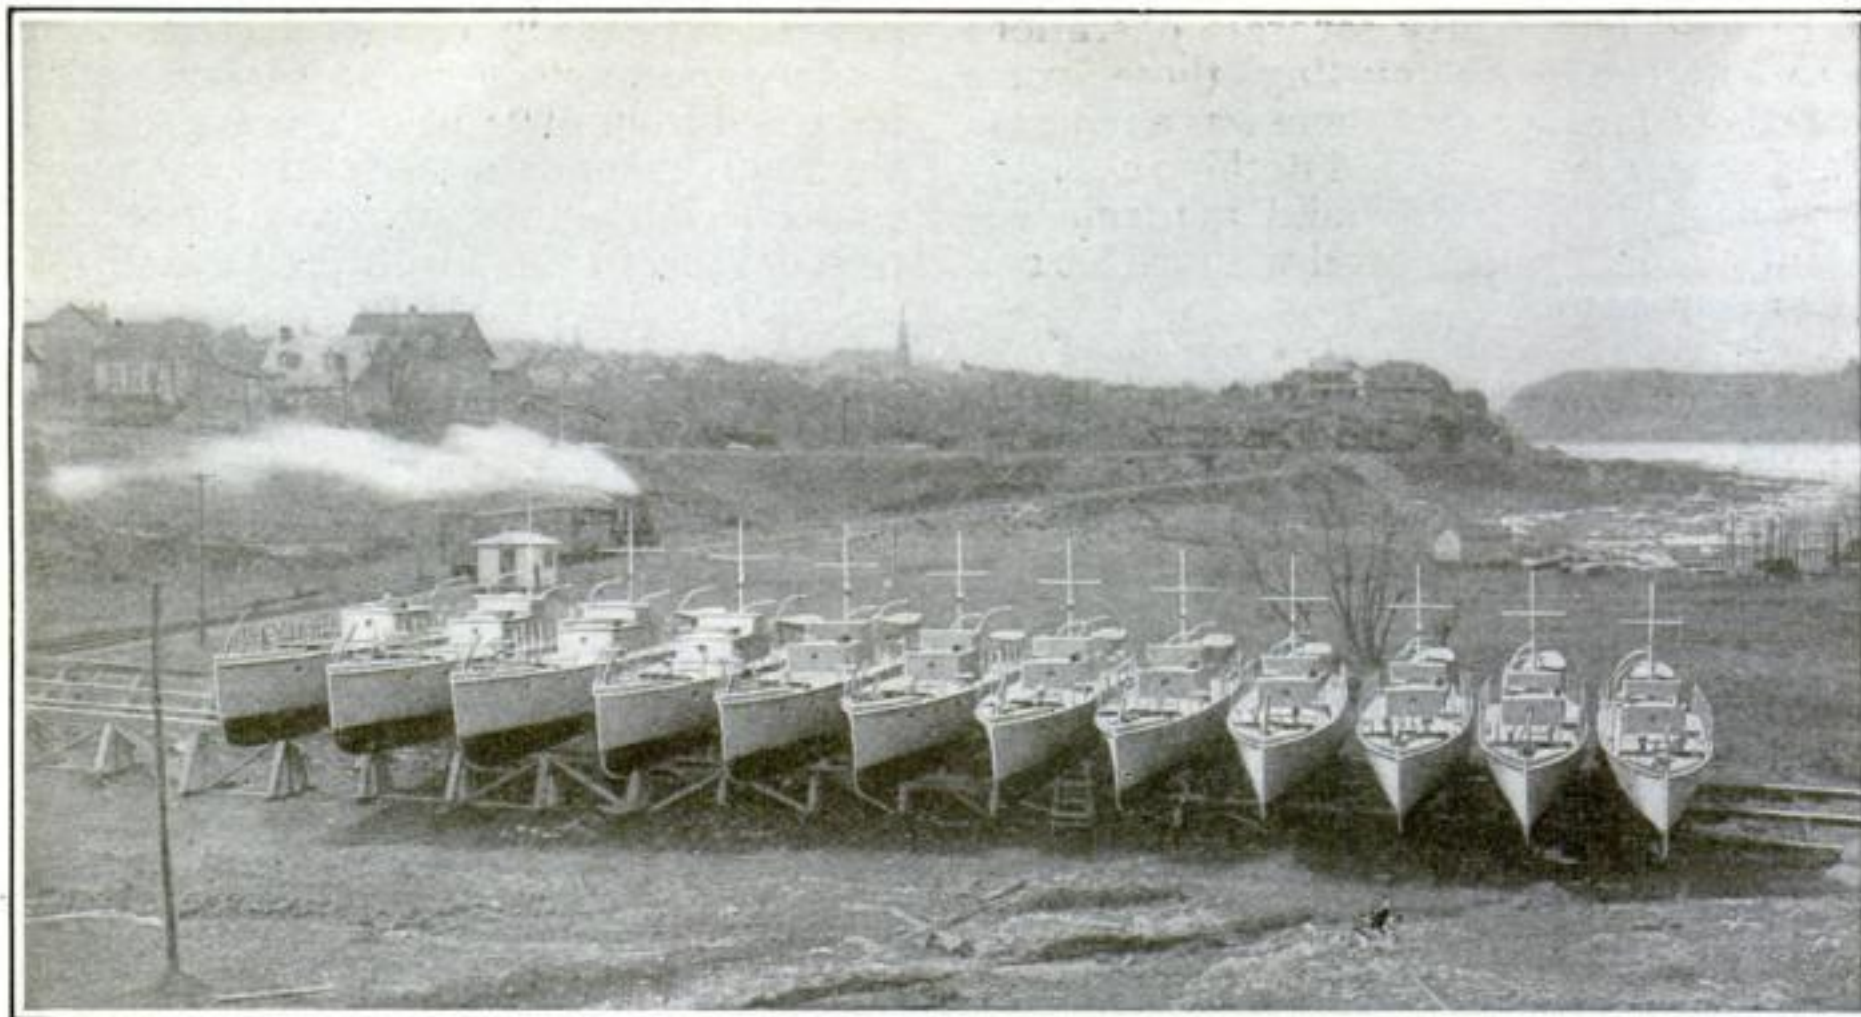

Picture continued on next page

Some of the finished boats ready for inspection. Each boat was thoroughly tested in the St. Lawrence River before being accepted. Arranged as in the photograph the five hundred and fifty boats

and wash basins, 11,550 ventilator cowls, 1,650 toilets, 325,000 ft. of wire rope of various kinds and 450,000 pounds of paint, varnish and putty.

Will Every Coast Dweller Own a Motor-Boat?

In the assembling operation alone more than 3,000 men were employed, and about 9,000 others were scattered in the various workshops fabricating the material before it was sent to the main plant. This is the first time that the principles of standardization, division of labor, and progressive


assembling have ever been applied with any thoroughness to shipbuilding. There is no reason, however, as this successful experiment proves, why motor-boats cannot be turned out cheaply enough to make them as available to the aver-

age citizen as is the popular-priced car.

The movement toward standardization began in 1905, when Mr. Sutphen's company built 120 twenty-one-foot mine-yawls for the United States War Department. The same company two years later built 33 thirty-foot mine layers on standard lines, and during the next six years turned out 110 thirty-six foot power life boats for the United States life-saving service. Probably the largest motor-boats ever built according to uniform design were two 98-foot yachts, made in 1910. Others who

have made experiments along the same line are a company that turned out a number of thirty-footers, and another that has been building twenty-foot steel motor-boats in fairly large quantities on standard patterns.

It should not be imagined that these submarine chasers built

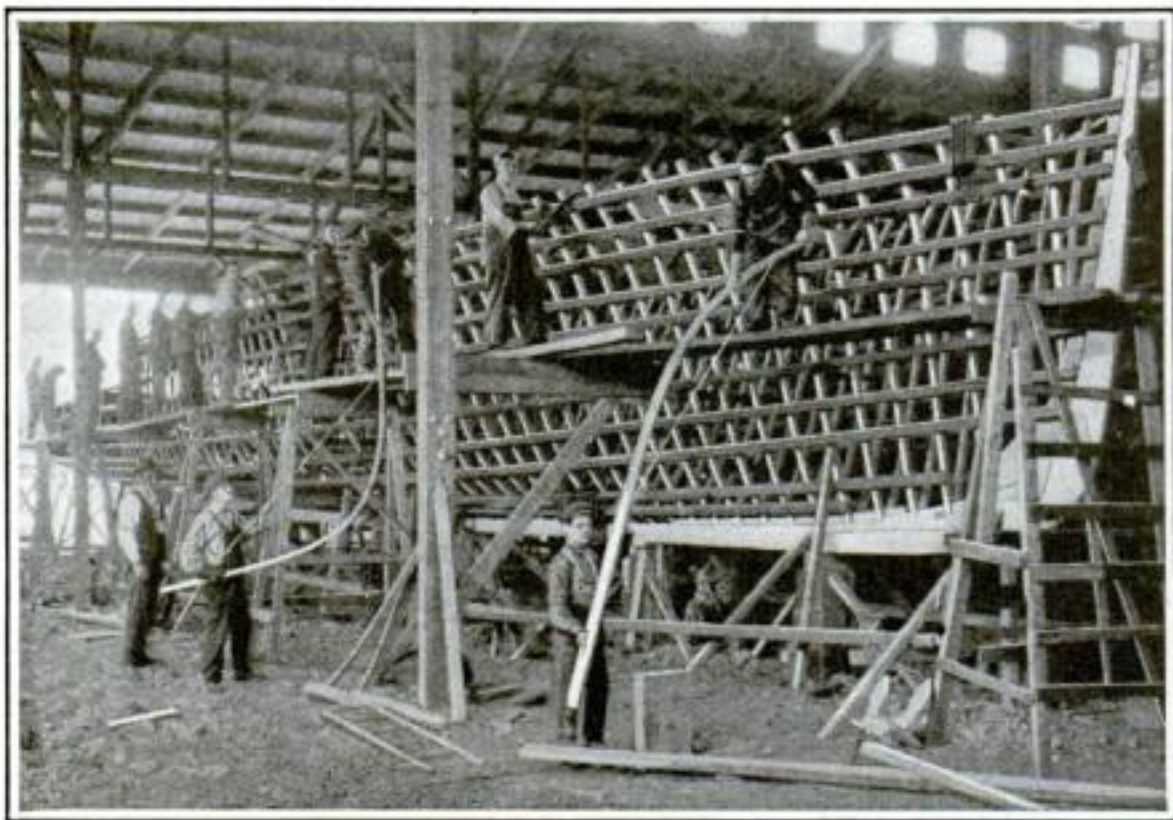

About fifty operations were involved, each requiring a separate gang of men. Here is the "ribbing gang"



covered eight miles. End to end they would form a chain nearly twenty-five miles long

for England were motor-boats in the ordinary sense. They were really yachts. The interior design from bow to stern was as follows:

Chain locker, lavatory for crew, fore-castle for eight men, ammunition room, large fuel tanks, engine room, galley, mess room, office state room for two and additional tank capacity in the extreme rear. On deck there was a platform forward for a three-inch gun. Behind this was the chart house, and further back still the bridge where the steering apparatus and engine telegraph were located.

One feature of this boat is an arrangement by which the steering lines are laid along the side of the deck from the wheel, making them easily accessible for repairs.

The chasers were designed for service in the English

Channel and the North Sea, and while their sea-keeping qualities are excellent, nevertheless they do not carry enough food and fuel to last more than ten days. On the other hand, however, a boat of this size painted gray is invisible at a distance of more than three miles, so that it is often possible to catch the submersible unawares. The boats are intended for offensive operations almost entirely, though of course they would make good convoys near the coast.

The British have discovered that fighting the submarines is a question first of all of endurance. A larger chaser would be more comfortable, of course, but by no means so dangerous to the submarine.

A Board Which Will Help You Learn to Swim

A SWIMMING board invented by William H. Roberts, of Newburyport, Massachusetts, is a help in learning how to swim.


The device is nothing more than two warp-proof boards of pine which are fastened together at a very large angle. The swimmer straddles these at the narrow junction of the boards. Lying with his body flat upon the front board and resting more or less upon the saddle board, he is buoyed up in the natural position for swimming. He

learns the leg strokes first and then the arm strokes, and he rests back upon the boards whenever he becomes tired. By keeping his legs going slightly, the board is kept from overturning.

The buoyancy of the boards helps him to ride the waves and contributes to his enjoyment. Since there is no danger to fear, confidence is soon gained and the swimming strokes are mastered in short order. The swimming board is used purely for sport, also.



The buoyancy of the boards prevents you from sinking below shoulder level

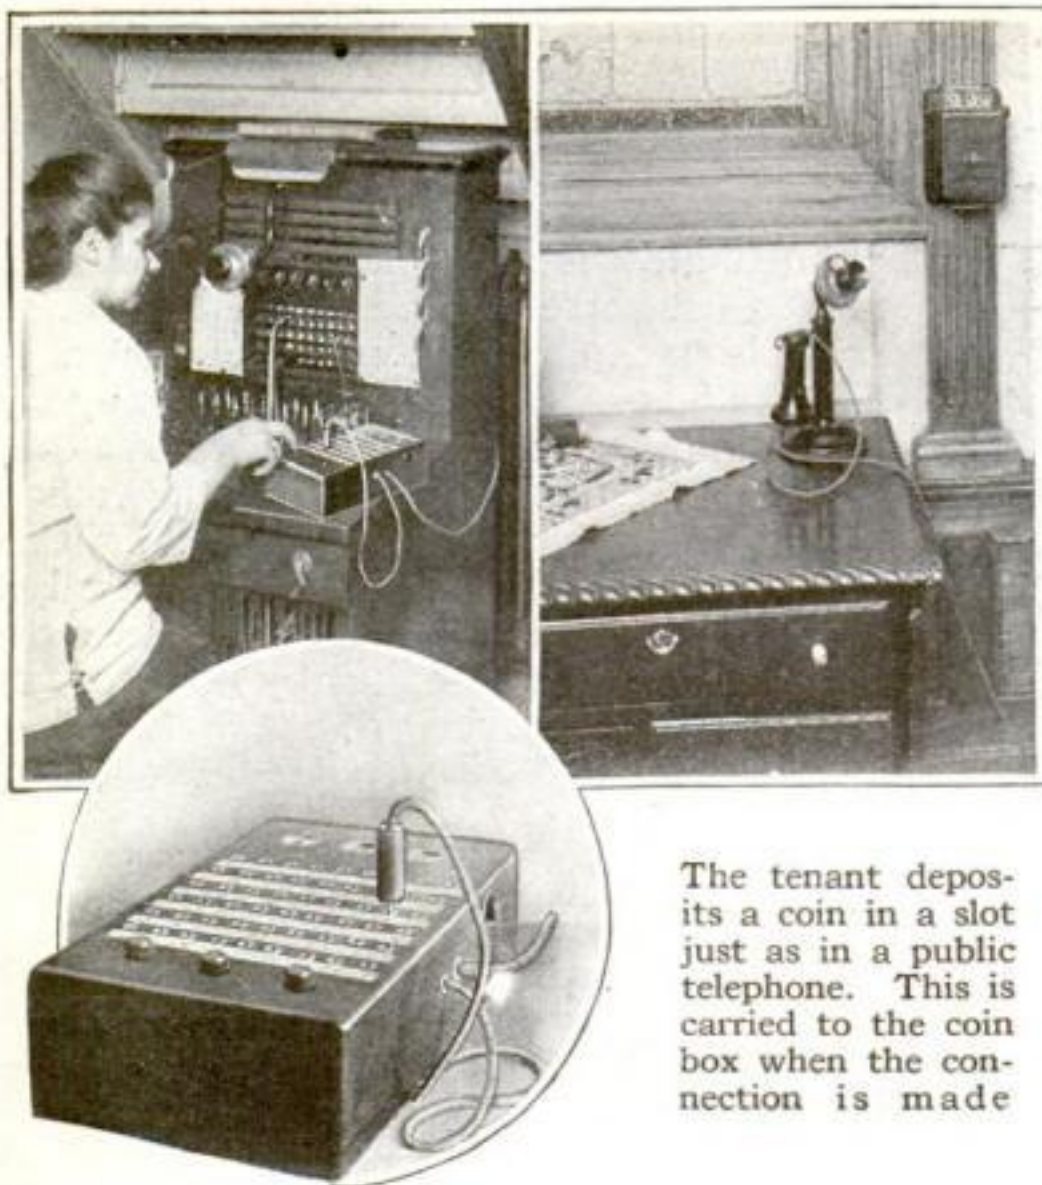

The tenant deposits a coin in a slot just as in a public telephone. This is carried to the coin box when the connection is made

Changing the Apartment Telephone into a Pay-When-You-Call System

A NEW telephone device deserves a Carnegie medal for furthering the cause of universal peace between tenants and apartment house managers. It enables the manager to collect at the time of the calling, and protects him and the tenant as well from being over-charged.

The coin-collecting device works entirely independently of the regular telephone system. Thus, the tenant calls the operator's switchboard in the apartment house lobby and is connected with central just as usual. But before the operator actually connects the tenant with central, she connects the coin-collecting box in the tenant's apartment with a recording box on her switchboard prefacing the action with a request for "Five cents, please." The recording box signals her the instant the nickel is placed in the collecting box. If central obtains the person called, the operator then connects him with the tenant, and by pressing a button, deposits the nickel in the coin box. If the person called cannot be found,

the operator then presses another button to return the money to the caller, just as in other pay-telephone systems.

This accessory has a credit feature, however, which is unusual. In case the tenant is out of change, the operator releases a brass check of the size of a nickel from the coin box. The tenant uses this, and when the manager comes around to collect the coins deposited, the tenant redeems these from him.

Be Thou Wary of the Bubbling Cup


A PROFESSOR in a western university has discovered that small organisms lodge in a great many kinds of bubbling-cup drinking fountains, and for a curious reason based on an ancient physical principle.

Twenty-five years ago writers of textbooks on physics had not the wealth of material to draw from that is now available. In carrying out one of their few experiments a rubber-tube-and-spout arrangement was prepared in such a way that it could be attached to an ordinary water faucet and a small jet of water was projected directly upward. In this jet a small ball would be placed—and, curiously enough, would remain in the

air, almost stationary, held up by the jet. The jet seemed to clutch the ball and hang onto it instead of throwing it away. The stream would divide under the ball, come up equally on all sides and hold it in place. The sphere might oscillate up and down slightly, but otherwise it appeared to be settled permanently in place.

The western professor mentioned has discovered that bacilli may oscillate up and down in some kinds of bubbling cups all day long, day after day—in the same way and for the same reason that the sphere did in the old-time jet.


GERMS HELD UP BY JET OF DRINKING CUP

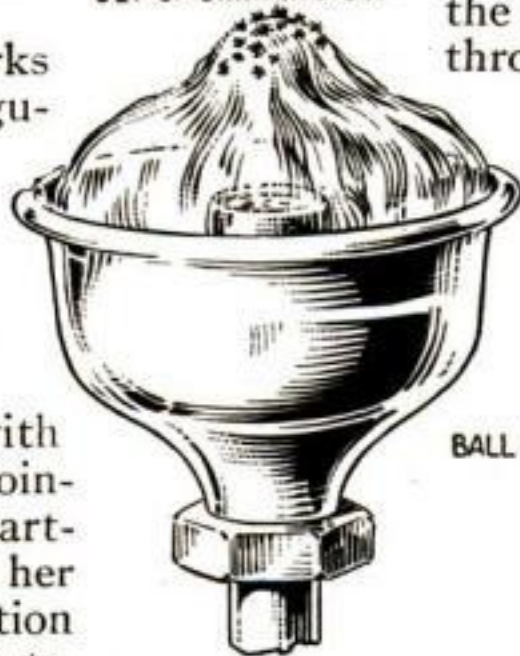

BALL HELD UP BY JET



The principle in accordance with which the ball is held up in the jet of water is the same as that of the germs held in the bubbling fountain

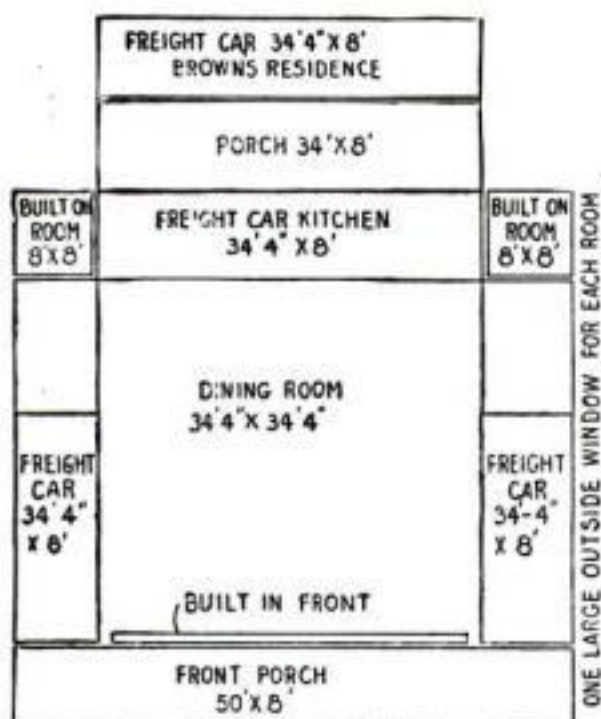

Plan and finished appearance of the box-car hotel. There are eight guest rooms and the landlord's apartment, besides hotel kitchen and storeroom. The two-story effect is only simulated

Owens Valley, California, Has a Freight-Car Hotel

OWENYO is a railroad junction point in Owens Valley, California, east of the Sierra Nevada Mountains. Mining and agricultural development have made it important. But it had no hotel. George Brown built one with the best material that he could find. He couldn't get steel for a frame or onyx for a foyer, but he could get box cars. So he built his hotel of box cars.

Standard box cars are thirty-four feet four inches long, eight feet wide and eight high. Three of these, unwheeled and with proper foundation, were placed in the form of a hollow square, inner corners connecting, with the open space facing the tracks. In this opening a front was built, with double doors and large windows. The center is a dining-room thirty-four feet four inches square, well floored, and lighted by many windows in a superstructure which gives the appearance of a second story. Across the front is a fifty-foot porch eight feet wide and across the rear another.

Behind that is a fourth car, constituting the residence of the landlord and his family.

Each of the side cars is divided into three comfortable bedrooms, and at the rear, on either side, another guest room is built in,

making eight guest rooms in all. The rear car in the building is the kitchen.

The entire building is metal-roofed, plaster-board finished and paneled throughout the interior. Every room has a large window.

Turn on the Water in Your Bath. It Can't Overflow. This Alarm Will Warn You in Time

WILLIAM J. ABERLE, of St. Paul, Minnesota, has devised an alarm which tells you when your bathtub has been filled to whatever depth you desire. Instead of having to watch the rising water, you simply adjust the alarm and let it do the rest.

A light hollow float is suspended in the water by a vertical iron rod. The rising water raises the float nearer and nearer to a horizontal lever connected with a bell. When the rod rises high enough its upper end touches the bell trigger.

A spring is immediately released by the trigger,

a clapper is brought into action and the bell rings. By adjusting the height of the bell mechanism, the height to which the water must rise to sound the alarm can be regulated as desired.



A float on the rising water lifts a lever which operates the alarm mechanism

A Ten-Ton Motor-Truck on Eight Wheels

It combines the greatest possible carrying capacity with the high speed and easy riding of lighter trucks



The eight-wheel truck is mounted on two sets of four wheels each, with tires of the pneumatic type. This arrangement provides an easy-riding vehicle of great stability and carrying capacity

THE novel motor vehicle shown in the accompanying illustrations is mounted on two trucks, patterned after the old-fashioned four-wheeled railway coach truck, having eight supporting wheels in all. Each wheel helps to drive the vehicle, which is thus always able to secure traction, since it is extremely unlikely that all eight wheels would be mired at once.

Because of the large number of supporting wheels, the tires may be of the pneumatic type, even for as large a vehicle as a ten-tonner. The use of such tires instead of the solid-rubber type, which must now be fitted on the conventional ten-ton vehicle, would cushion the driving mechanism to such a great extent that the vehicle could be run with safety at greatly increased speeds. This is in line with the most advanced trend in vehicular transportation, which is to carry as large unit loads as possible at the greatest speed compatible with safety. Large loads on one vehicle take the place of smaller loads on a larger number of vehicles of less capacity. This substitution means less traffic congestion, which is one of the greatest problems the police forces of our

most important cities have to contend with.

Aside from the advantages of carrying large loads at fast rates of speeds on pneumatic tires and of being able to secure the necessary driving traction at all times, even on bad roads, the eight-wheel arrangement also provides an extremely easy-riding vehicle of great stability and one of extremely short turning radius, since in the case of the vehicle shown, all the wheels are mounted so as to turn for steering.

In detail, the vehicle is mounted on two sets of four wheels, each set carried on a suitable cross-frame member. Each cross member has two arms on each end. Each end is made into the shape of a yoke to carry a wheel on a vertical spindle. This spindle simply serves to support the wheel so that it carries its share of the vehicle load and so that it can be turned in steering.

The power for revolving the wheels is secured from a conventional gasoline motor placed off the center line of the vehicle to the right at the front. The motor shaft extends aft of the crankcase in the usual manner and transmits its power to a four-speed gearbox located between the front

and rear sets of wheels by means of a short driveshaft. The power is in turn transmitted through the gearbox by means of a silent chain drive to two shafts, one extending forward from the front of the gearbox and the other aft from the rear side. Each of these shafts carries two worm gears, these meshing with large worm wheels and differentials mounted on supplementary axles which simply drive each pair of opposite wheels, but do not support any of the wheel load. Each of the supplementary driving axles is divided into two parts on each side, these parts being joined by means of universal joints so as to permit relative motion between any of the wheels of each truck, as when passing over road obstructions, without binding any of the driving members.

The motor must be placed rather high so as to clear the front axle of the front truck. The top of the motor extends up into the driver's cab and is covered by a removable metal hood. The driver sits on one side of the motor and the helper on the other. This construction permits the driver's seat to be placed well forward, which in turn allows a longer body on the same length of chassis than would be the case in the usual construction with the motor under a hood out in front.

All of the wheels are arranged to turn for steering, this being accomplished through one steering wheel and column by attaching the steering crank by means of a rod to a vertical turn-bolt carrying three arms. One of these arms is a separate lever, while the other two really comprise one bar pivoted at

the center. The separate lever serves to turn the vertical turn-bolt as the driver turns his hand-wheel to steer. Additional rods attached to one end of the two-armed bar lead to the front set of wheels, and other rods attached to the opposite end

lead to each opposite pair of the rear wheels. Thus as the turn-bolt is revolved, causing the two-armed bar to revolve about its pivot, it makes the front truck wheels turn in one direction and the rear wheels, controlled from the opposite end, in the reverse direction, thus giving a very short turning radius.


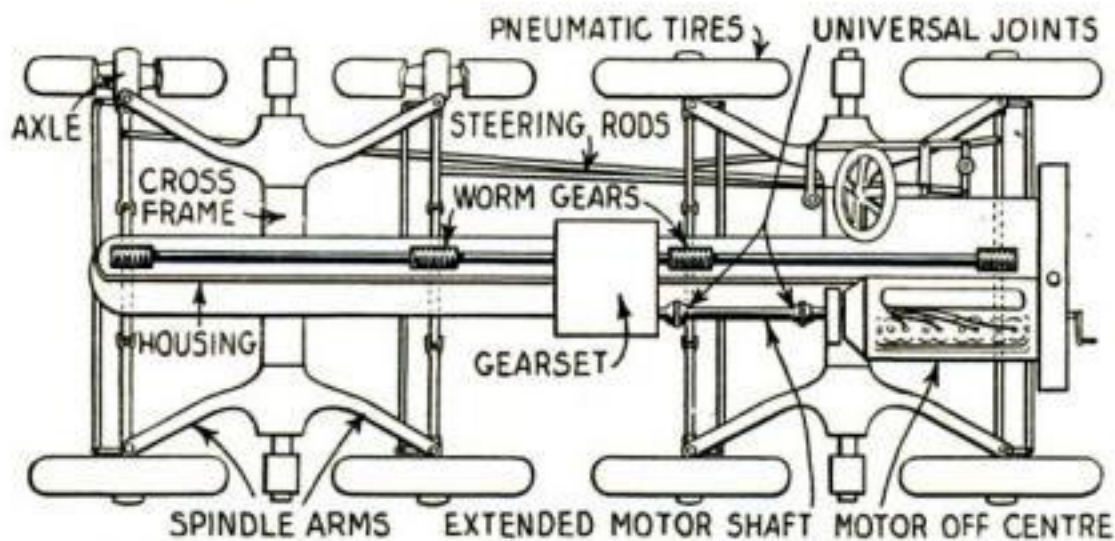


Diagram showing the driving and steering arrangement of the eight-wheel truck. All wheels turn for steering

To Make Your Lawn Attractive You Must Edge It Evenly

AN improvement on the ordinary lawn edger has been invented by Christian L. Schneider, of Davenport, Ia. It not only edges the lawn neatly but cuts a trough at the same time at a regulated depth.

The edger consists of a J-shaped knife carried on an arm which adjusts it to any height. One of the wheels of the edger runs on the path surrounding the lawn, with its outer flange pressed against the asphalt so as to insure a straight line. The other wheel is arranged so that it will keep parallel with the wheel on the path, whatever irregularities may occur in the lawn over which it travels. This makes it easy to push and insures a straight edge.

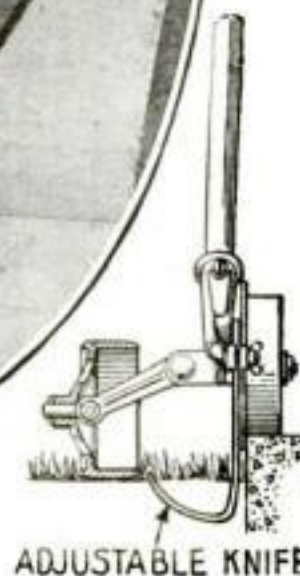

ADJUSTABLE KNIFE

The outer wheel presses against the edge of the path to insure a straight line. A trough is dug at the same time

An Adjustable Rake for the "Land Patriots"

ALL contributions to the cause of agricultural preparedness will be gratefully received! Especially when they are as good as the adjustable garden rake that is shown in the accompanying illustrations. Instead of having to use a number of different sized rakes to fit between rows of different kinds of vegetables, you can adjust this one rake to suit all purposes. All the teeth of the rake, excepting the central one, are riveted to two rectangular side-frames pivoted to an iron socket on the end of the rake handle. When weeding,



When the central tooth is removed the rake will straddle the small shoots. Then both sides of the row can be worked at one time



Above: The side teeth adjusted to a narrow row. At right: The rake opened out



or when loosening the ground between rows of potatoes, for instance, the side bars are swung around until they aline. The rake, thus opened to its fullest width, is then locked in this position by the wing nuts shown. When cultivating onions, on the other hand, the angle between the side bars can be reduced to adjust the rake to the smaller width.

When the sprouts are young, this rake can be used for cultivating both sides of the row at one time. The central tooth may be unscrewed and taken out making it possible for the rake to operate on both sides of the small shoots.


Eliminating the Noise from Railroad Traveling

ONE railroad at least has solved the noise problem. Much to the delight of the passengers, the "Burlington Route" has rooted out the grinding of wheels, the creaking of axles, and the other noises usually attendant upon traveling. They have accomplished this by installing a sound-proof flooring in their new steel cars. A layer of hair felt one inch thick, a layer of specially prepared paper, and a half-inch air space separate the steel floor of the car from the steel sub-floor nearer the ground. The sounds coming from the wheels are practically all absorbed by the insulating layers. Especially in traversing the loosely packed felt, the sound vibrations are readily lost in the loosely connected fibers, so that they will never reach the ears of the travelers.

Combining a Strainer with the Bung of a Barrel

A BARREL attachment which serves as a bung and a strainer in one has been devised by William R. Brison, of Tompkinsville, New York. Screw the attachment into the barrel and contents can be drawn through an exceptionally fine strainer, without retarding the flow.

The attachment consists of a hollow steel head that supports the cheese-cloth covered wire framework of the strainer.

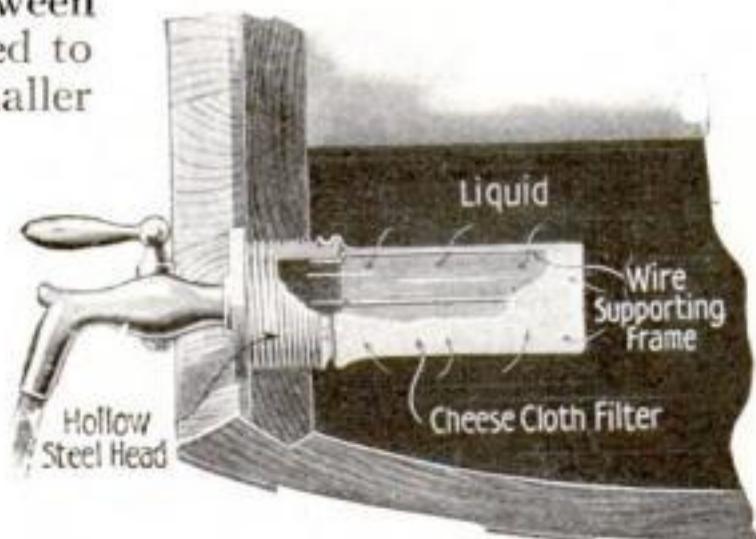

The cheese-cloth strainer extends back into the barrel like a long, hollow tube

Counting the Moisture Drops in a Fog


MEASUREMENTS of fog have hitherto been crude.

But an example of more refined measurements of fog has recently been afforded by experts of the United States Bureau of Standards. The measurements were made in the most notoriously foggy region of the world—the Grand Banks of Newfoundland.

The tiny drops that constitute a fog are smaller than raindrops. They are formed by the condensation of the gaseous water in the air, known as water vapor. Each drop condenses about a "nucleus"—consisting of some substance other than water. The air always contains an immense number of these nuclei, ready to form centers of condensation, when the conditions of temperature and moisture are right for this process. A method of counting these invisible nuclei was devised by John Aitken. It consists in causing a drop to form around each nucleus in a sample of air, and then counting the drops through a microscope.

Another process, devised by Carl Barus, makes it possible to determine the size of the drops. When a light is viewed through a cloud or fog it is seen to be surrounded by a colored ring, called a "corona." You have seen such rings around the moon and around street lamps at night. The angular diameter, or aperture, of these rings depends upon the size of the drops. Small drops produce big rings, and *vice versa*.

The apparatus of Barus was installed in the pilot-house of the *Seneca*, and the number of nuclei present in a given volume of air was measured three times a day, whether the weather was foggy or otherwise. A sample of air was drawn through a pipe, projecting from the port bow. It was admitted to a "fog chamber," saturated with water vapor, suddenly expanded, to condense water on the nuclei,

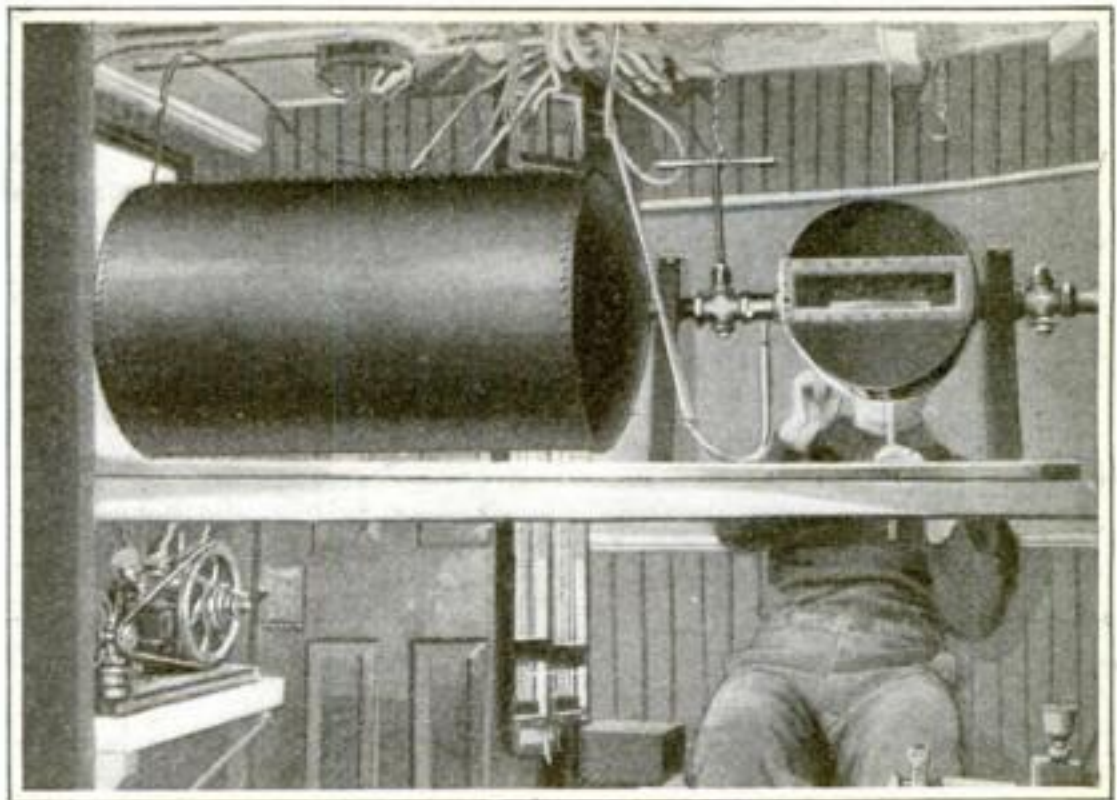

Instrument for measuring the tiny drops of fog. Sixty billion drops equal one-seventh of a glass of water

forming an artificial fog. The corona around a source of light, viewed through this fog, was measured, and the size of the drops was determined from the known amount of moisture in the chamber.

A Twelve-Year-Old Girl's Combination Umbrella and Rain-Cape

ALITTLE girl, Miss Martha Bachman, who lives in Chattanooga, Tenn., has evidently suffered the discomfort of wet stockings caused by the flapping of her just-so-long rain-cape against her legs on her way to school, as so many other little girls have done in days gone by. But Martha has an idea for eliminating such discomfort from future rainy days.

Her idea is to attach a cape of oil-cloth or rubberized material to the rim of the umbrella with snap-fasteners, buttoning it down the front in ordinary rain-cape fashion. An isinglass window at about the level of the eyes would prevent the wearers of such an umbrella-cape from bumping into each other on the street, like pilotless ships. In this way books could be protected from the rain also and the hand holding the umbrella.




Martha's combination umbrella and rain-cape. Even the dog can crawl under cover

Can the Railway Train Be Made Noiseless?

"Yes," say the inventors, "by improving the wheels."


"No," say the engineers, "unless you perfect the road-beds"

By Marius C. Krarup

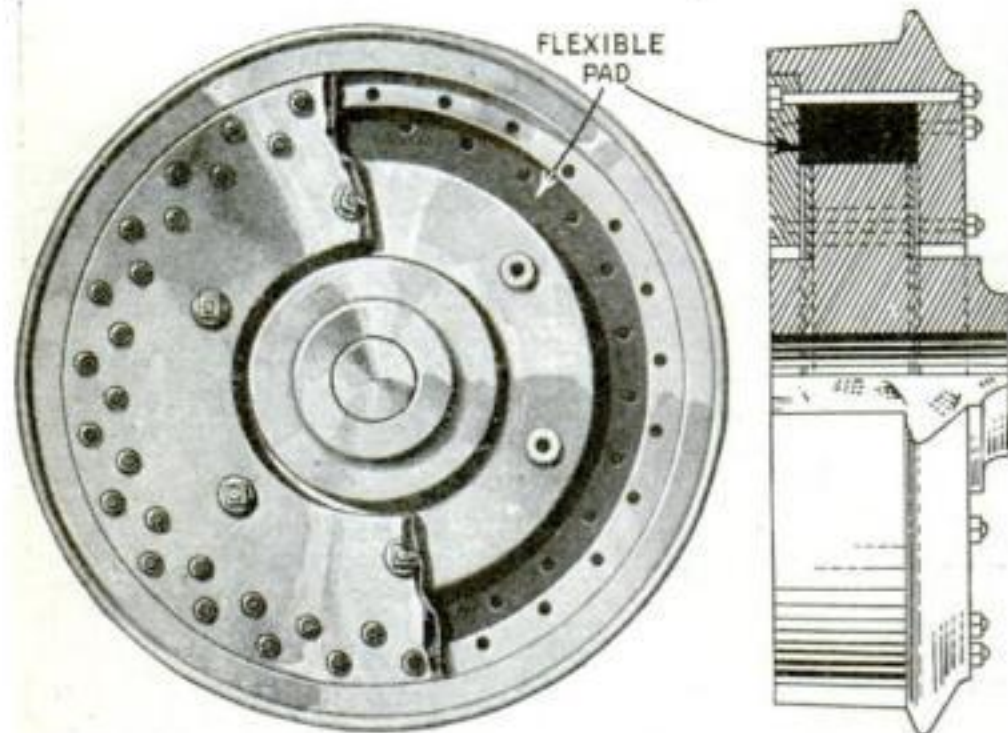

The Maginn wheel is built up in sections secured together by bolts or rivets for flexibility

THE idea of producing a noiseless rail wheel, and even making it distinctly flexible to reduce the wear and tear of the rolling stock has seemed a good one to some inventive minds, and they have proceeded to patent their conceptions. These are all characterized by a noise-deadening and more or less elastic substance which is inserted between the flanged rim and the hub portion of the wheel; by some provision to prevent the rim from slipping round on the inserted material, and by guide plates on the sides to hold the hub and rim in alignment. The details can be followed without difficulty in the accompanying illustrations but are subordinate in interest to the question whether the whole plan is practicable. It is next to impossible to make the "built-up" wheel as cheap or as strong as the one-piece construction. It is almost hopeless to try to introduce a wheel which is after all only a little less noisy than those in use, unless it pays for itself from the start through savings in other directions. If the wheel is frankly intended to be flexible, as the Maginn

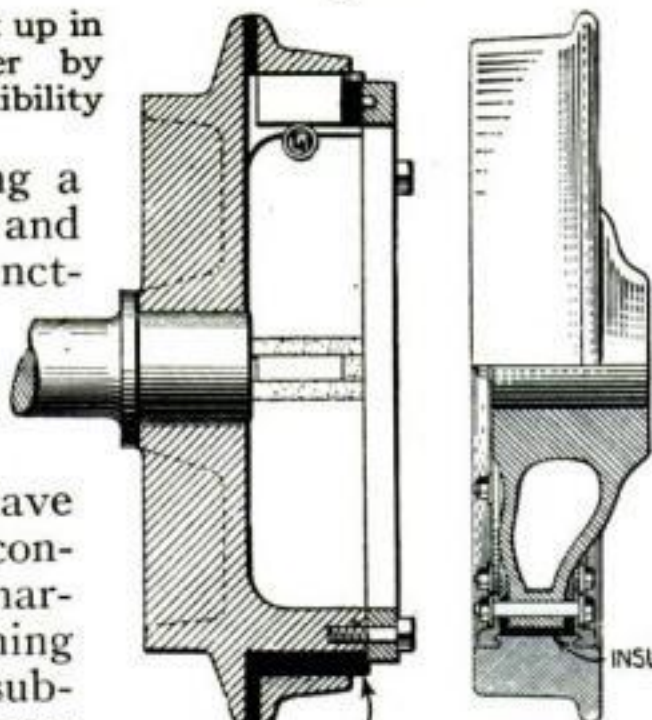

At left above, the Lindblad wheel; at right above, the Kinsman wheel

wheel among those illustrated, it is well to remember that flexibility makes a constant demand on the power of the locomotive. In the Kinsman wheel the main object of inserting a non-metallic substance is to insulate the wheel and the car from the rail electrically, this being a requirement in some forms of electric railway service, and this represents a new angle of the subject having little to do with the other efforts. The Lindblad wheel, on the other hand, is a cushioned and anti-noise wheel with special wiring to prevent it from becoming non-conductive.

The most radical and efficient method for securing comparatively noiseless operation as well as saving of road-bed and rolling stock, according to modern traffic engineers, comprises thorough grading, draining and ballasting of the road-bed, smooth hard rails of ample dimensions, manganese steel rails at crossings, frogs and improved design of switches, accurately concentric wheels and car springs with well damped and governed rebound. These would reduce noise and improve the service.





The Madden sound-deadening wheel also has a flexible pad which fits like a lining around its rim



The head and body of the suit are of cast metal riveted. The arms and legs, however, are of canvas reinforced by coils of strong metal tubing. Flexibility is thus given them while their ability to protect the limbs from being crushed by the enormous pressure of the water is not impaired.

The heavily laden divers are lowered by single steel cables which enclose the telephone wires through which the orders are transmitted. Oxygen apparatus is attached to each suit. In this enough oxygen is stored to last for eight hours. The weight of the suit is an advantage.

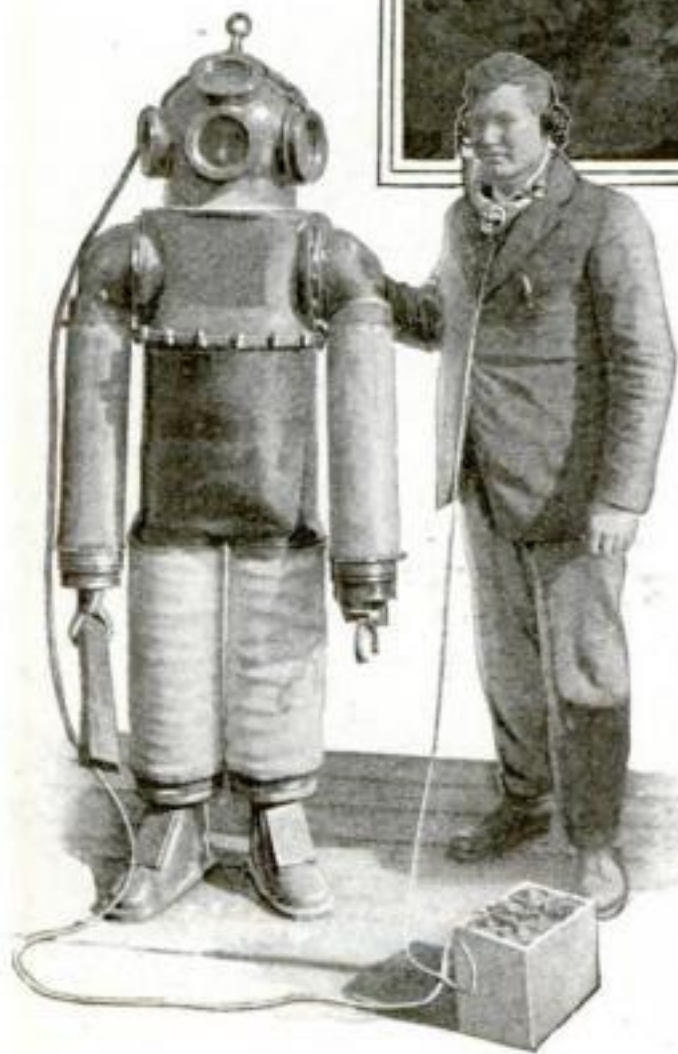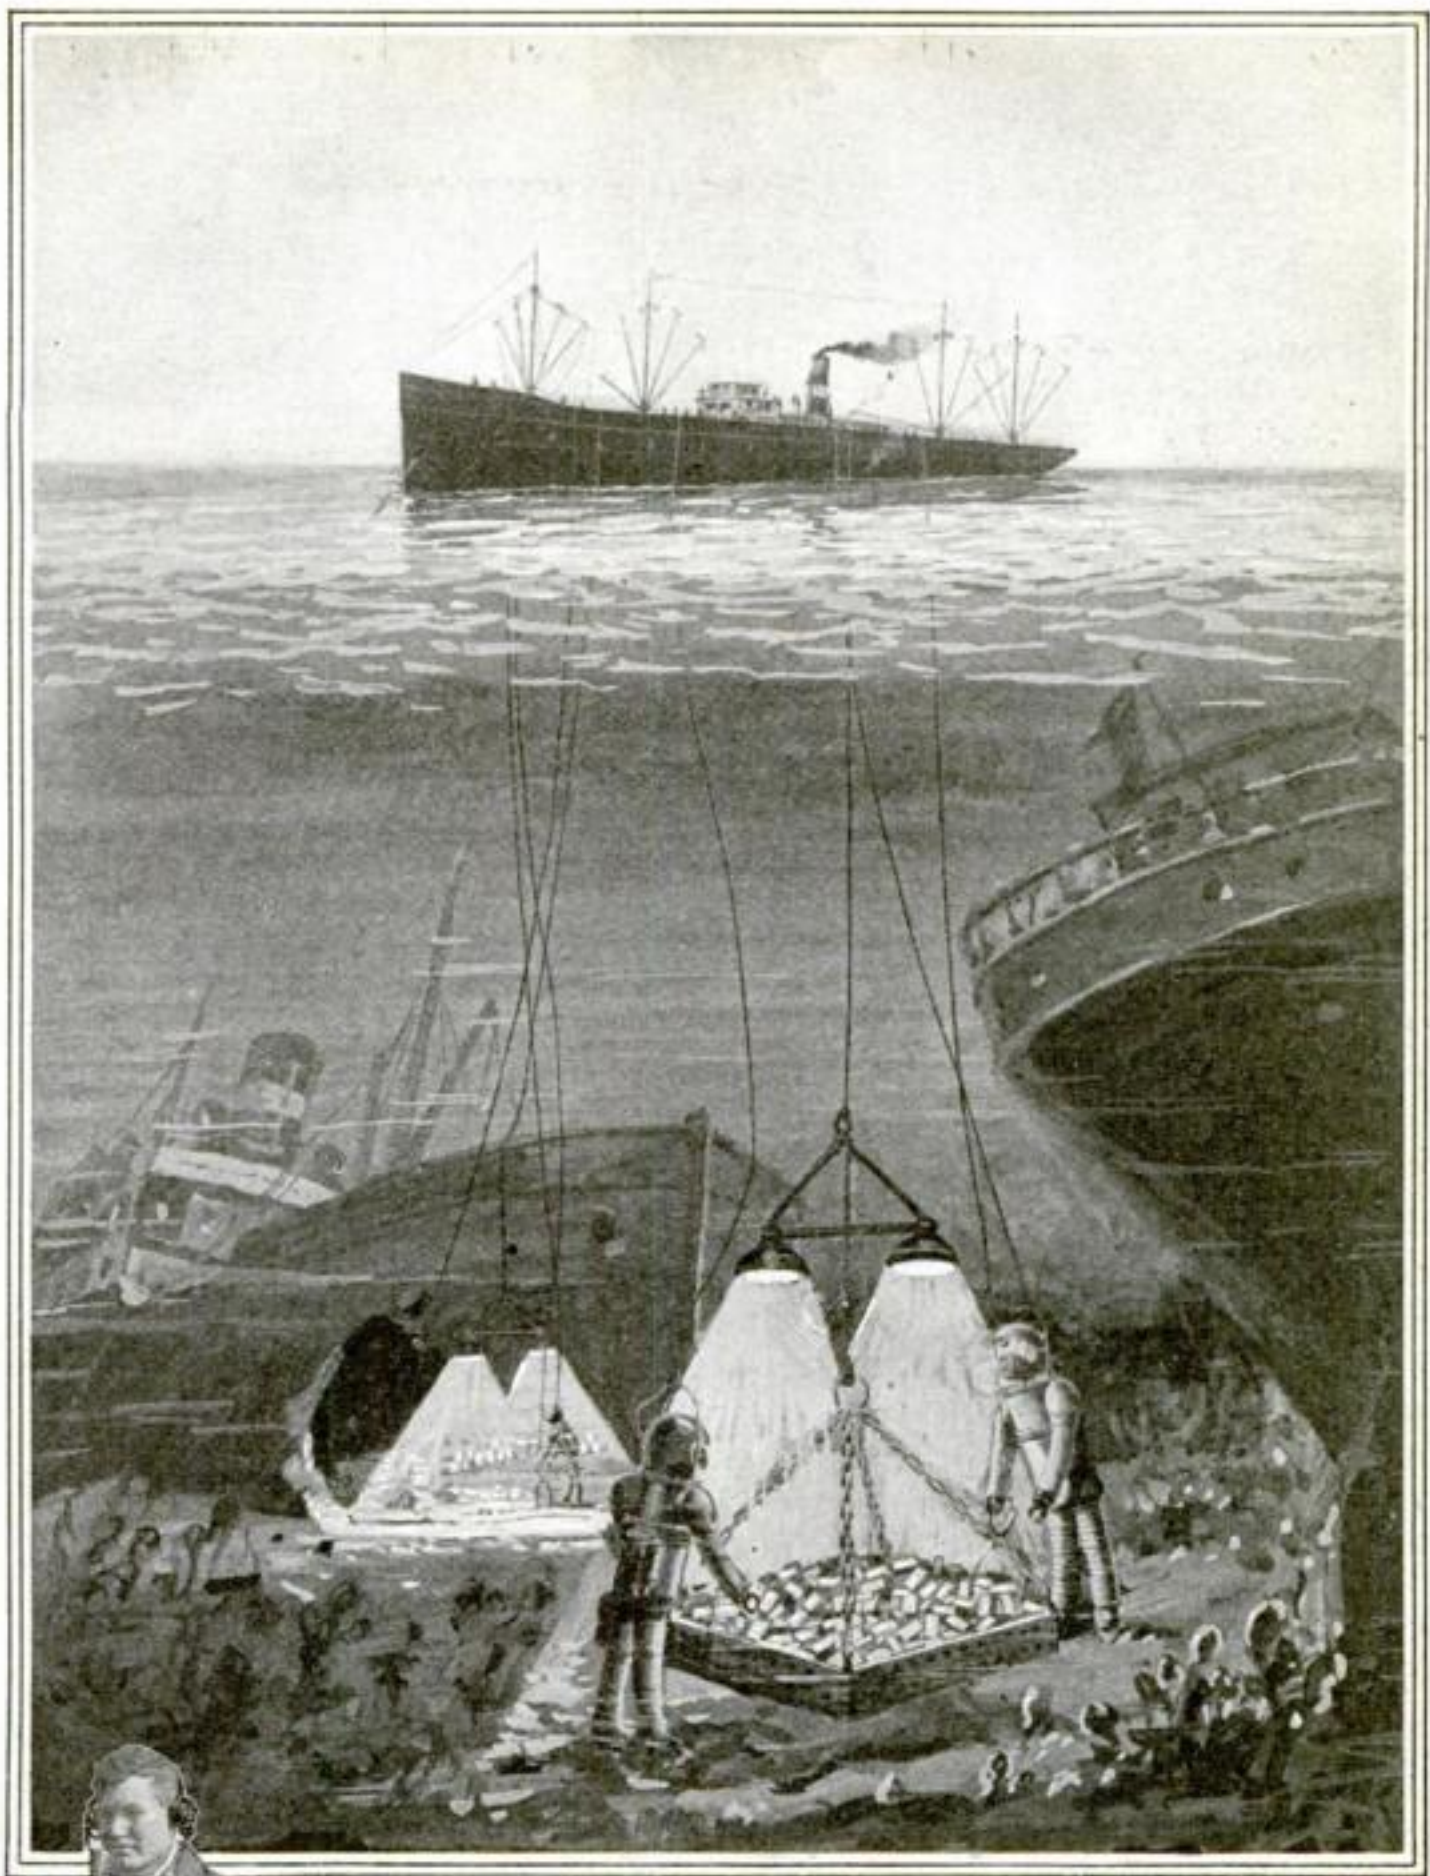

Salvaging in Armor

AS a diver goes down, the water pressure increases at the enormous rate of over three tons a square foot for every one hundred feet. This water pressure is overcome by supplying the diver's lungs with air of an equal pressure. Evidently, the air pressure has to be increased the farther down the diver goes; but if at any time this pressure becomes either more or less than the water outside, the diver will be injured or even killed.

This danger is entirely done away with by the armored diving suit invented by B. F. Levitt, of Toledo, Ohio. His suit entirely separates and protects the diver from the water. Manganese


bronze, which is as strong as steel but not so likely to rust, has enabled the inventor to descend to one hundred and twenty feet below the depth attained in the former world's record of three hundred and sixty-one feet. The great strength of this bronze was found capable of withstanding a crushing pressure of some eleven tons per square foot. In marked contrast to the experience of the three divers who made the former world's record—one died shortly after—Levitt experienced no hardships whatever. The air was supplied from an oxygen apparatus attached directly to the back of the diving suit.

The body and the head-piece of Levitt's suit are of cast metal and are riveted together. The legs and arms, however, are of canvas so that they can be bent while the diver is working. These are prevented from collapsing under the water pressure by closely wound coils of strong bronze tubing. The water-tight joints at the shoulders, ankles and wrists run in ball-bearings so the pressure cannot cause them to jam. Obviously, the suit must be very heavy. This fact is by no means a drawback, however, since every bit of the armor's weight is required to make the suit sink down straight. After the suit has been assembled on the diver, he is lowered into the water by a steel cable unwinding from a derrick on the salvaging boat. This cable also serves

the purpose of hauling the diver up afterwards. Small telephone wires form the core of the cable and connect the telephone apparatus strapped to the diver's head with similar apparatus on the salvaging barge. Powerful electric lights and carriers for the loads are lowered with the diving corps. This method will be used in an attempt to salvage the *Pewabic*, which went down in Lake Huron nearly fifty years ago.

Dummy Guns and Turrets Train England's Gunners for the Sea

WHEN England trains her gunners for the sea, she sends them to Whale Island in Portsmouth Harbor. Here the entire island is given over to steel sheds which are built like gun turrets on a battleship. The great guns projecting from these sheds are dummies, though they are exact counterparts of those on a battleship. The prospective officers and men are made to go through the exercise of range-finding, loading, aiming and "firing" these guns as rigidly as if they were in a real battle at sea. The heavy steel projectiles are hauled from the magazine by hydraulic and electric cranes just as in an actual ship. A real breech mechanism locks the projectile and its powder charge in the gun while an intricate swivel mounting of steel swings the gun into the firing position.

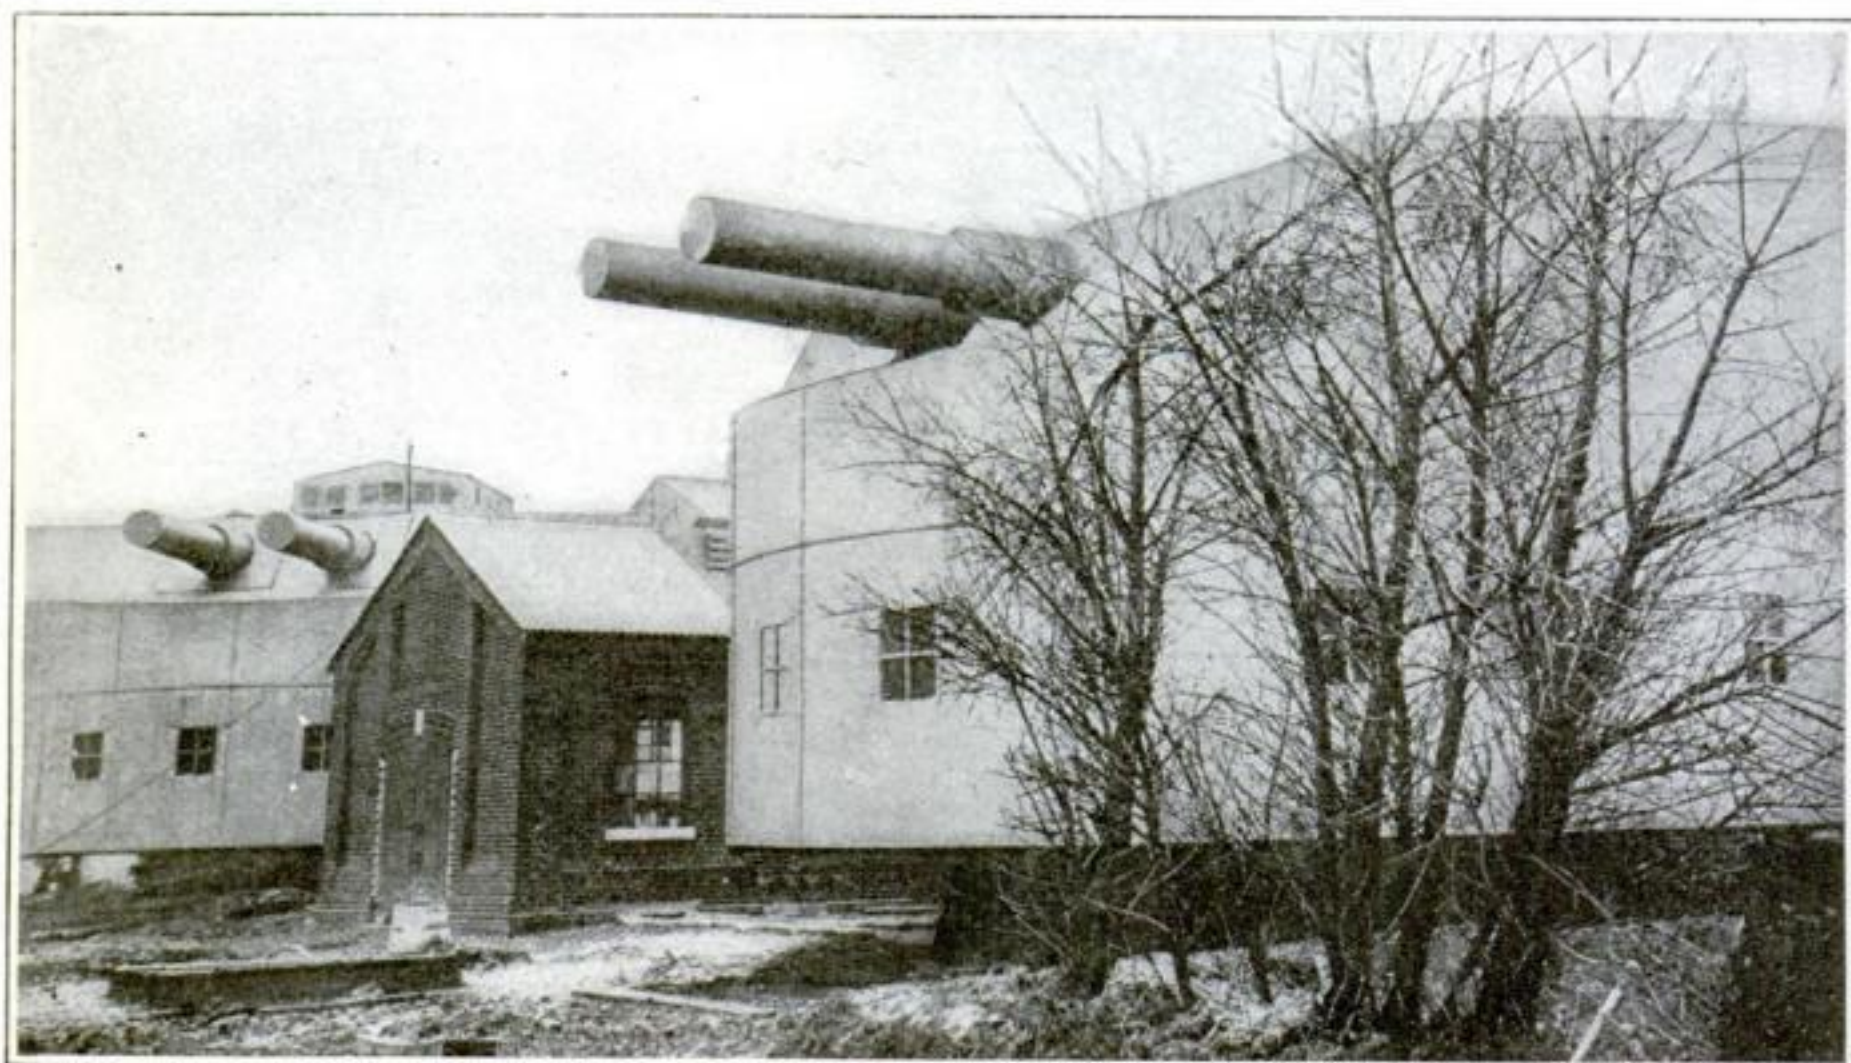

The great guns projecting from these sheds are dummies, though they are the exact counterparts of those on a battleship and can be loaded, aimed and "fired" by the recruits in training

The Straw Hat for Storms. The Top Turns Inside Out

A STRAW hat which can be taken out in the fiercest storm with impunity is a recent invention of William Wilson, of Newark, New Jersey. There is nothing exceptional about the straw. The top of the hat, however, can be turned inside out. The folded waterproof covering that is thus exposed can be drawn over the entire upper surface of the hat.

Ordinarily the waterproof cover is concealed beneath a cloth lining under the top. An elastic band keeps the lining drawn up tight.




When it rains, the top of the hat is swung around and the elastic covering carried underneath the lid is drawn down over the entire hat

Arthur Picard, a resident of New York city. It is in three sections—a handle, a sliding support for the pad, and the pad itself which may be of bristles or of absorbent material. The sliding support has

side jaws which clamp the pad securely in place when the ring shown on the tapered portion of the handle is pushed up as far

as it will go on the pad-holder. To release the pad, the ring is slipped down on


the handle, and the tongue in the groove of the pad-support is pushed up. This expels the pad from the groove.

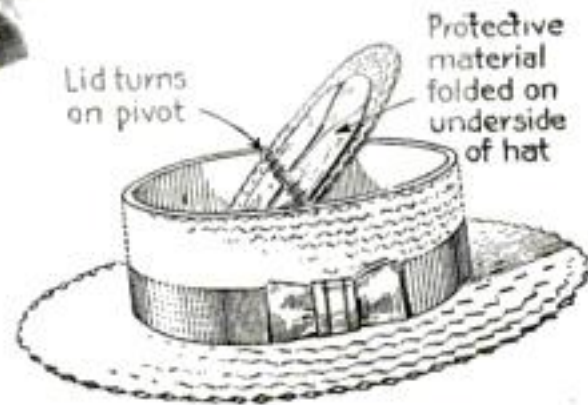

A Toothbrush for the Sick—It Has a Removable Pad



The pad may be made of bristles or of absorbent material. It is expelled from the groove and immediately destroyed

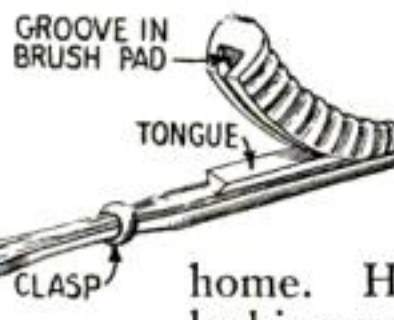


THE toothbrush of an invalid should be destroyed after a single use. That is the practice in the more carefully conducted hospitals. Ordinarily this would necessitate having on hand a goodly supply of brushes if the patient's teeth are to be properly cared for. With the type of brush shown in the illustration, however, only the pad, or bristles, need be destroyed. The handle may be sterilized and used as long as it lasts.


The brush is the invention of Alphonse

The Private Hairbrush—The Bristles Can Be Locked Up

APPARENTLY only one man of inventive genius in all the United States has been able to remain unaffected by the zip-boom-bang of guns and war news and to apply his talent to the crying needs of everyday and home. He has invented a device for locking up his hairbrush to protect it from the other boarders in the house! It is in the form of a cover tacked to the back of the brush and with overlapping sides which fasten with lock and key.

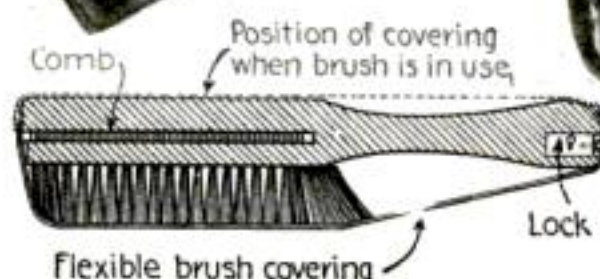

The cover is tacked to the back of the brush. The sides fold over and are fastened with lock and key

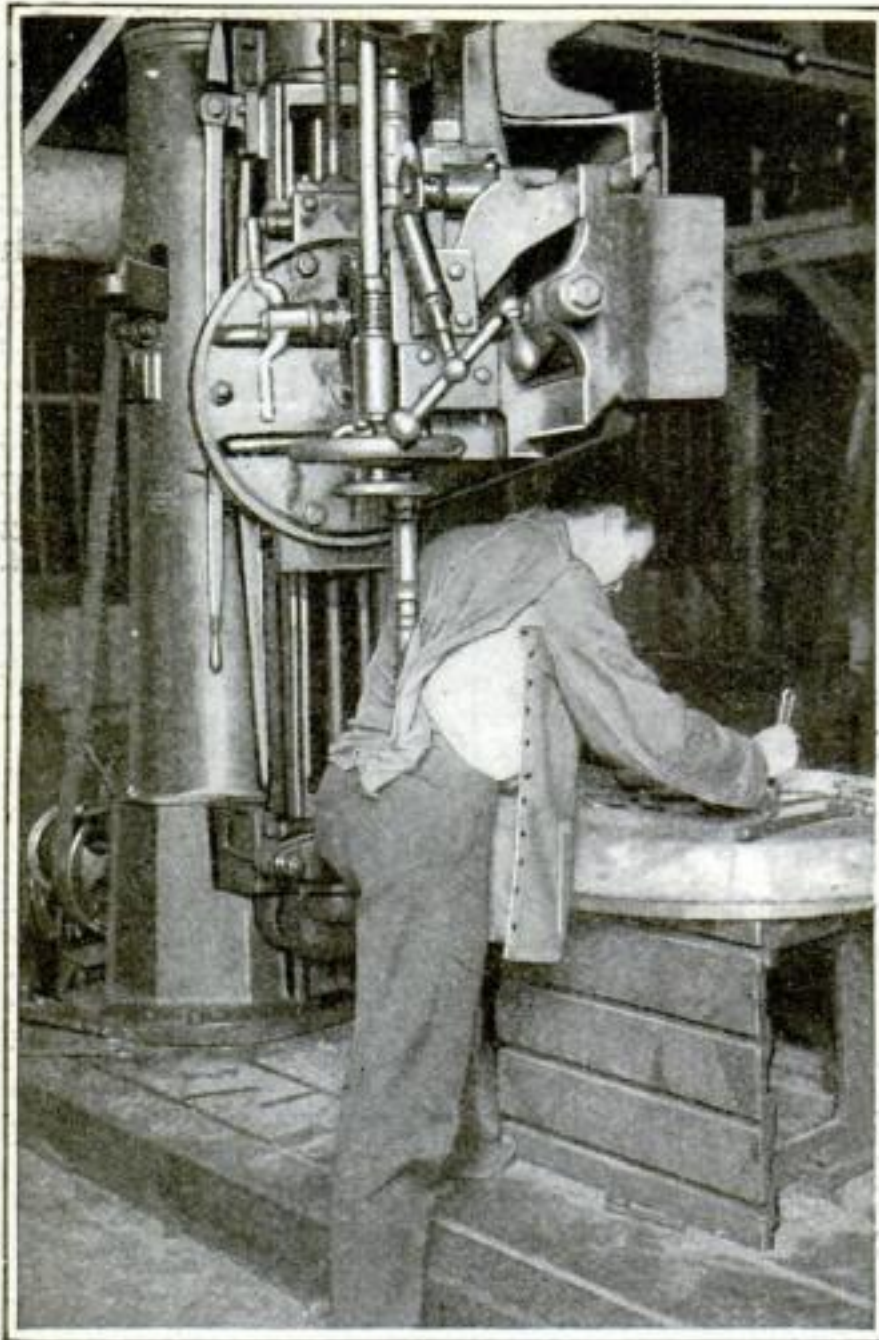

The coat is fastened together in sections so that it pulls apart readily when caught

A Safety Coat for Workmen. It Pulls Apart in Sections

TWO million machineworkers in the United States read safety bulletins each week and operate machinery equipped with every kind of safety appliance which money will buy. Yet not a week goes by but several careless workmen are injured and one or two killed outright because of their own recklessness. One of the most common forms of accidents is the catching of loose and exposed garments in revolving shafts, pulleys and other moving machinery.

Only recently a man wearing a ragged sleeve while turning a bolt on a machine in an Omaha shop was stripped to his waist. By a miracle his life was saved. Had he worn the safety garment illustrated on this page


he would have lost part of the coat only. Herbert P. Andrews, of Portland, Oregon, the inventor, has designed the coat in sections in such a way that any unusual pull on any particular section will detach it bodily from the rest of the garment.

The coat is not sewed together at the seams, but is fastened, one section to the other, by snap fasteners. Thus any section may be detached without tearing the rest of the garment or endangering the life of the wearer. If the workman is fortunate enough to see the machinery catch his coat, he can pull himself away instantly, losing only one section of the coat. The snap hooks and fasteners do not detract from the general appearance of the coat, and it meets all the demands for ordinary wear.

Motor Attachment Which Prevents Injury to Rowboat Screw

WITH the marketing by a Western concern of a tilting motor attachment, the motor-driven rowboat comes into its own. In the past when beaching the boats or when passing through shallow water, the propellers of rowboats using motor power were endangered. In a boat of such light draft as the rowboat, the propellers have to be held below the bottom of the boat to afford it sufficient "push." This, of course, is unsafe; for in beaching the boat, or in passing a rock or a snag in shallow water, the propellers are likely to be snapped off or bent out of alignment.


The tilting motor attachment prevents such an accident. The entire propelling apparatus is mounted on the flexible tilting attachment, so that if anything strikes against the back of the propeller the apparatus automatically tilts up and the propeller clears the obstruction without injury.

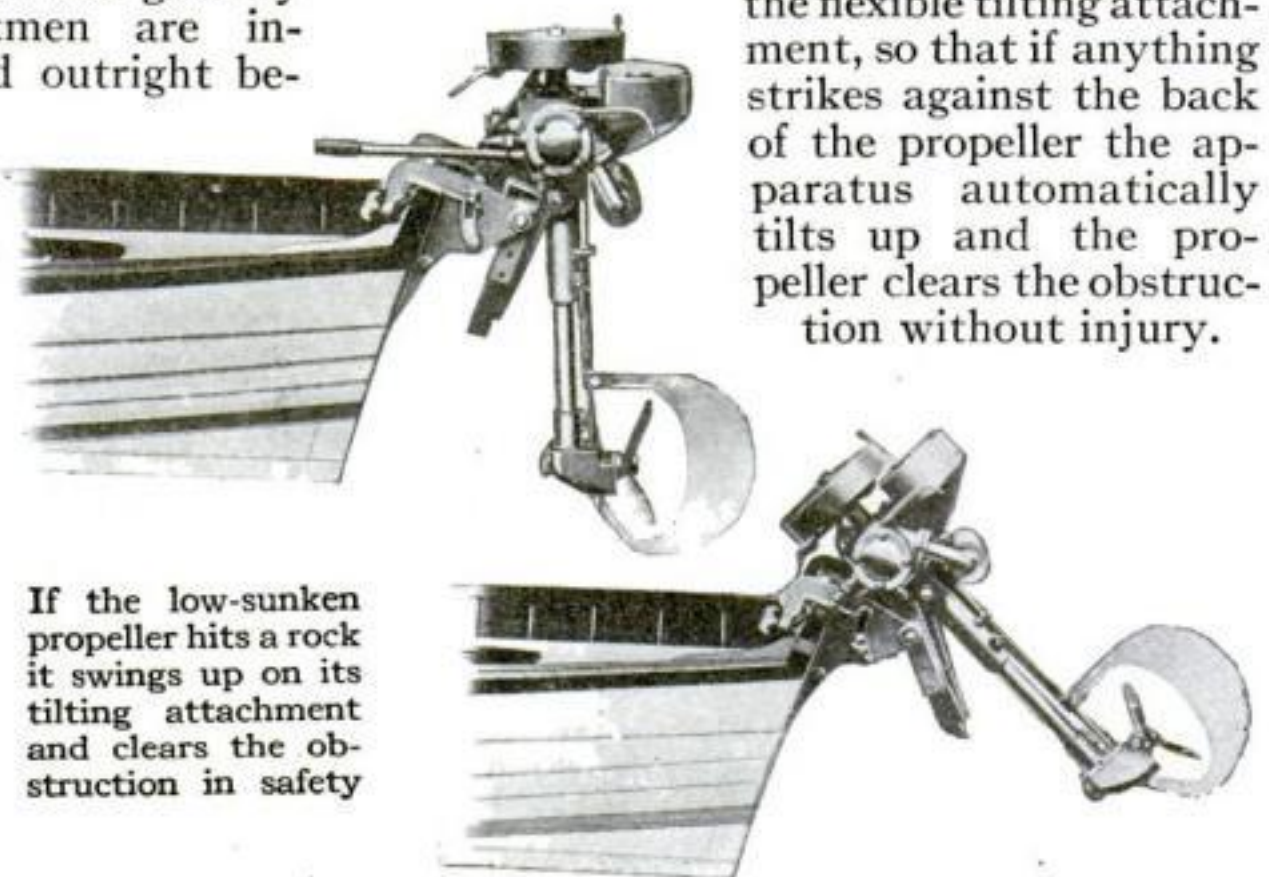

If the low-sunken propeller hits a rock it swings up on its tilting attachment and clears the obstruction in safety

It Stormed; So the Funeral Was Conducted by Telephone

FROM Wisconsin comes the report of a funeral by telephone. A Methodist minister, of Oakfield, died and his bishop was to deliver the funeral sermon. But a severe storm came on and the bishop, who was on his way, saw no chance of getting to the village, since traffic was stopped on the short branch line leading to the place. Stopping at a farmhouse to telephone his predicament to the waiting family, he decided to conduct the service over the telephone, one of the members of the family repeating his words to the mourners.

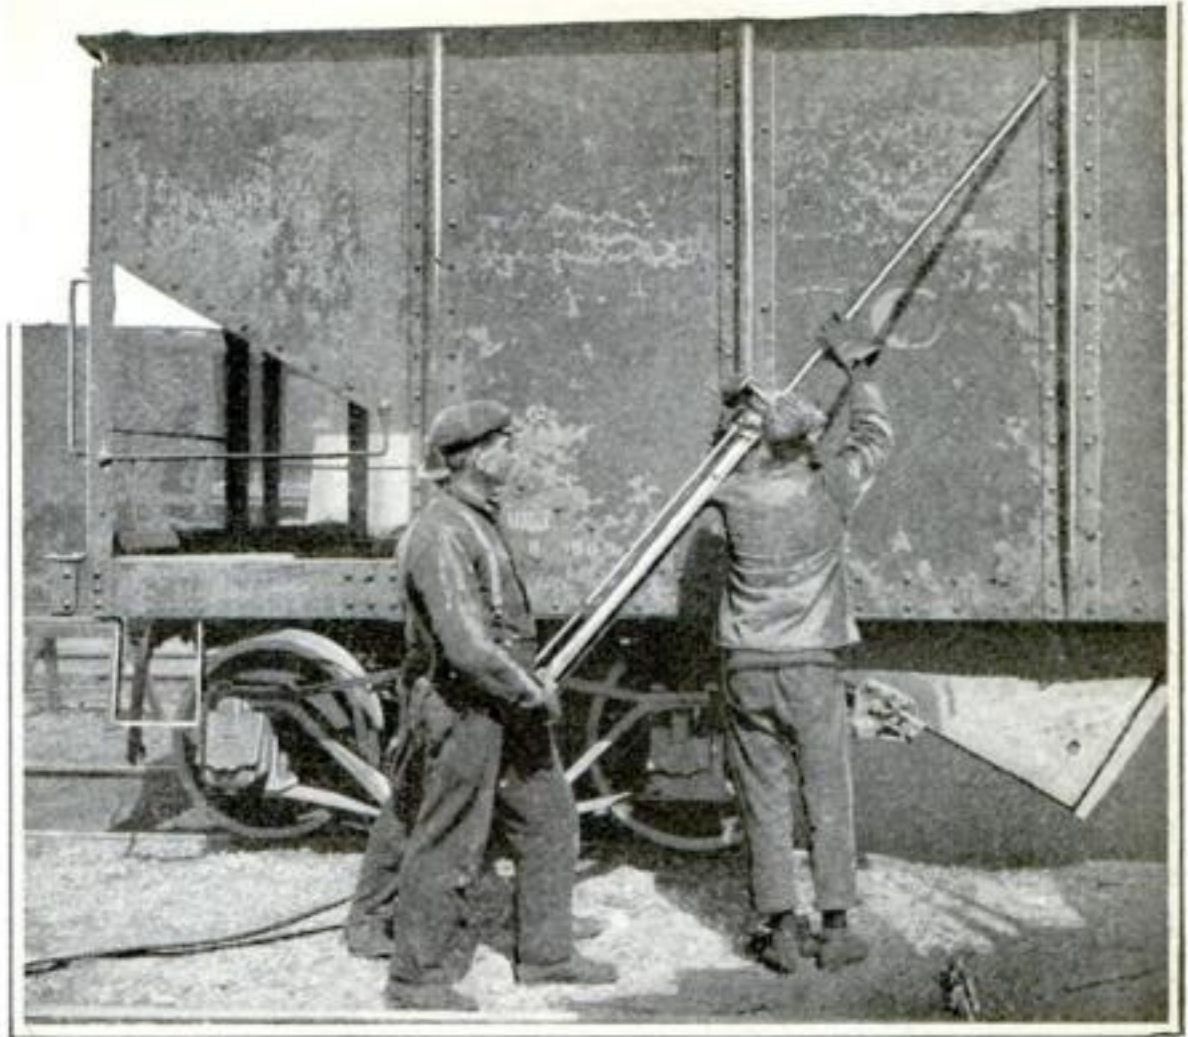


Compressed air pumped into the cylinder rapidly vibrates the cutting bar as would a short-stroke reciprocating engine

The Last Word in Fountain Pen Efficiency—An Eraser Attachment

IF you should make a mistake while writing, the fault is yours, not your pen's. However, your pen may be made to correct the mistake very neatly. Daniel R. Markley, of Lancaster, Pa., has devised a plan for attaching an eraser composed of threads of spun glass to the top of the barrel of any ordinary fountain pen.

The spun-glass threads are encased in a cup which is held in another cup which screws on to the barrel of the pen and is covered by a cap resembling the one which covers the pen. The inner walls of the cup holding the bristles, or threads, converge at the outer end so that the bristles are held in a compact little bunch, as shown in the illustration. As the bristles at the end are worn away the remaining lengths may be fed through automatically by screwing the cup further up.

The addition of the eraser does not alter the appearance of the fountain pen in any other way than by slightly increasing its length.

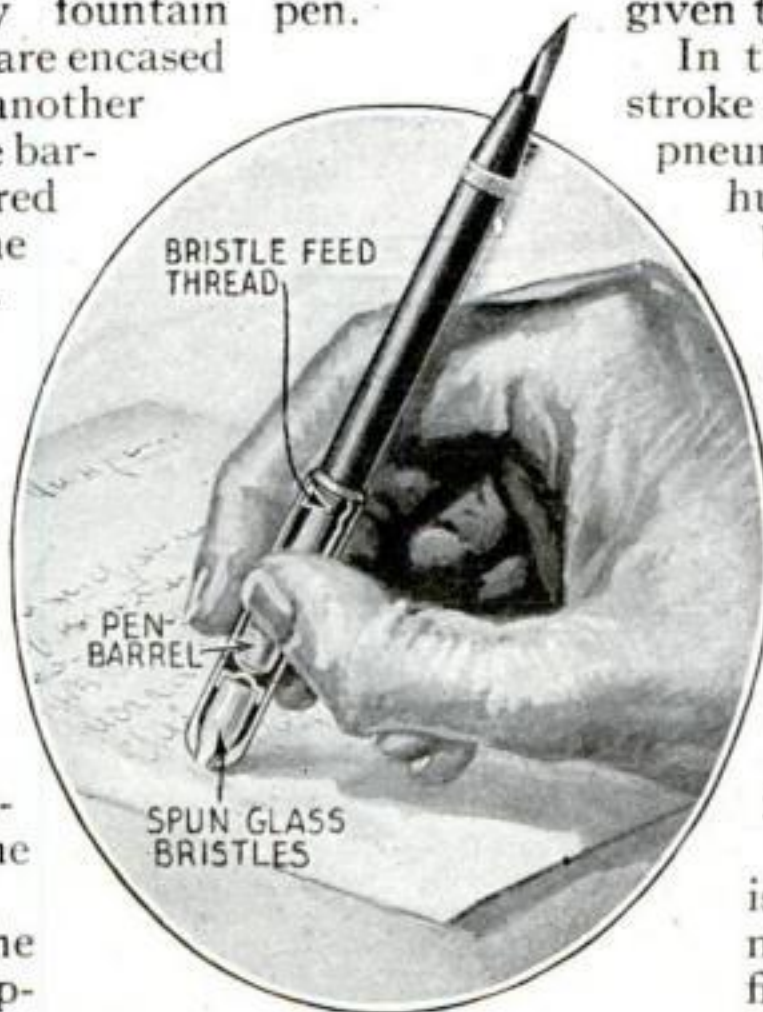

Bristles of spun glass are fastened in a cup threaded on the barrel of the pen for an eraser

Removing Iron Rivets with a Pneumatic Hammer

THOUGH the pneumatic hammer has long been used in structural steel work to shape the heads on red-hot rivets, the old hammer-and-bar methods are still used in removing the rivets. A pneumatic hammer has been invented, however, which removes fifty times as many rivets in a given time.

In the time that one hammer stroke can be given by a man, the pneumatic hammer gives several hundred. The long cutting bar is attached to a piston in a long cylinder. Air is pumped to the cylinder under pressure of one hundred pounds per square inch, and it immediately vibrates the bar violently. When the crew press the hammer against a rivet, the pounding knocks the rivet's head off almost instantly.

This method of cutting is not only easier for the men, but it saves seventy-five per cent on the cost of the hand method. Moreover, it can be used in ordinarily inaccessible places.

Giving Convicts a Real Chance

How the Prison Farms of Florida have superseded the inhuman leasing-out system

By Ewing Galloway



A gang of convicts at Bradford Farms grading a lot for an electric powerhouse, ice plant and steam laundry. One of the two locomotives belonging to the prison is seen in the background

A FEW years ago Florida's penal system was one of the cruelest, the most brutal that ever existed in the United States. All able-bodied male convicts were leased to private concerns to work in lumber and turpentine camps, and thousands of them were overworked, underfed, and housed in cages unfit for wild beasts. Often those who failed in the slightest degree to please guards or overseers were beaten unmercifully.

Magazines and newspapers revealed the truth about the lumber and turpentine camps, and as a result of their exposures the State Government established a prison that might serve as a model for agricultural states or principalities throughout the civilized world.

In 1913, after thirty-three years of leasing out all convicts capable of earning money for private concerns, the State authorities bought 17,000 acres of pine forest and swamps in Bradford County and started the development of what is now known as

Bradford Farms. In November of that year crews of convicts began clearing and draining this tract of wilderness and laying the foundations of some of the buildings. To-day they have three thousand acres in a high state of cultivation, a prison town of thirty-five buildings, all the implements, livestock and poultry they can use to advantage, and a steam railroad of their own construction running to all important sections of the plantation.

Offenders serving time at Bradford Farms are not made to feel that they are despised outcasts upon whom the State is wreaking vengeance. They are treated as misguided persons to be corrected morally and trained for lives of usefulness. They

are given wholesome food, housed in clean, airy buildings, encouraged to improve their personal habits, and employed at healthful and instructive labor.

The field laborers work only nine hours a day, which is about two hours less than the time spent



The wards are as light, clean and airy as the State could make them. The men rise at 4:30 and retire at 7:30



The stables and shops of the model prison farm. The land shown in the photograph was a wilderness of pine forests and disease-breeding swamps before the convicts improved it

each day in labor by the average free farm hand in the South. They take three hours, exclusive of the time spent en route to and from the stockade, for rest and dinner in the middle of the day.

They grow cotton, corn, sorghum cane, potatoes and all kinds of vegetables, and raise cattle, hogs and chickens. Last year their Irish potato patch was 550 acres, and an even larger area was given to sweet potatoes.

The methods of crop cultivation and livestock raising that have been adopted are

the best known to the State Department of Agriculture. The Commissioner of Agriculture, William A. McRae, sees to it that all the work is done in the best possible manner. The result is that practically all persons released from Bradford Farms are highly skilled farm workers. The more intelligent ones are well trained in farm management also.


At the present time the prison population at Bradford Farms is approximately 650. About 250 are leased to counties to work on public roads. There are 736

working for private corporations. But the lease law of to-day is not like the old one. It places the working of leased convicts under rigid State inspection, and gives the Commissioner of Agriculture the right to cancel contracts whenever lessees fail to treat prisoners humanely. Only negroes of low-grade intelligence are leased, and the contracts are limited to two years.

There is a rapidly increasing sentiment in favor of abolishing the lease system and sending all the State's convicts to Bradford Farms during imprisonment.



This gives an idea of the work the convicts accomplished in converting the three thousand forest acres into tillable land

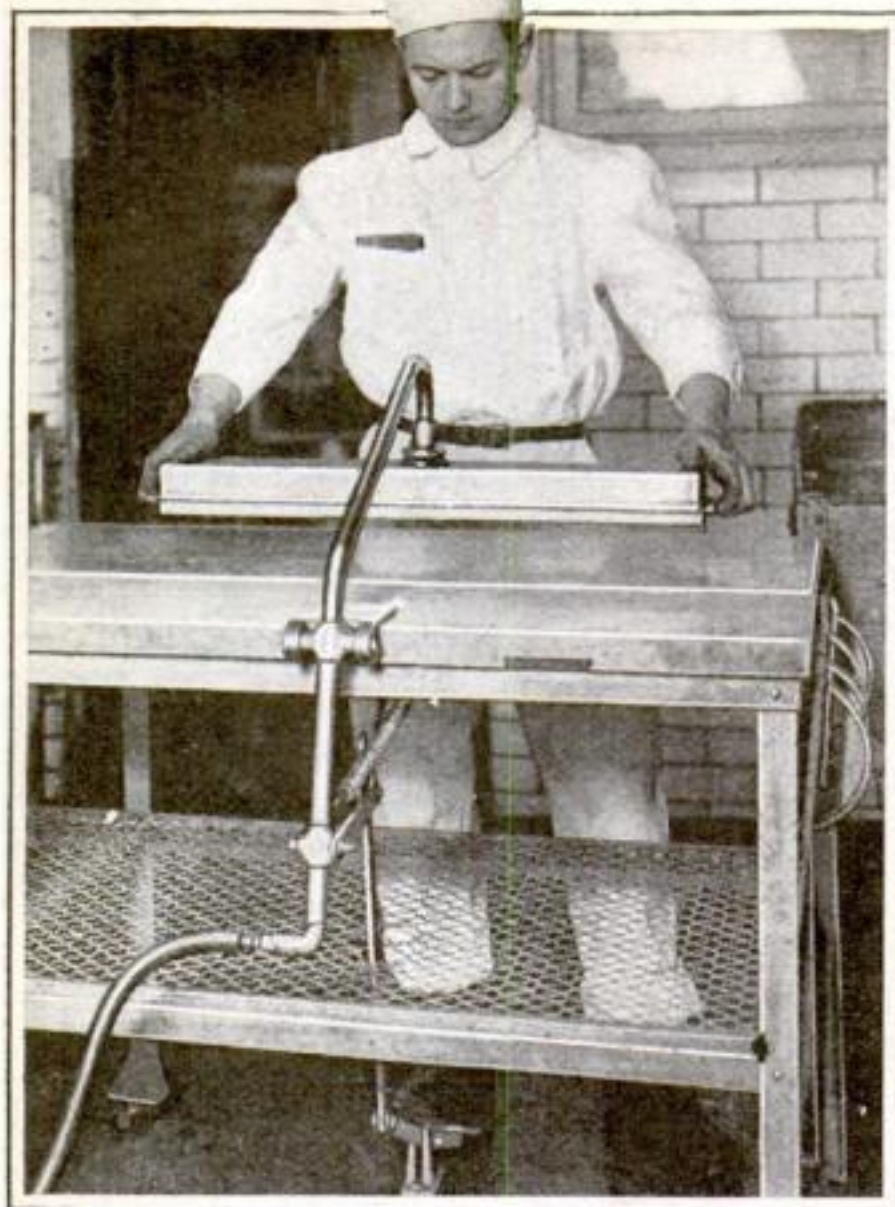


The inflow of compressed air is controlled by a foot-treadle so that the hands are free to move the block to and fro under the pipe mouth

With the Warm Weather Come Improvements in Ice-Cream Making

THE ice-cream manufacturer encounters the same difficulty in removing blocks or forms of cream from their molds as does the average cook or housewife with her frozen desserts.

A recent device, patented by L. M. Hendler, of Baltimore, Md., for overcoming this difficulty, is a contrivance for forcing warmed air through a pipe to the bottom of the mold to dislodge the bricks of cream. This is more particularly for the convenience of dealers who handle large oblong blocks of cream which must afterward be cut up into the smaller bricks. The valve which controls the compressed air inflow is conveniently operated by a foot-lever.

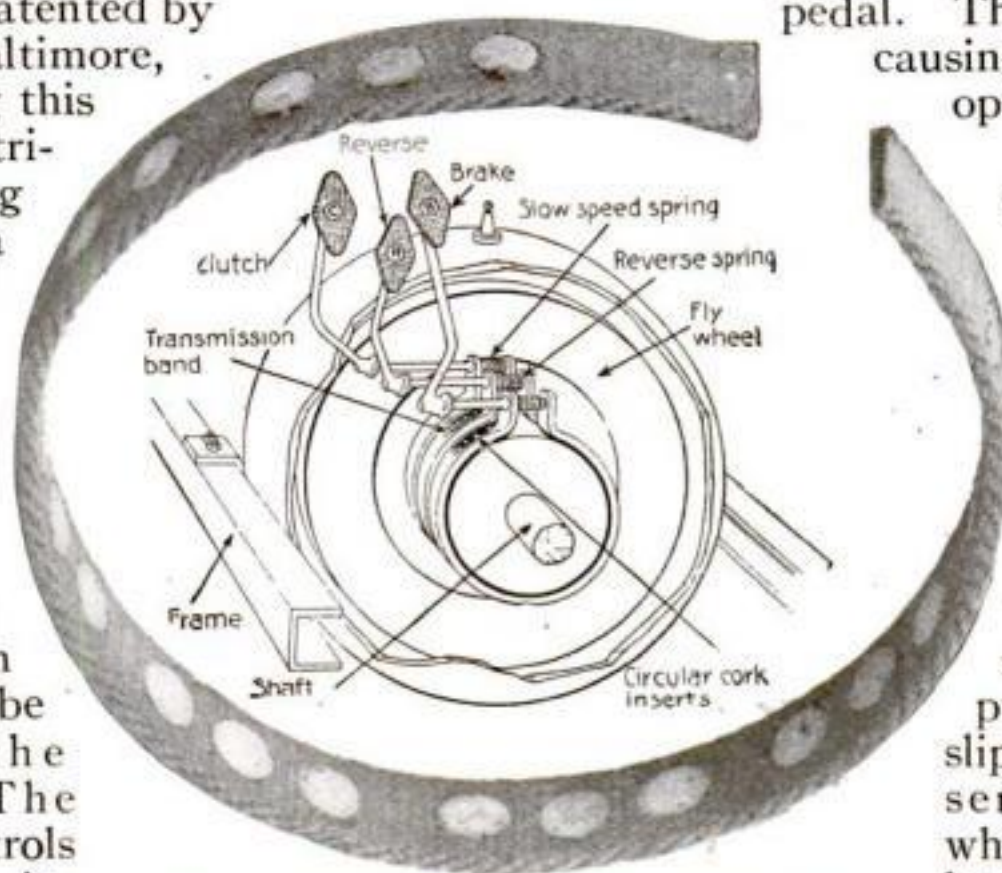

The transmission band with cork inserts, encircling a diagrammatic drawing showing the band in use on the automobile

Why Not Dress Alike and Save Money During War Time?

WHY not a civilian uniform as a measure of economy in clothing? suggests a Canton, Ohio, man. It could be worn by everyone, man, woman and child, and thus eliminate foolish dressing, the dude, and the spending of hundreds of thousands of dollars on needless finery. It would certainly bring home to the civilian population their part in the war, and the ladies would need to apologize no longer for appearing twice in the same dress. As the result of investigation carried on by the Ohio man, a standardized suit of wool of excellent quality could be sold for less than twenty dollars.

A New Type of Transmission Employs Cork Inserts

THE new type of transmission band shown in the accompanying illustration is designed to overcome the objection to the planetary form of transmission, such as used on the Ford car. It has cork inserts like buttons. These extend out beyond the band proper for a very slight distance and come into direct contact with the revolving drums as the speed is changed.

On account of the high coefficient of friction of cork and steel, the braking effect commences at once, whereas the plane surface fabric band usually fitted slips as it becomes worn and glossy and does not grip except when an excessive amount of pressure is exerted on the transmission pedal. Then it grips suddenly, causing a jarring in the operation.

The cork buttons also act as springs; for as the pressure increases they are compressed, thus allowing the band itself to come into contact with the drum. This makes an easily operated transmission which acts positively without slipping, even after long service, and one in which the bands have a longer life due to this practical elimination of the slipping.

This Actually Happens Oftener Than You Would Think

IT may be a mere matter of superstition which causes so many hundreds of soldiers to wear small Bibles and Testaments over their hearts. But the Pocket Testament League of England reports that it is very generally done, and occasionally we hear of incidents which confirm the report of the League. Superstition says that the heart so protected will never be pierced by a bullet. Certainly the soldier who wore the little volume shown in the accompanying photograph must be a firm believer in its efficacy. He was struck by two machine bullets. One of them remained in the Testament, though practically destroying it. The other passed through it and penetrated his ribs, but without causing serious injury.


Superstition also says that if the Testament be the gift of a mother or sweetheart it is doubly valuable as a talisman.

Notice the face on the right-hand page.



Two bullets pierced the little pocket Testament without doing the wearer any serious harm

The Door to This Siberian Home Is Located on the Roof

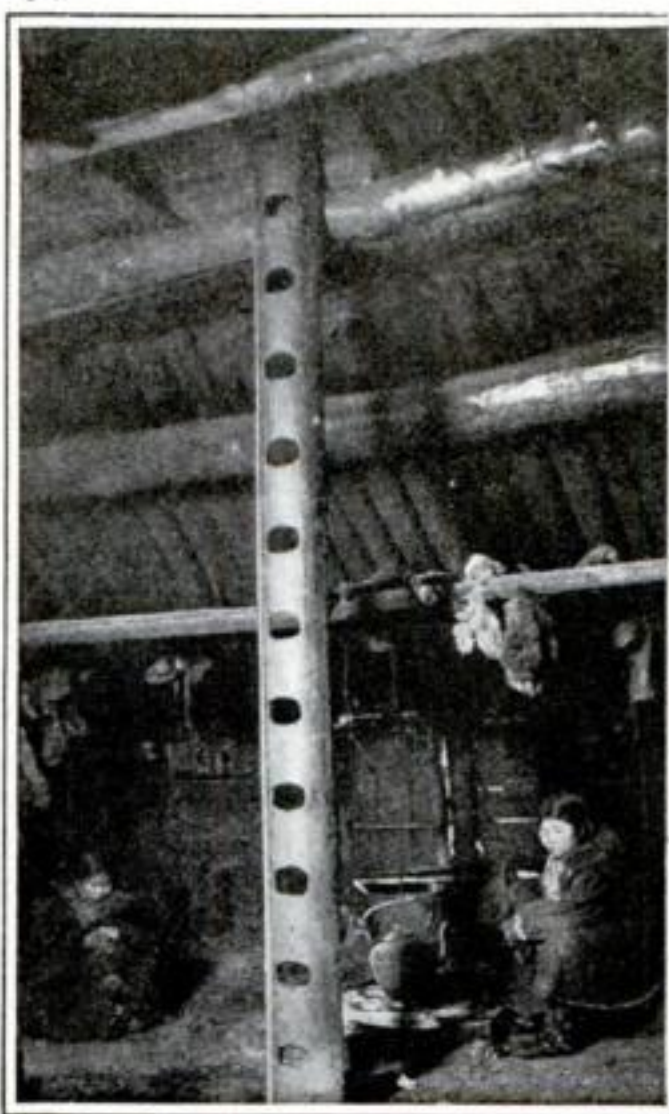

© Press Illus. Serv.

The Siberian native enters his home by a ladder leading from a door in the roof

MUCH of Siberia is a vast wilderness which still remains to be explored. In the winter season, when the streams cease to flow, disappearing beneath the ice and snow, the animals hibernate in their dens and the natives repair to their huts to sleep away, so far as possible, the infinite silence that broods over the land.

The illustration shows the interior of a Siberian home. The odd-looking ladder in the foreground leads to the door of the hut, which is situated in the roof. The ladder is hewn from a big log and the hole rungs in it have all been cut by hand. It is necessary to enter a Siberian home through the roof during the severest winter months, because the snow, driven by the gales of the North, forms great drifts which not only effectually cover up all side entrances but often conceal the whereabouts of the hut itself.


Have You Put the Cat Out for the Night? Then Don't

Says Lee S. Crandall, in *Pets* (Henry Holt & Co., New York): "The practice of turning the cat out of doors at night is as cruel as it is unnecessary. No animal is fonder of warmth and comfort, and the pet's happiness certainly is not increased by a night spent outside in cold and dampness.

"If as much energy were exhausted in keeping the cat indoors as too often is expended in putting her out, how great would be the boon to human nerves and unfortunate wild things! All felines are normally nocturnal, and it is at night, if ever, that a curb on their activities is needed."

The Problem of the Automobile Top

It may be made self-effacing and self-adjusting

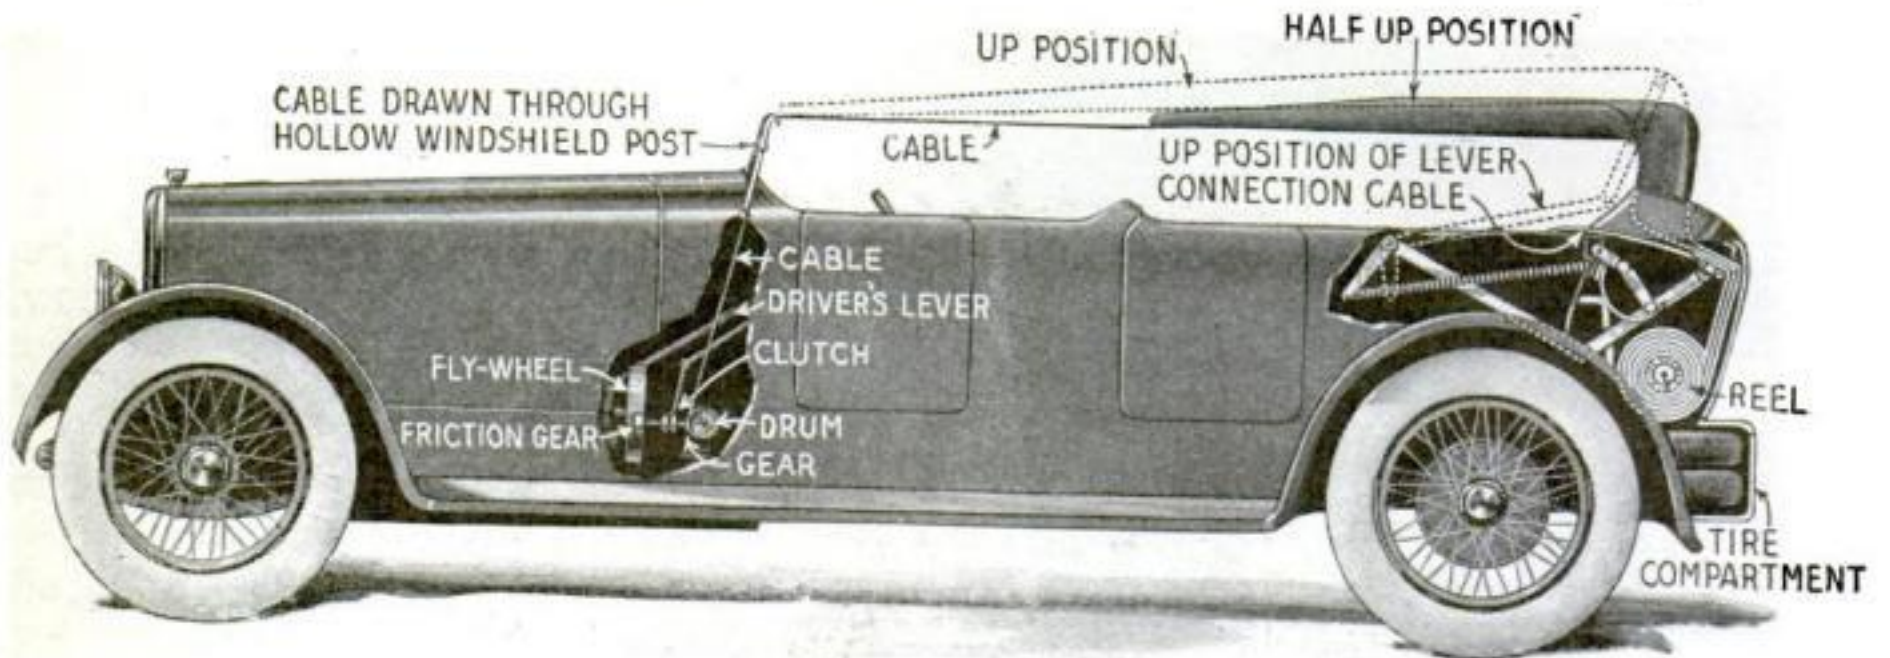


The automatic top is not only raised and lowered by the power of the engine but it is stored away out of sight in the extended rear end

ONE of the most conspicuous and ugly parts of the average automobile is the top. Folded, it is an overhanging object at the rear out of harmony with the pleasing lines of the body.


To eliminate this unsightliness, the engineers of two large companies have designed two types of disappearing tops which are entirely hidden when not in use. Both of these are shown here. One is raised by hand. The other differs from all other types of tops in that it is automatically raised and taken down not by hand but by power secured from the vehicle's engine, a convenience especially attractive to thousands of women drivers.

When not in use the hand-raised and lowered disappearing top is stowed away out of sight in a turtle-backed compartment at the extreme rear of the car behind the rear seat. This turtle back serves as a cover but also gives the body the lines of a yacht. The top is inserted in the rear compartment through a large U-shaped door in the top and two smaller doors on the sides of the rear seat, all three doors forming one large U-shaped opening when they are revolved up about their respective hinges. The side arms supporting the top, when up,

are pivoted at opposite points inside the compartment. Suppose the top is to be lowered. The chauffeur walks to the rear of the car through the divided front seats and folds the top away in the conventional manner. When the three doors are closed it is entirely hidden from view. An eave trough is provided in front of the doors so that water cannot leak through the door joints and down into the compartment where it might rot the

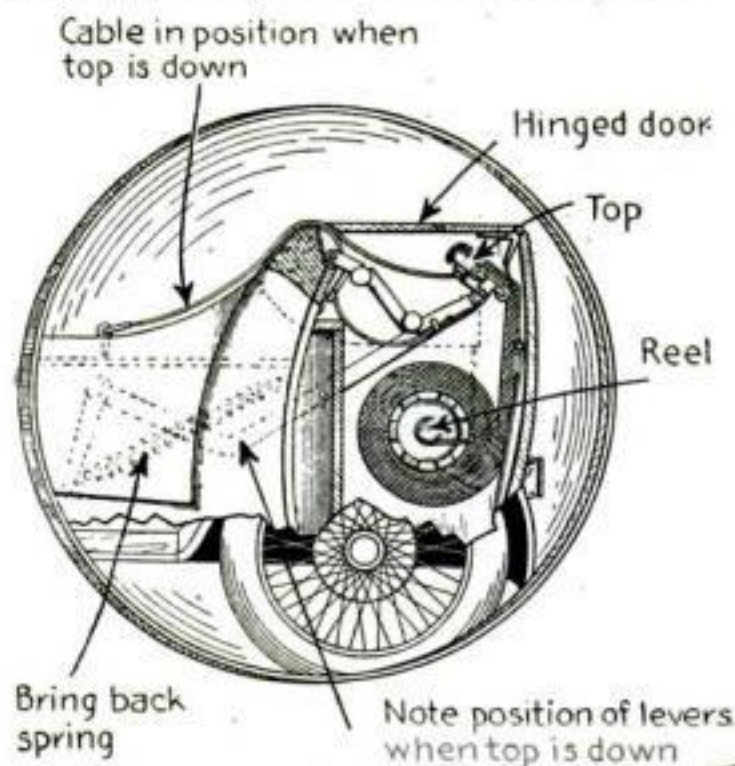

The automatically adjusted top wound round the roller in the rear compartment

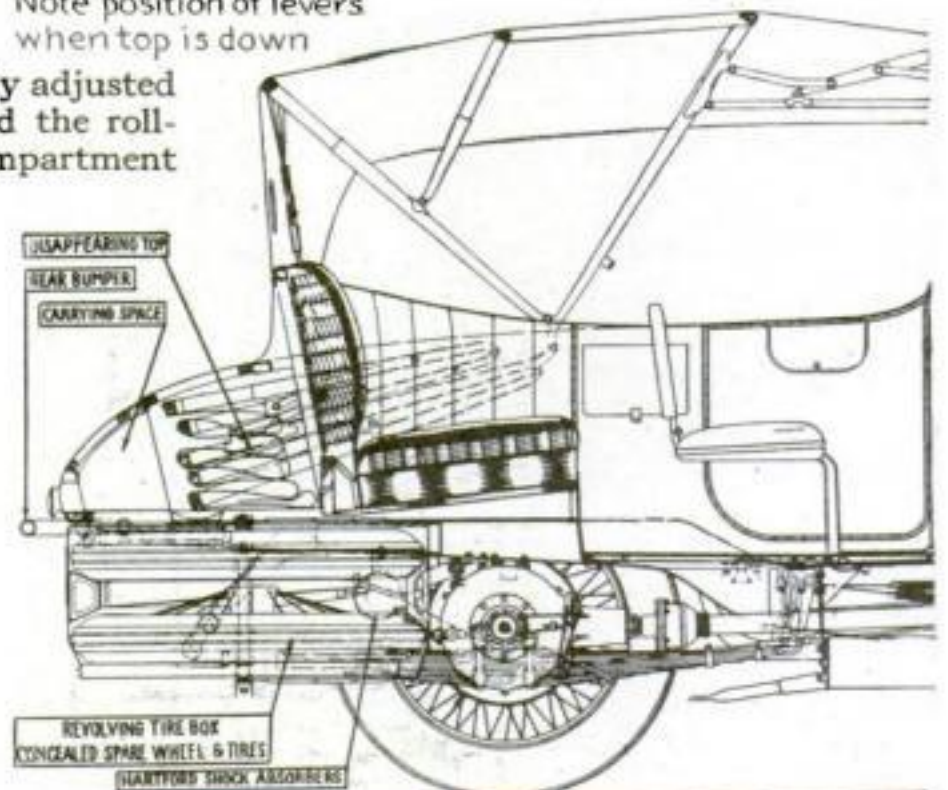

The hand-operated top is folded back in the usual way and then stowed away out of sight in a turtle-backed compartment

top if allowed to accumulate. The water drains off the eave trough through pipes to the ground.

Another feature of the turtle back is a tire-carrier directly under the top compartment. The carrier is made of two semi-circular halves mounted on a central shaft so that one half forms a curved door to provide a closed cylindrical box when shut and provides access to two horizontal shelves, each of which carries a tire, when open. This arrangement is especially convenient because it eliminates lifting and strapping the tires upon a conventional carrier.

The automatic top differs from that just described not only in that it is raised and lowered by the power of the vehicle engine instead of by hand but that it is stowed away out of sight in the extended rear end of the body without any turtle back. When not in use the top is wound around a horizontal crosswise roller in the rear compartment. The front end of the top is drawn forward to the windshield by means of two steel cables which extend down through the hollow windshield side posts to a small spool drum revolved through a friction gear from the engine fly-wheel. The operation of drawing the top forward out of its compartment and winding the two cables around the drum is controlled by a small lever manipulated by the driver. The winding drum is revolved through a set of gears and a clutch under the floor of the cab. The top compartment is closed by a door restrained by springs and so arranged that a push

on a small button by the driver automatically opens it. The manipulation of the drum lever draws the top forward in ten seconds. It is automatically stopped when it reaches the windshield.

To lower the top the operations are


reversed, the cables being disconnected at the windshield and the top drawn back by a spring-reel at the rear. The free ends of the cables are laid in small grooves in the body sides in the way of the rear seat where they are easily reached by the driver. When up, the top is prevented from sagging by means of three thin strips of spring steel wound with it

around the roller. The spare tires are carried in a horizontal position beneath the top roller in the rear compartment.


A Vast Fortune Is Chewed Up Every Year

LOUD and long are the complaints of the stringency of the times and the wails concerning the tightness of money; but these laments are not coming from the manufacturers of chewing gum. Neither the war nor any other calamity has affected the output of this great necessity. The

annual imports of chewing gum average about 7,000,000 pounds, although in 1913 the average reached nearly 14,000,000 pounds. Thus it is estimated that \$13,000,000 are chewed up annually.

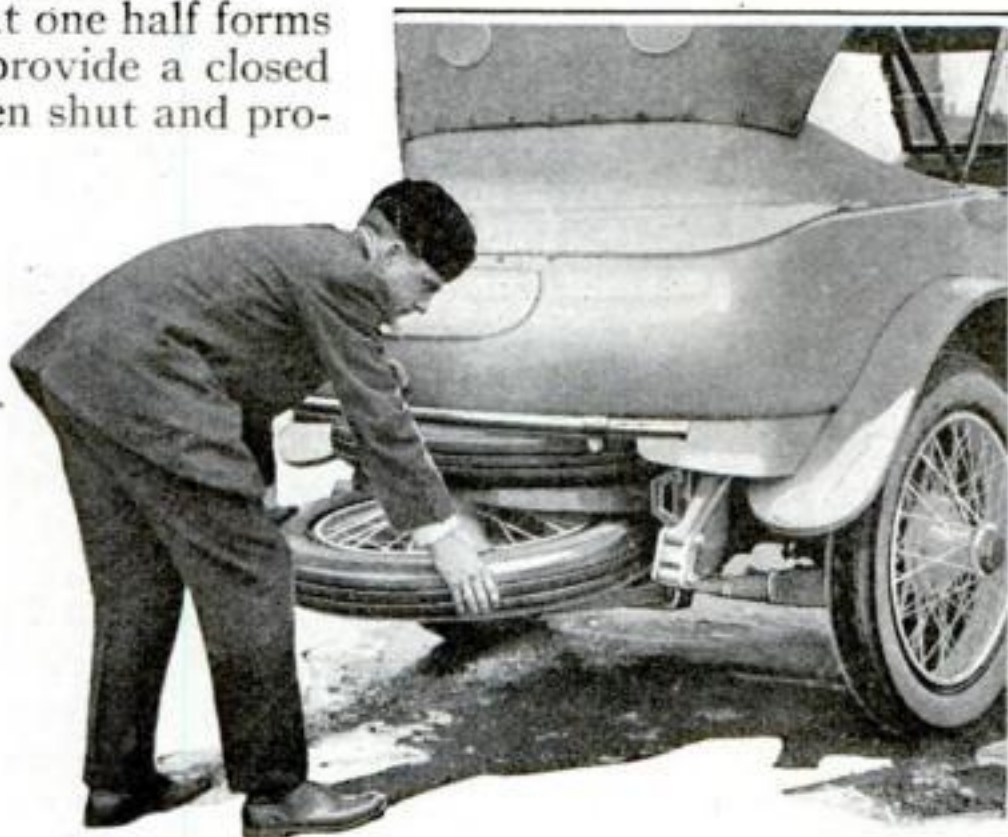

A separate compartment to carry extra wheels, a feature which distinguishes this car from all others

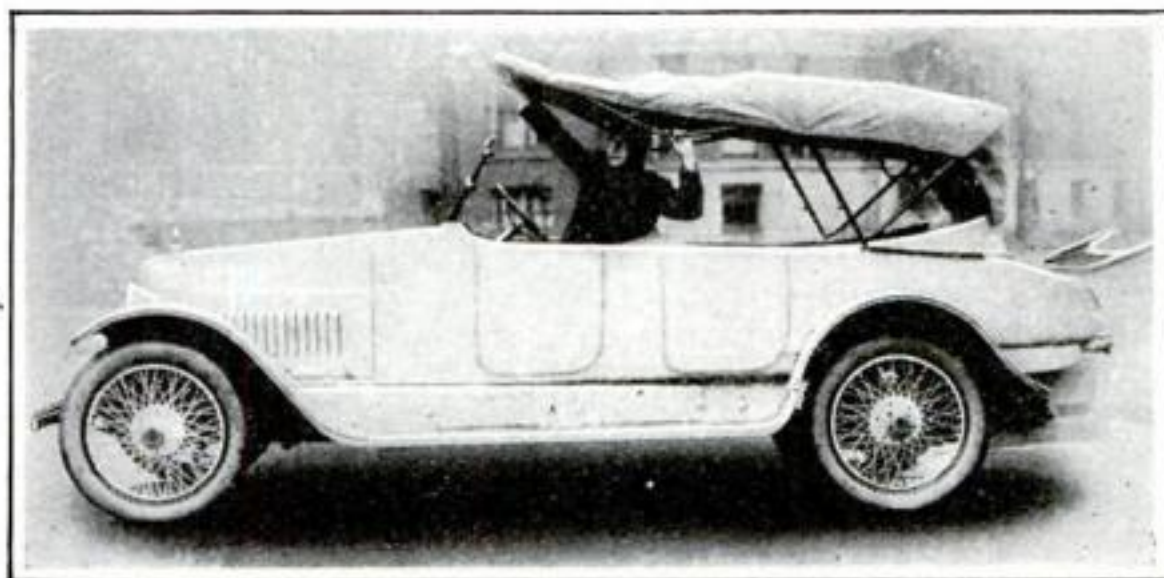

Raising the top after removing it from its hidden position in the turtle-backed carrier at the extreme rear of the car

Electric Newspapers in the Sky

They flash information in flickering tidbits—
a fresh, dazzling morsel every ten seconds

ANY evening now in Chicago you can look skyward and read, one after another, flaming messages to the general public. Up on top of some tall skyscraper is the contrivance that delivers these messages. It is a form of electric sign, at a distance differing but little from the ordinary kind, except that the messages it blazons forth change with far greater rapidity. In the darkness the framework of the sign is invisible; the separate letters seem to stand out like so many stars against the inky sky behind. Inside a little coop behind the sign young men are punching small keys in an immense keyboard—setting up in electric type messages that come from various parts of the city; from the war zones; in fact from all over the world. For this is the newest form of newspaper—a newspaper in the sky! It prints all that the ordinary paper does, excepting cartoons—news, advertisements, catchy sayings, sporting comment, anything that is the life of the ordinary penny sheet. And its public is even as big!


Where old bulletin boards could dole out limited bits of information to a few within range of thirty or forty feet this new sign-board flashes its intelligence to thousands anywhere up and down the long ranges of



two intersecting streets.

To change the wording of the sign men do not shift the letters bodily as in an ordinary theater bulletin board. The separate letters forming a given message simply go out, and others, expressing a new idea, light up in their places. This is possible because the sign is divided off into squares, called "letter-blocks," each the size of an ordinary letter, and each having fifty-three lamps scattered over its surface in such a way that by picking out the right lamps in a given instance any letter in the alphabet may be made to appear in that space at will. When the operators punch keys in the keyboard

One of the newspaper electric signs overlooking Longacre Square, in New York city

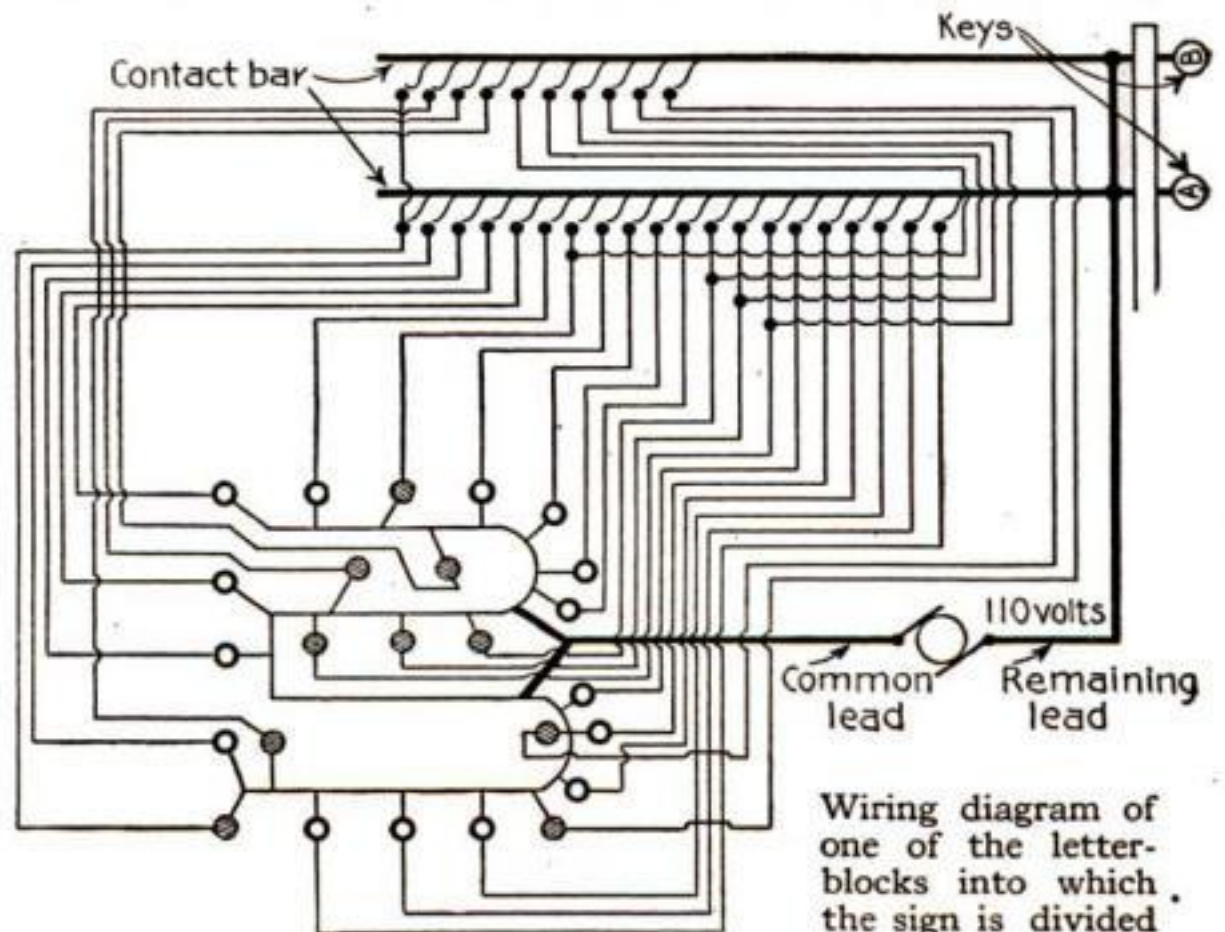

Wiring diagram of one of the letter-blocks into which the sign is divided


previously mentioned they simply cause switches back of each key to pick out the right set of lamps to blazon forth the letter it is desired to show in a given letter-block. Since the letter-blocks are arranged in long lines it is possible to spell out words and phrases, simply by causing the individual letter-blocks to show the character desired. The principle is made clearer in the illustrations.

Changes in the wording of the sign are effected as fast as the operators can work the keyboard—one man devoting his entire attention to a single line on the sign, but together with his fellows getting orders from cardboards in the hands of the chief operator. A given message is made to flash on the sign very much as type is set up on a linotype machine. In the linotype case the printer punches proper keys to spell out one line, strikes a lever convenient to his right hand, and the matrices pass on into the machine to mold the type while he is busying himself with the next line. In the same way, the operators of the new sign punch proper keys to spell out a given message, strike a lever, and the message flashes on the sign. While people are reading it, the men are setting keys for the next communication, which appears the next instant.

The sign was originally patented by W. W. Arnold, of Hamilton, Ohio, but it has been worked out in a commercially practicable way by M. E. Launbranch, an engineer of Chicago.

Compared with Electricity Gas Is Still the Cheaper Medium


IN spite of the decreased cost of electric service and the increased efficiency of electrically operated devices, the fact remains that of the two sources of energy generally available for heating, lighting and cooking, namely, electricity and gas, gas is by far the cheaper medium. At the present time one thousand electric heat units cost fourteen times as much as one thousand gas units. Furthermore, it is impossible to cook as rapidly with electric heating devices as with gas cookers. In the lighting field gas is, under certain conditions, cheaper than electricity, although it has not the large variety of applications that electricity has.

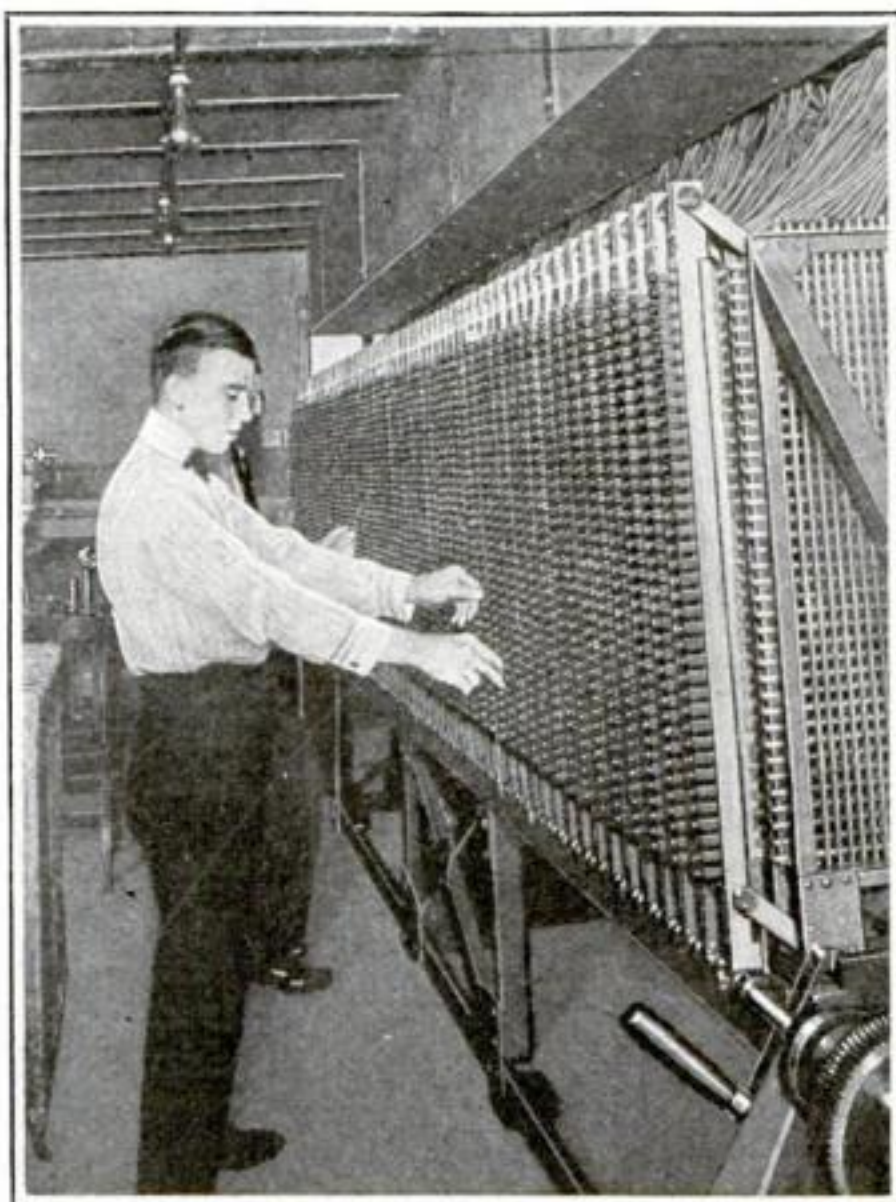

A message is made to flash on a sign very much as type is set up on a linotype machine. The operators punch the keys to spell it out

A Telephone Attachment Which Performs the Services of a Watch Dog

RUPERT H. GREENLAW, of New York, has invented a meter attachment which is a mechanical watch-dog for your telephone. It consists of a small case containing a locking and registering mechanism, a clamp which fastens it to the telephone standard, and a rod which engages with the telephone receiver. By removing the receiver the rod is forced in and out of the interior of the meter. It is impossible to replace the receiver upon the hook until the call has been registered.

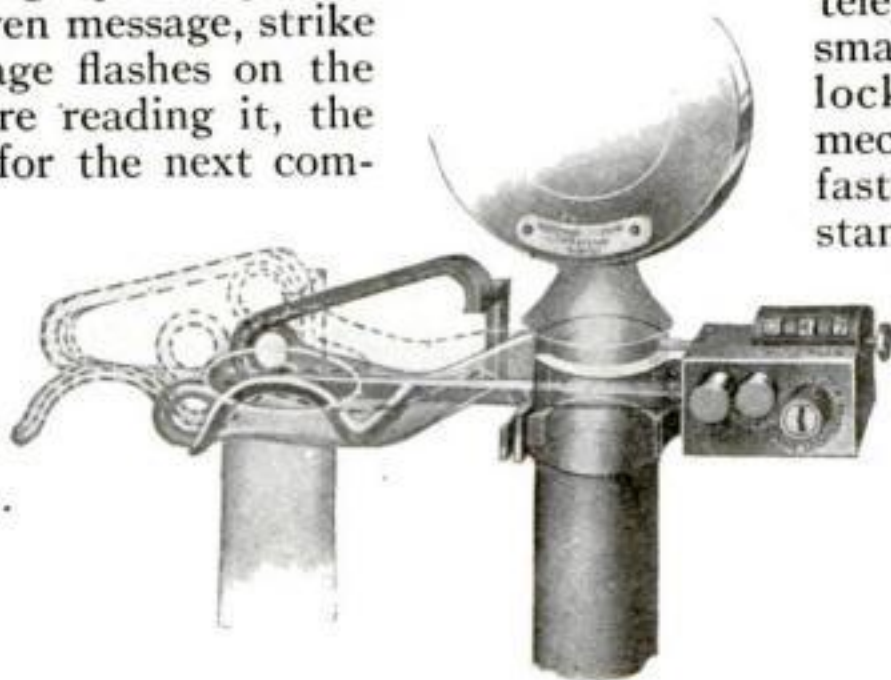

The attachment which locks the telephone when it is not in use and registers all calls


A Silo Roof Which Opens Like an Umbrella

A ROOF built like an umbrella is the ingenious device of a manufacturer of appliances for silos. It has this advantage: the structure can be filled five or six feet above the level of the walls; as the ensilage gradually settles, the roof will close down upon it automatically. This eliminates the need of a second filling of the silo after settling, and saves a good deal of labor and time.

The silo roof is constructed of triangular sections of galvanized iron, which are joined by sections of tenting. When the roof is open it forms a continuation of the cylindrical walls of the silo, and as it settles upon the contents the triangles of metal join snugly. By an arrangement of joints that overlap, a weather-proof cover is formed. Within this are the sections of canvas, which are likewise protected from the elements.

The supports that hold the roof to the upper wall of the silo are of wrought iron, and are so narrow that they offer little resistance to the wind. By pulling on a rope suspended through the center of the structure down to the floor, a single man can open the umbrella.

The roof can be attached to silos of concrete, metal, wood or tile. It is made in diameters of eight to seventeen feet.

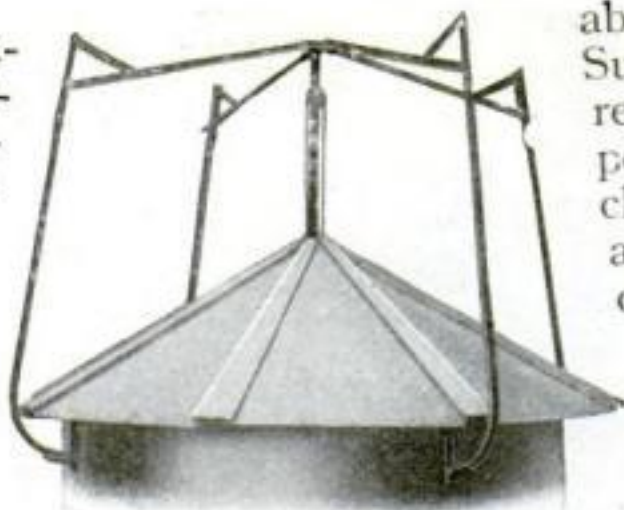

By pulling a rope one man can easily spread the umbrella roof

grating where they may be steam-soaked.

The steam is generated in the boiler at about eighty pounds pressure. Suitable valves are provided to reduce this pressure to ten pounds when it enters the chamber. When the jacket about the chamber is thoroughly heated, the articles to be disinfected are placed in the rack, which is then pushed into the chamber. The door is closed and made steam tight. When the temperature within

the chamber has risen sufficiently, an exhaustor is opened until the gage shows about fifteen inches of vacuum. Then a small amount of steam is allowed to enter the chamber. Following this, the exhaustor again is opened until fifteen inches of vacuum is indicated.

Steam is then allowed to enter the chamber until the temperature within it rises to two hundred and thirty-eight degrees F. The steam is allowed to circulate through the chamber during the period of exposure. It is then cut off, and the exhaustor draws off steam and vapor. After a short drying period the door may be opened and the clothing removed.

When using formaldehyde gas as a disinfectant in the apparatus the jacket is brought to a temperature of eighty degrees F.; the clothing then is placed in the chamber and a vacuum of fifteen to twenty inches obtained. When

a temperature of ninety degrees is reached, the gas is admitted.

The United States Armies Are Preparing to Fight Vermin and Germs

CLOTHING disinfectors of a portable type similar to those in use in Europe have been purchased by the United States Army.

The outfit consists of a five-horsepower upright boiler connected by piping with a cylindrical chamber about six feet long and three feet in diameter. The rear end of this jacketed chamber is provided with a door that can be hermetically sealed. A rack for clothing slides into the chamber, while smaller articles are laid on a



A disinfecter for our Army. It can handle fifty uniforms and kits in forty minutes ridding them of all germs

Flushing Streets with Water Pipes on Trolley Cars

IN Worcester and Springfield, Mass., the day of horse-and-wagon street flushing is past. Trolley cars carrying large water-tanks and electric pumps have been found much more effective and considerably more rapid. The pumps force the water out in such powerful streams that the trolley-car method has proved itself cleaner than the horse-drawn barrel-wagon from which the water flowed by gravity.

The pump supplies water to four pipes. Two of these lead to nozzles on the car itself and two lead to an arm which swings on the road-side of the car. This arm is swung back when automobiles or other obstructions are to be passed.

The flushing is done early in the morning after the cars have first gone the rounds in sprinkling the streets. The cars run at high speed so that an entire city can be cleaned by a very few of them in a very short time. With the old horse-and-wagon method speed was impossible. Sometimes the sprinkling had to be started during the night.

The added expense of the electric pump is balanced by the saving in the number of units and of men, so that the running expense of the new method is not increased. On the other hand, only eighty-five per cent of the water formerly used is now required. The side streets which are not tracked are now flushed by connecting long hose to the street hydrants.



Dr. L. L. Funk, using his mechanical broach wrapper and sterilizer. At no time during the process is the cotton touched by the hands

That Wad of Dental Cotton—Was It Sterilized?

IN cleaning the root-canals of affected teeth the dentist employs a wad of cotton wrapped on a steel needle. This wad is called a "broach," and is used in reaching the vital point where the nerve of the tooth passes out into the bony structure.

Usually the dentist twists the cotton around the needle with his fingers, which is neither sanitary nor safe in most cases. Dr. L. L. Funk of Chicago has invented the machine shown in the illustration. It does the wrapping mechanically, and sterilizes the cotton at the same time. Different methods of sterilization are provided for. The first is by means of dry heat of 275 degrees Fahrenheit, obtained from the electric heating unit; the second employs steam obtained by placing a four-candlepower electric lamp in a glass water-container and bringing the water to boiling point. This is used for moist sterilization and for melting inlay wax. A carbolyzed sponge is used for sterilizing the needles.



Electric motors pump the water in four powerful streams that wash away every trace of refuse while the car runs at high speed

Mountains That Float

Why? Because the underlying materials are lighter than the mountains

IN a remarkable series of researches conducted by the U. S. Coast and Geodetic Survey, under the direction, first of Professor John F. Hayford, and later of Mr. William Bowie, Chief of the Division of Geodesy, it has been conclusively proved that mountains and continents, and probably islands, float.

The earth is solid. How, then, can we say that the mountains float?

A hundred or even a thousand years are as a day in the geological calendar; and for such periods the movement of portions of the earth, under any forces which may act on them, would probably be so small as to go unnoticed. But when such forces act for a hundred thousand or a million years or longer, the earth's materials behave as if they were plastic; in other words, they give way to the forces affecting them, and assume a state of equilibrium. Those who work in the deep mines of the earth are familiar with the movement or creeping of the rock which will close old shafts or tunnels.

But what is the evidence that mountains float? The answer is in the observed tilting of the plumb line and in the measurements of the earth's pull, called gravity.

The Proof Furnished by Gravity

Let us confine our attention to gravity. If the earth's material were a perfect liquid, its surface would be perfectly smooth and the shape of this surface would be that of a ball. Since the earth spins very rapidly, centrifugal force is set up which causes the maximum at the equator and a minimum or zero at the poles. This means a shortening of the axis of rotation by a distance of about twenty-six miles. That is, the distance from the north pole to the south pole would be that much shorter than the distance through the earth's center between two points opposite each other on the equator.

Exactly the same shape would result if the earth's material, though solid, were arranged in layers according to the density, the densest material at the earth's center and the lightest at the surface. The earth would assume that shape because of the yielding under the attractive force of each particle of the earth's material on every

other particle, and because of the centrifugal force due to the earth's rotation which tends to throw its materials out into space.

The resultant of these forces, or gravity, would on this ideal earth vary gradually in intensity from the equator to the poles.

How We Get the Idea of Floating

The earth's materials are not arranged in layers exactly with respect to their densities. As a matter of fact gravity determinations show that the materials under the vast plains along the coasts are arranged very nearly in the normal way, but that the materials under the mountains are found to be lighter than normal. The deficiency of material under a mountain down to a depth of about sixty miles below the sea level is almost exactly equal to the mountain material which is above sea level.

Similarly, under plateaus like those of our Western States, there is a deficiency of materials very nearly or exactly equal to the mass of material between the surface and the imaginary sea level surface beneath. The normal density is that under the coastal plains.

As a result of this counterbalancing of the material above sea level at any part of a continent by material lighter than normal under it, the pressure or weight of material on an imaginary surface about sixty miles below sea level is the same at all points of that surface.

This brings out the idea of floating. If we should see an iceberg floating in the ocean, we would conclude that the ice showing above the water is held up or floated as a consequence of a greater mass of ice under it. As all know, ice is lighter than water. A block of wood thrown in the water has some of its material held above the surface by the portion under the water. The weight of the material of the whole block exactly equals that of the water displaced by the block. Similarly the weight of a mountain mass and the column of material directly under it to a depth of say sixty miles, below the imaginary sea level surface, equals that of the weight of a similar column of material of equal cross section, under the coastal plain, which has little or no material above sea level.

Land Skates with Brakes and Pneumatic Tires

The latest "quicker than walking" form of exercise

A BALL-BEARING, pneumatic-tired skate which will run easier on a level road or street



The road skates are provided with brakes which are operated by the braces

than an ice skate will slide on ice, has been invented by Charles H. Clark, of New York city.

Located on opposite sides of each foot are two nine-inch wheels, the front wheel being on the inside of the foot and the rear wheel on the outside, so as not to interfere in any way with the movements of the legs.


On the outside of the leg, as shown in the illustration, is a brace journaled to the foot rest. The upper end of the brace is attached to the ankle, thus relieving it of any strain.

In addition to this purpose of protecting the ankle the brace acts as a brake arm to set the band brake on the rear

wheel. By pushing either foot forward, in the same manner that a person would do who wanted to stop when walking, the brake is operated. The tires are resilient enough to enable the operator to steer with ease. According to the inventor a person equipped with the skates can travel three times as far with the same amount of effort as in walking.

Considering the skate as a foot-propelled vehicle it is certainly efficient. No transmission system with an attendant loss of power is necessary because the propelling force of the legs is applied direct. Furthermore, the skate need not be left at the curb like the automobile. Arrived at your destination you can unfasten your skates and take them into the building with you.

To travel, you simply raise one foot and then the other as you would in walking. The wheels are placed in such a way as to maintain an even balance at all times

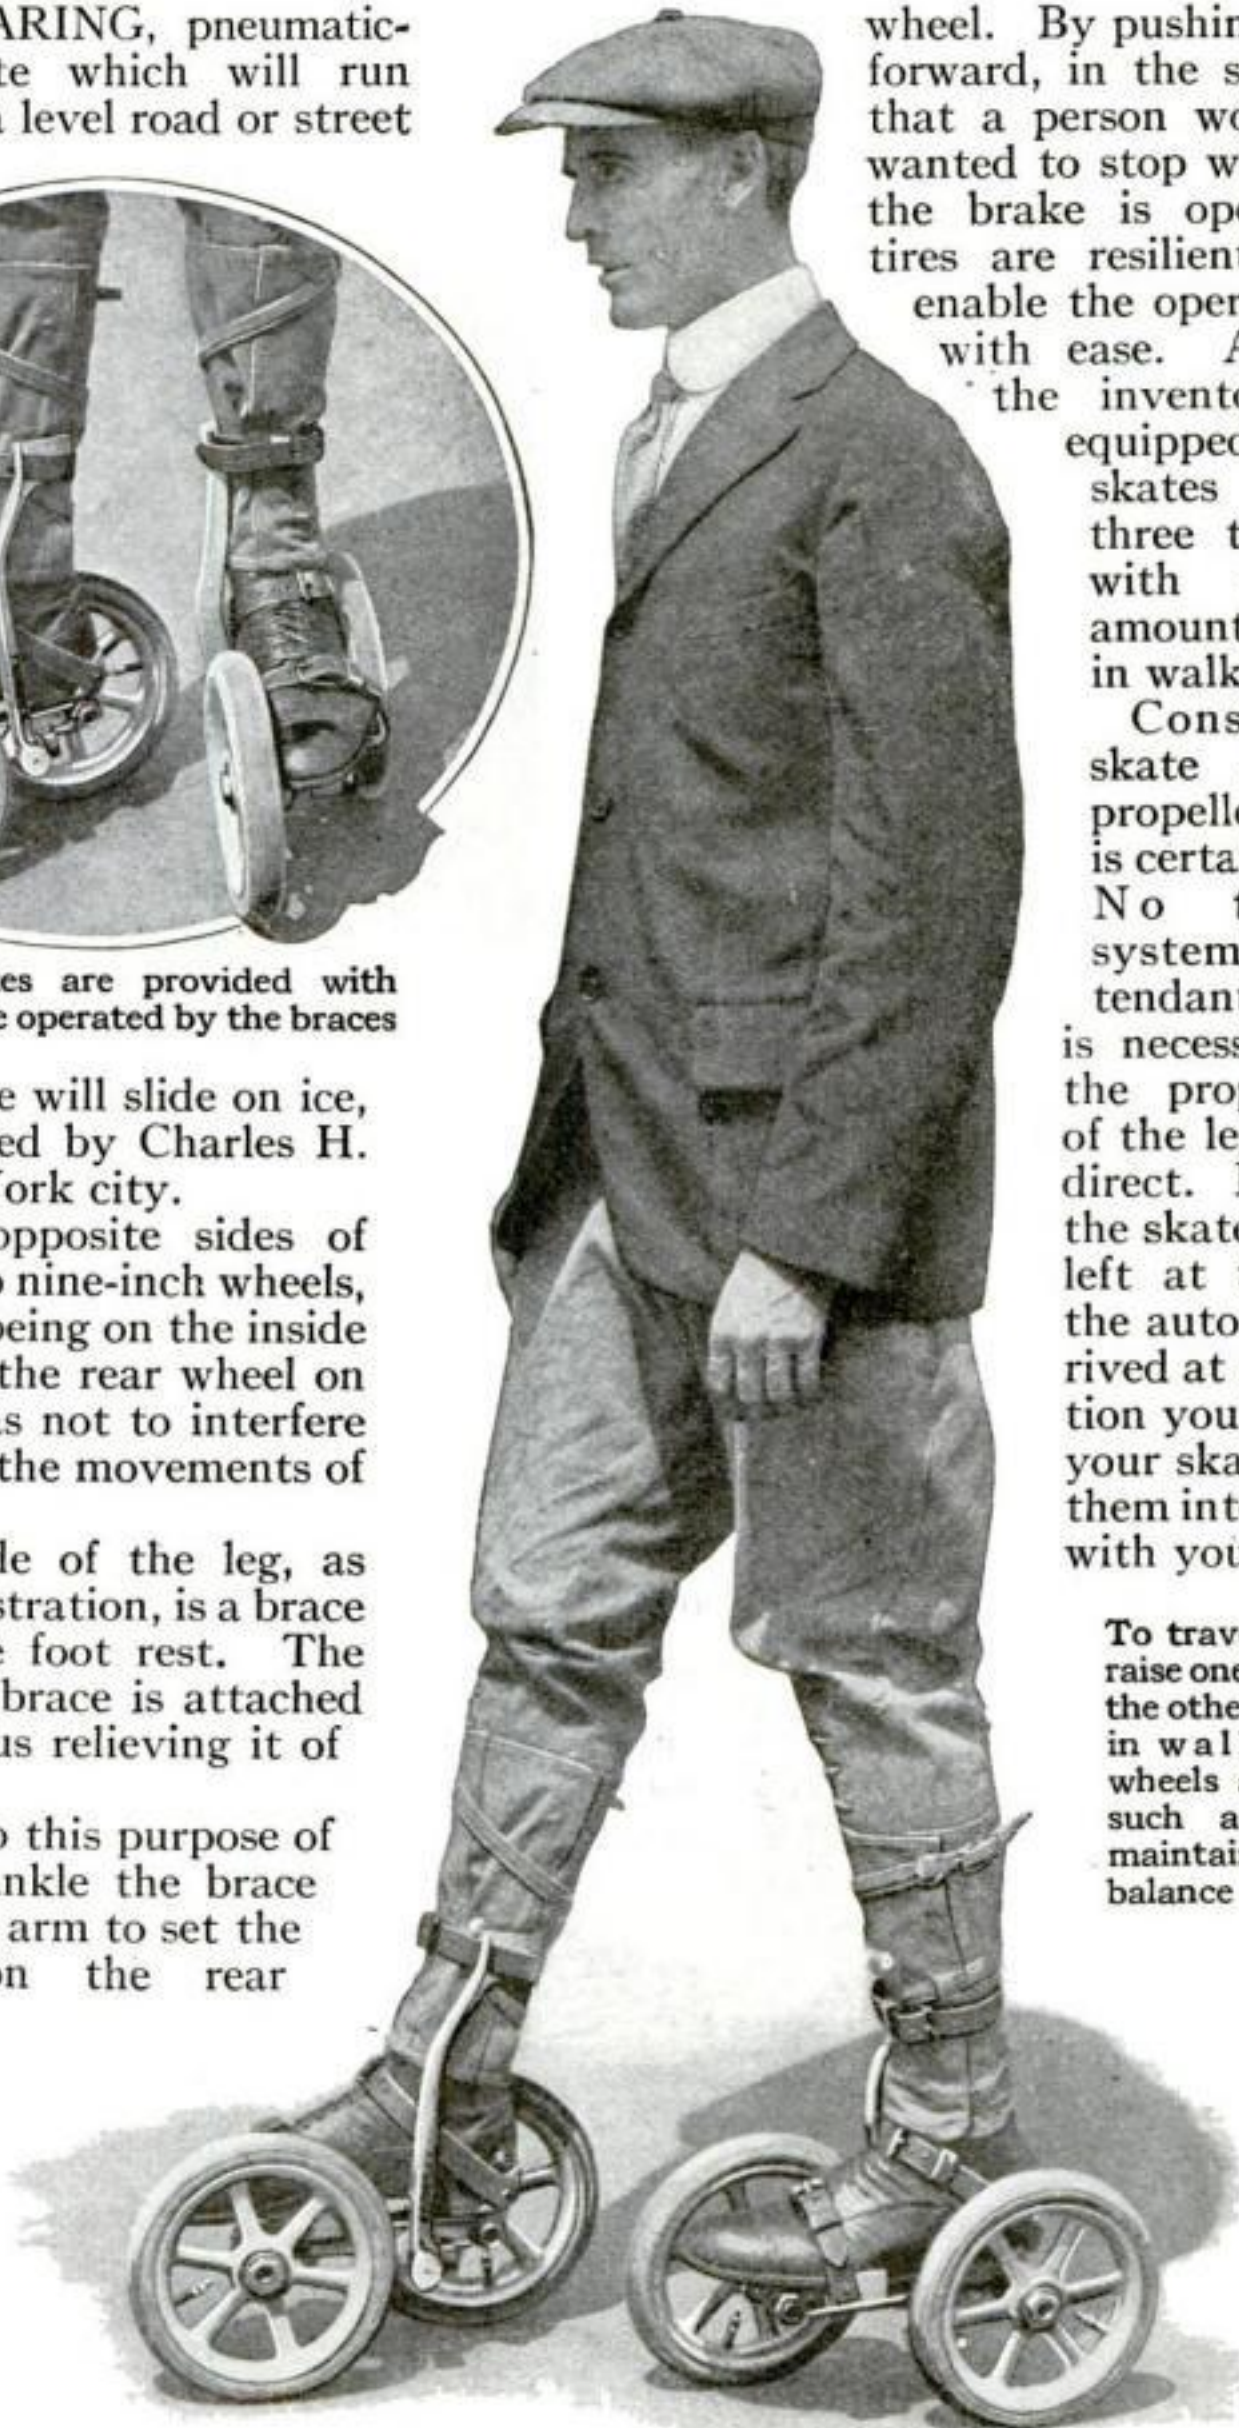



© Brown and Dawson

The water is shallow and always warm. The rules of the sport are "Hold on tight and don't mind a ducking"

Rafting the Rapids on the Rio Grande in Jamaica, British West Indies

JAMAICA, although a tropical country, has a form of sport equal if not superior to tobogganing. The national pastime is shooting the rapids in the Rio Grande River on bamboo rafts. For about four miles of its length the river is one succession of rapids. The depth of these rapids is never over ten or twelve inches, and many of the rocks protrude above the surface, so it is not possible to use a boat at all.

The natives build rafts of light, tough bamboo, which float where there is water and will slide like a sled over the wet, smooth stones where there is no water.

Each raft is about twenty-five feet long and is composed of twelve to fifteen stalks of bamboo. The bamboo is about six inches in diameter at the base and tapers to one inch at the point. The tips of the bamboo form the bow of the raft and the base the stern. Near the stern is a built-up platform on which two passengers may sit and keep their feet out

of the water, which often covers the raft. The helmsman stands towards the bow. With a long pole he guides the raft down the rapids and away from the worst stones.


Shooting the rapids is exciting. Every cataract is different from its predecessor. One is short, another long; a third straight, and others are full of curves. We slide over the small stones that protrude slightly above the surface, but we must keep away from the large ones, for they will break up our frail raft, or, worse yet, turn it over on us. In some places jungle trees overhang the river so low as sometimes to

sweep the passengers off; in other spots the channel between the high ledges is so narrow as to require very fine steering on the part of the negro helmsman. But it is seldom that a raft goes through without its passengers being thrown off, swept off or having their craft turn over on them.

Facts about Your Enemy, the Common Housefly

MORE than one-third of all the known flies belong to one family, *Musca Domestica*, or the common housefly. This fly is perhaps the most cosmopolitan in the whole order of insects, being found in almost every part of the world. The eggs are laid in groups, and in a few hours the larvae make their appearance.

Each female lays about seventy eggs. Though the common housefly has been "swatted" all over the world, the fly family shows no signs of decreasing. The most approved methods for its extermination employ prevention and sanitary measures.

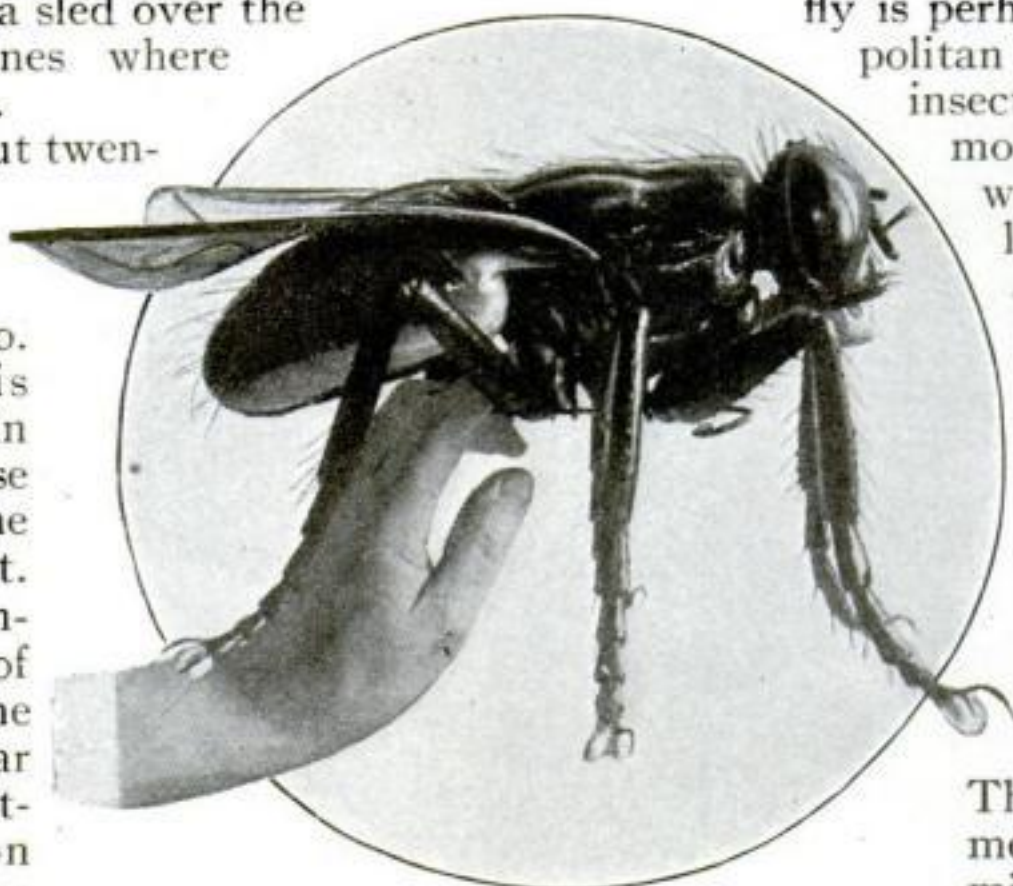

A glass model of a housefly, magnified to show its interesting construction

A Community Garage Comprises Fifty Buildings on One Lot

FIFTY garages, set as closely together as possible, occupy a vacant lot in New York city. Each one is rented to a car owner living in the neighborhood. The fireproof structures are uniform in design, being made out of galvanized iron with the framework formed of angle steel.

The doors are of wood, sheathed with metal, and the windows are of wire glass. Each tenant is provided with keys and has access to his garage at any time of the day or night. The buildings are ten feet by eighteen feet, with cement floors. They are large enough to accommodate the car and provide additional room for a workbench. Facilities for cleaning are provided in the court yard, and there, too, may be found a supply station for gas, oil, etc.

The garages may be provided with heating devices if desired. Care service is rendered at a moderate charge, though this is optional with the owner. The lot measures 155 by 175 feet and besides the individual garages, which are placed back to back in the center of the lot, there is ample space provided for driveways.




One city lot accommodates fifty buildings placed back to back, with room for driveways, as a community garage

Making the Kitchen Range One Hundred Per Cent Efficient

THE oil-burning stove of Garritt Van Daam, a combustion engineer of Buffalo, New York, is a recently invented rival of the modern coal range.

The usual kerosene heater is a good little stove, but it is known to smoke and to smell generally. This shows that some perfectly good oil is being wasted. Van Daam's heater neither smokes nor smells, which means that it is practically one hundred per cent efficient. The coal stove is seldom better than fifty per cent efficient.

The secret of this burner's high efficiency is in the heating of the kerosene before it burns. From the supply tank near the stove,

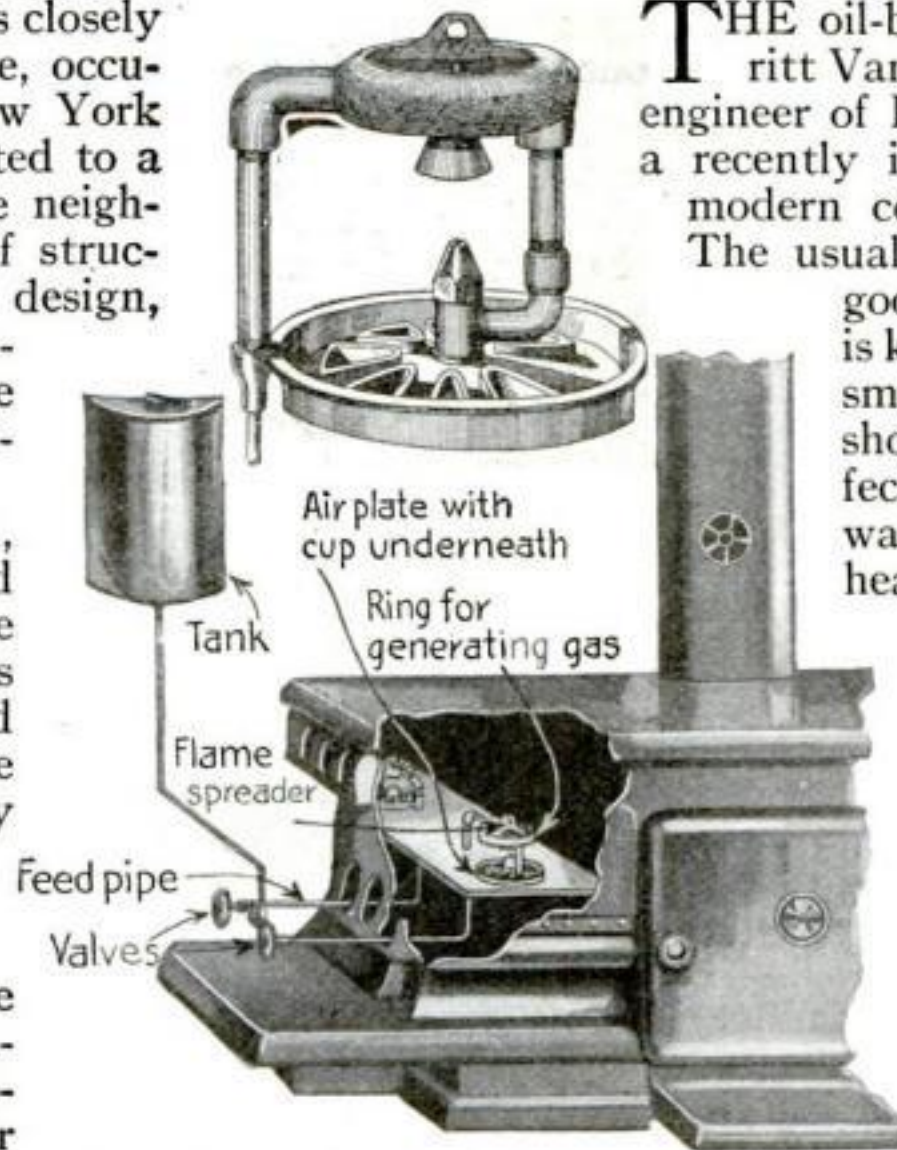

The oil passes over the flame and every particle of it becomes vaporized. The burners concentrate the heat where it is wanted

the kerosene feeds by gravity through a heating chamber placed directly over an ordinary gas-burner jet. Two minutes after the kerosene has been lit, the chamber will be so hot that all the kerosene that follows will be vaporized. In this state, every bit of the kerosene is combustible and burns fiercely. In the ordinary oil burner this is impossible because all the oil does not get the chance to vaporize.

The portion that does not is wasted, because it merely changes into soot.

With the oil-burner made practical, there will be no more working in an overhot kitchen to accomplish a little cooking in the summer. The burners are placed to direct the heat only where it is wanted. For baking, the oven burner will concentrate the heat in the oven and neither the whole stove nor the room will need to be made hot along with it. Equally as comforting is the fact that the stove cools off immediately after the oil is turned off.

Protecting the British Fleets with Chain-Nets

No enemy submarine can thread the English Channel without being caught like a fish in a seine

DISPATCHES from Europe tell repeatedly that hostile submarines have been caught in nets, but none of them have indicated how it was done. The English fleet is kept in the Orkney Islands, protected by great steel chains woven in the form of simple nets which are not stationary but mobile. If they were anchored so that they could not be moved there is little doubt but that the industrious German commanders would find some way of getting through occasionally.

The nets covering the grand fleet are stretched out in great arms from the shores of the Islands, completely covering the fleet. Various types of enemy vessels have come steaming up to these barriers, though of course underwater, in the effort to catch the great fleet napping. Whenever a daring commander has attempted such a coup he has always, so far, found himself not only nosing against a network of great chains but when he turned to run he has found himself in a circular net and doomed.


The British operations are simple. A sharp lookout, and probably electric look-

outs as well, keep the chain operators informed as to what is going on. When an enemy submarine enters the net its presence is soon known and the operators, taking the ends of the chain, draw it together to form a circle. The


trap is then sprung. The British wait until something happens—until the submarine comes cautiously to the surface to look about, for there is nothing else that the commander can do. Once up he has the choice between destruction by shell or surrender, and to the credit of Germans it must be admitted that very often the commander

refuses to surrender, hoping that some means of escape may still lie open.


The same sort of traps exist in the English Channel, where great chains are spread from the coast of France to the coast of England, with but a very few loopholes which are known to British officers only, through which commerce may be carried on in safety. Every time a raider or a submarine cargo boat slips out of Germany it takes the northern passage. The channel is impossible to negotiate for any uninformed ship captain and it probably

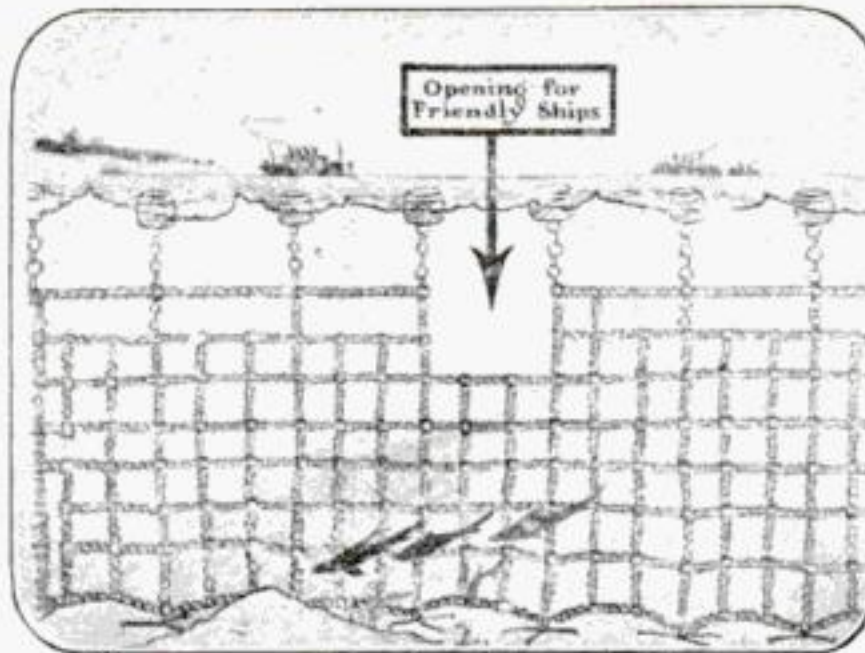

There are a few loopholes in the nets, known to officials only, through which commercial vessels may pass in safety

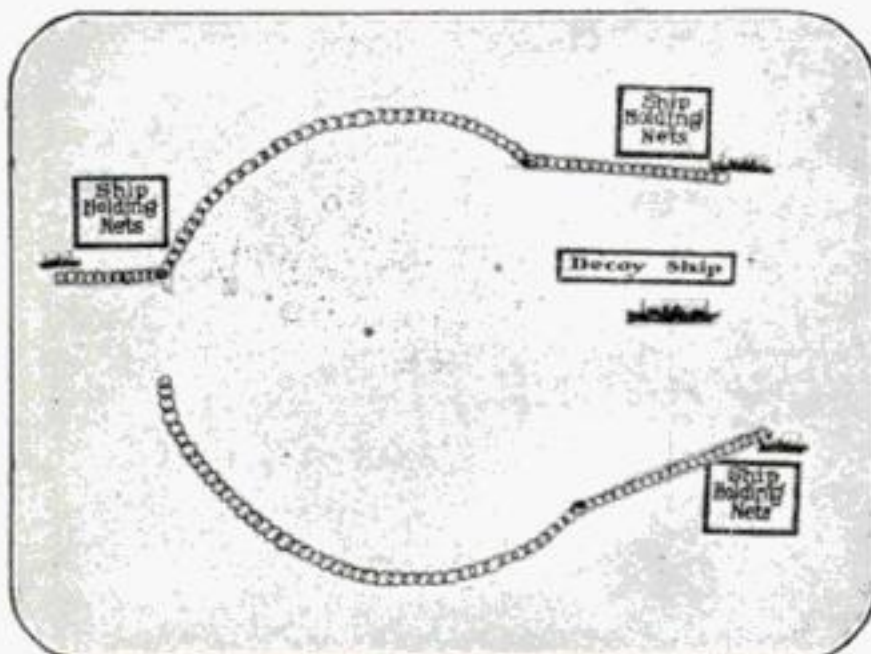

A decoy ship leads a pursuing submarine into a circle of nets which immediately close up around it so that there is no escape

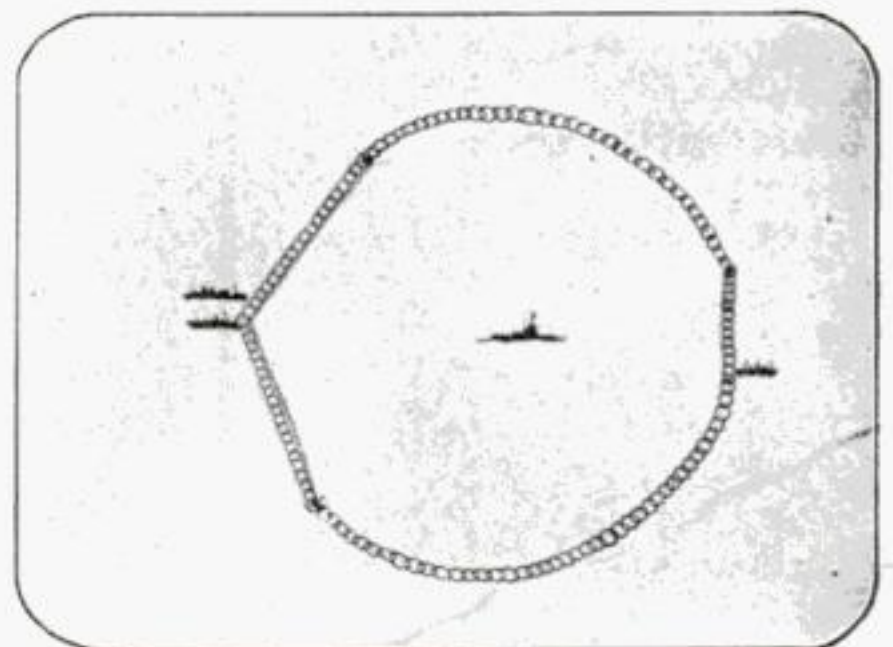

Once enclosed by the chain of nets, the commander of the intruder faces destruction from the shells or complete surrender



The traps are spread from the coast of France clear across the English channel



The English fleet, anchored in the Orkney Islands, is completely protected by the nets

would still be so were the grand fleet in the Orkneys to be destroyed.


When United States Naval officers were consulted concerning the use of these nets, and the possibility of such a method they unanimously agreed that it was possible, although they knew nothing about it. They said that nets were certainly being used and that very probably the minor difficulties in their way had been solved.

The Latest Salvaging Device for Metals —An Electromagnet

A LIGHTER accidentally turned over at sea, spilling several thousand cases of shells. A diver was put on the job, but owing to the ice and extremely cold water, he was able to work only a few hours at a time. At the end of a day less than one hundred cases had been raised.

An electromagnet was installed and dropped to the river bottom. On the first trip it recovered four cases. This was repeated again and again, until at the end of the day over two hundred boxes had been brought to the surface.

A large number of cases were broken, so that the shells fell out and sank deep in the mud. This magnet was found powerful enough to draw both shells and cases out of the mud.

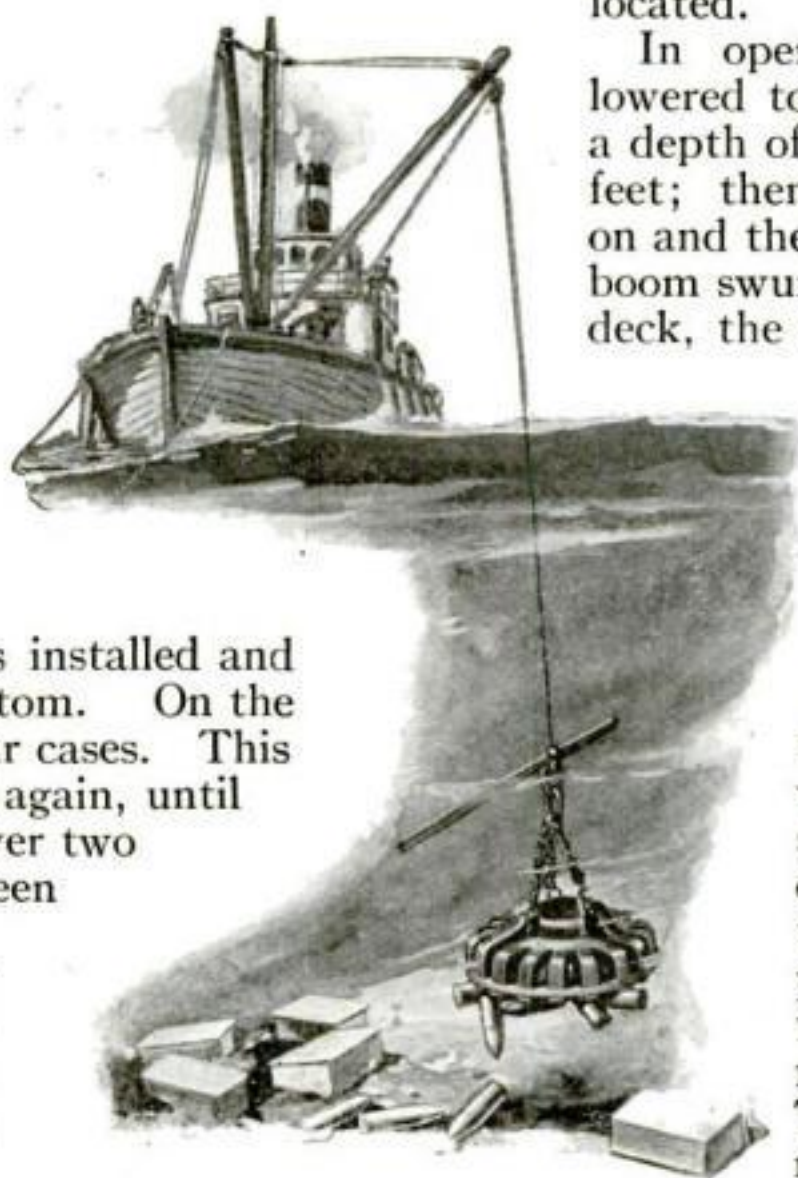

The electromagnet diver bringing to the surface cases of shells some of which were buried in mud

In fact when a shell is left at a distance of about twelve inches from the magnet and the current turned on, the shell, weighing about 255 pounds, jumps to the magnet.

The outfit consists of a gasoline-driven generator, control apparatus for the magnet, and the magnet, which weighs about 9,000 pounds, and requires from eighty to ninety amperes at 240 volts direct current to energize it.

The magnet was attached to the cable, and by means of a swinging boom could cover a large area without having to move the lighter on which the apparatus was located.

In operation, the magnet was lowered to the bottom of the river, a depth of between thirty and forty feet; then the current was turned on and the magnet lifted. Then the boom swung the magnet over to the deck, the current was switched off, and the cases of shells were dropped.

This type of magnet (designed for handling scrap iron and steel) though never intended to operate under water, is quickly attached and in this particular case was operated with marked success for ten consecutive days with no special attention or repairs except perfunctory tightening of the bolts and filling the main feed cables with tar. The cases of shells were recovered with comparative ease. The method will probably be used for other salvaging purposes.



Safety nets of rope are now taking the place of plank floors to insure the safety of those who work on skyscraper scaffolding

"Safety First" for Skyscraper Workers Attained with Nets of Rope

TO protect the men who erect the steel frames of skyscrapers, life nets are now used instead of the usual flooring. The building laws of practically every state require that the contractor install a plank floor for each story as the structural work progresses. In building auditoriums, arch trusses in theaters, towers, bridges and in special cases, it has sometimes been impossible to comply with the law, for plank floors could not be erected. Hence nets of rope were adopted as the most practicable measure of safety.

The nets are made of manila rope and are provided with loops on the borders so that they can be readily attached to the iron work. In Chicago they have been used for about a year. At least two lives have been saved with them. California has only recently adopted them. Ordinarily a net costs about sixty dollars, provided it is of the usual size—ten by

thirty feet. The Illinois records show that workmen have fallen a hundred feet or more into a net without suffering any injury whatsoever. Had the men fallen on plank floors they would have been killed.

Seal Your Letters by Electricity

BESIDES its special task of keeping letters and packages intact and safe from prying eyes, sealing wax lends itself to many forms of decoration, especially on china. The chief difficulty in the way of its use is in heating it to the proper flowing state without smoking it or spoiling its color. A candle or small alcohol

lamp is usually used, but the device shown in the accompanying illustration serves the purpose more satisfactorily.

It is the invention of Fay M. Andrews, of Columbus, Ohio. It consists of a hollow tube handle through which wires lead from an applying disk to conductors from the nearest electric lamp socket. A push-button near the applying disk controls a contact plate mounted in the handle to cut the resistance in or out. The applying disk is provided with a plug, like that of an ordinary small lamp, so that when it is screwed into the shell the proper electrical connection is made.

In operating it, the handle is gripped in one hand and the current turned on. The wax, which is held in the other hand, is then melted by the heat from the disk and dropped into place. The disk is then moved lightly to and fro over the wax until it is smooth, directing the flow wherever it is desired. It heats almost instantaneously with the pressure on the push-button.

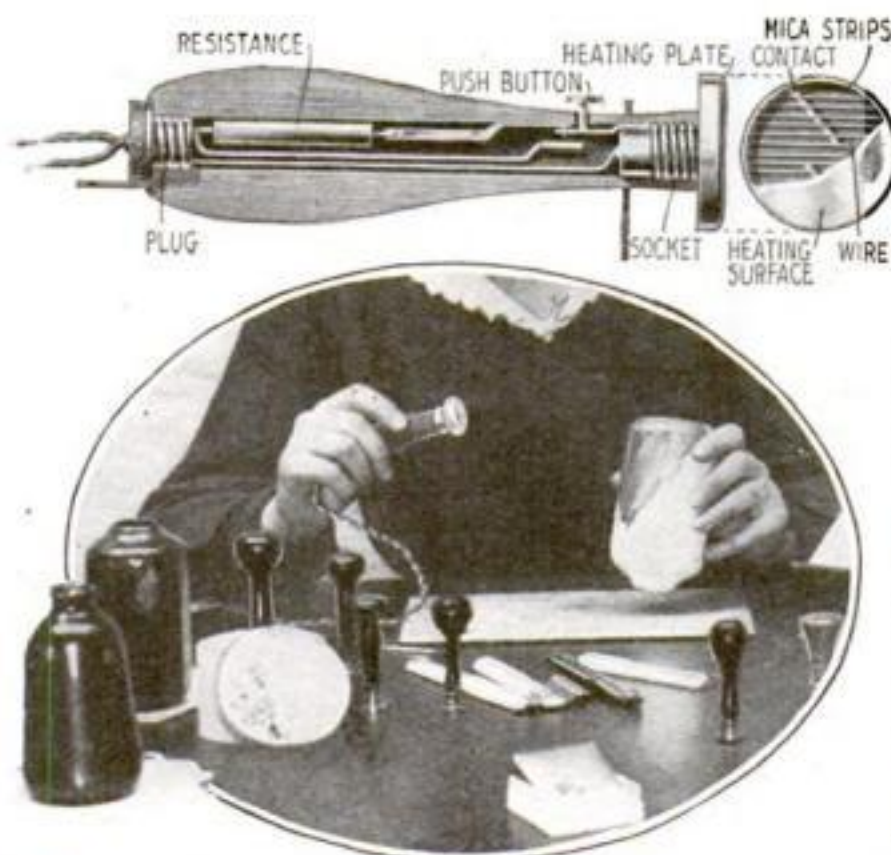


Diagram showing the construction of the electric wax-heater, and the device in operation

An Electric Eye Watches the Smoke Screen During a Battle

THE manner in which the density of the smoke screens is now regulated during a battle is interesting. By partially shutting off the draft to her boilers, a battleship is made to emit clouds of smoke which screen her from the enemy. But how can the stokers, who are far below deck, see the stacks so that they can regulate the smoke clouds to the proper density? Answer—By an electric "eye." The eye is placed near the top of the smokestack and it records the exact density on electric meters conveniently located in the boiler room.


This remarkably clever eye is simply a wire coil of selenium which is carried in a housing on the inside of the smokestack walls. An electric light, in another housing directly opposite, plays its beam of light squarely upon the wire. Now selenium, as is well known, has the peculiar property of changing its resistance to an electric current when the light falling upon it changes. The weaker the light, the greater the resistance, and vice versa.

Evidently then, the denser the smoke emitted through the stack, the weaker the light that gets through the smoke from the electric lamp and falls upon the selenium. By connecting the selenium with an electric meter

and the ship's lighting mains, the electric current going through the meter will be lowered by the increased resistance. The

meter is very sensitive and shows the slightest change in smoke density. Moreover, it is calibrated to indicate exactly what the actual smoke density is, so that the stokers can regulate the cut-off of the draft to a nicety.

Glass plates are placed in front of the lamp and of the selenium coil to protect them from soot. The plates are kept clean by streams of compressed air directed across them. This device was installed on the U.S.S. *Conyngham* and was called to the attention of the Society of Naval Architects and Marine Engineers by Rear Admiral R. T. Hall, U. S. N.

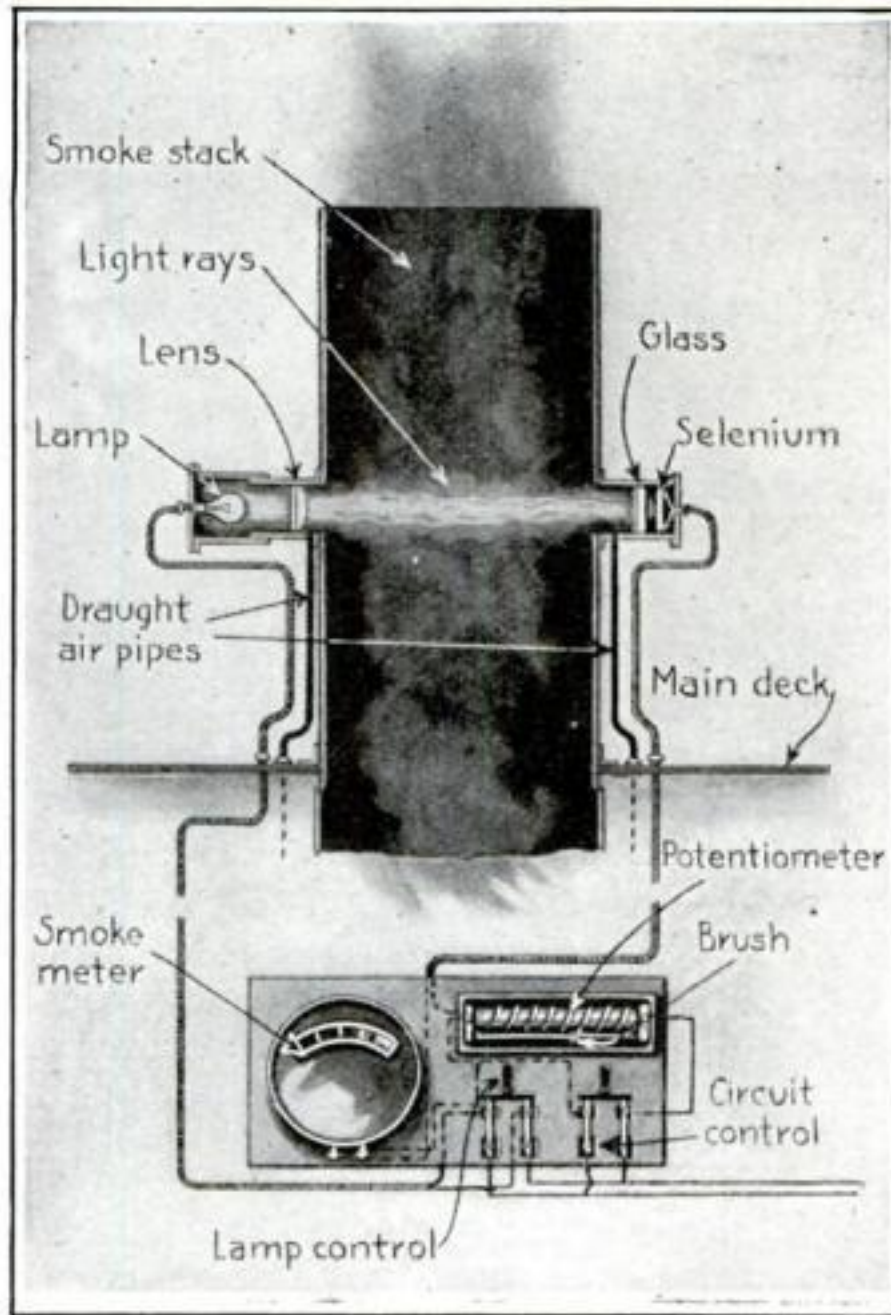


The selenium cell is sensitive to light. Hence when the smoke shuts off the light it can "see" what happens in the stack

An Ice Helmet to Relieve the Fever Patient Without Disturbing Him

THE principal defects of the ice caps so frequently used on the heads of fever patients are that they do not fit the head, they can not be refilled with cracked ice without removing them from the patient and the water can not be drained off.

A New York city inventor, M. Finkelstein, seems to have overcome all these shortcomings in devising the ice cap illustrated. A screw-top opening permits the nurse to replenish the cap with cracked ice without disturbing the patient, and a drain pipe is provided.

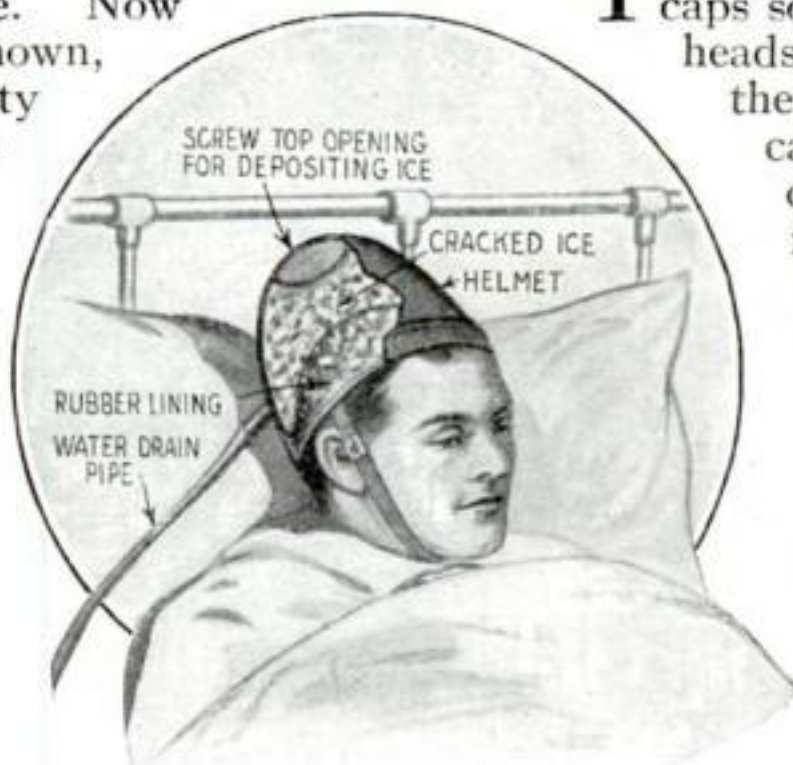

The ice helmet which can be drained and refilled without disturbing the patient. It fits the head securely

Practical Motor-Boating

A series of three articles on the selection, operation, care and upkeep of a motor-boat

I.—Selection of a Boat

By George M. Petersen



Photos by Edwin Levick

No doubt the best type of motor-boat for large bodies of water is the raised deck cruiser, which can be navigated through almost any storm with little or no danger

MOTOR-BOATING, as commonly thought of by the amateur boatman, consists mainly of trying to drive any kind of hull through all kinds of water, at any speed possible, by means of a mass of cast iron in the shape of a propeller in the stern of the boat. The old sailors are inclined to think of the motor-boat as the "dude's friend," which requires no knowledge of seamanship. While motor-boating is considerably easier to master than is the art of sailing a craft through all conditions of wind and water, there is, nevertheless, a knack to be acquired and mechanical knowledge to be obtained concerning it.

In this series of articles we will deal, first, with the classification of boat models for various waters, selection of the boat, and most desirable type of engine. The most important point is the selection of the type of hull best suited to the requirements of the waters on which it will be used.

For instance, a glass cabin cruiser, while affording a large amount of head room and permitting an unobstructed view from within, is not to be considered as even a fair type of boat for large or rough bodies of water; but it is a desirable type of boat for rivers


and quiet bays or other protected waters.

The best type of motor-boat for large bodies of water like the Great Lakes is undoubtedly the "raised deck" cruiser, which may be successfully navigated through almost any storm with little or no danger. This type of boat is generally built from twenty-six to thirty-five feet in length; the 27-foot model provides comfortable cruising accommodations for two or three persons. When equipped with a ten- or twelve-horsepower engine it is capable of a cruising speed of from eight to ten miles an hour.


Authorities differ greatly as to the most desirable type of boat for general use, but practically all experienced boatmen agree that some type of cruiser is the most satisfactory.

The long and narrow speed craft which delights the eye as it dashes past the Club House on a quiet day, is of absolutely no value for either cruising or long day runs

on unprotected waters, as the excessive speed causes them to be extremely cranky and hard to handle in a seaway, and a quick turn is liable to cause them to capsize. However, for pleasure and safety the boat making from seven to twelve miles per

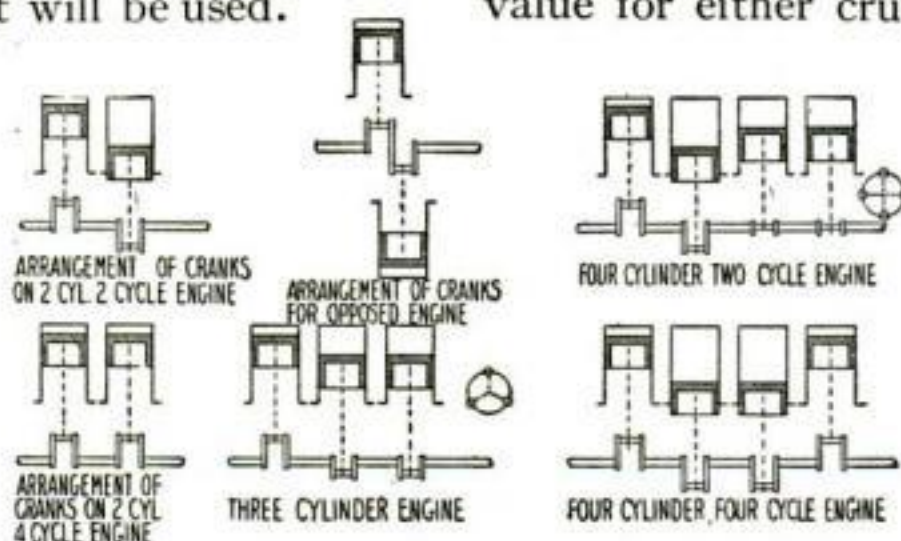

Arrangement of crankshafts required for different types of engines for motor-boats

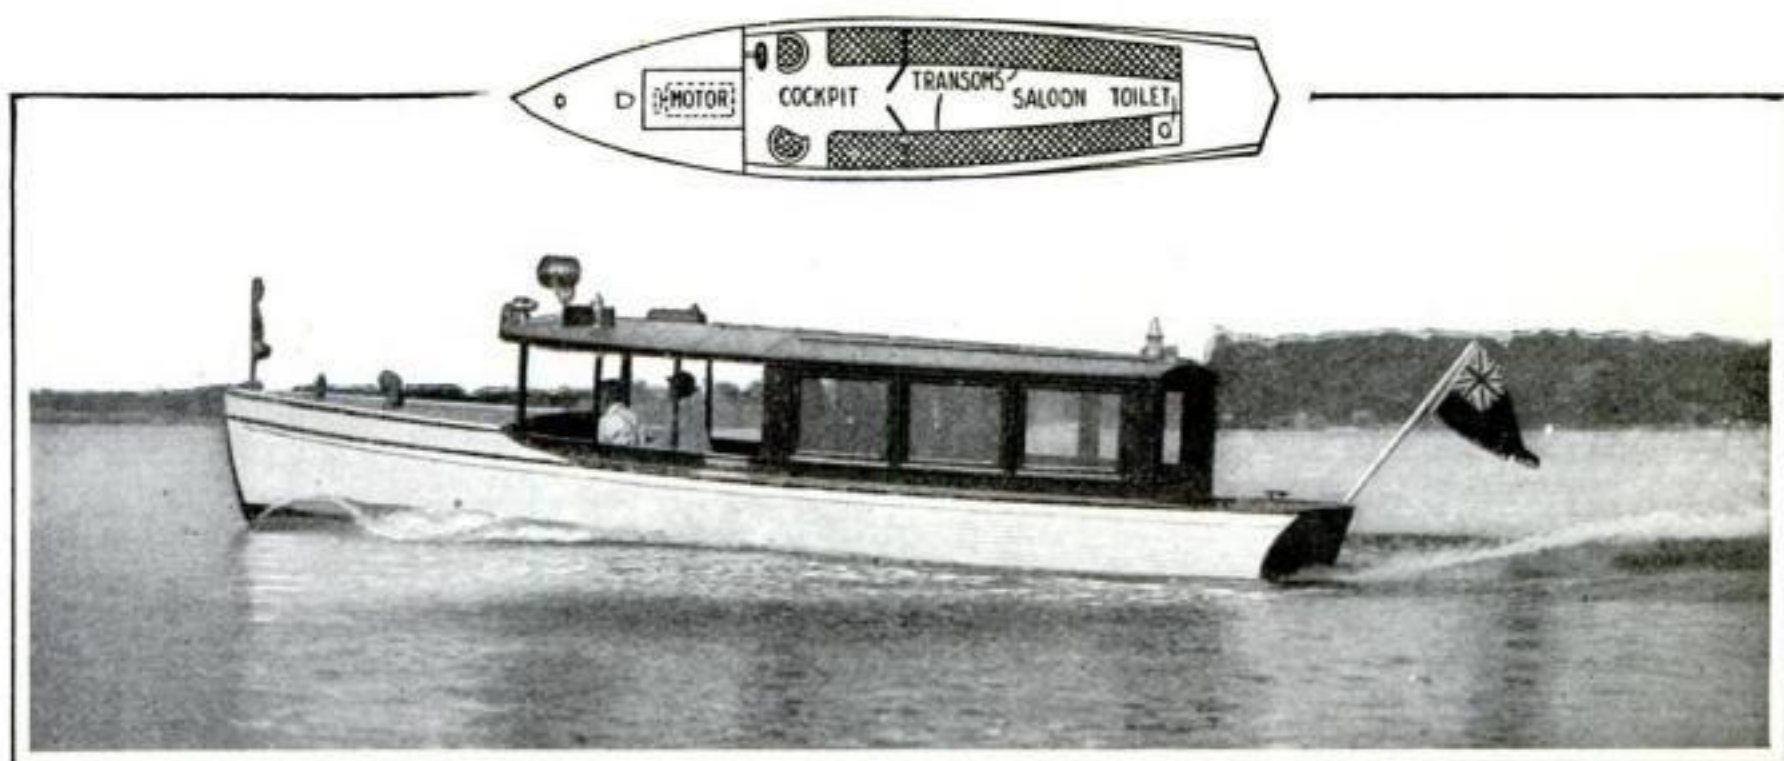

For short trips and pleasure rides in protected waters the day cruiser is the most desirable of all boats, as it can be handled readily and will travel at a fair speed under favorable conditions

hour is the safest and most satisfactory.

There are three ways of obtaining a motor-boat; the first is to have a boat designed to order by an experienced naval architect in which all of the whims and fancies of the owner may be incorporated. The second is to purchase what is termed a "stock model"; the third is to pick up a second-hand boat for a small sum and put it into condition. For the man who can afford the service of a naval architect, this article will be of little interest, but for the man who must select a stock model craft, or who is willing to experiment for two or three seasons with second-hand boats until he is sure of the exact kind of boat he desires, it will be helpful.


As quantity production greatly reduces the cost of any class of goods, the cost of the stock model motor-boat is relatively low. This is due to the fact that a certain plan is used for a large number of boats which are all made up at the same time; so the cost of designing, patterns, labor and incidentals is not charged up

against one particular boat but against a large number. A few years ago the number of stock models which it was possible to obtain was limited, but on account of the great popularity of motor-boating recently there is now scarcely any model which cannot be termed "stock."


The "second-hand boat" method is the one which is undoubtedly the most satisfactory in the end.

Some of these boats only need new hulls; the power plant is usually in good condition. At the present time boats ranging from twenty to twenty-six feet are the most popular. Real bargains in boats of this size are comparatively scarce, but as we go into the class of the thirty-five and forty-footers, the bargains are more frequent.

The most vital point of a motor-boat is always the hull, below the water line and near the keel. The condition of the timber may be readily determined by jabbing the

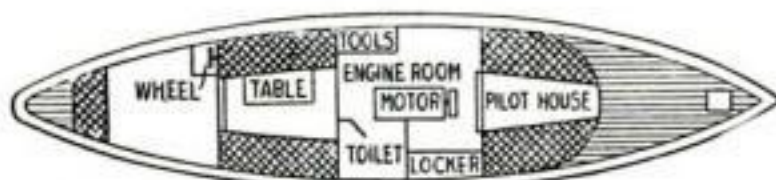

Deck plan of the neat glass cabin cruiser shown in the photograph below

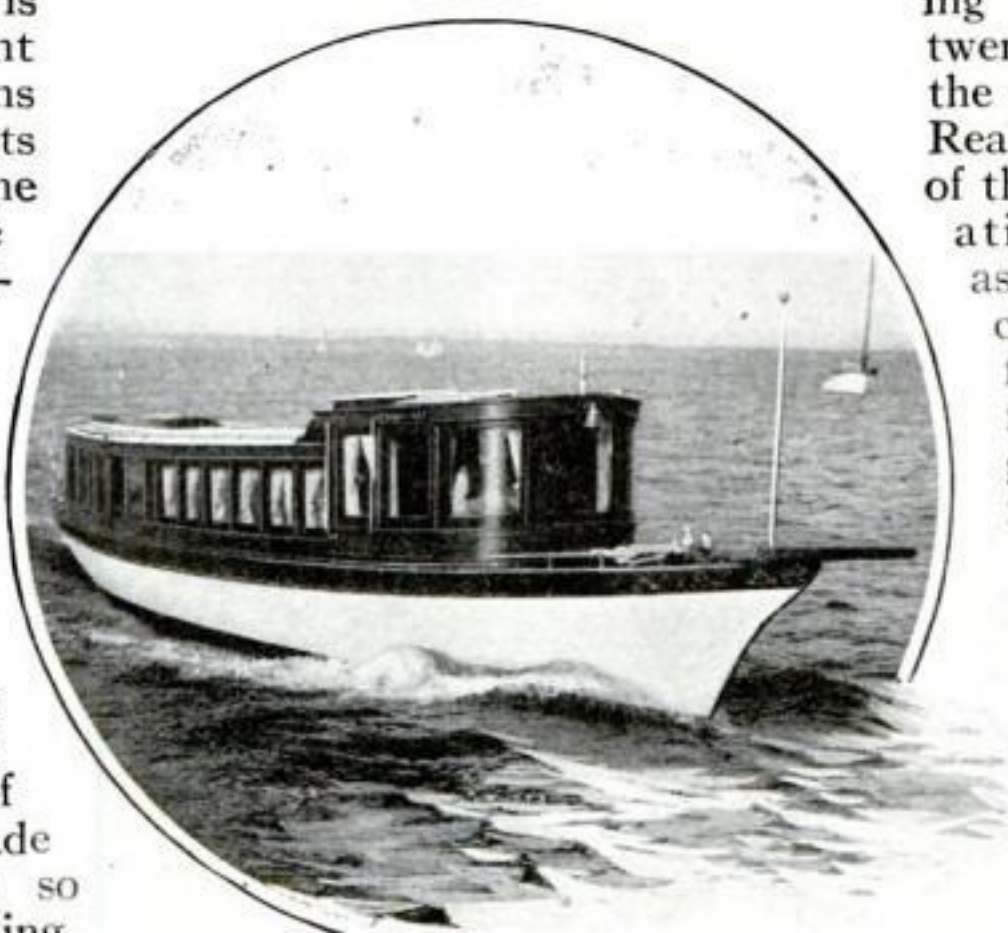

A glass cabin cruiser affords plenty of head room and is adapted for rivers



A bridge deck cruiser having two compartments is not considered a fair type of boat for large or rough waters but is adapted for protected waters, such as a lake, river or bay and for fair weather


planking with a sharp-pointed knife. If the timber is sound, it will be difficult to make the point enter the wood, but if it is inclined to "dry rot," the blade of the knife will sink into the plank, meeting practically no resistance. While this inclination towards rot does not necessarily condemn the boat, it does necessitate new planking or timber, and this expense must be figured when making an offer for the craft. There is an old idea held by many boatmen that the most vulnerable part of the hull is that which lies between "wind and water." This, however, is not the case. Dry rot is caused in most cases by steam. For that reason the bilge of the boat is most likely to be the part affected, as there is always more or less water lying in the bilge and the hot sun often causes it to steam.

The ribs should also be carefully examined. If they are spliced out or doubled it is a pretty sure indication that the boat is either getting pretty old or has at some time run ashore

and been wrecked. As a general rule, a hull that has been re-ribbed or stiffened should either be inspected by an experienced boat-builder or be rejected entirely, for fear of its opening up badly in a pounding sea.

Authorities differ as to the most desirable power plant; but it is the model of the hull rather than the power used to drive it that develops the speed. For instance, the short, beamy, heavy fishing boats used on the Columbia River are equipped with an eight horsepower, single cylinder engine which drives them along at a speed of about six miles an hour. Several years ago the writer endeavored to speed up one of these boats by installing a twenty horsepower engine. This resulted in an increased speed of

about one mile an hour, and the boat was practically wrecked from the excessive vibration and her sea-worthiness decreased to a large extent by the excessive weight. This same idea holds good in practically any class of craft.

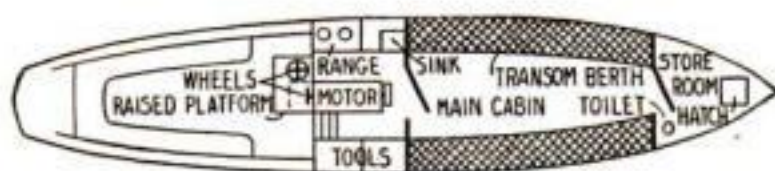

Deck plan of the sturdy trunk cabin cruiser shown below



Separating Russian Prisoners from Vermin

The Germans have special stations on the Eastern frontier for "de-licing" friends or foes from Russia

GERMANY is more afraid of vermin than of machine guns. To the German military surgeon a filthy Russian Cossack—and there is nothing filthier—is more to be dreaded than screaming shrapnel.

Germany, in particular, has to deal with the problem in a serious way. Thousands of Russian prisoners of war have been brought into German concentration camps literally swarming with lice. One of


the accompanying photographs shows four Russian prisoners as they arrived at a camp. Their caps of fur, their whiskers, and their heavy clothes were veritable breeding places for vermin of all kinds. The men were not long in the camp, however, before these caps were discarded, the whiskers and the hair removed, and new clothes supplied. Then they appeared as in the right-hand photograph below.

Every man, nobleman or commoner, friend or foe, who enters Germany from Russia must be "de-liced." There are special stations along the eastern frontier


for that purpose. Even royalty is not spared. Prince Adelbert, one of the Emperor's sons, had to be thoroughly disinfected and purified, not because he needed it, but because it was the military law. He received a guardedly phrased certificate to the effect that "His Royal

Highness, Prince Adelbert, is, for the time being, free from lice." The military disinfectors were not guaranteeing the future.

Provision is made in all armies for the extermination of bacteria-carrying insects. All men occupying the same quarters at the same time, or for alternating short periods of time, are regarded as a single unit and are transferred to a receiving station equipped with cleansing apparatus.

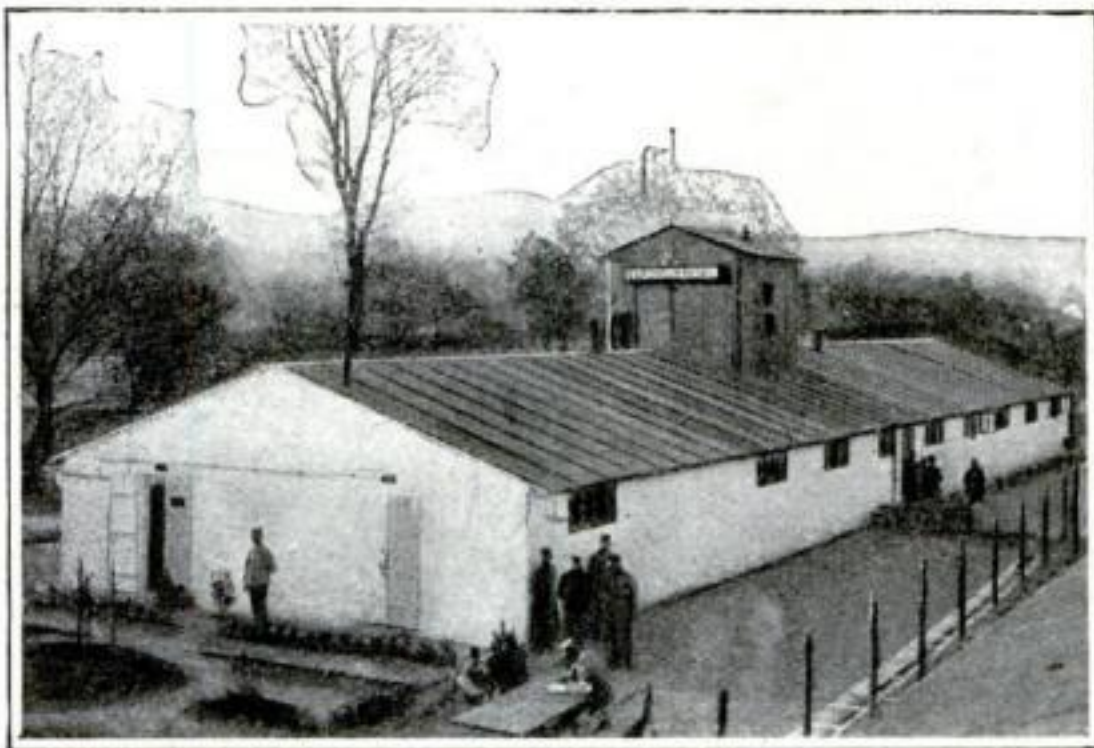

One of the disinfecting stations at which the Cossacks are deprived of their fur caps, coats, whiskers and vermin

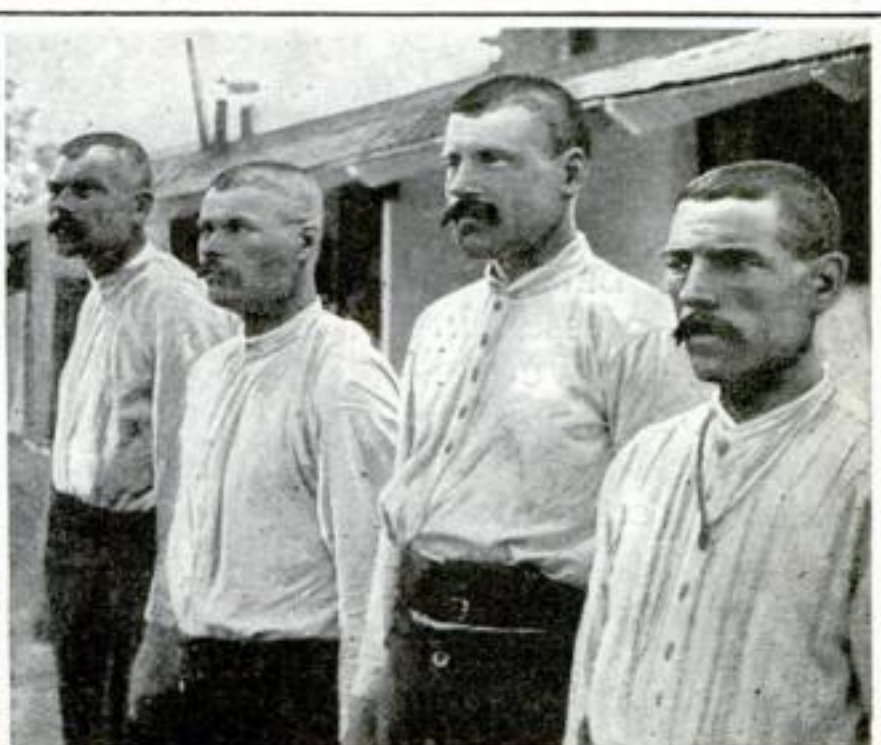

Photos © Brown and Dawson


This is a "Before and After" photograph. At left four Russians are shown as they appeared when first taken prisoners. They came out of the de-licing station cleaner if not happier men

An Attachment Which Will Lock Your Camera to the Tripod in an Instant

An ingenious camera attachment has been invented by Clarence J. Dawson, of Detroit, which will instantly lock your camera to its tripod, and will just as quickly release it. It does away with the inconvenience of having to turn your camera a dozen times about the tripod stand in order to screw it down tight. With this attachment, the camera can be locked down by the mere pressing in of a bar, when pointing in any direction.

One-half of the attachment consists of a metal casing which is screwed permanently on the tripod stand. A slotted locking bar slides back and forward just beneath the top of this casing. The other half of the attachment consists merely of a metal disk through which a flat-head screw projects to within one eighth of an inch from its end. This half is screwed into the threaded aperture in the bottom of the camera. The camera is immediately ready to be locked to the tripod. This is accomplished by setting the camera down so that the flat-headed screw passes through the hole in the top of the metal casing, and through the hole in the locking bar, also. The bar is pressed inward. The wedge-shaped slot in the bar grips down upon the head of the screw, fastening down the camera in the operation.

Simple it surely is, and it can be made very cheaply. Automatic pressing machines could stamp the parts from sheet steel.

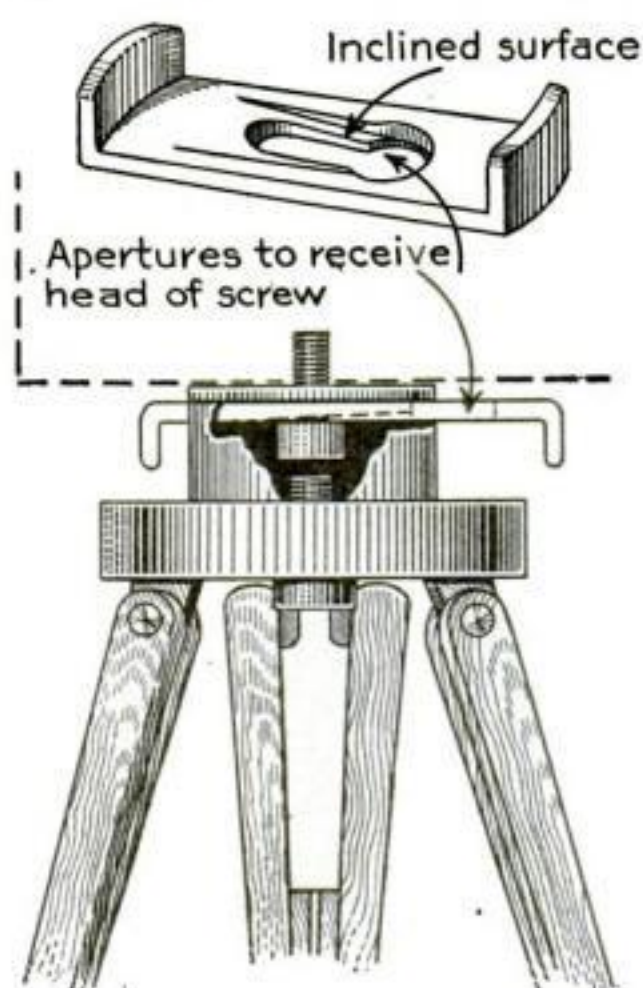

A flat-head screw is passed through the top of the casing and the hole in the slotted bar to the bottom of the camera


Making the Acetylene Light as Brilliant as the Electric Lamp

THE accompanying diagram shows the details of an ingenious device which makes the acetylene light almost as brilliant as that cast by the electric lamp on automobiles and motorcycles. The burner consists of a round disk, or "button," three-fourths of an inch in diameter, set in a pressed metal holder. It is made of the same white substance of which ordinary gas mantles are constructed. A tiny bunsen burner directs the flame against this disk, which is thus caused to give out a bright incandescent light. The burner is designed to fit any standard headlight from an acetylene tank.

Two kinds of light may be produced. If the white disk and bunsen tube are pointed toward the reflector, a brilliant white light is thrown far ahead on the pathway. If the burner is turned so that the flame comes from the front, a diffused light is cast instead of the powerful ray. This is really equivalent to a dimmer, since it is a light which does not dazzle. No wrench or other tool is required for turning the burner. It can be easily accomplished with the fingers.



Here the light is directed into the tree top. At right is a diagram of the burner

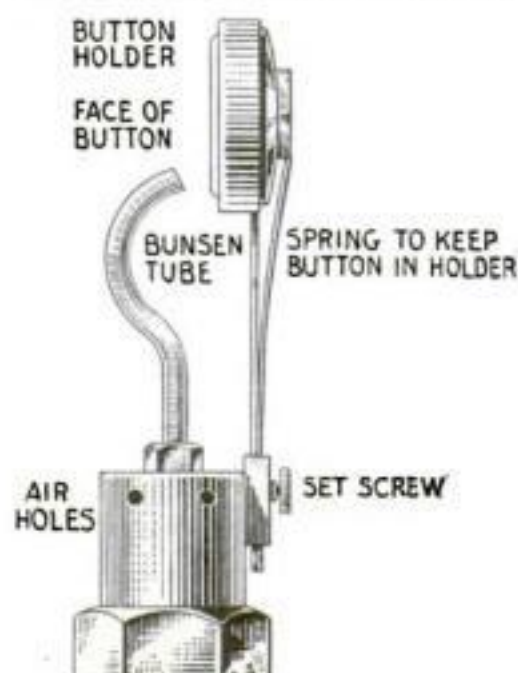



FOR PRACTICAL WORKERS

Cutting Clippings from Magazines with a Pin

WHEN you lose your knife or do not have a pair of scissors at hand for cutting the paper a common pin or needle of any kind serves the purpose admirably. If it is a single sheet from which the clipping is to be removed, lay the part on another paper, hold the pin slantwise so that the point will follow around the clipping, just as if tracing its outline. Pass back over the scratch with the point in the lead and you will be surprised how smoothly the pin cuts the paper. This method can be used to good advantage by the housekeeper for cutting paper that requires a fairly straight line.—L. MURBACH.


Solid Board Fence with Artistic Upper Edge

THE owner of a small cottage wanted a garden in his back yard, and to prevent prowlers running over it at night it was necessary to have a high wall or tight board fence. To secure an artistic effect the fence was made as shown in the illustration. The scalloped edge effect was obtained by using boards 10 or 12 in. wide of 4 ft. 8 in. and 5 ft. lengths placed alternately. The difference in the lengths of the boards is such that the depth of the opening is less than the width, making a rectangular form of a cut-out or scallop. The boxes are also spaced evenly and fastened on the



Ornamented square box on the fence corner

ends of the longer boards. They are square, slightly smaller at the bottom than the top, with their height about equal to the depth of the scallop. Four sharp-pointed ornamental side pieces were nailed on the boxes as shown, which aid in bringing out the low

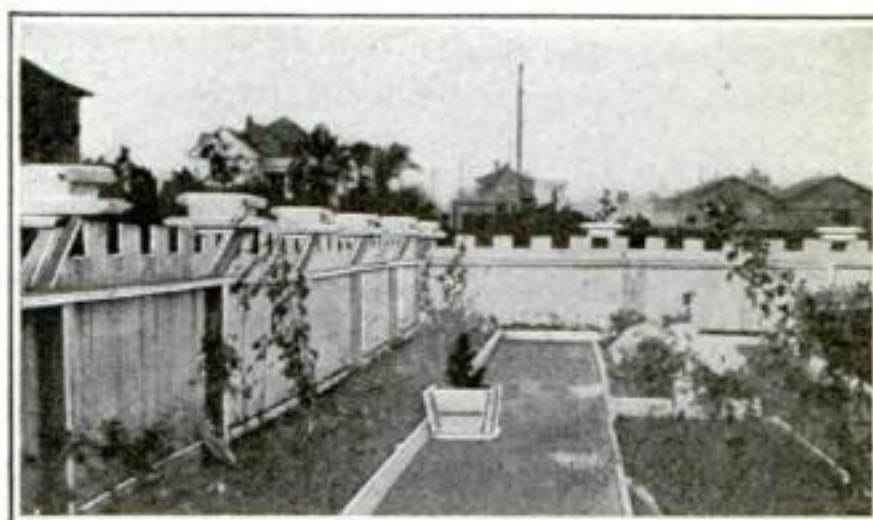

A part of the solid board ornamental fence surrounding a corner of the rear garden

form idea. The flowers grown in these boxes are bright colored and decorative.

Within the inclosure the ground was artistically plotted, and laid out with gravel paths having wood edges. All boards were painted with whitewash or exterior water paint.—L. R. PERRY.

Rustic Furniture Made of Poles and Logs

THE illustrations on the next page show a new idea in rustic furniture. Almost any kind of wood may be used; however, these are small tamarack poles and disks sawed from an oak tree. These disks, when made very smooth by planing and sandpapering, and then given a coat of oil and one or two coats of spar varnish, present a very fine appearance, showing the grain to the heart of the tree. The completed furniture is comfortable and handsome enough for use anywhere. Some of it is heavy, however, and when used inside, whether on a porch or in a living-room, should be fitted with casters.



The larger portions of each piece of furniture consist of disks of wood sawed from a large tree trunk, the other parts being made up of tamarack poles with their ends smoothed and oiled


No mortising, as in ordinary furniture making, is needed. The lapping of one piece over the other, leaving the sawed ends exposed, is more in keeping with the nature of the work. These ends should be smoothed, oiled and varnished, the same as the disks. Some bolts were put in to fasten the arm pieces to back and seat of chair, and the legs to set supports. Smaller braces and rustic trimmings were nailed in position.

In the construction of a chair or settee the four most important pieces should be selected first—the rear legs, which also form the back, and the front legs. If possible these should have slight curves. Plan and build the back first, arriving at the size and putting the cross-pieces in position. The front section should then be made.

Nailing the arm-rests and braces into their respective positions will complete a solid, rigid chair.

Tables are easier to build than chairs or settees. Careful measurements and simple tools are all that are required, and a great variety of chairs, tables, settees, desks, rustic baskets, and other useful articles may be made. The material, in most cases, may be gathered during a tramp through the woods in vacation-time, or it may be purchased at little cost.

Branches from the wood lot, limbs pruned from fruit orchard or shade trees, small tamarack or birch trees and the ordinary willow from some swampy spot may all be used to good advantage. The making of the furniture is more of a pleasure than a task.—J. E. WHITEHOUSE.

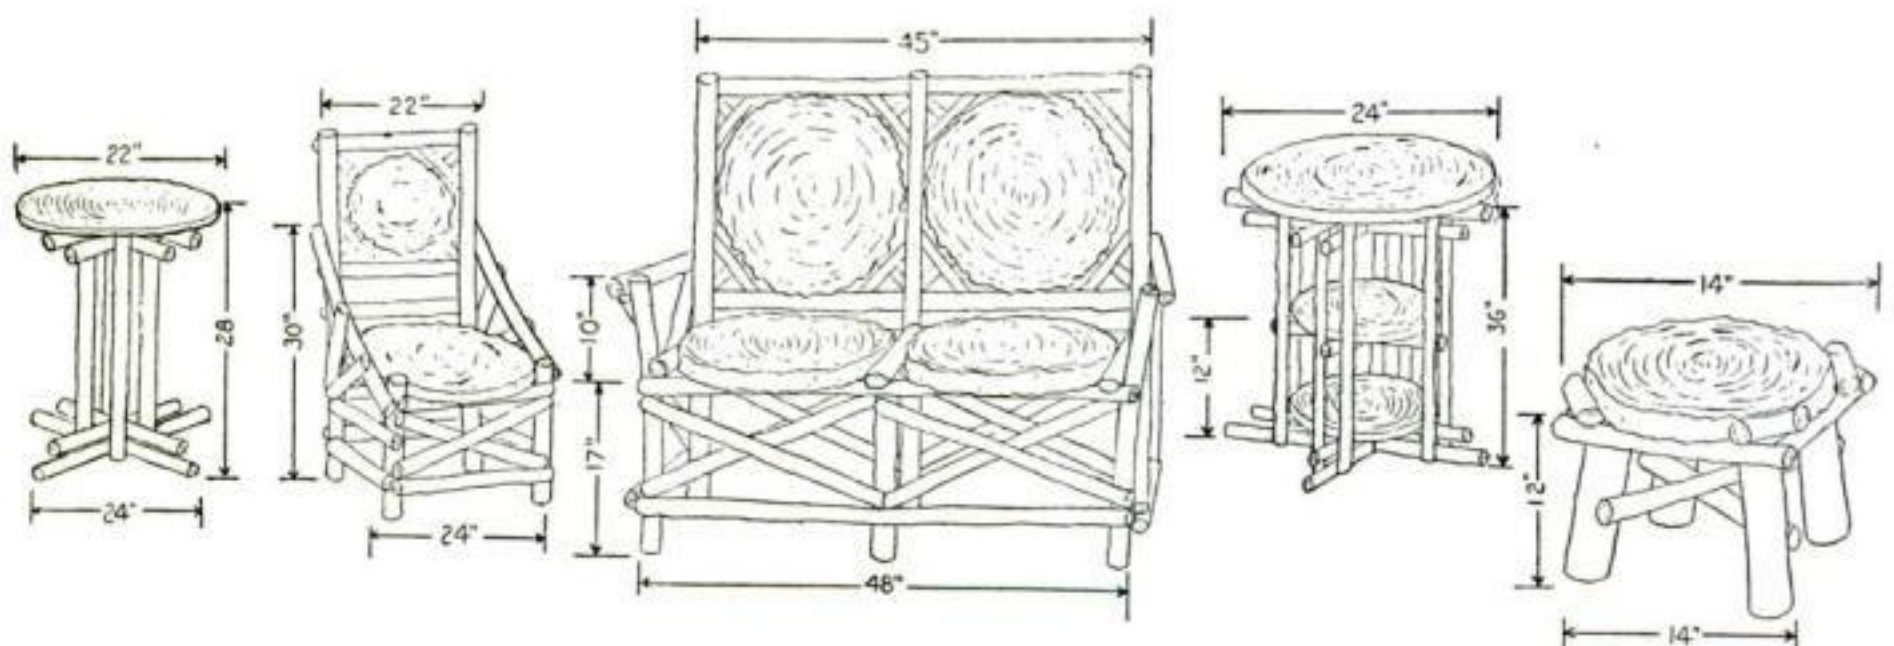

Dimensions of each piece of furniture shown in the halftone illustration above. These dimensions are not arbitrary but merely give an idea of about the right proportions for comfort

Using a Drop of Water for a Lens

It Is a wonderful magnifier in microscopic photography

By Frank M. Gentry

EVERY amateur photographer will be glad to learn of a method that is both simple and inexpensive, by which he may make perfectly clear photographs of microscopic objects.

It has been known ever since the first scientific investigations of the refractive properties of different substances, that water, if it could in some practical way be held in shape, would form a lens of extraordinary value. Moreover, it is also well known that a drop of water held by capillary attraction in a loop of wire forms a wonderful magnifying lens. The question, therefore, arises, "Why not use this drop of water as a photographic lens?" An explanation of how this might be done follows:


The first step is to cut a disk *A* from very thin copper to fit the lens cell of the camera. In the center of this disk, *B*, there should be bored a 1/32-in. or smaller hole. The smaller the hole is, the more perfect the lens will be and, therefore, the greater its working capacity. The edges of the hole should then be rubbed carefully on an oilstone so

as to remove all the little particles of projecting copper. Great care should be taken to follow accurately these instructions, as the result will depend on your faithfulness in this respect.

Next remove the lens from its cell; reverse the threaded ring which held it in place; insert the copper disk, and screw in place with the ring. The result may be seen in the illustration on page 125, where *C* represents the lens cell; *D*, the threaded ring; *E*, the copper disk, and *F*, the drop of water. The cell may now be screwed back into the camera until ready for use.

In order to place a drop of water in the hole, a wire should be bent as shown at *G*. Dip the straight end into the water. When it is removed, the drop that

adheres will be just enough to properly fill the opening. Patience is required to place the drop accurately so that it will not run over the edges, which would be disastrous. The operation may consume over an hour but the results well atone for the trouble. Glycerine or castor oil may be used in place

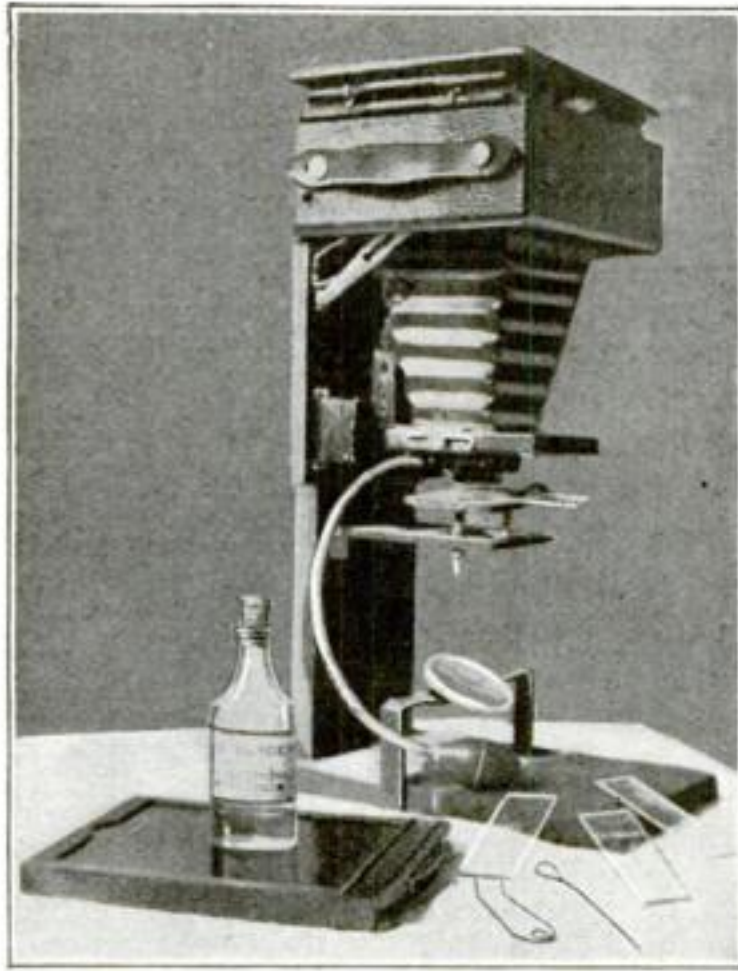


The camera as it is mounted on a pedestal for microscopic photography



At left: Crystalline formation of a bichromate of potassium solution on a gelatine slide. In center: Portions of the antennae of a beetle. At right: Microtomic cross-section of a stem of fern

of water; in fact, the former may be preferred to it, for, although it necessitates a somewhat longer exposure, it is free from evaporation and is not so likely to be jarred out of place, on account of its superior capillary attraction.

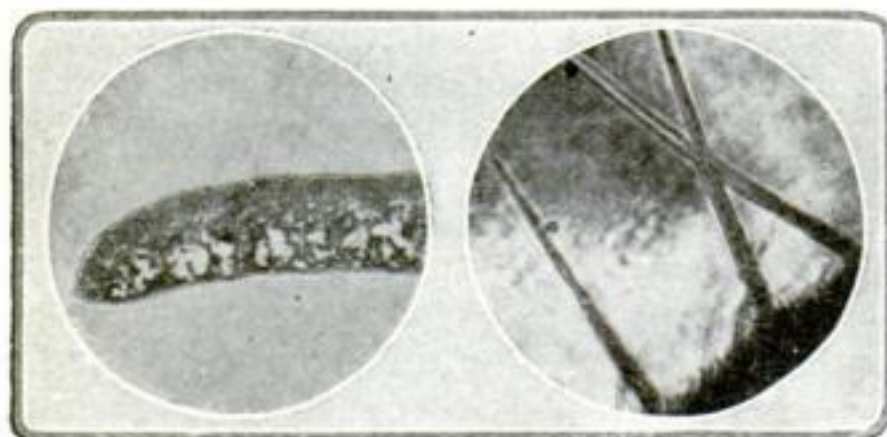

At left: Microtomic cross-section of a rue leaf. Right: The hair on the leg of a housefly


A standard must next be constructed, as shown at *H*, and *I*. No dimensions will be given as the construction will vary with the type of camera employed. Near the top of the standard a $\frac{1}{4}$ -in. stovebolt, *J*, should be inserted and screwed into the tripod socket, thus holding the camera in place.

The adjustable slide-holder is next to be considered. Some time was spent and a quantity of material utilized in devising methods of construction for this important part. The one which proved to be the most successful is shown at *K*. It represents a piece of $\frac{1}{8}$ -in. wood (a cigar box will do) in which a $1\frac{1}{2}$ -in. hole, *L*, was cut. On each side of this hole a $\frac{5}{32}$ -in. bolt, *M*, was inserted and made stationary by the nuts *N*. A long battery bolt will serve the purpose excellently. Another piece of $\frac{1}{8}$ -in. stock, *O*, somewhat longer than the other, with a $1\frac{1}{2}$ -in. hole as shown at *T*, was also made. To one end of this second piece there was nailed a $\frac{1}{2}$ -in. square strip, *P*, which served to fasten the whole part to the standard. On either side of the $1\frac{1}{2}$ -in. hole of the second piece, there was bored a hole corresponding to the bolts, *M*, and large enough to permit them to slide up and down easily. Springs, *Q*, were then slipped on the bolts, which were in turn passed through the corresponding holes in *O*. Thumb nuts, *R*, such as are found on batteries, were then screwed on the bolts. By tightening or loosening the thumb nuts, the slide-holder was adjusted to the lens. A strip of spring brass, *S*, was then fastened on *K*, to hold the slide rigid. When it was desirable to use a color-screen in photographing or examining any object, the filler was laid over the hole, *T*, on *J*. The

adjustable holder was then mounted by means of a strip, *P*, on the standard near the lens *U*, in the shutter, *V*. On account of the great magnification the focus is necessarily very short; indeed, it has been found that when a 6-in. bellows extension is used, the focus is not quite $\frac{1}{16}$ in.

An adjustable mirror, *W*, must be mounted on the standard base, *H*, by means of an axle working on pivots in the strip *X*.


To operate, the object to be photographed must be placed on a thin glass slide which should be fastened by means of the spring brass clip, *S*, over the hole, *L*, in strip, *K*. The bellows containing the water lens must be extended as far as possible. The mirror, *W*, should be adjusted until the direct sunlight is reflected through the slide into the camera. Focusing is then accomplished by tightening or loosening the thumb nuts, *R*, as the case may be. The plate is then placed in posi-

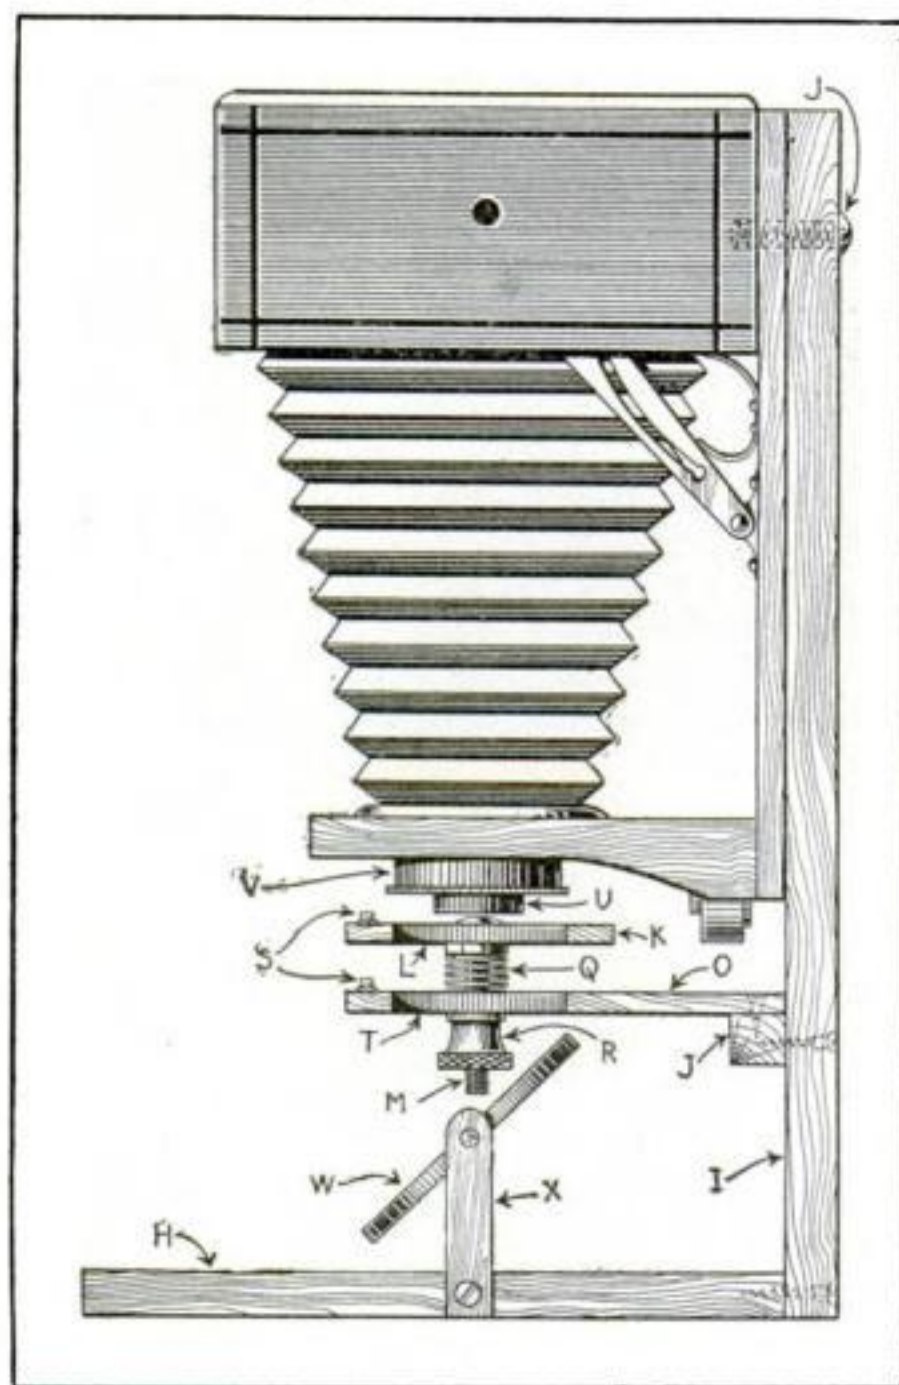

An ordinary camera attached to support for making microscopic views with a water lens

tion and the actual photographing carried on as usual. An old magic lantern may be used as the source of illumination; but

whatever the source, the light must be very strong. The exposure must be found by experiment, as it varies with the light, size of the lens, the subject photographed and

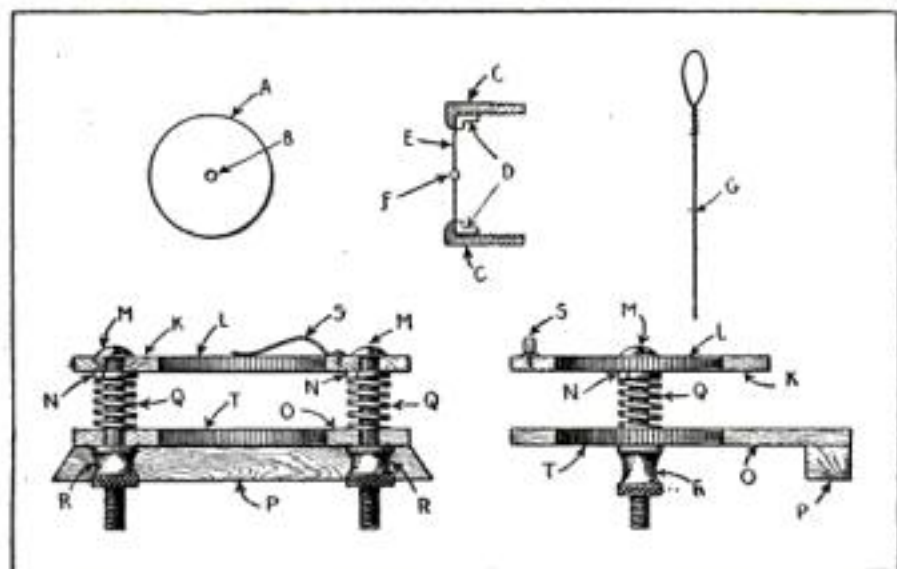

The disk for holding the drop of water in lens barrel and the slide holder attachment

whether or not a color screen is used. The accompanying photographs show the finished instrument and several of its photomicrographs.

Very convenient slides may be made by cutting old lantern plates the right size. Colored glass makes very good filters when they are needed. It is of course understood that some transparent objects, such as the white blood corpuscles, must be dyed before photographing in order to render them visible.

The magnification of this instrument ranges from 300 to 500 diameters, depending upon the lens and bellows extension. I have successfully examined and photographed blood corpuscles, the starch cells in a potato and various other things by this method. On one occasion while using a magnification of 923.5 diameters the hair on a fly's leg appeared $2\frac{1}{2}$ in. long. Another time, while examining the wing of a recently killed fly I was able to see the watery fluid drying up in the capillaries. To perfect this method several different instruments were tried out during more than a year of experimenting.

The same method of constructing a lens may be used in a similar manner for an ordinary microscope in cases of emergency, but the drop of water will need to be a trifle larger than for the camera lens. It can be made in a small loop twisted on the end of a small wire, allowing sufficient end for a handle.

An Effective Fireproofing for Children's Clothing

IT is a common occurrence for children's clothing to take fire from playing with matches and from other causes. This may be prevented by a little precaution which may be taken every time the children's clothes are washed, particularly the dresses, suits and petticoats.

A non-inflammable solution of 1 oz. of alum or sal ammoniac should be added to the rinse water or starch. This renders the garments practically fireproof. Should they take fire, they would burn very slowly and without flame.—JENNIE E. MCCOY.

Collecting Ants in a Sponge and Drowning Them

ANTS in the house or on the lawn can be quickly eradicated in the following way: Wet a large sponge and sift sugar all over it and place in the infested spot.

It will be filled with ants in a very short time. Sink it in a pail of water and the ants will leave it and drown. Repeat the operation until they are all destroyed.

Exterminating Moles and Gophers by Asphyxiation

IN some of the Western States moles and gophers are a great pest and difficult to exterminate. One of the best methods of getting rid of these animals is to fill their holes with the burnt gases from the exhaust of a gasoline engine. The illustration shows the method used by a Western farmer for the purpose. He attached a hose to the exhaust of an automobile



Forcing the deadly gases from the exhaust of the automobile engine into the burrows of moles and gophers

engine and forced the burnt gases into the burrows of the animals, causing death by asphyxiation.

Exhibiting Specimens of Flowers in Single Blossoms

CERTAIN flowers, such as pansies, cannot satisfactorily be shown in bunches, but should be exhibited as separate specimens. To put each in a vase by itself takes

up too much room and displays more glass



Glass tubes set in table top to hold water for cut flower stems

than flowers. A good way to exhibit such blossoms is to make a table top of soft wood and bore holes into it for inserting glass tubes. The top of the table should then be covered with paper, through which the flower stems may extend down into the water-filled tubes. Most amateur photographers can soon collect a number of developer tubes, which are just the thing for this purpose. If these cannot be obtained, little "homeopath" vials may be found at the druggist's. These tubes may be arranged in the shape of letters, or if desired, emblematic designs may be formed for table decorations. The effect of each flower standing seemingly by itself without any support is surprising as well as pleasing.—W. H. SARGENT.

A Tracing Cloth Repair That Does Not Affect Transparency

THE principal objection to patching a tracing cloth is that the part covered is no longer transparent enough for making a perfect blue print. If the tear is not too large, apply liquid court plaster to the parts and allow it to dry. This holds the parts together, fills the gap or hole and does not

impair the transparency of the cloth. With a little care any missing lines of the drawing may be drawn on the plaster filling the gap.—LOUIS FLEISCHER.

Difference in Curing Time of Parts Makes Poor Tire Repair

SOME repairmen attempt to use materials from two or more concerns on the same job. For example, sometimes a fabric is bought from one firm which cures at 40 lb. steam pressure for 40 minutes, with gum from another firm, curing at 55 lb. for 50 minutes. This combination inevitably results in improper curing of one or the other, or both of these materials. It is best to use one make of repair materials for satisfactory results.

Porcupine Removes Window Pane to Gain Entrance

THE wily ways of a porcupine and its almost human intelligence are illustrated in the accompanying picture. A camping party having food stuffs stored in a cabin, left the place for a few days to go fishing across the lake. They left the door and windows securely locked, but upon their return they found that a porcupine had gained entrance and played havoc with




After gnawing through the window-sash frame the porcupine knocked out the pane of glass

their edibles. The creature evidently tried various ways to get in, but finally succeeded in gnawing through the window-sash frame at the corner and knocking out the glass pane in that section.

Round Belt Guide on a Washing Machine Wheel

THE circumference of the washing machine flywheel shown in the illustration

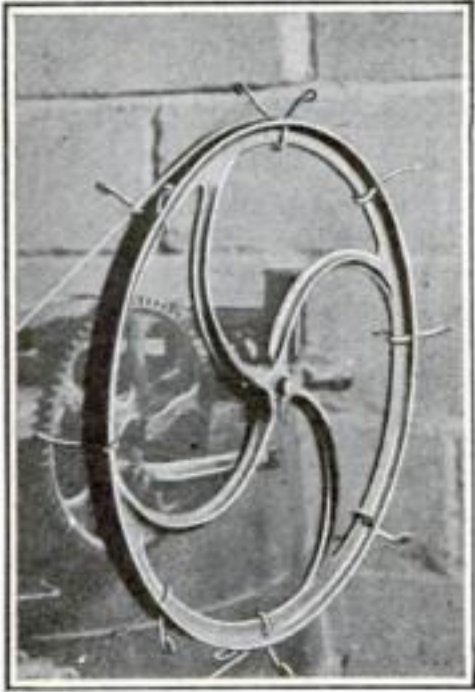

The U-shaped belt guide made of pieces of wire

center of the wheel.—GEO. C. ROUSCH.

is divided into eight equal parts and at each division a pair of $\frac{3}{16}$ -in. holes are drilled. Pieces of stiff wire bent U-shaped and about 4 in. long are slipped through these holes from the inside of the wheel rim and their ends bent outward as shown. These wires serve as guides to keep the belt on the

of the square where all four meet. Then tie or spike them together.

Morning-glory vines are planted around three sides of the base and are trained up




The vine-covered tepee admits the cool breeze and keeps out the hot sunshine

A Vine Covered Tepee in the Garden for the Little Folks

A VERY attractive tepee can be built of 2 by 4-in. timbers, as shown in the illustration. First lay out a plot of ground and box it in with the timbers, filling up the part within with dirt to the upper edges of the timbers. Near each corner of the frame stand one of the timbers, allowing the upper end to slope toward the center

to trail over wire mesh fastened to the timbers. The fourth side is left open to provide an entrance-way. Lawn chairs and a table may be placed inside. The breeze from any direction can enter such a tepee and the hot rays of the sun will be kept out.—EDWARD F. BIGELOW.

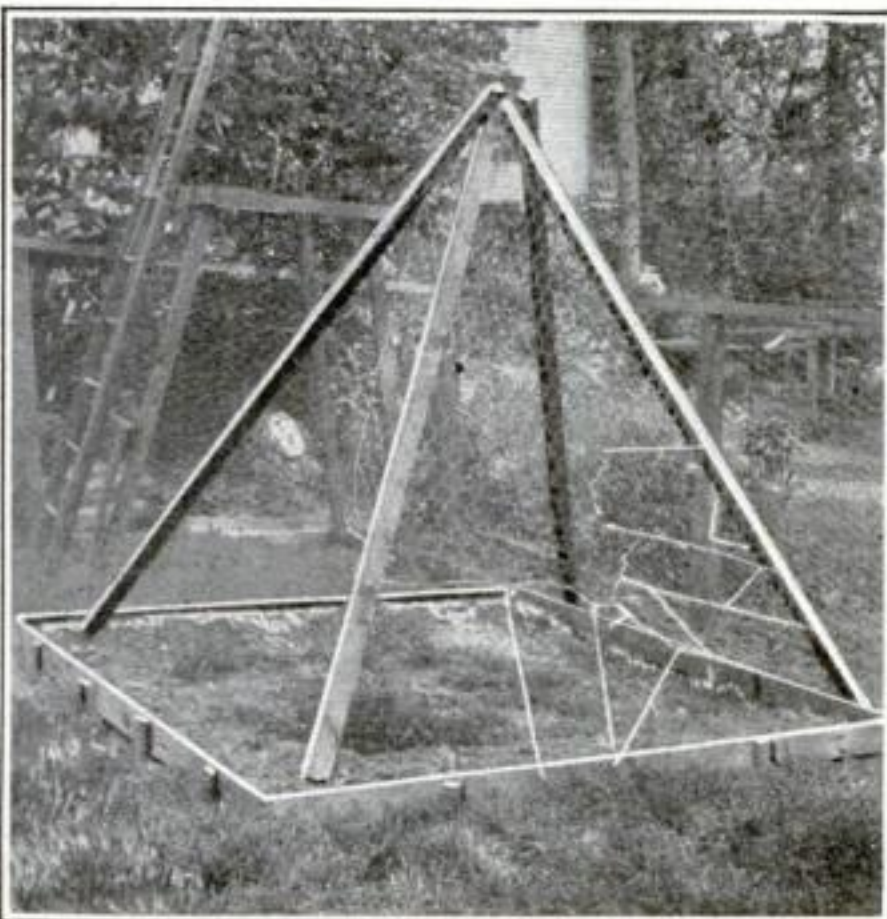

A plot is boxed in and timbers set up in tepee form and covered with wire mesh

A Shaft-Polisher Made Like a Lemon Squeezer

PISTON rods, mandrels and similar shafts of considerable length turned in a lathe are usually given a high finish. Where no grinding fixtures are available this finishing must be done with files and emery cloth. A polisher for such work that gives more pressure on the surface and does better work with less fatigue may be made on the principle of a wood lemon squeezer. Two pieces $3\frac{1}{2}$ in. wide and $\frac{7}{8}$ in. thick are joined at the back with a piece of old belt leather for a hinge. Shallow grooves are cut across the boards on the inside and pieces of emery cloth tacked in them. The leverage gives as much pressure as desired.

Building an Artistic Bird-House For the Garden

THE design as shown by the drawing is an attempt to carry out a pergola effect. The general dimensions are 11 ft. 6 in. from center to center of round columns. From the ground to the under side of upper beam is 12 ft. The diameter of columns at base is 1 ft. 5 in., at the top 1 ft. 3 in. The general dimensions can be changed to suit the particular fancy of the amateur builder, but for satisfaction and to avoid mistakes they ought to be carried out as shown. The columns are of wood of built-up construction, and set in the ground not less than 6 ft. That portion in the ground and 6 in. above ground line is thoroughly coated with tar, both inside and outside. The inside of each column, particularly the lower portion, is reinforced.

It adds much to the stability if that portion of the columns below ground line is in concrete. At the ground line base of the column there is a concrete finish, octagonal in form and about 7 in. high, and on the four sides there is a square block 6 in. high. The edges are slightly rounded. All are built of cement or stone, with suitable foundation. The columns, beams, and other woodwork are of cypress. The column cap is square. On top of each column cap is a wood beam or bracket 4 ft. long, 1 ft. 3 in. wide and 10 in. thick. The ends are shaped as shown. This short beam or bracket is of built-up construction and is laid trans-

versely to the long beam above. On top of these two wood beams, a longitudinal beam is securely set in place. This beam is 17 ft. long, 1 ft. 3 in. wide and 1 ft. 1 in. thick, and is of built-up or box construction. The ends are shaped as shown. The top of this beam slopes from the center to each side. The slope is about $\frac{1}{2}$ in. The top is covered with tin, painted on each side. There are sixteen separate compartments

or rooms on each side of the beam, also six more on top of the beam in the gables. There is a wood partition dividing the front and the rear, also cross-pieces, giving each compartment about 6 in. by 6 in. floor space. The height is the height of the inside of beams, or the gabled roofs as the case may be.

Each compartment has an opening with semi-circular top. From the floor to the base of circle it is $2\frac{1}{2}$ in. high; the width is 2 in. The opening is splayed on the inside, to carry


out the drippings during rain storms.

Outside of each opening is a latticed shelf or ledge 6 in. wide with a 9 in. projection. On top of the beam there are gables. Each gable has two compartments, built in detail the same as specified for the lower compartments. The roof of gables is covered with tin. On top of this tin there is wood tile. This tile is thoroughly painted in red and thoroughly sanded.

The openings at each end of the beam have a small slanting roof. The cross beam extending from column to column is made removable.



A very neat design for several bird-houses set on the cross beam of a structure resembling a pergola over a walk

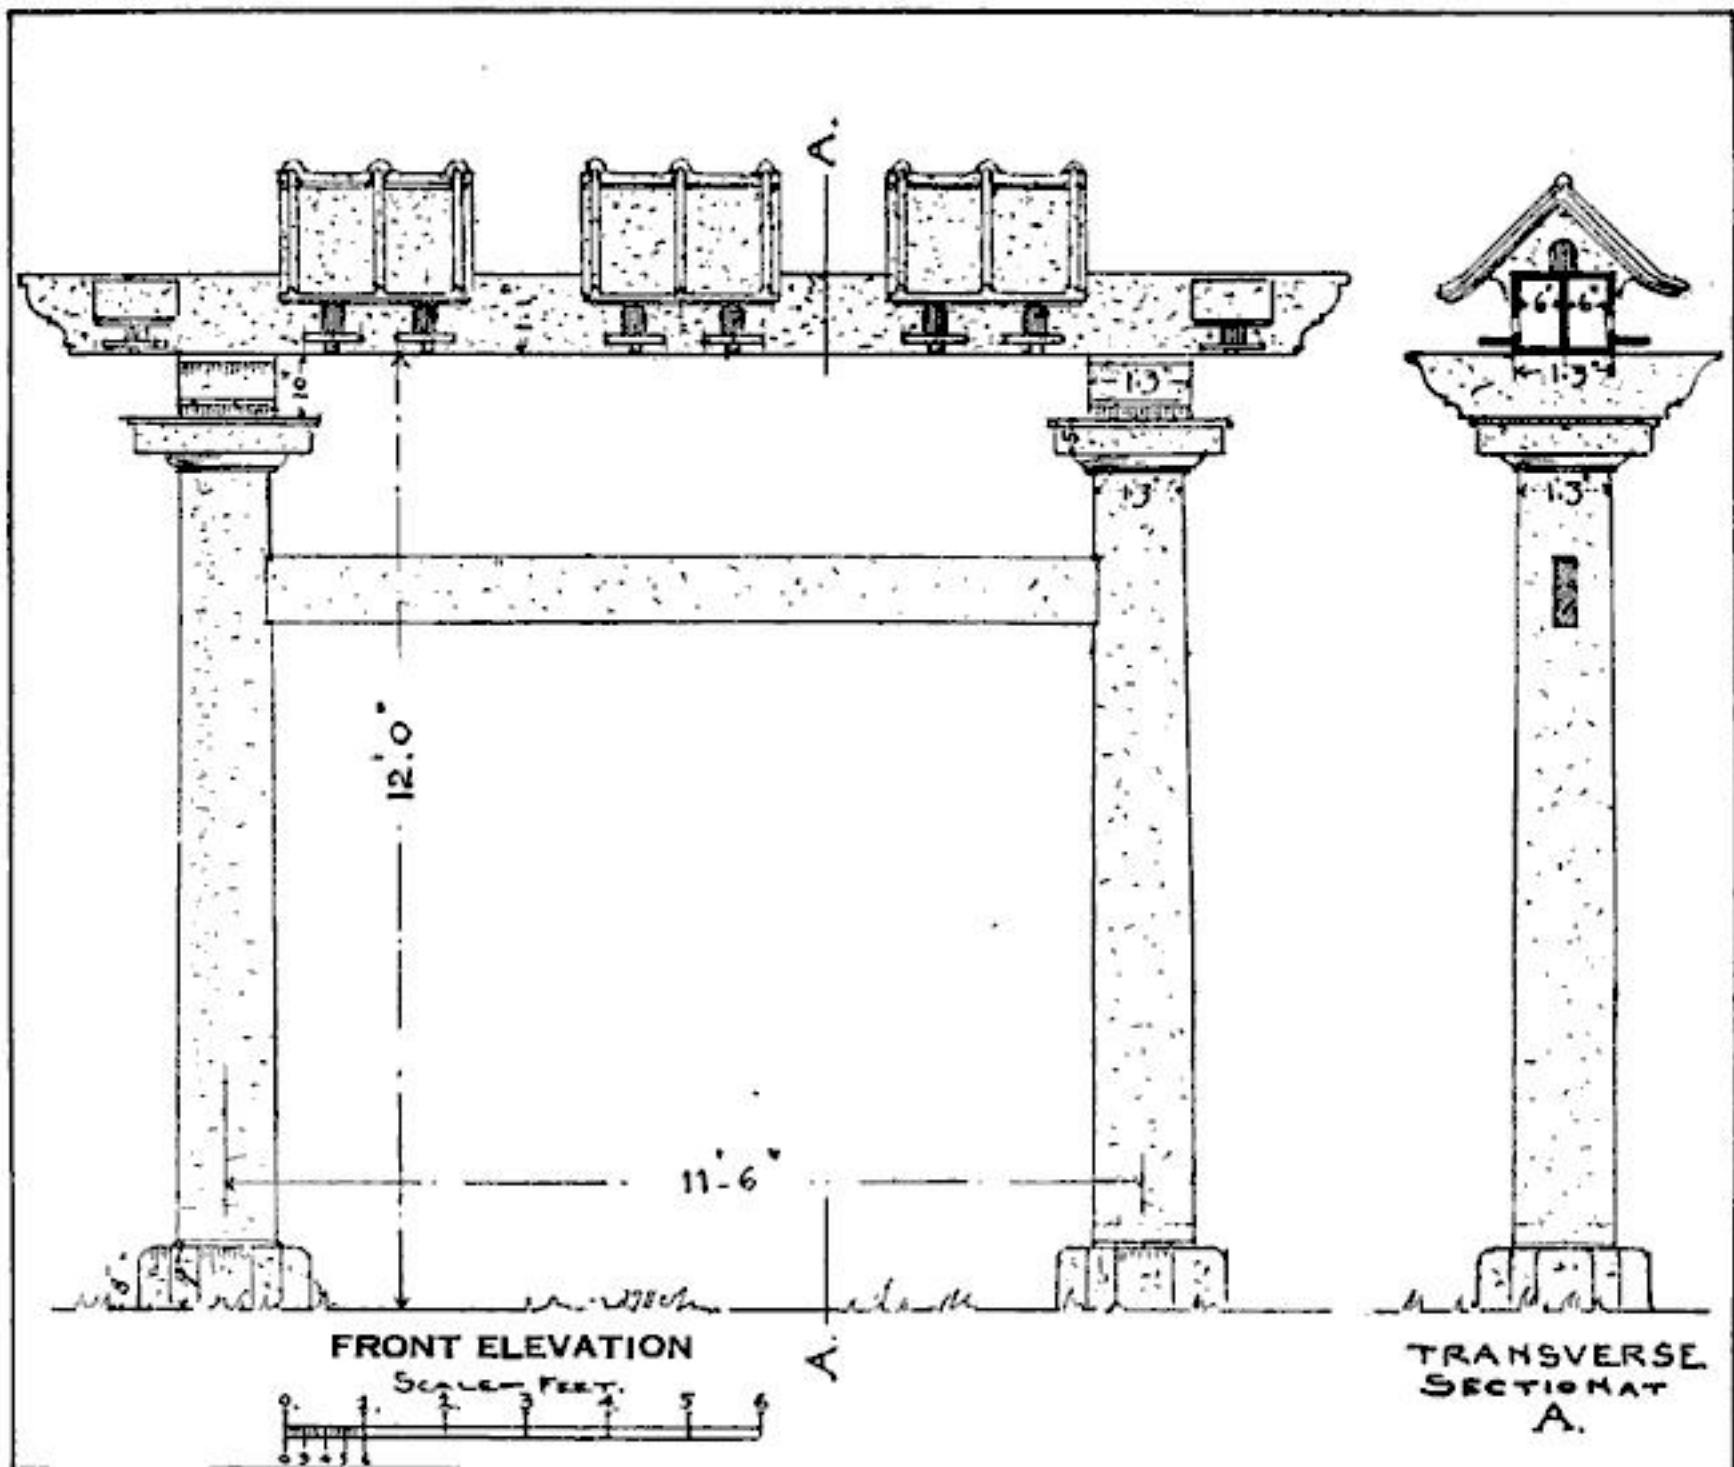

Diagrammatic drawing showing dimensions and plan. The entire structure is built up of wood for the framework and covered with concrete, the bird-houses on top being covered with tiles

The inside compartments, including the floor, are built independent of the side wall and top, so that they can be let down from below for cleaning. These are held in place at each end with a metal chain which runs over a suitable pulley on the inside of the column and down to a point opposite opening 4 ft. from the ground and suitably secured in place. The opening for access to the above chain has a suitably hinged door. All woodwork is painted a light gray color and finished in sand.

A Printing Process for Imitating Hard Woods

THE art and practice of graining dates back about 150 years, the exact period not being known; hence imitating hardwoods is by no means a modern idea. An expert grainer to do his best, uses only his best; whereas Nature, always variable, gives us her best and her worst, and the result is seen in poor cabinet work. In other words, the woodworker in making

up a piece of work will often use pieces of natural wood that are not beautiful and often not matched so that the finished job will not compare with that of the expert grainer.

For some time past there has been a serious shortage of fine hardwoods suitable for cabinet work and, to help out, veneers have been used. For this the wood is sliced into extremely thin pieces or sheets which are glued to a baser wood; or plain woods are stained to make them look like the finer hardwoods. Various methods other than graining have been adopted for imitating hardwoods. About 25 years ago, a Pittsburgh painter invented a machine for filling a board with punctures so that when it was stained the surface resembled oak. The board could be sawed and cut in the ordinary manner and finished in perfect imitation of oak.

The most modern method of graining employs a printing roller. The roller is made of a strong light wood, well seasoned. This may be in the form of a segment of

a circle, in which case it works with a rocking motion. The length of the segment should be sufficient to cover the surface to be grained, otherwise it will be difficult, but not impossible, to make the joint unnoticeable. A full circle roller is made as follows: Take a shaft and fix upon it, by mortise or otherwise, spokes of proper length, according to the size of the desired circumference, and around these spokes run or bend a strip of $\frac{1}{4}$ -in. gum wood. If the ends of the shaft are smoothed off and allowed to extend about 4 in., handles will be provided to hold the roller in operation. Place around this roller the composition for making the print. A large roller may be made with a circular head of 1-in. board having flanges from $\frac{3}{4}$ to $1\frac{1}{2}$ in. larger than the roller. Turn the roller over and stop all holes with plaster of Paris. The best way to do this is to run the plaster all around the inside of the roller. In the head of the roller, as it stands upright, cut three or four notches along the edge, about 1 by 2 in. to make places for pouring in the composition and for letting out the air. Make a long smooth strip of zinc large enough to cover the roller, rub it over well with grease or oil, then place it around the roller and pour in the composition. The oiled or greased side must be next to the composition. A very large roller will need collar bands to hold the zinc. Draw the zinc around the heads of the roller and pour in the composition through a strainer. Allow it to stand for at least 12 hours before removing the zinc.

Making the Roller

To make a smaller roller form it in a mold made of a light wood frame of the required size, set on a piece of zinc or glass. Pour the composition into it, then lay a piece of canvas on top of it. When cool, attach to a roller or rocker with tacks.

The composition is made as follows: Heat 12 oz. of raw linseed oil to the boiling point and add 1 oz. of chloride of sulphur. In another vessel dissolve 2 lb. of the best white glue and when melted add 8 oz. of commercial glycerine. Use as little water as possible in melting the glue. The best way to dissolve or melt glue is to pour enough cold water on the dry glue to cover it and let it soak over night. It will take all the water it can hold. Pour off the surplus water and add enough boiling water to melt it. To the glue add 8 oz. of commercial glycerine and mix well.

Another formula is to dissolve or melt 24 parts of the best white glue and add to it 12 parts of commercial glycerine, which is cheaper than the drug-store brand. For a roller requiring from 10 to 15 lb. of composition add $\frac{1}{2}$ pt. each of molasses and raw linseed oil. To test the composition for consistency, cool a little of it and if it dries too stiff add a little glycerine; if too soft add more glue. This composition should be kept hot until used. Boiling it will do no harm, as this is inclined to drive off more of the surplus water.

Now for the Scraper


A scraper will be required and it is made as follows: Procure a piece of white pine board 12 in. long, 4 in. wide and $\frac{7}{8}$ in. thick and make a groove in one edge of it 1 in. deep in which a piece of sole leather is placed after giving the depression a good coat of glue. The piece of leather should be about $1\frac{1}{2}$ in. wide and as long as the board. The edges of the board should be planed down so that it will not interfere with the projecting $\frac{1}{2}$ in. of leather.

The printing color should be a little heavier than oil paint. It is composed of pigments ground in Japan. A board is the next requisite. It is made from the kind of wood to be imitated. Select as fine a figured specimen as possible and make it perfectly smooth and even of surface. This board must be 6 in. wider and 1 ft. longer than the circumference of the roller. Nail thin strips around the edges of the board, allowing them to extend 1 in. above the surface. Bore a $\frac{1}{2}$ -in. hole in one corner through which to pour off the liquids when cleaning it off. With the board ready, prepare a solution of 1 lb. of concentrated lye dissolved in hot water and pour it on the board's surface, allowing it to remain for 20 minutes. Then pour it off through the hole in the corner and rinse with clear water to remove the lye, after which flow a little vinegar water over it to neutralize the lye. The board is then left to dry out thoroughly, after which it may be lightly rubbed with fine sandpaper. The lye removes the soft fibers of the wood, leaving on the harder grain an effect similar to etching. The board is then ready for the printing process; but first try it by making a print from it on paper. If it shows an imperfect or faint print apply the lye solution again. Pour some of the printing color on the impression-board through a strainer. The printing color is made into

a paste form with turpentine, working it as smooth as butter. When ready to use, thin out with more turpentine and add a little boiled linseed oil, which is to keep the paint from drying on the board. Do not make the printing color too thin; use plenty of it so that the sunken parts will be filled level-full. Then with the scraper spread the paint out evenly, pushing the tool forward, using both hands to press it down hard. This will leave the sunken parts full and the high parts smooth.

An Improvised Stage for an Out of Doors Fairy Play

AUTOMOBILES, four on the right and two on the left, furnished most of the light for a fairy play, "The Merman's Pipe," produced under the direction of Mrs. A. J. Commons, at Merrill Springs, Wisconsin, for the benefit of a rural school social center five miles away from any stage machinery or electric lights. Each car was so turned as to throw the rays of the

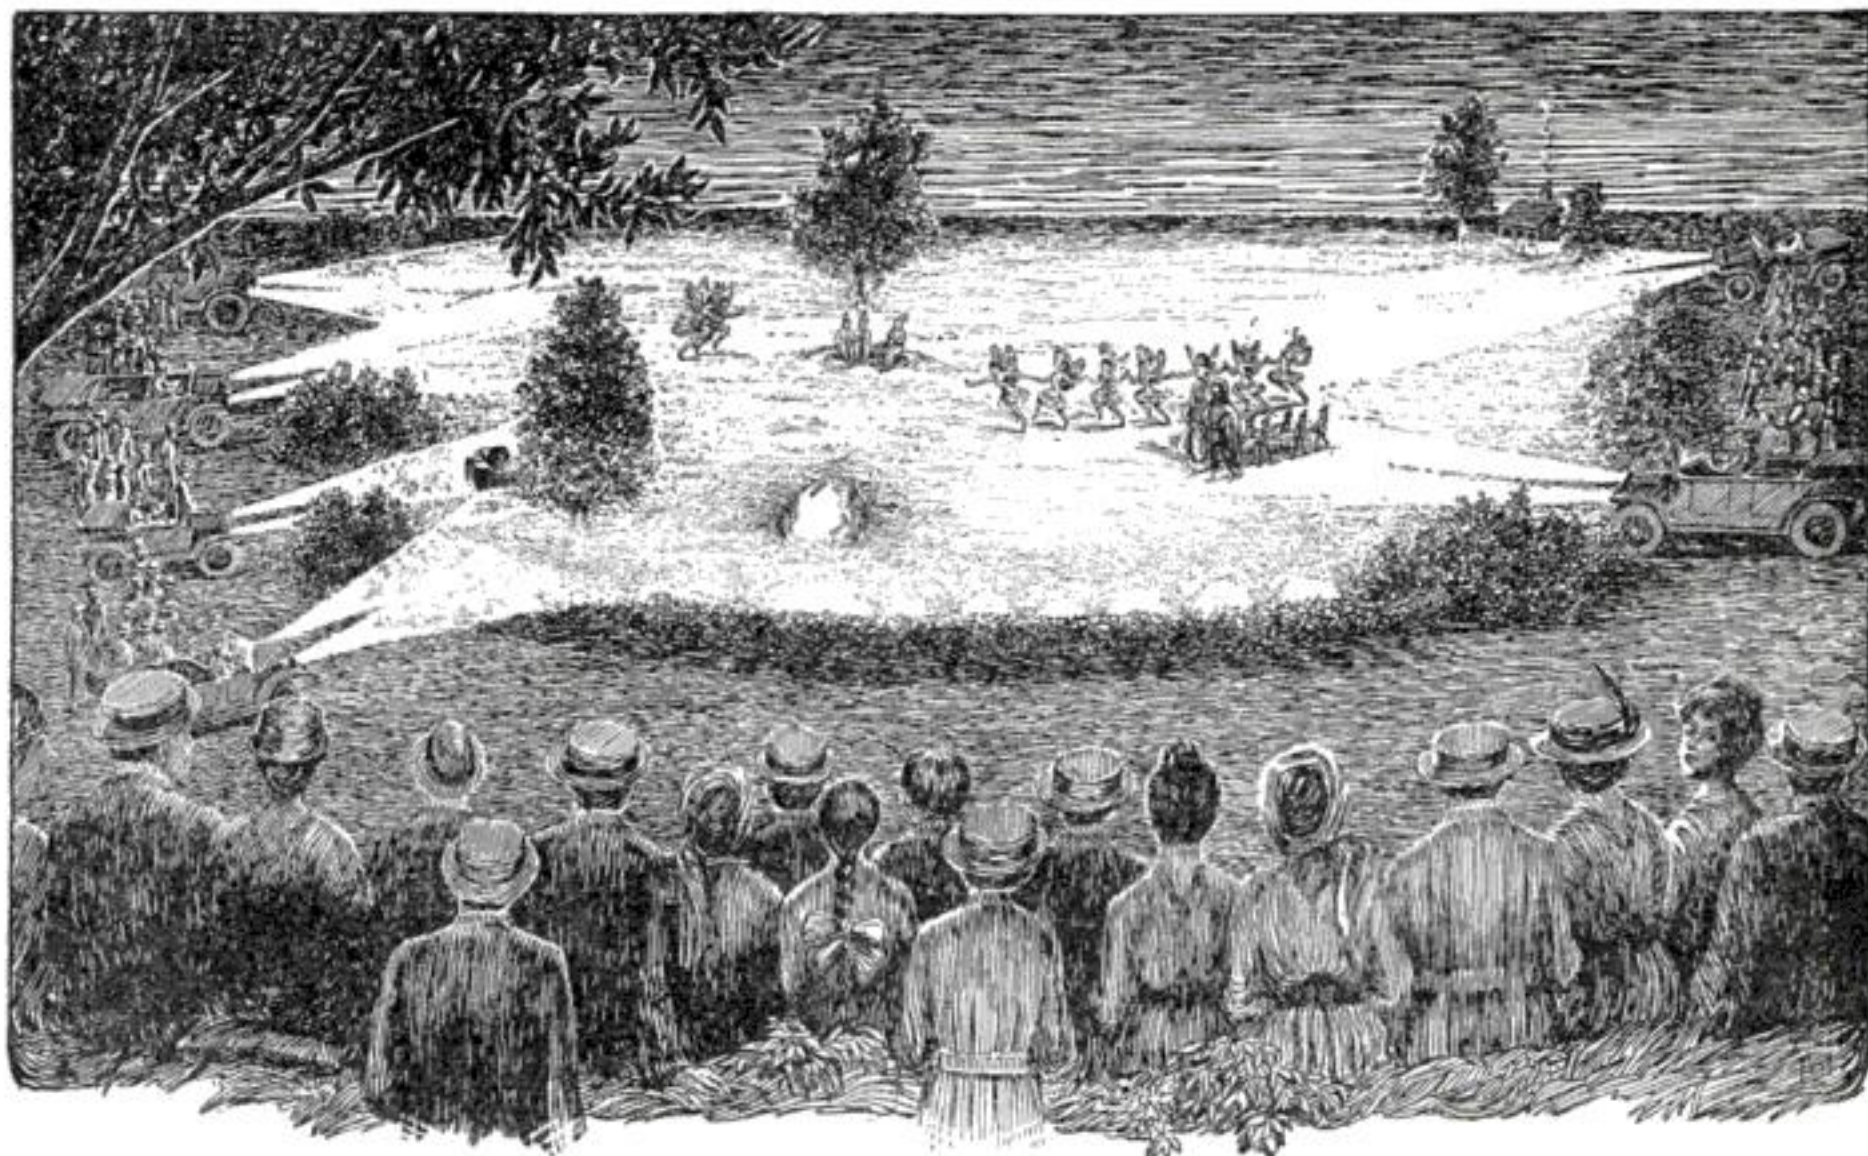

The brilliant rays from the headlights of six automobiles and a number of lanterns furnished the spotlights and footlights for a fairy play given at night in a far-from-the-city locality

With everything ready and the impression-board filled with color, take the roller in both hands and select a point on the roller-surface at which to start. Place this part down on the board, and with a firm, even pressure roll it along over the surface until one complete revolution is made. Be careful to stop when the starting point of the roller is reached. This is to avoid making a lap. Carefully pick up the roller, not permitting it to slip on the board, and place it down on the surface to be grained.

The first impressions from a new board are seldom good and for this reason it is better to make several on some other surface until the board gets into proper shape. When you have finished with the board and roller clean them off with benzine and a stiff brush.

lamps on some important scene. In that way they provided six areas of spotlight.

For footlights the farmers brought their lanterns. The producer arranged these along the inside of a screen made out of the finest poultry wire interwoven with leafy branches. Sheets of tin reflected the light upon the stage. One scene in the foreground demanded stronger illumination. There a large carriage lamp was used instead of a lantern.

The lake shore was the background; but that was not essential, for the play was repeated later where there was no lake. A green curtain hung on wires, with brush, leaves, and rushes fastened to it, gave a dense leafy drop that helped out wherever Nature failed to provide the proper screens of foliage.


A phonograph behind some convenient bushes took the place of an orchestra. Another clump of trees served to show where the fisherman's hut was supposed to stand. Such was the stage and its machinery. The audience, seated ancient fashion upon the hillside, enjoyed what was probably as lifelike a presentation of fairy-land as could be produced by human beings.—SHIRLEY L. SEIFERT.

An Experiment in Optics Using Heated Graphite

AN interesting experiment in optics may be performed in the following manner: Take a bit of hard graphite, such as a lead pencil, and hold it in the tip of a candle flame until it is completely covered with soot. It will then appear black in the air, but lay it in some water, completely covering the lead part, and it will appear like silver. The explanation of this phenomenon is that the water is unable to touch the object, due to surface tension and lack of cohesion. The water then acts like an unsilvered sheet of darkened glass, reflecting the light.—THOMAS W. BENSON.

Small Hand Drill Made from a Cheap Watch

IN doing some very fine repair work it was necessary to use a smaller drill than could be used in a breast drill without

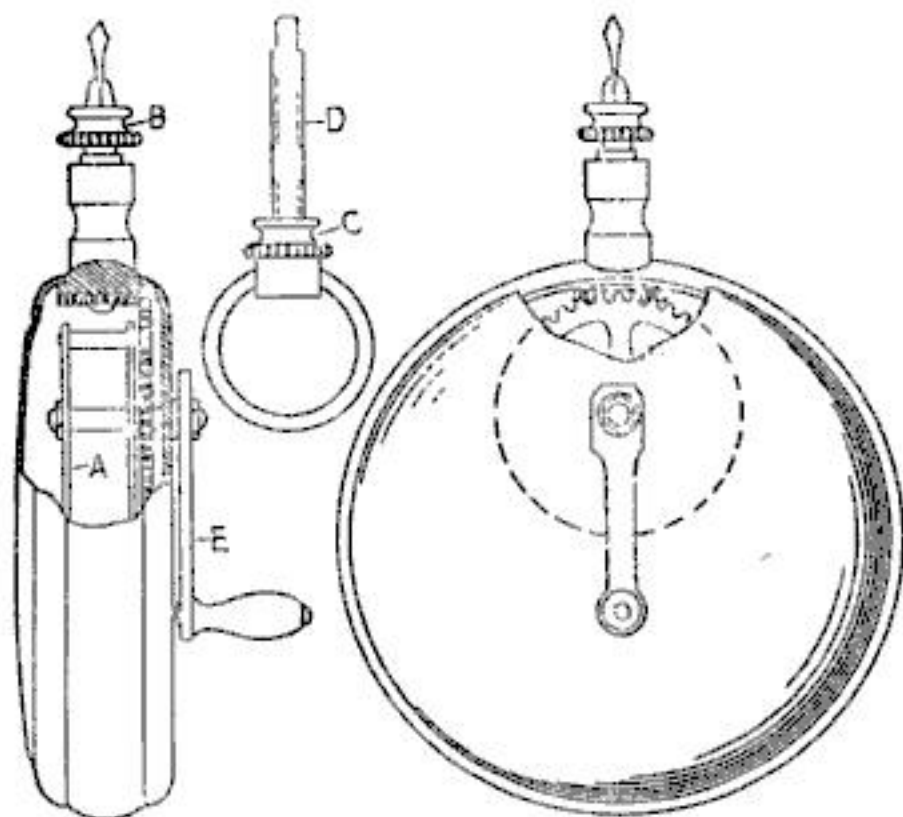

Two small clock gears used in the frame of a cheap watch to drive a small drill point


breaking. To accomplish the drilling of very small holes I made a drill driver of an old dollar watch and some parts taken

from a discarded alarm clock. All the wheels, ring and winding stem of the watch were removed, keeping the frame intact, as shown at *A*. The drill chuck and drive shaft *B* were made from the ring bolt taken from the alarm clock. The nut *C* was cut on the dotted line and the knurled part used for tightening the slotted end of the bolt on the drill shank. Of course it is necessary to drill a hole and saw a slot across it in the threaded end of the bolt for the chuck jaws.

Two suitable gears were taken from the clock movement and arranged as shown in the watch frame. The bolt is filed or turned down to the dotted lines *D* to fit into the hole in the watch stem. A crank is attached to the driving shaft as at *E*. The handle for the crank is made from one of the feet on the alarm clock, the arm being cut from a piece of sheet metal.

A Snap-Fastener for a Small Cupboard Door

AN efficient fastener for small cupboard doors can be quickly and easily made from a brass-headed tack, a piece of soft rubber, a small piece of tin and a few small nails. Bore a hole in the edge of the door $\frac{3}{8}$ in. in diameter and at least $\frac{1}{2}$ in. deep at the location for the fastener. Cut a piece of the soft rubber to a shape and size that will entirely fill the hole and drive the brass-headed tack into the rubber as shown in section drawing, taking care, however, that the tack is not long enough to enter the wood at the bottom of the hole.

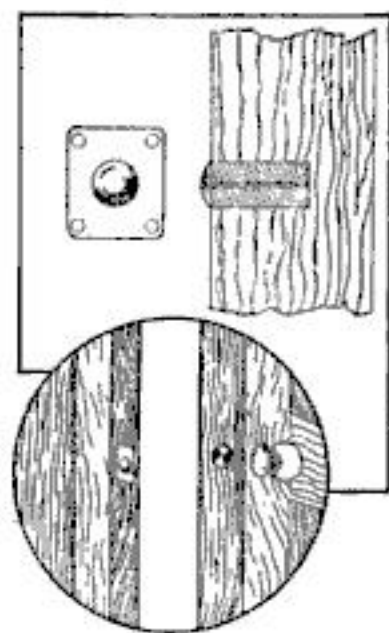


Snap-fastener placed on a cupboard door

Cut a piece of tin or other sheet metal about $\frac{3}{4}$ in. square and form a depression in its center that will be just the size and shape of the head of the brass tack. Punch a small hole in each corner for nails.

In order to find the exact spot where the plate should be placed, open and shut the door a few times, causing the tack head to draw a mark on the door frame. At the extreme end of this mark make a shallow depression. Place the convex surface of the plate in this depression, tack it into place and it is ready for use.

Awnings for the Veranda and How they are Made.

By H.S. Tallman

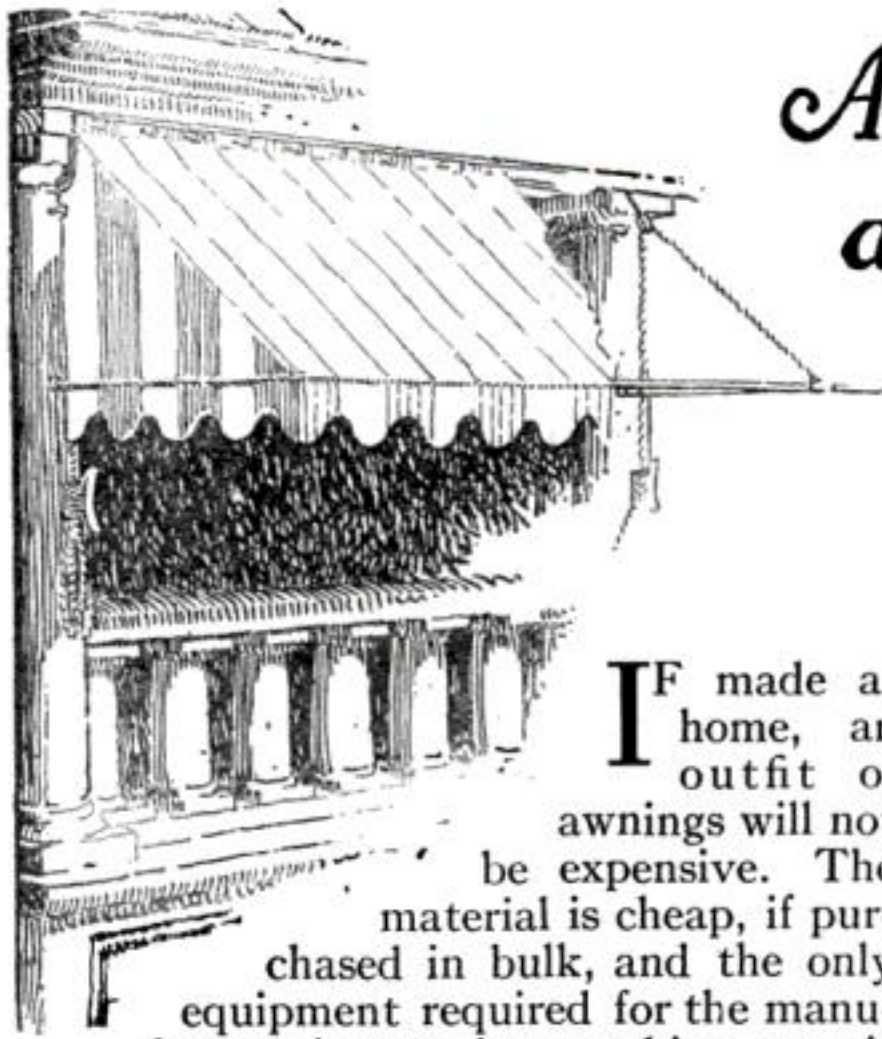

IF made at home, an outfit of awnings will not be expensive. The material is cheap, if purchased in bulk, and the only equipment required for the manufacture is a sewing machine, a pair of shears, a small pipe-wrench, a hack-saw, and a $\frac{3}{8}$ -in. pipe die. The frame is made from $\frac{3}{8}$ -in. galvanized pipe and fittings. Black pipe will rust. For example take an awning

24 ft. long, supported on four pillars, and having about a $4\frac{1}{4}$ ft. reach. Assume a porch 9 ft. from floor to plate. The fringe or valance should not be nearer the floor than 4 ft. when fully lowered. This will protect the eyes when sitting from an almost level sunlight. Measure the porch, and chalk out on the floor a profile view as shown in Fig. 1. Put a 2-in. by $1\frac{1}{2}$ -in. batten along the front of the plate as shown. This takes the screw eyes used to fasten the awning at the top, and prevents marring the paint. It can be taken down by removing a few brass screws when the awning is stored for


the winter season. Chalk the position of the batten on the diagram. Lay off the outline of the end piece, remembering to allow 8 in. for the balance. If the material shows alike on both sides, it will save waste in cutting the end pieces. If it has alternate stripes of white and a solid color, this is sure to be the case. Otherwise it must be examined carefully before cutting, to make sure that no difference in appearance is visible.

For the canopy, cut the goods into lengths of exactly 7 ft. This allows a 2-in. hem at the top, 6 ft. $1\frac{1}{2}$ in. for the slope, 8 in. for the valance, with an allowance of $\frac{1}{2}$ in. for take up where it folds around the frame. In selvedge sewing, lay the two pieces with selvedges parallel, one projecting

about $\frac{5}{16}$ in. past the other. Turn this projecting edge over the other, and sew as shown at A. Then unfold until flat and sew again as shown at B. Repeat this process with each selvedge joint until the required length is put together. Be sure the sewing machine takes a fairly fine stitch, properly locked, and does not draw.

When completed, draw each seam over the edge of a table or the back of a chair to smooth it and equalize the stitching.

For a 24-ft. awning it should be about 24 ft., $1\frac{1}{2}$ in. long. The selvedge seams have each taken up about $\frac{3}{4}$ in. If the

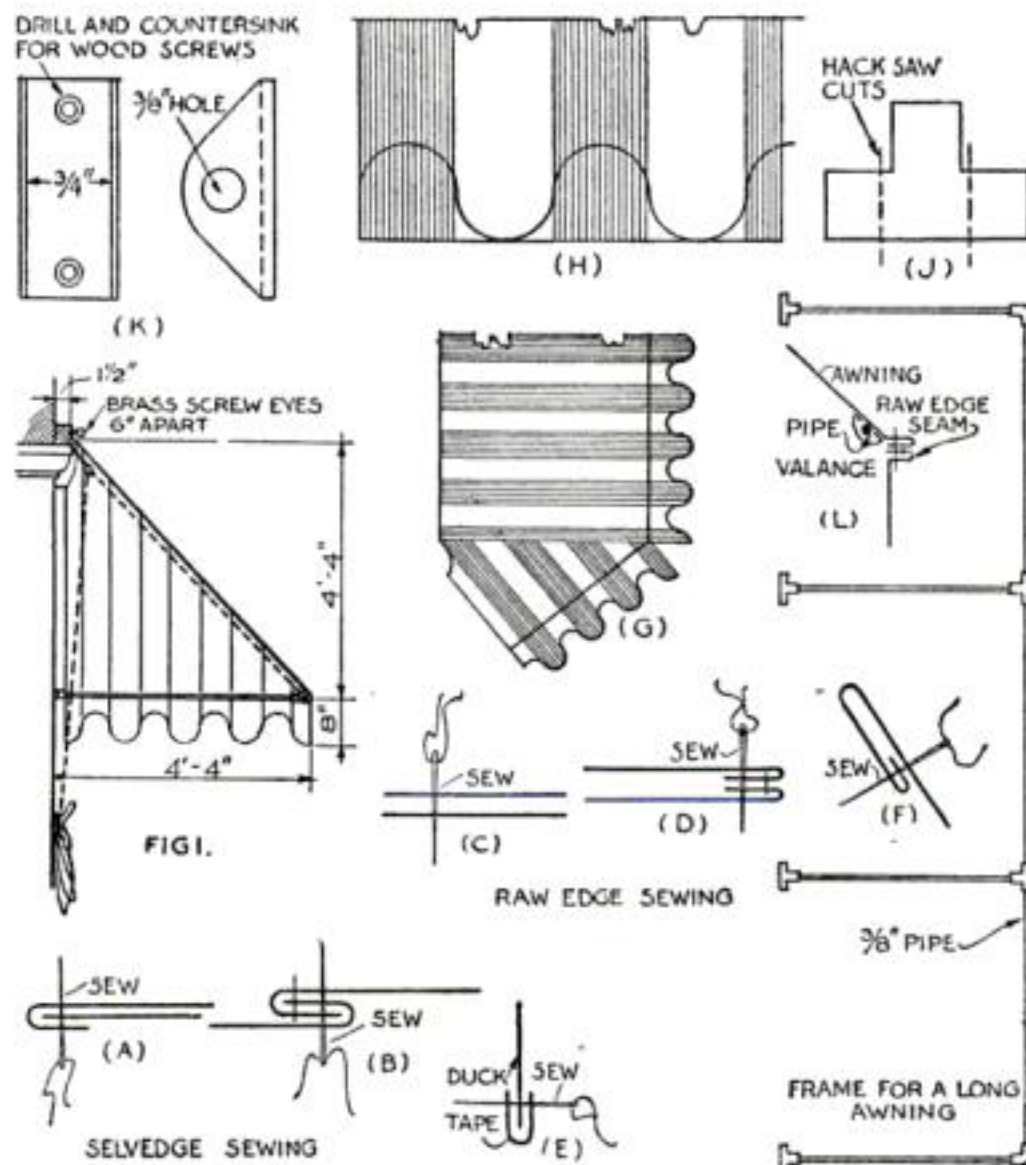

The manner of making the cloth joints and sewing the seams, also the details of the pipe frame

goods are 36 in. wide, there are eight of these seams. So 6 in. have been lost. This requires a portion of another strip 8 in. plus $1\frac{1}{2}$ in. plus $\frac{3}{4}$ in., equal to $10\frac{1}{4}$ in. wide. Along the top edge, turn back 2 in.; turn under the raw edge, and sew as indicated at *F*. The end flap is next attached as shown at *G*, using the method shown at *D* and allowing the finished heading to stand outside. If the stripes are of equal width, get a tin-can lid, a tea-cup, or other circular object the same diameter as the width of stripe, and with chalk draw a line on the goods half the width of the stripe from the edge of the valance, which must be first trimmed straight and true. Scribe alternate semi-circles in successive stripes, and cut out a wavy line on this scribing. The raw edge so produced must be bound with woolen tape, which can be purchased where the cloth is procured. It will take about eighteen yards of tape to bind the valance for this awning.

An alternate method would be to cut a slash, 4 in. long and 1 in. wide, $\frac{1}{2}$ in. on each side of each stripe line, or each alternate stripe line, if the stripes are equal and regular. For an irregular stripe a spacing can be selected and repeated without regard to the stripes. This method will require 30 to 40 yards of tape for binding. Be sure to use wool tape in red, blue, white or green, all of which are fast colors. Cotton tape is always bleached by the weather.


The frame is made of $\frac{3}{8}$ -in. galvanized pipe and malleable fittings. Cast fittings are too bulky. For this frame two elbows, and six tees are required. Four of these tees, which form the hinges against the porch posts, must be cut with a hack-saw, as shown at *J* in the drawing. This will reduce the length of the tee arm to about $\frac{5}{8}$ or $\frac{3}{4}$ in. From a piece of galvanized sheet steel, say $\frac{1}{8}$ in. or number 10 or 12 gage, make four double brackets as shown at *K*. Drill and countersink these on the center line of the back for two 10 by $1\frac{1}{4}$ -in. wood screws. Drill a hole for a short $\frac{3}{8}$ -in. bolt through both ears. When they are finished this far, drop them in a glass jar filled with bluestone solution, 4 oz. bluestone or blue vitriol to a pint of water. Leave them for several hours. Remove from the jar and dry. Polish them with an old rag, and you will find all the spots left after the galvanizing was removed are now plated with copper and rust proof. If dipped in strong vinegar before placing in the bluestone bath they will plate more

readily and take a heavier coat. Do the same with the cut tees and the hinge bolts.

When all this is attended to, the frame is assembled by screwing up the threaded ends of the pipe into the fittings. Make up good and tight, everything square, and lay the awning down as shown in *G*, lay the frame on it in the proper position, and proceed to put on the pocketing material. This is a strip of the awning material, 3 in. wide and 7 ft. long, sewed to the line where the slope stops and the valance begins. When sewed true on one side, turn the strip over the frame and sew to the awning above the frame as shown at *L*. This must be done along the front so that the weight of the frame holds the awning taut when lowered. For the ends, it is only necessary to put on a strip of the material 3 in. wide near the hinge. All raw edges of the valance as well as the seams for the ends and where the valance joins the slope, should be bound with the wool braid, carefully run on by machine. Soft laid cotton cord about $\frac{1}{4}$ in. in diameter, run through small galvanized-iron pulleys, will serve to raise and lower the awning. A lead of this should be placed in the center of each panel and all cords led to one end where a cleat is provided to fasten them.

Fastening an Oar-Lock to Keep It from Falling Out

IF an oar fits a lock snugly the lock is likely to be pulled out of the socket when

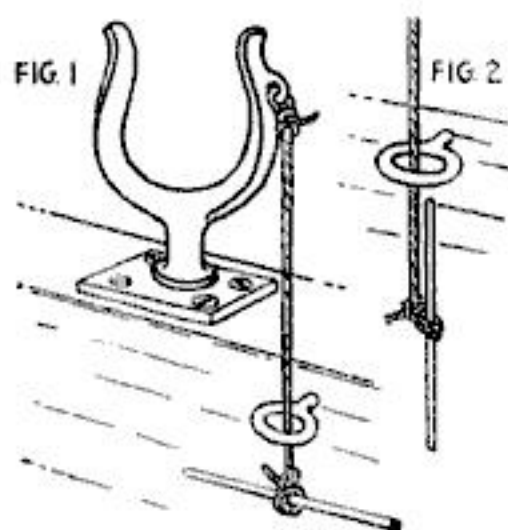

Fastening an oar-lock securely with a string

the oar is removed, and it may be lost. I have found that fastening such a lock in the manner illustrated will prevent this. A stout cord is tied to one arm of the lock and run through a screw-eye turned into the block or oar-

lock base as shown in Fig. 1. A small metal bar is fastened to the other end of the string. The bar when turned parallel to the string, as in Fig. 2, can be slipped through the eye of the screw. To keep the bar from slipping out of the knot a depression should be filed out in its center, circling the bar.—G. P. LEHMANN.

A Boomerang Flyer

by J. S. Zerbe



A LITTLE gyroscopic flyer which can be adjusted so it will return like a boomerang can be made by any intelligent boy. Excepting the shaft, every part can be made with such simple tools as a jack-knife, a pair of pliers and a hammer. The only outside work required is the boring of two small holes in the shaft. This a watchmaker or jeweler will do.

The flyer may be made any size, but as the power which is available must be considered, the following dimensions are suggested: The disk *A* should be 10 in. in diameter made of a thin tar board, for this material is absolutely flat and does not warp or twist out of shape. Aluminum is also serviceable. Unlike the common gliders, lightness is not the first consideration. On the other hand, weight is of considerable importance, as the ability of the device to soar depends on the momentum of the disk itself. In using aluminum, No. 28 gage is the best thickness.

Centrally in the disk is a hole to receive a 3/16-in. steel rod *B*, 4 in. long. Exactly in the center the rod is bent at right angles so that each part, *B* and *C*, is 2 in. long. The part *C* is bent laterally, at a point midway, as shown at *D*, so that it will lie flat on the disk, and an end *E* is turned up so it will serve as a crank handle. The object of this arrangement is to provide a means whereby the disk can be rigidly fixed to the stem so the plane of its surface will be maintained perpendicular to the stem *B*.

After the stem *B* is placed in the central

hole of the disk, wire staples *F* may be used to fasten it firmly, as shown. Through the stem portion *B* two small holes *G* are drilled 1/2 in. apart, to receive a bent pin or wire *H*, which provides a means for attaching a rubber band.

The body of the flyer is made of a strip of pine *I*, 9 1/2 in. long, 1 in. wide and 3/8 in. thick. The interior portion of this strip is cut away to form an upper and a lower bar. The forward end is tapered off to form an A-shaped edge, while the rear end has a blade *J*, made of thin aluminum 2 in. long by 1 1/2 in. wide, to serve as a rudder. The metal should be thick enough to remain set after bending in either direction.

A hole is bored vertically through the upper and lower bars of the frame to receive the stem *B*. A short tube *K*, 3/8 in. long, is placed on the stem between the disk *A* and the upper edge of the strip *I*, and a thin washer *L* is placed between the pin *H* and the lower side of the upper bar. By this means the stem *B* is held rotatably fixed to the frame.

The rubber band *M* which serves as the motive power, should be 4 in. long by 1/2 in. wide, a size easily obtained. The rear end of this elastic is secured to the side of the strip *I* by means of a wire staple *N*.

If the elastic band is wound up and the flyer thrown into space it will sail along with remarkable evenness of flight, due to the gyroscopic action of the rotating disk. The propelling device consists of a pair of triangular-shaped blades, *O*, secured to the opposite ends of a light wire rod *P*. This rod has at each end a projecting right-angled bend *Q*, to which the blades are attached.

Each blade has at its rear margin a downwardly-projecting and rearwardly-extending finger *R*, which passes through a slit in the disk *A*. These fingers have two functions; first, to hold the propelling mechanism in place, and second, to rock the wire rod *P* back and forth. The

blades, *O*, are set at an angle relative to each other, so that when one lies flat on top of the disk, as is shown in the illustration on the left side, the other blade, on the right side is raised, thus causing the latter to strike against the air and draw the flyer forward. As each blade passes the rear end of the frame *I*, the finger strikes the upper edge, thus rocking the rod so that while one blade is traveling around with the disk from 1 to 2, it offers no resistance; at the same time, the other blade, traveling from 2 to 1, serves to pull the flyer, because it is elevated to catch the air.

After the elastic *M* is wound up to get the desired tension, the rudder *J* is grasped between the thumb and second finger, and the tip of the forefinger is placed in the notch *S* of the disk *A*. Preparatory to flight the finger is removed from the notch, and when the elastic motor has set the disk in motion the thumb and finger release the flyer and a forward motion is imparted to the device. If the rudder is set straight the action of the rotating disk tending to turn the frame, will cause it to fly in a circle. By bending the rudder to the proper angle and initiating the flight at the correct inclination the device can be made to describe a circle and come down close to the starting point.

By properly adjusting the rudder it will make a straightaway flight and sail a long distance after the power has ceased to act, because in that case it simply acts as a skipper. The frame *I* should be heavier at its rear end so as to give it normally a positive angle, and this can be provided for by a sliding block *T* between the upper and lower limbs of the frame, which block can be moved back and forth until the right adjustment is obtained. This type of

flyer has the advantage of durability, as it is not readily injured. No part of the mechanism is exposed to obstructions which it may meet in the path of its flight.

How to Cut Roses So That the Plants Are Not Injured


THERE is a right and a wrong way to cut roses. If the cut is not made correctly the blossom-producing properties of the plants may be seriously injured. This applies particularly, of course, to rose plants chosen and grown especially to supply cut-flowers. Such roses will be

largely of the perpetual blooming sorts.

When a rose is cut from such a plant only two or three eyes of the current season's growth of that branch should be left on the plant. This should give the roses very long stems. Succeeding blossoms should be cut to the ground. It will seem like destroying the bush to take so much off, but if the object is the production of roses, the cutting away of the surplus wood will simply further the desired end.

If the spring pruning has not been sufficiently severe the plant is likely to have long, naked stalks and short stems to the flowers. In such a case only one or two strong leaf buds should be left on the branch when the flower is cut, so as to stimulate as much growth as possible from the base of the plant.

The temptation is great to leave wood where there are two or more buds on one branch, some being small when the terminal one is open. This bad practice can be avoided by pinching off all side shoots after a bud has formed on the end of a branch, thus leaving the stem perfectly clean and willowy.

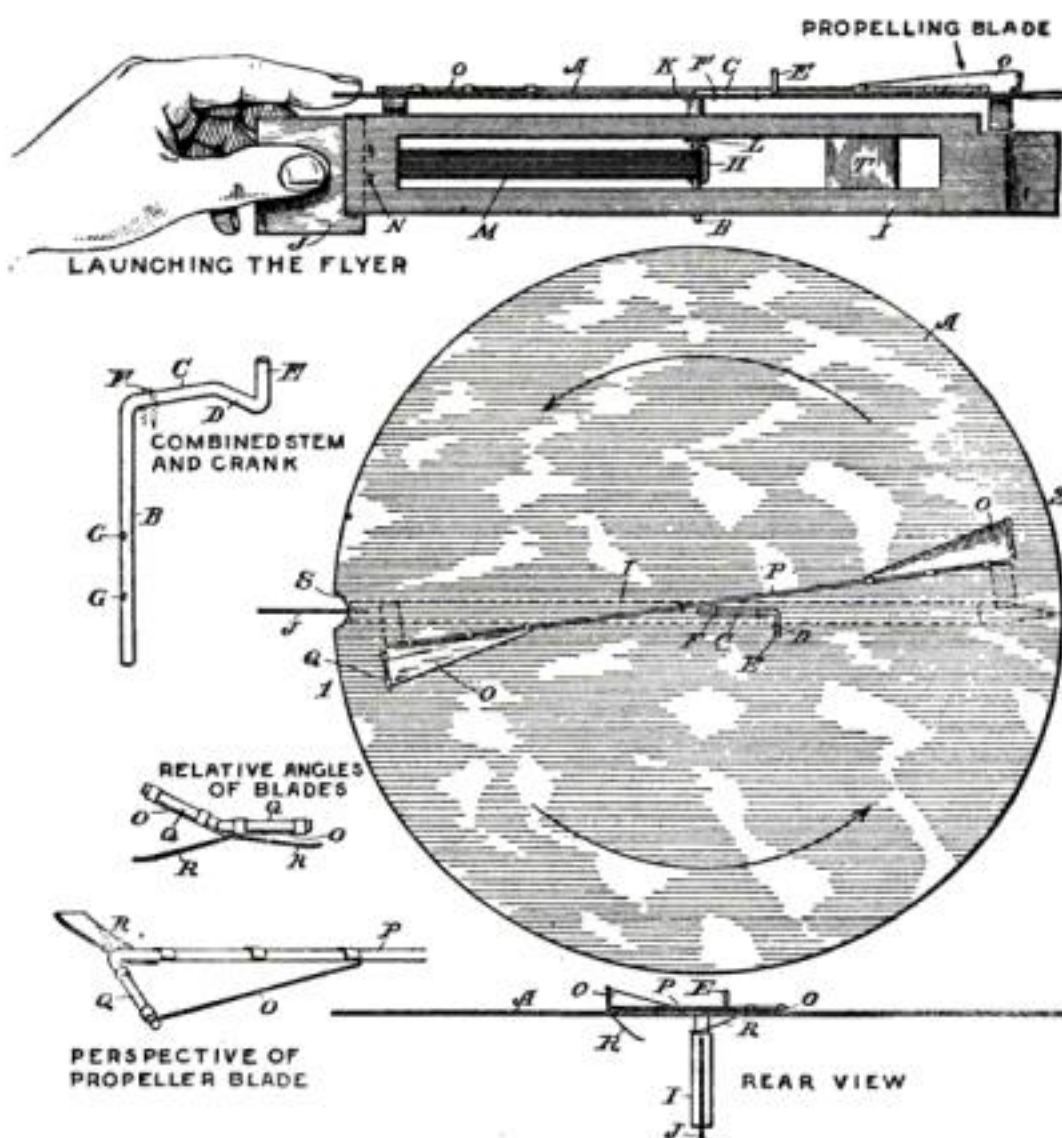

A thin flat disk with projecting blades which propels the flyer in the direction set by the rudder


Sheet Metal Working Simply Explained

II.—An easy problem in developing a pattern for a scale scoop

By Arthur F. Payne

Assistant Professor Manual Arts, Columbia College

THE problem for this article is apparently entirely different from that of the periscope. It is true that it is an entirely different object, but the methods used are exactly the same. Pattern drafting is divided into six divisions; namely, (1) orthographic projection (big words, but the easiest of all to draft), (2) parallel lines, (3) radial lines, (4) triangulation, (5) approximation, and (6) templet work. The periscope and the scoop both belong to the second division *i. e.*, parallel lines. If you will examine both drawings you will see that the lines are all parallel, either vertical (up and down) or else horizontal (from right to left).

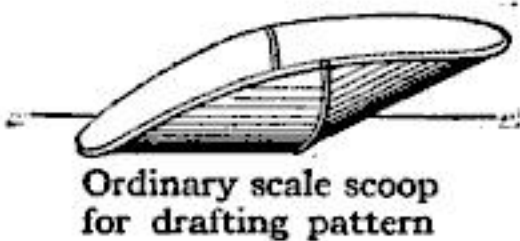

Ordinary scale scoop for drafting pattern


The scale scoop was chosen for this problem because it is apparently a difficult pattern to draft, but in reality it is an easy one. It is only necessary to draft a pattern for one-half of the scoop, as the two halves are exactly the same. Imagine the scoop as being a portion cut out of a cylinder, and the drafting of the pattern becomes simple.

To develop the pattern we must first draw an elevation (front view) of the entire scoop the exact size desired. (The sizes given in the illustration are merely suggestive.) The easiest way to do this is to first draw the line *A-B* the length of one-half of the scoop; draw the line *B-C* at an angle of 75 deg. to the line *A-B*; then draw the line *B-D* at 75 deg. to the line *C-B*. Locate the point *E*. For the size given in the drawing the distance from *C* to *E* would be about 11 in. With this distance as a radius strike the arc *A-C-D*, thus completing the front view of the scoop. Next draw the cylinder of which the scoop is a part. This is done by drawing a line from *C* down to the base line at *F*. The distance *A-F* will be the radius of the cylinder. Only one-half of the cylinder will be required; however it will be easier to understand if the entire front of the cylinder, *A-G-H-B*, is drawn.

Draw the bottom view of the cylinder and divide it into sixteen equal parts as shown. Draw the base line *A-K* of the pattern, and step off sixteen spaces equal to the sixteen spaces in the bottom view. Draw lines from the points upward as shown. Draw lines through the points on the bottom view upward until they cross the lines *A-C* and *C-B*. From these points of crossing draw lines parallel to the base line *A-K*.

With a pencil carefully follow the lines 17 and 1 from the bottom view upward to *C* and then to the right until the cross lines 17 and 1 coming up from the base line *A-K* intersect at this point. Follow lines 16 and 2 upward until they cross *A-C* and *C-B*, then to the right from both points until they cross the same numbered lines coming up from the base line and make a cross at each point. In the same manner follow up all the points from the bottom view and you will have a series of crosses above the base line *A-K* that will outline the pattern for the scale scoop.

Connect these crosses with a pencil line and the pattern will be developed.

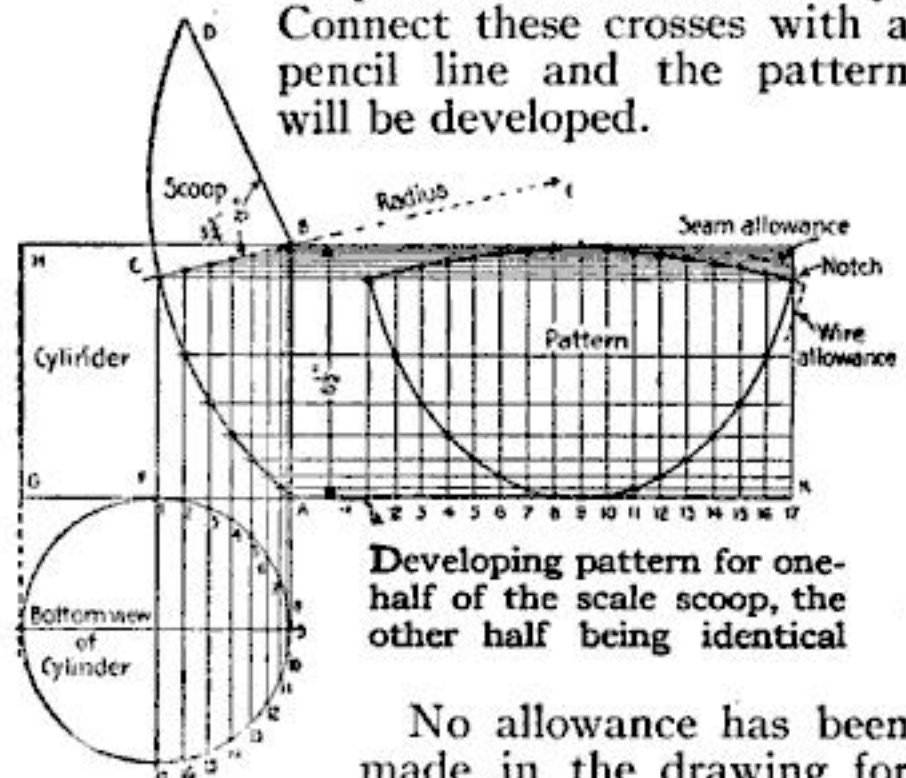

No allowance has been made in the drawing for wiring or seaming. A good rule for wiring allowance is to add to the pattern twice the diameter of the wire and four times the thickness of the metal. Another is to allow two and a half times the thickness of the wire. The allowance for the seam will depend on the width of the seam. For a locked seam, three times the

width of the seam must be added to the edges of the developed pattern. This may be added in two different ways. Add a single width on the edge of one pattern and a double width on the edge of the other pattern. The other way is to divide the three-seam widths in half and add the same allowance on each pattern, which would be one and a half times the width of the seam.

Wherever there is a corner in the seam or wire allowance the metal must be cut out or "notched" as shown in the illustration. This is done so that the ends of the wire or seam allowance will come together neatly.

A Pin Inserted in a Cork to Make an Oil Dropper

IN oiling fine machinery, clocks, watches, etc., too much oil is often used. Light oil flows so freely that it is difficult to get just enough out of the spout of an oil-can and to put it in the exact spot where it is needed. A needle inserted in the cork of an oil-bottle will be found to pick up just a drop of oil. This drop will be carried on the point of the needle and can be deposited exactly where desired. Care must be taken not to dip the needle too deep in the oil or there will be more oil clinging to its surface than the single drop needed for a bearing.—W. H. SARGENT.




Picking up a drop of oil with a pin

An Automatic Watering Tank for Poultry Yards

MANY types of automatic tanks have been invented to provide fresh clean water for the fowls all during the day. Several of these must be tipped upside down in the process of filling.

The accompanying sketch presents a type of tank in which the water may be poured in through the top. The tank can be made of galvanized iron. A small faucet, *A*, is placed near the bottom so that it will open beneath the surface of the water in the dish, *B*. The cover must fit tightly to make an airtight joint when it is screwed down. To do this a broad shoulder is left at *C* so that the gasket rubber *D* will have a firm foundation.

The following procedure is necessary in filling the tank: Close the faucet, *A*, remove the screw cap, *E*, and pour the water in at the top. The lid is then replaced and

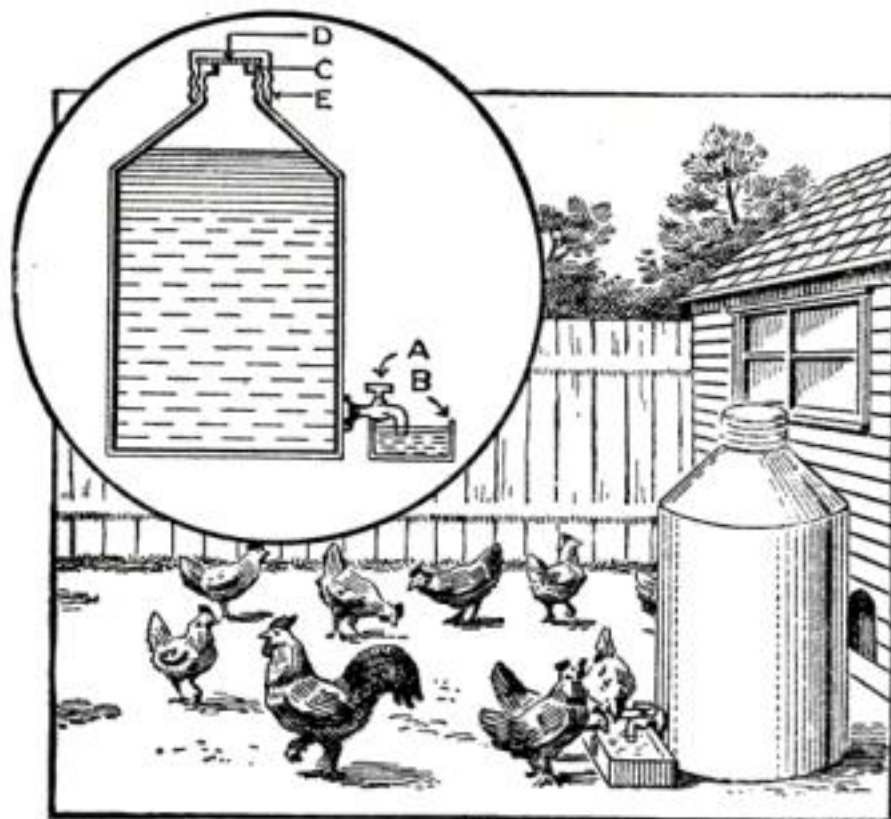


A reservoir from which fresh water is automatically supplied to the poultry yard pan

the stop-cock, *A*, opened. The water will run out until the level in the dish, *B*, comes just above the opening of the faucet.

A Trough for Thoroughly Washing Film Negatives

ASPECIAL trough for washing negatives will be found a great convenience to the photographer who uses films. The trough here illustrated is nothing more than a long, water-tight box, made of galvanized sheet steel, having a drain cock fitted at the bottom of one end and with a small piece of tubing soldered at the top of the other end to hold a length of rubber tubing or

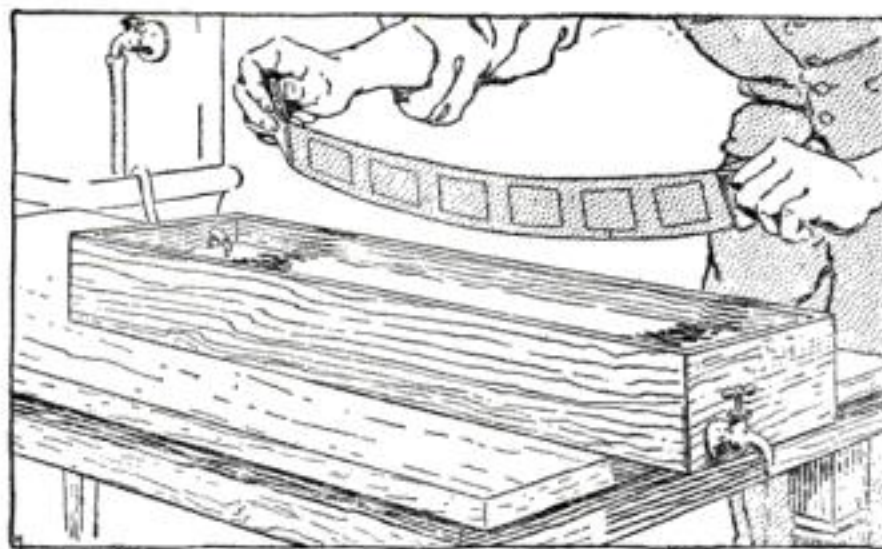

A galvanized iron washing tank for rapidly removing all traces of chemicals from films


hose for making connection with a faucet. The trough is 40 in. long, 7 in. wide and 5 in. deep.

In use, the trough is placed in a level

position so as to drain into a sink, wash-basin, bath-tub, laundry-tray or barrel. The hose is connected with a cold water faucet, the trough almost filled and the inlet and outlet regulated to maintain a constant depth of water in the trough. The film, with a film clip attached to each end, is laid in the running water, emulsion side up, or, better still, stood on edge where possible. Film pack negatives may be pinned on a stick the exact length of the trough and placed in the running water.

Safety Guard Placed on an Emery-Wheel Dresser

IN the crusade for "safety first" attachments on machine tools, one that is likely to be overlooked is the emery-wheel dresser. This, however, has been taken care of in a very efficient manner in one shop as illustrated. A piece of 1/16-in. boiler plate about 2 in. wider than the

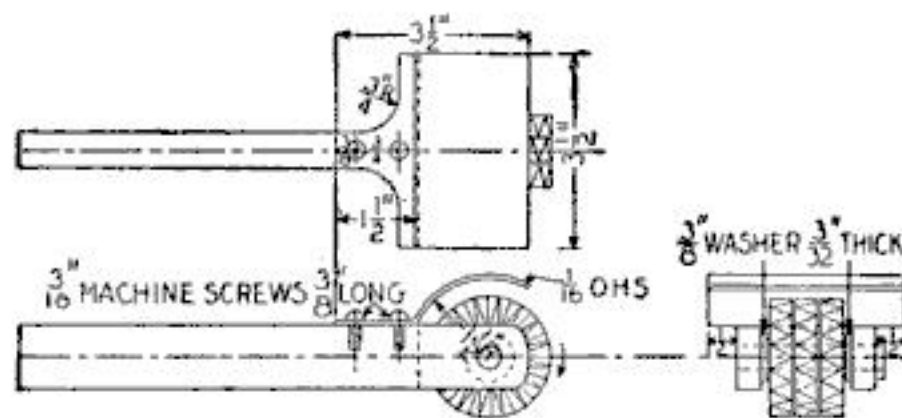

Metal guard attached to the handle to prevent flying particles from striking the eye


cutting wheels of the dresser was bent and fastened with two 3/16-in. screws about 3/8 in. long on the handle of the dresser for a guard.—JOSEPH K. LONG.

A Nest-Box Trap for Catching the English Sparrow

SPARROW traps may be classified, according to the U. S. Department of Agriculture, as nest-traps and bait-traps. Inasmuch as sparrows usually feed in flocks, but approach nest-boxes singly or in pairs, the annual catch of a bait-trap will exceed that of a nest-box trap many times; but during the breeding season the nest-box traps are decidedly useful.

A nest-box trap, as the name implies, looks like an ordinary nest-box. The weight of a bird entering such a trap puts into operation a mechanism which catches the bird and sets the trap for another. There are a number of devices to accomplish this. In designing a nest-box trap one

should bear in mind that English sparrows, like other birds, dislike drafty quarters, and that a mechanism delicate enough to be operated by a sparrow's weight is likely to get out of order unless the parts are few

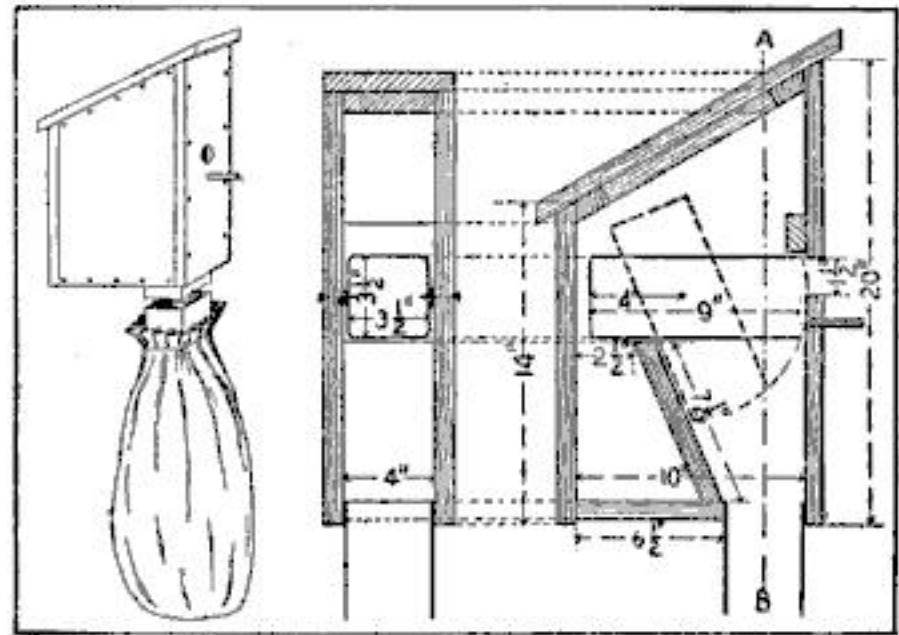

A trap-nest for catching the English sparrow in a bag hung from beneath the box

and perfectly protected from the weather.

Probably the simplest nest-box trap yet designed is the one illustrated. The essential parts of the trap are: a box, a tipping chamber within the box, a down-spout below it and a bag at the lower end of the down-spout. The dimensions of the several parts are given in the illustration. The tipping chamber is made of tin, the down-spout of wood or tin, the box of wood. The roof board is cleated across the ends, and also lengthwise between the cross cleats, for the attachment of the sides, as shown in the side elevation.

The close weave of a 2-bushel bag makes it suitable for the lower end of the down-spout. One of coarser fabric would allow a draft through the spout and thus detract from the efficiency of the trap. In building this trap the front wall is the last piece to put in place. It is fastened there with screws so that the trap can be easily overhauled. It is a good plan to fasten with shellac a few feathers or bits of hay to the floor of the tipping chamber near the rear end to excite the interest of the sparrows.

Look Over Stored Tires Before Applying Them to Rims

BEFORE using tires laid aside examine them carefully for cuts on the outside, remove tacks and small nails, reinforce any breaks in the fabric inside and lubricate the fabric and inner tube with powdered mica. Apply a thin solution of graphite, shellac and alcohol according to instructions.

A Metal Garage Made from a Discarded Tank

AN opening was cut out in one end of the tank large enough to admit the automobile; then a strip was cut out on the side and the metal bent out to form a




The metal of a discarded factory tank provides an excellent housing for the automobile

covering in the shape of an inverted U. A framework was made of wood and placed on the ground. To this the sides and ends of the tank were attached. The metal which was carefully removed from the end and side, was used for making the doors, which were hung on ordinary hinges riveted to the metal of the tank. A flashing was attached above the door to keep the rain from beating in back of the doors. A window could easily be placed in the opposite end to furnish additional light if desired.—CHARLES CLAUDE WAGNER.

A Cheap and Effective Method of Bracing a Roof

IN many instances the partitions of frame buildings do not allow the rafters to be effectively braced from them, so that

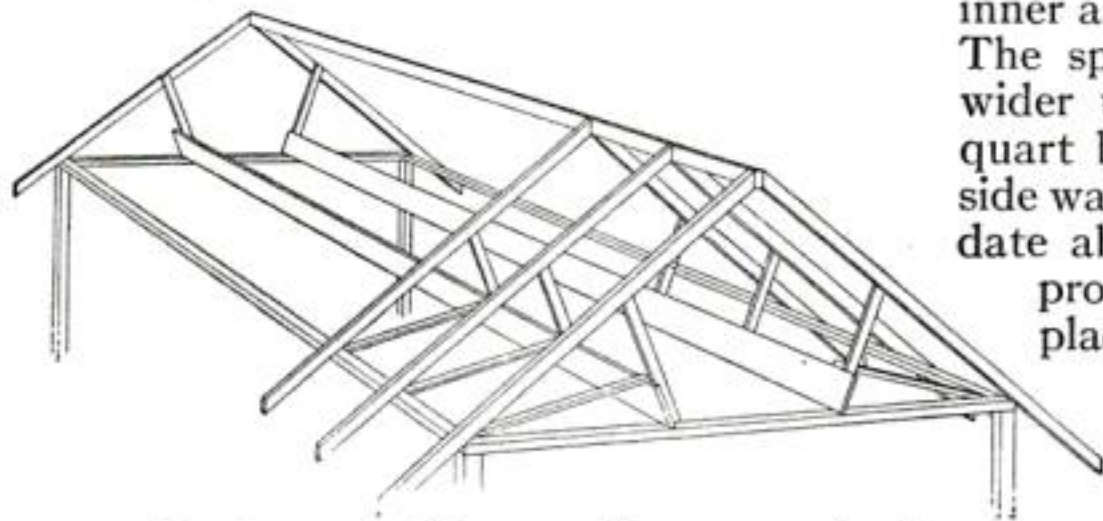

Bracing a roof to provide a space in the center not obstructed with timber supports

trussing is resorted to. This, however, spoils any room directly under the roof. The method illustrated is more effective

than trussing, is cheaper, and provides a stronger brace. Also, it does not interfere with the space under the roof.

The trussing consists of two 1 by 12-in. boards the exact length of the distance between the front and rear plates. As many 1 by 3-in. pieces are used as there are rafters. These should be the length of the distance between the bottom edge of the outside rafters and the top edge of the plates at a point half way down the rafter. Nail these on the boards as shown, after having laid out the location of the rafters on their surfaces. Be sure that the ends of the bracing pieces are all in line. Then adjust each board under its side of rafters in an inclined position so that the ends of the braces catch under each rafter, supporting the ends on the front and rear plates of the building, and elsewhere on any partitions there may be in the enclosure. The upper edges of the boards are further braced with 1 by 3-in. strips nailed to the top edges and to the side plates. This keeps the top edges from bulging or moving. It is now only necessary to sight each rafter, slightly moving the braces until the rafter is properly lined and then to secure it with nails.—HENRY SIMON.

Small Closet in Door-Frame Stile for Milk Bottle

THE question of where the milkman shall put the milk bottles in the mornings in order to prevent them from being stolen, upset by dogs or cats, or from smearing the porch or steps has been answered in many ways; but the neatest and best device for the purpose which I have yet seen is a little closet cut out just above the floor in the kitchen, between the inner and outer wall of a cement bungalow. The space between the walls is a little wider than the diameter of the ordinary quart bottle of milk, and a length of the side wall was cut out sufficient to accommodate about four bottles. An inner door is provided so that the bottles may be placed in the little closet and the door shut from the inside. An outer door is also provided so that the milkman may unlatch it, take out the empty bottles, set in the fresh supply and close the door again leaving no trace of the milk visible. This outer door overlaps the opening, somewhat, so that no draft is admitted through cracks.—JAMES A. CARTER.

Winning an Athlete's Laurels

IV.—Pole vault and potato races

By Albert B. Wegener

A technical instructor and director of athletics of twenty-seven years' experience

THE pole vault is the most spectacular and at the same time the most exacting of athletic events, requiring strength, speed, and skill. A left-footed jumper should grasp the pole with the ordinary left-hand grasp and the right hand reverse grasp, hands 30 in. apart. For the usual vaulter the right hand grasps the pole according to the following instructions: When the bar is placed 9 ft. high, the right hand is at 9 ft. on the pole; for each foot that the bar is raised the right hand is lowered 4 in. Carry the pole on the right side with the point directly forward and raised a little. Run squarely to the front, avoiding a twist.

The take-off or jumping spot should be directly under the right hand when the pole is planted ready for the spring and the striding marks placed accurately at about 40 and 80 ft. from the stands. These marks must be placed so as to help produce accurate running, as described in the high jump. During the run, look at these marks. Start to run at about 100 ft.

Taking the Jump

Plant the pole lightly by thrusting the end into the hole just before the left foot strikes the take-off. At the same time throw the arms forward up and slide the left hand up close to the right. The arms at this point should be almost straight, the hands above the left foot or a few inches in front of that spot. Any other spot for the take-off will strain the chest or back muscles, and if the arms are too straight or too much bent you cannot rise well. The left foot should be placed upon the take-off a couple of inches to the right of a line drawn directly back of the point of the pole. The hole for planting the point of the pole should be 6 in. toward the runway from a point just under the bar.

In the rise, swing the body forward at arm's length to the right of the pole, facing directly forward. When half-way up to the bar flex the thighs and legs so that they are above the head and the bar. Now

straighten out, turn to the left, pull up and push up strongly with the arms. This brings the hips above the bar and facing it in an arched position with thighs flexed. Now push over the bar and release the grasp, with the left hand first, allowing the pole to drop back. Alight facing the bar or with an additional turn to the left.

Training Hints

For several weeks before attempting to vault, practice the following developing exercises: On the horizontal bar, chin several times; then do the same and circle backward over the bar. Circle forward over bar. Hang and raise feet to the bar. Free backward circle. Pull up and shoot over a cross-bar placed 2 ft. in front of and as high as the bar. Practice walking on the hands. Do the hand balance against the wall, then bend and straighten the arms. Practice the rope vault. Practice sprinting and jogging.

When starting to use the pole do not try to vault over a cross-bar for a few weeks, or until the movement is thoroughly learned. Preliminary practice with the pole should be, planting the pole and using the grasp at about 8 ft. high. Plant the pole and swing forward. Plant, swing, and rise. Plant, swing, rise, and pull up, etc. Introduce the bar only when able to do about 8 ft. without it. Do not vault more than ten times a day. Give much attention to massage. If sore and stiff, rest and massage.

Other Styles of Vaulting

For those who have not the time to devote to learning the exacting shift-hand style, and especially for boys, the no-shift style is recommended. In this the hands are held about 2 ft. apart and neither of them is moved from that position until after the rise, swing, pull up, and shoot over are made. It is impossible to go high with this, but it is much easier and safer than the other style. The Vault for Distance is an event seldom, if ever, now used in

The rules governing the running broad jump also govern the pole vault for distance, except that when the man leaves the ground in an attempt, it is counted a trial.

If the uprights are moved, the field judges should make a re-measurement, because if there is any inequality in the ground at all, changing the uprights may make a difference varying from 1 in. to $\frac{1}{4}$ in., and a competitor should not be allowed to obtain an advantage in that way.

Indoor Athletic Events

Indoor athletic events are quite as popular as outdoor events, and have the advantage in large cities of being more easily promoted in gymnasiums, large halls, and armories, and of not being subject to the weather. With certain modifications most of the outdoor events can be conducted indoors.

Among the most popular indoor running events are the sprints. These are run either on the main floor or on an elevated track. If run on the main floor the distance is limited by the length of the room. Nothing below 25 yd. is considered satisfactory for "straightaway" running.

When a circular track is used any distance may be run; but contestants cannot, in most places, start side by side on the same mark, on account of the narrowness of the track. For that reason the contestants must run either singly or two may start so as to finish directly on opposite sides of the track, thus allowing the judges to sight across and determine the winner. The most popular arrangement is to have four runners start and finish from separate marks a quarter distance around the track, each runner being timed by a set of watches. This is as close to a real sprint as can be run on a narrow gymnasium track. None of these methods is without objection for narrow track sprinting, and for that reason are never used in important meets. In such meets the sprints are limited to the straightaway on the main floor and nothing less than a half mile is scheduled on the narrow track. But the other methods may be used with profit in closed meets and where absolute conditions are not demanded.

For straightaway sprinting on the main floor there is no difference from outdoor sprints, but for narrow track sprinting the start and "taking the curve" must receive special notice. Toe-blocks cannot be used on such a track. Thus the runner is al-

lowed to brace his rear foot against the foot of another person at the start. In running around the banked curve a sprinter will make the best time by running up high on the outer edge and inclining the weight well in toward the rail.

In track events of a half mile or more the contestants start together at or near the same mark, except of course in handicap races. Such races on a narrow track are not always satisfactory because it is almost impossible to pass a runner in the lead without fouling. The only way that this difficulty can be lessened is to insist that the "runner up" must take the outside and the runner ahead keep the inside of the track on the "straightaway" part, and allow no passing on the curve.

Indoor hurdling has been found to be very satisfactory. It should never be attempted on the narrow elevated track usually constructed in gymnasiums. Indoor hurdling, whenever it is scheduled, is always run as a straightaway on the main floor like the sprints. It is seldom possible to have more than two hurdles at the regular distances. It is, of course, possible to place the hurdles about 6 yd. apart and use a single stride between hurdles, thus using more hurdles.

Relay Races in the Gymnasium

Indoor relays, like all other sprints, are never run side by side like outdoor relays, unless run in an exceptionally large room with at least a 220-yd. track wide enough for that purpose. Relay races may be run on the regular gymnasium track, but only two teams can run at a time, and these must start from opposite sides of the track. Such races are popular and should be scheduled in all indoor meets. They are usually made short—one or two laps for each man—because the winning team must run repeatedly. Uprights should be erected on each side of the track opposite the center across which the judges sight on the finish. All runners should line-up on the inside of the track so as not to interfere with the other team as they pass.


The starter should stand at the end of the gymnasium rather than near one of the teams. One judge should be stationed on each side of the track at the finish line. Rules about passing are the same as in other narrow track races, but because fouls are almost unavoidable it has been found better to allow no passing. Such races are

popular as a feature of regular gymnasium class work in which there are many on each team.

Novelty relays are not used in serious meets but are popular as diversions at

light objects, ovoid in shape, the greatest diameter not to exceed 4 in. and the smallest diameter not less than 2 in. The first of these objects shall be placed 2 yd. from the receptacle.

Each competitor must pick up each of the objects singly and place the same in his own receptacle. After having picked up one of the objects he must deposit it in

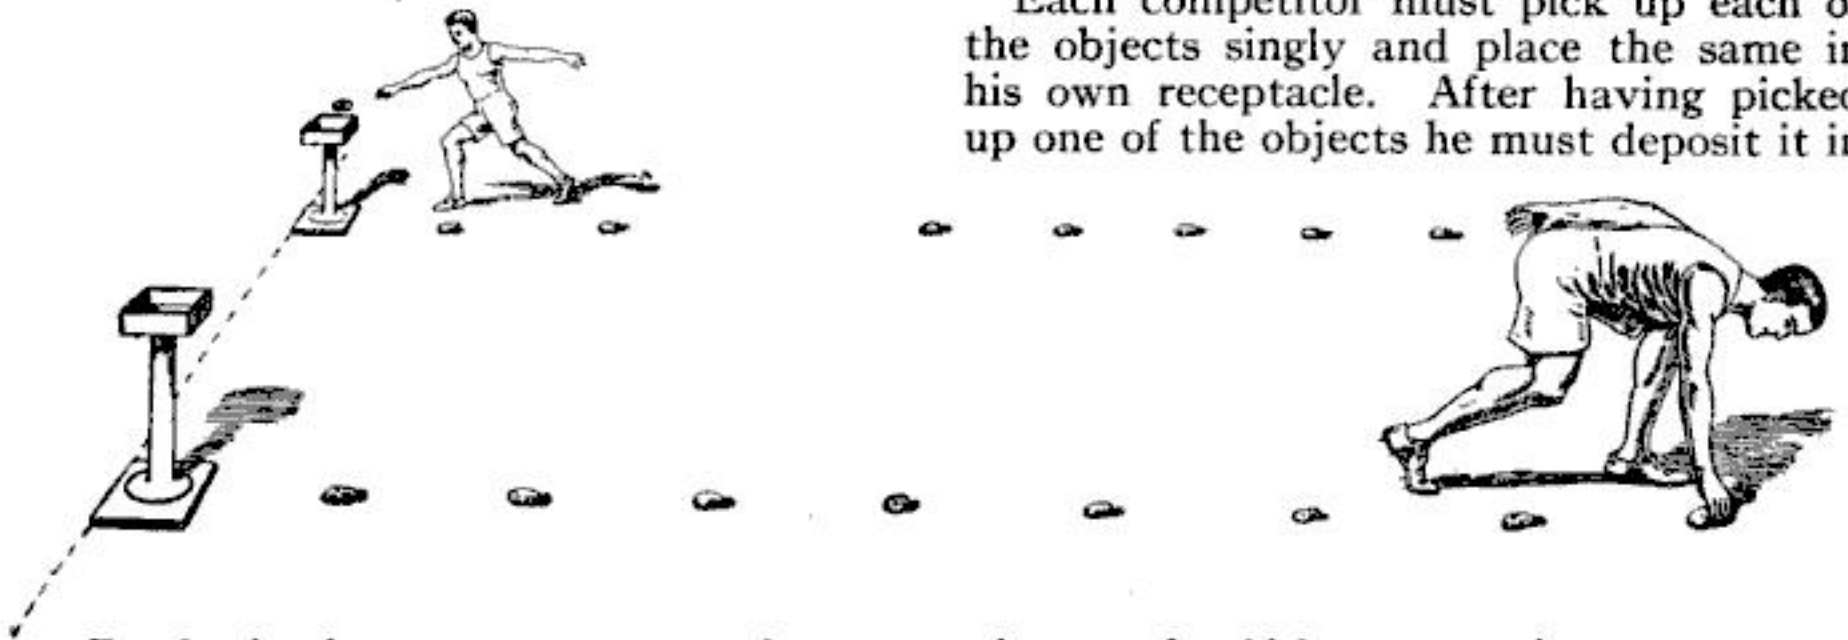

For the shuttle potato race a receptacle not more than two feet high or an opening not more than thirty-six inches in circumference is placed upon the starting line for each competitor to fill

gymnasium class periods and on other occasions when a jolly contest is in order. Each team has a separate course, consisting of some piece of apparatus placed at each end of the gymnasium. The course of each team is parallel to the others and far enough away so as not to interfere. The kind of races that may be run is limited only by the ingenuity of the director.


Potato races are runs in which potatoes or any other light objects are carried from one place to another. There are two kinds of these races; namely, shuttle and stadium.

For the shuttle potato race a receptacle not more than 2 ft. high or an opening not

the receptacle before picking up another. After all the objects are placed in the receptacle the competitor must cross the finish line, which is 5 yd. behind the receptacle.

In handicap competitions, the marks are given from behind the starting line.

In the stadium potato races two boxes 4 in. deep, 12 in. in diameter, are set on stands 2 ft. high, for each contestant. The outer edges of these boxes are 31 ft. apart. The runner may start on either side of the box that contains the potatoes, from a line parallel to its outer edge, the starting mark, with one potato in his hand. He runs around both boxes, each time placing one potato in the other box, and finishing at the starting point on the other side of

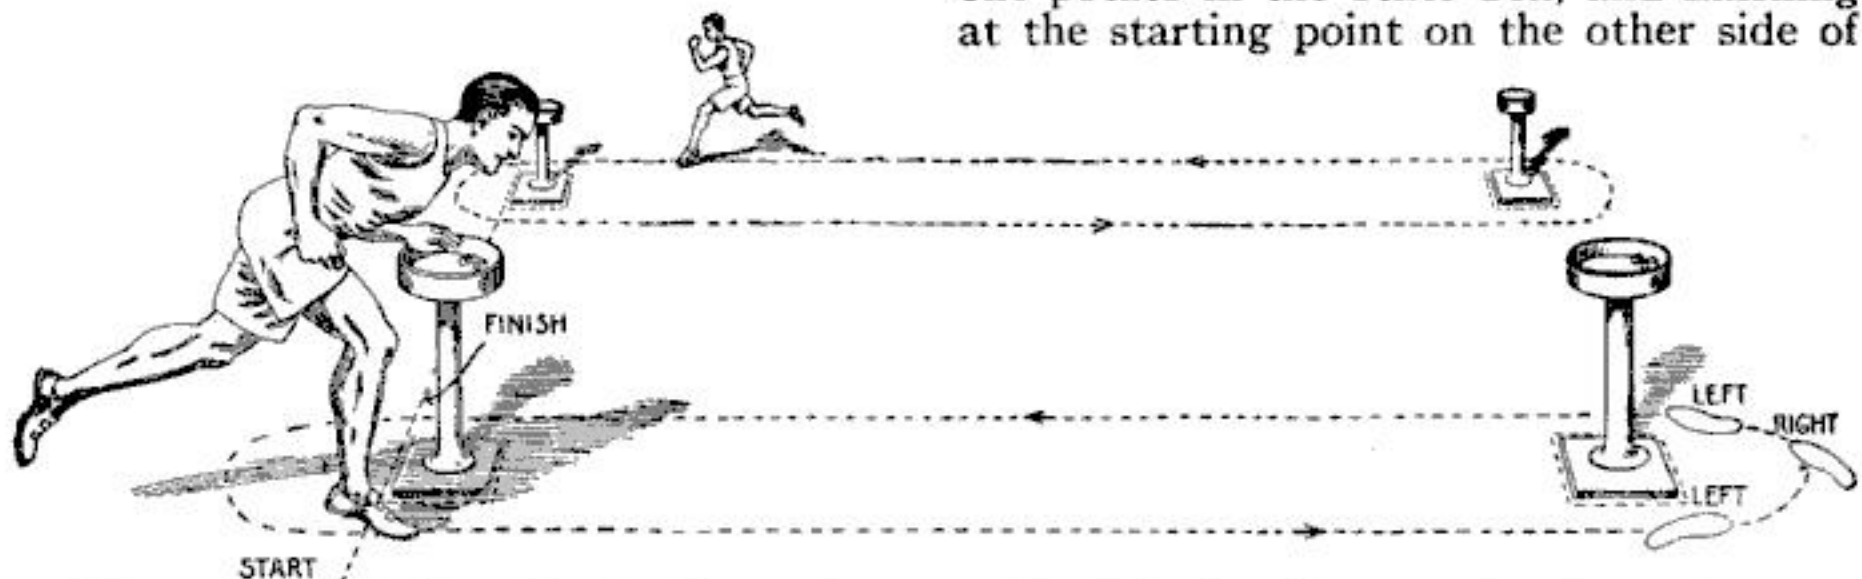

The runner starts from the starting mark on one side of the box that contains the potatoes. With one potato in his hand he then runs around both boxes, placing the potato in the other box

more than 36 in. in circumference is placed upon the starting line for each competitor. Upon a straight line drawn from the receptacle at right angles to the starting line shall be placed, at distances of 2 yd., eight

his own box. Grasping either stand in any way, failure to run around both boxes, or a failure to transfer all the potatoes singly from one box into the other shall disqualify the runner.

In case potatoes are dropped or upset by the runner he must replace them without assistance before proceeding with the run. He must not interfere with another runner in any way. The boxes may be fixed to stands, having their bases approximately the same size as the boxes. The stands are not fastened to the floor.

The various distances and number of potatoes are:

60 yards	potato	race	requires	3	potatoes
160	"	"	"	8	"
220	"	"	"	11	"
440	"	"	"	17	"

There are two styles in running the potato races. Some runners keep a steady pace and run in large circles. Others run in a narrow oblong that necessitates slackening the speed on the turns. The latter is more generally used but is thought to be more exhausting than the former.

In making the turns, the runner should face the box and bend well over it, if the narrow oblong style is used. In this it is also well to give attention to the striding. If, as usual, the run is made from right to left, as in track running, the turn should be made with three steps as follows: the left foot should be at the side of the box, then the right should be placed at the end of the box and then the left started on the new stretch.

(To be continued)

Sticky Fly Paper Used to Keep Insects Away from Poultry

TO keep insects away from fowl in a poultry house sticky fly paper may be used with good results. It is placed sticky side down on the upright parts holding the roosts, which rest on the paper. Do not allow the paper to touch the sides of the building in any place. It is also a help to keep the roosts and parts well greased with some thick grease well rubbed in to fill all the cracks. If there are any night prowling insects in the coop a fair sample of them will be found stuck to the paper in the morning.


Large poultry houses should have metal supports for roosts, with grooves for the ends of the roosts to rest in without fastening. Raise the end of such a roost and put a small piece of fly paper under it, sticky side down. Be careful that the edge of the paper does not stick against the support.—PAUL GREER.

Saving Concrete in Setting Posts in Holes

THE ordinary method of setting a post in concrete is to set the post into the hole and fill in around with concrete. This is

wasteful and does not reach the highest efficiency.

A square hole should be dug so that the concrete will have square corners. After placing the post in position the concrete should be poured in until the hole is about one-fifth filled. The concrete is marked *A* in the drawing. The hole is partially filled with wet earth, here marked *B*, leaving room for more concrete.

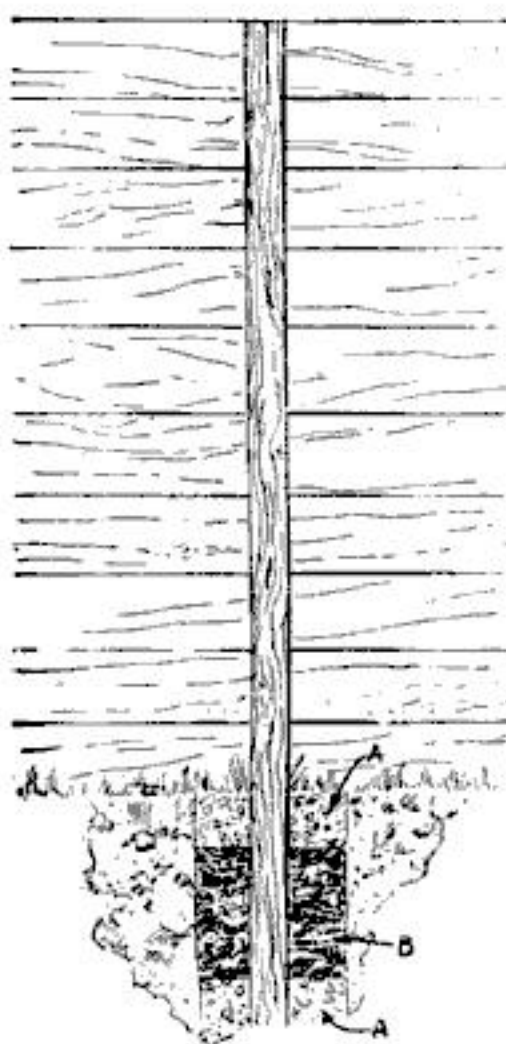

The part of the hole between blocks filled in with dirt

The upper concrete block should be about 50 percent larger than the lower block to offset any difference in the hardness of the ground. There is practically no strain exerted against the ground between the two concrete blocks.—ROBERT W. PHELPS.

Waterproofing Blue Prints and Drawings for Rough Handling

WHEN blue prints are handled to a great extent or when it is necessary to use them outdoors, as in construction work, they often become spotted by water or soiled; which makes the prints difficult to read. Waterproofing them protects them from the water, and makes it possible to wash them off when they become soiled. The waterproofing can be accomplished by dipping the prints in melted paraffin wax and hanging them by the corner to drain.

Another method, not so clumsy, is to immerse heavy blotting paper in the wax and when cold lay the print between two of the sheets and pass a hot iron over them. These processes are applicable to all kinds of papers.—THOMAS W. BENSON.

A Coating Which Gives the Appearance of Stone to Wood


TO make imitation stone for outdoor furniture, sun-dials, flower pots, etc., the following can be used:

10 parts lime
12 parts rosin
1 part linseed oil

Dissolve ingredients thoroughly and apply the mixture while hot to the wood as a coating. The result will be an attractive stone-like appearance that will last indefinitely.—L. E. FETTER.

A Special Ladder for Use in Boiler Shops

THE type of ladder illustrated is especially made for use in boiler and car shops where it is necessary to climb up to moderate heights for doing work. Being of the A-type it can be used like a painter's ladder and a plank can be put between two of them to form a trestle which will accommodate more than one workman. This method of construction makes the best possible ladder—strong, safe and economical. It is built of short pieces of $1\frac{1}{2}$ -in. pipe, each about $21\frac{1}{2}$ in. long, which may be picked up about any shop where considerable pipe is used, such short pieces being useless for general work.

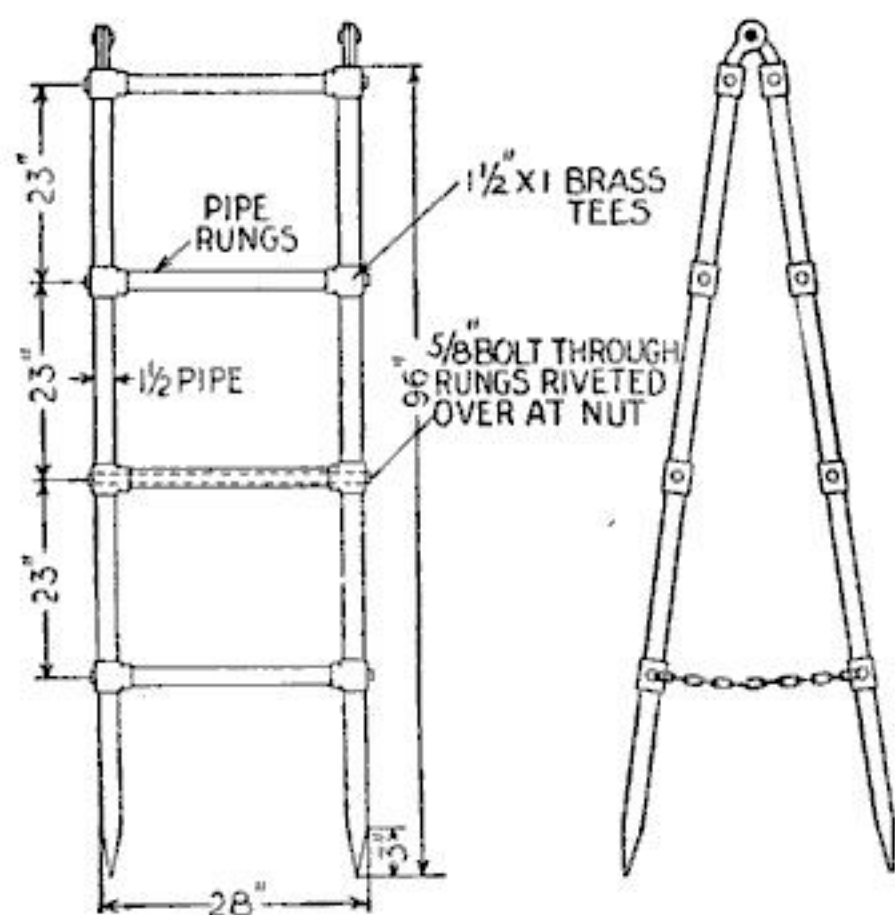

An A-shaped ladder made of short lengths of gas pipe and fittings for a boiler shop

The pipes forming the rungs are 1 in. in diameter. In the making of the ladders illustrated, sixteen $1\frac{1}{2}$ in. by 1 in., brass tees and eight $\frac{3}{8}$ -in. bolts, one for each rung,


were used in each ladder. The parts were hinged at the top and pointed irons were fitted in the lower ends as shown. A chain is used between the parts to keep them from spreading.

While this ladder is very heavy, yet for the usage to which it will be subjected the construction is most desirable and at the same time inexpensive.—JOSEPH K. LONG.

Three Plates and Three Color Screens Used in New Color Photography

IN a recent patent on color photography there is brought out a process whereby three sensitive plates are placed together in such a way that the color screens in them produce the desired effect on the plate.

To obtain these results it is necessary to have all plates that are used in sets, sensitized at the same time, so that they will age the same and have the same emulsion.

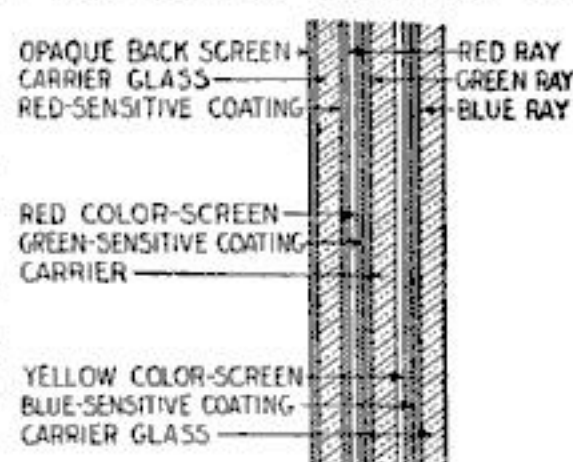

Arrangement of plates in pack to record natural colors

The ordinary dry plate is sensitive to the blue rays. In making up the sets green-sensitive plates must be used, which are sensitized with a chemical dye. A batch of these plates is divided into two parts, the first portion being coated on the back with opaque substance and allowed to dry, after which they are treated for rendering them red-sensitive. In the meantime, the second portion of the plates, which are already green-sensitive, are superficially coated with a temporary green. Then they are assembled to form a plate pack, and if desired, a blue-sensitive is combined with them. By securing these together they make a unit which may be exposed in any desired manner. After exposure the plates are separated, developed and fixed.

The chemical dye which gives a plate sensitiveness for a given color may be termed a color-sensitized agent and the plate a dye-sensitized plate. The green-sensitizing agent is preferably included in the original emulsion. The illustration shows the sensitive plates and their arrangement in a pack to record the natural colors as the rays fall upon them successively from the camera-lens.



The Amateur Electrician

And Wireless Operator

Applying Insulation to Splices Made in Electric Wires

TO comply with the rules of the American Institute of Electrical Engineers, it is necessary to apply a rubber coating over a soldered joint in a wire. One of the best methods of doing this is to lay on the rubber over the splice before it begins to cool from the soldering operation. The thickness of the coating depends on the amount of voltage carried in the line. Cover the rubber insulation immediately with friction tape, drawing it tight, while putting on a sufficient number of layers to stand the wear.


To make a neat covering, cut the friction tape into narrow strips, less than $\frac{1}{2}$ in. wide, and a smoother joint will be the result after the wrapping. If this is done neatly and drawn tight enough there will be a noticeable bulge in the joint. This can be easily wrapped with a cord—silk if the case calls for it—then given a coat of shellac. If the proper color cord or silk is selected a joint that cannot be easily detected results.

A Simple and Easily Made Electric Battery Motor

A SIMPLE and easily made motor that will run at high speed with two or three cells of dry battery, or on an alternating current with a transformer, is shown in the illustration. While this motor can be made in any size that will appeal to the experimenter, only one dimensioned drawing is given. Procure two hexagon-head bolts, *A*, $2\frac{1}{2}$ in. long and $\frac{1}{4}$ in. in diameter under the head, also some thin hard fiber tubing $\frac{1}{4}$ in. inside diameter to slip over the bolts. Cut two pieces *B*, each 2 in. long, and fit on heads or washers, *C*, about $\frac{7}{8}$ in. in diameter, leaving $\frac{1}{4}$ in. of the tubing projecting at the threaded end. This forms the spools for the magnets.

Wind the spools with No. 22 or No. 24 magnet wire in the usual manner having the inside as well as the outside ends come out at the back end of the magnet.

The soft iron standard *D* is about 3 in. high, $\frac{1}{2}$ in. wide and $\frac{1}{8}$ in. thick and bent L-shaped at the lower end to form a foot by which it is screwed to the base. In the standard are drilled three holes. Two of these are of the same size to allow the ends of the bolts or magnet core to enter and project on the outside for the nuts, which hold the back ends of the coils in position. The third hole is located centrally between

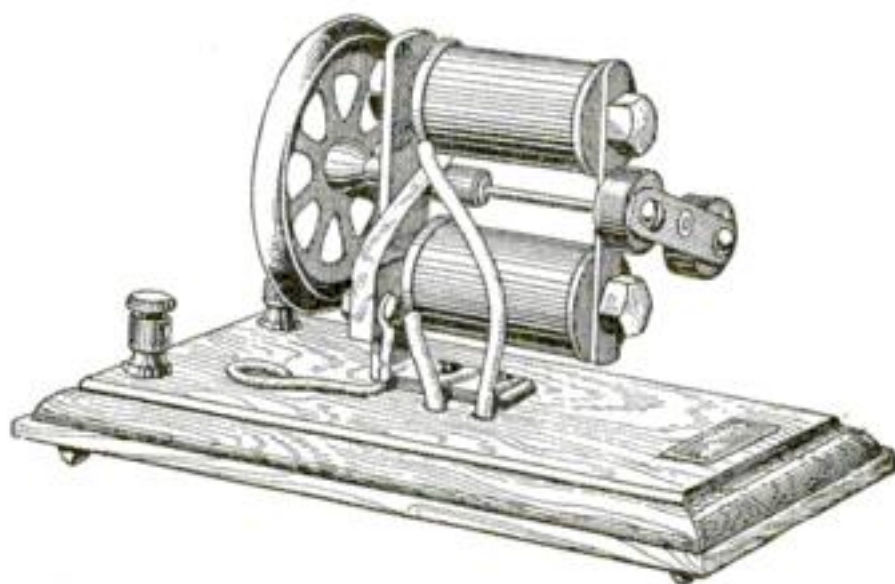


Universal motor that will run on a battery current or reduced alternating current

the other two to accommodate the shaft. The same number of holes and in the same position must be drilled in the brass yoke for supporting the front ends of the magnets and the front bearing. This brass yoke may be a flat strip about $\frac{1}{2}$ in. wide and of a length to cover the front ends of the coils. When the bolts are put through the magnets the protruding ends of the fiber tube will butt up against the back standard and all parts will be held securely in place.

The armature poles *F* consist of soft iron buttons about $\frac{5}{8}$ in. in diameter and $\frac{1}{4}$ in. thick, connected by a strip of brass $\frac{3}{8}$ in. wide, having a hub in the center for

fastening it to the shaft. The balance wheel may be made to suit the fancy of the builder.

Before assembling the parts, a commutator must be made and slipped on the shaft back of the standard or between the upright and end support. As it is necessary to have a break in the current for a short

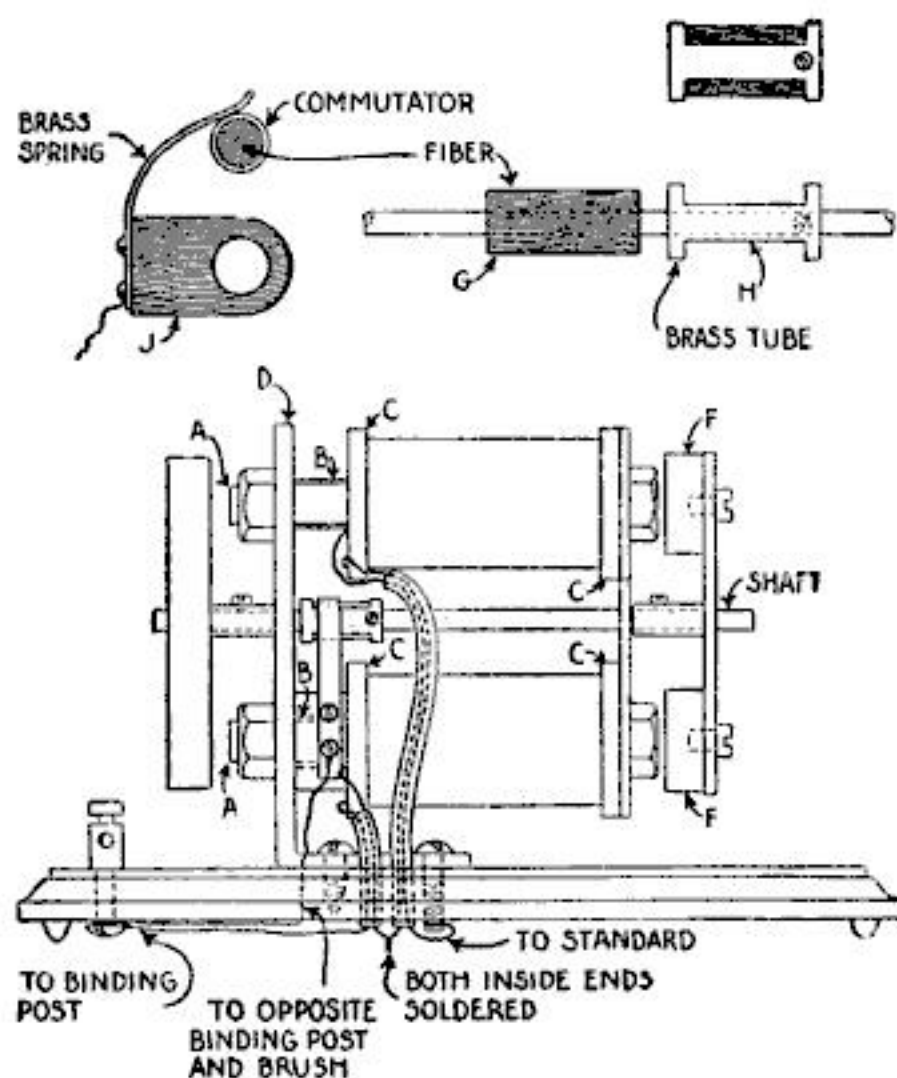

The parts and their assembly for the construction of the universal motor

period a part of the commutator must be insulated from the shaft. This is accomplished by making a base *G* cut from a hard fiber rod which is drilled to slip in the shaft. A brass tube having an inside diameter to fit on the fiber rod is filed as shown at *H*, and when assembled it appears as shown in the illustration on page 147.

The brush-holder for making contact on the commutator is constructed as shown at *J*. The base is made of hard rubber, or fiber $1\frac{1}{2}$ in. long and $\frac{1}{4}$ in. thick. One end is rounded and drilled to slip over the core or lower bolt between the standard *D* and the magnet end *C*. The thin brass spring makes contact with the metal strips on the commutator as it revolves.

Both inside and outside ends of each coil are brought down through the base in rubber tubes. The inside ends of coils are soldered together. One outside end is connected with the iron standard *D*, and the other outside end with a binding post. The remaining binding post is connected with the spring on the brush-holder.—W. E. DAY.

Rebuilding Worn-Out Dry Battery Cells

THE most difficult part of rebuilding dry cells in quantity is the removal of the contents, which consists of peroxide of manganese and carbon powder tightly compressed and covered with pitch. Strike the pitch a sharp blow with a hammer to break it; then dig it out with a pointed tool like that of a screwdriver. Save the pitch and sand in separate receptacles.

The compressed oxide and carbon are also difficult to remove. About the only quick method is to use a twist drill $\frac{5}{8}$ in. in diameter, placed in the chuck of a lathe. By pressing the zinc-cylinder of the cell on the drill and boring several holes in the compressed material to within $\frac{1}{4}$ in. of the bottom, you will break it up so that all of the compound can be readily removed. Save the borings and the crumbled mass. If a small portion is left at the bottom it may be easily removed with the aid of a screwdriver. The material removed is spread out to dry and any lumps found are crushed. The exposure of this material in a thin layer not only permits the moisture to evaporate, but brings about a certain amount of reoxidation of the spent manganese dioxide. As soon as the material has become dry it must be heated to a moderate temperature—about 400 deg. F. will answer, but not to a bright red, as this will drive off some of the oxygen, every bit of which is needed in the renewed cell to act as a depolarizer. During the heating, which may be readily done in a stout iron pan, it must be well stirred. This process will eliminate a very large part of the exciting salts used in the original cell. The heated material must then be spread out and exposed to the air to cool. When cold it is ready to be mixed with the exciting salts and repacked in the original zinc-cylinders.

Almost all the cylinders may be used again after being soaked with hot water for about 1 hour or more. The soaking will loosen the original paper lining and it can be easily removed with a pointed tool inserted between the cylinder and the lining. Finally clean out the interior with a stiff brush and wet sand, or with a wire brush. When the cylinders are aired they are ready for re-filling. Some of the cylinders will be used up and unfit for use again. These may be dissolved in hydrochloric acid to form a strong solution of

chloride of zinc, which is required to make up the exciting mixture. In preparing chloride of zinc, the scrap-zinc should be placed in a large stoneware crock and 3 or 4 lb. of commercial hydrochloric acid poured over it. This must be done outdoors, because the hydrogen gas that is given off is harmful to breathe, and also inflammable. A great heat is generated and the liquid may boil up and make it run over the top of the crock. A small quantity of cold water may be poured in to lessen the chemical action without detriment to the resulting product, which should be left until quite cold before using. It is very important that this solution should contain no free hydrochloric acid, because its introduction into the made-up cell would cause chemical action, and the cell would soon be destroyed. Any trace of free acid is readily dispersed by adding a small quantity of chloride of ammonium in powder form and stirring the liquid until effusing ceases. By this method a small quantity of chloride of ammonium may be introduced without harm. As soon as the solution of chloride of zinc is ready it may be strained through a piece of damp muslin to free it from dirt, paper chips and other matter, and then filtered through a tuft of cotton pressed in the neck of a glass funnel. This will free the solution of any fine iron-deposit or lead that may have been in the zinc, thus aiding the efficiency of the re-made cell. This solution should test 32 deg. Baume. Sal ammoniac, or chloride of ammonium in the crystal form, is then dissolved in the chloride of zinc. Filtered or distilled water is then added and the mixture stirred well and tested to register 32 deg. Baume. The solution is then ready for use.

The carbon-rods and the brass binding-posts and screws must be cleaned and the zinc-cylinder lined with a double thickness of blotting-paper, or blotting-board, cut so as to leave a margin of about $\frac{1}{2}$ in. at the top where it is turned over on the outside. Cut some circular pieces of cardboard, or heavy blotting-board, so that they will fit tightly into the interior of the blotting paper. Press three or four of these down into the bottom of the blotting-paper lining inside of the zinc-cylinder. It is then ready for filling. Just before putting in the mixture pour in some of the chloride solution so as to wet the paper all over, drain it and place the zinc upside-down to drain off the excess liquid. This takes about

20 minutes, for the paper must not be over wet. Then place upon a smooth board about $1\frac{1}{4}$ lb. of the carbon and manganese powder that has been treated. Add about 3 oz. of the chloride of zinc and chloride of ammonium solution and mix well so that it will hold together when gripped in the hand. It must not be very wet or it will not give the proper amperage. The right consistency is very important. Pour some of the carbon mixture into the paper-lined zinc-cylinder and ram it down hard; insert one of the carbon rods, adjust it centrally, then pack some of the mixture around it and ram it down tight with a suitable strip of wood, hammering it in with a wood mallet. The carbon rod must be tapped down occasionally to prevent it from lifting.

The tighter the mixture is packed the greater will be the amperage when finished.

Cut off the outside edges of the blotting paper and fold the top of it inwards toward the carbon-rod, press it down and see that none of the carbon mixture makes contact between the zinc and the carbon-rod. This is essential as the connection would short circuit the cell. Place all the binding screws in position, test the cell with a suitable battery ammeter and see that the screws of the carbons are tightly fitted. It should give a current of 15 to 22 amperes.

Dry the sand and pack some of it over the top; then melt the tar and pour it on the sand to completely fill the cell to the top. These made-over cells will give an excellent working current for a considerable length of time.


Method of Insulating Secondary "Pies" in Transformers

IN most text-books on the construction of transformers, it is customary to advise the insulating of the "pies" or sections in the secondary winding by means of long strips of empire cloth, wound over and over through the center holes of the sections. This requires a good deal of work on the part of the constructor.

While overhauling a transformer, the writer tried out a somewhat novel method. The core was insulated in the usual manner, with a number of layers of empire cloth, but the "pies," instead of being wound with strips of empire cloth, simply had round disks of empire cloth, of double thickness, between each pair of sections. This gave fully as good insulation, and made access to the different sections easier.

Steadying the Voltage of a Dynamo Driven by Gasoline Engine

THIS problem has been solved in various ways. We are all familiar with the storage-battery system, and being acquainted with this system, realize its expense. If a gas or gasoline engine is to be used to drive a dynamo, some provision must be made to steady the speed of the dynamo.

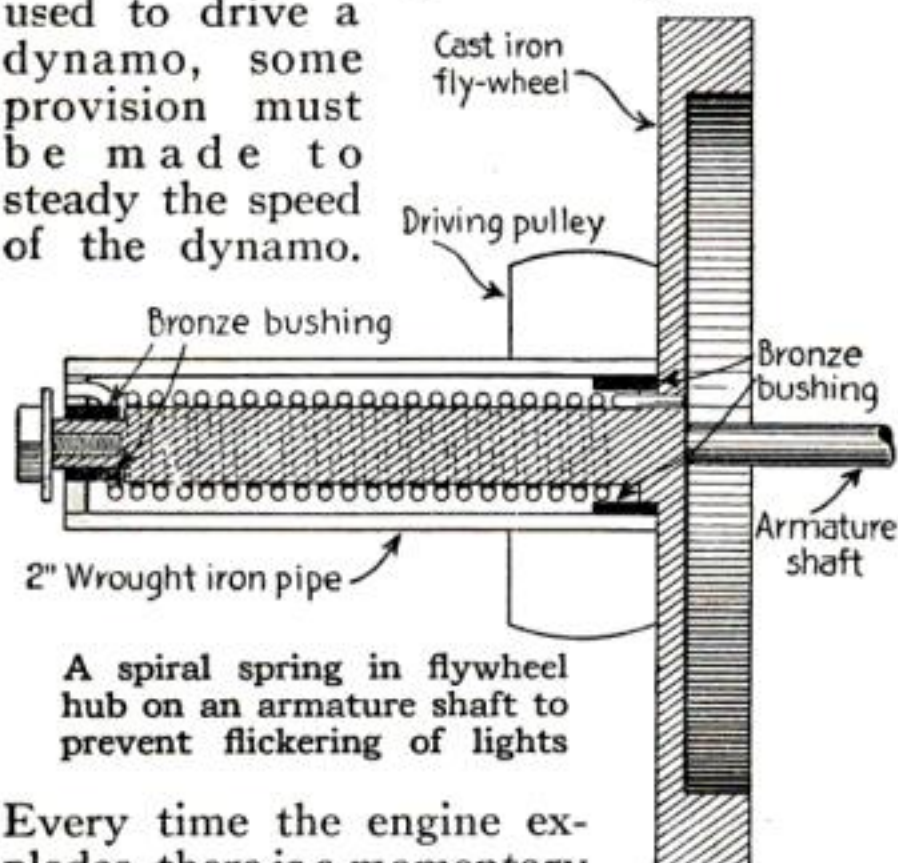

Every time the engine explodes, there is a momentary increase in the speed of the dynamo, causing a fluctuation of voltage, and a flicker of the lamps. Special engines with extra heavy fly-wheels have been built for this purpose, which give fair results, provided that the armature of the dynamo has a large moment of inertia. If a flywheel is put on the dynamo, the voltage fluctuation is lessened, but this induces belt slipping, and hence loss of power. Specially built electric lighting engines are expensive, and for small plants of from one-half to two or three kilowatts give but little satisfaction.

The writer has obtained satisfactory results in a one-kilowatt plant by using the spring flywheel arrangement shown in the diagram. The belt from the engine drives the pulley on the flywheel which is fastened to the pipe. The pipe in turn twists the end of the helical spring. The other end of the spring is fastened to the flywheel. In this way the impulses from the engine are spread over a longer interval, and the tendency is for the dynamo to run at a constant speed. The whole spring is packed in grease, so that there is but little loss of power from friction. Belt slipping is avoided by the freedom of motion of the pulley and pipe. The momentum of the dynamo flywheel tends to keep the speed of the dynamo constant while the engine

is slowing down on the compression stroke, and likewise while the engine is on the power stroke, the spring operating as an elastic medium between the driving pulley and the flywheel.


The spring must be made of steel of exceptionally good quality, on account of the rough usage to which it will be exposed. I used a No. 10-gage spring steel wire. This wire was made up into the form of a coil spring and then tempered. A spring was tried which was made of spring steel which had been tempered before it was made into the spring. This spring lasted but a few hours, after which time it was distorted beyond usefulness.

The results with the spring were compared with those without the spring, by first running the machine with the pipe clamped fast to the flywheel spindle, and then running the machine with the spring free to operate. In the first case there was a variation of between three and four volts upon each explosion of the engine; in the second case this variation was reduced to less than one volt, the plant operating at 110 volts. The power losses arising from this arrangement were negligible.

Increasing the Voltage of a Dry Battery

OFTEN a battery of dry cells will fall in voltage or become reduced in pressure because some of the cells have polarized,

consequently the current is not sufficient to operate the ignition of an engine or to perform its duty. Such an occurrence is likely to prove very annoying. In emergency cases the voltage can be increased temporarily by taking a good cell from the set,

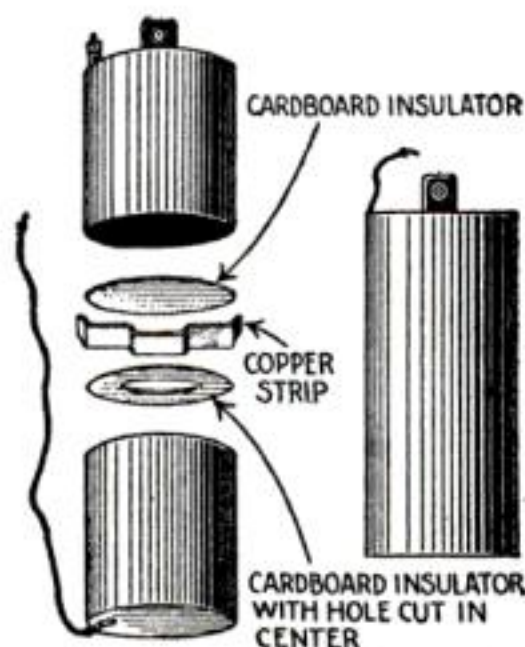

cutting it in half and then making the connections as shown. Slip the container out of its casing to make the cut and connections, then put the two parts back so that the cell will have the same appearance as before. This reduces the ampere hours, but it bridges over the difficulty.


Keyless Lamp Socket for Switching Electric Currents

THE well known key socket for electric lamps requires at least thirty separate and distinct pieces, the assembling of which is an important item in estimating the cost of production.

A new socket has been devised which may be made of less than half the usual number of parts. Instead of having a key the bulb itself serves to switch the current on and off.

Pushing the bulb inward about a quarter of an inch causes a spring finger to snap into contact to connect one side of the circuit, while the central contact point of the lamp is caused to engage with the terminal of the other side of the circuit, thus turning on the current without a push button or switch lever.

In order to cut off the light, the lamp is drawn back so as to sever the connections, the act of pushing in or drawing out the bulb being far less injurious to the threaded end of the socket, or to the fixtures, than the turning operation of the key.

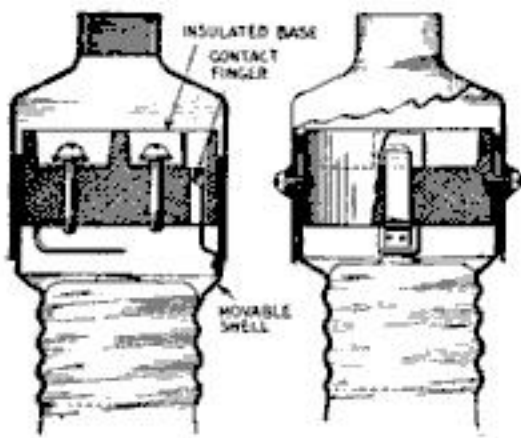

A part turn of the socket switches the current on or off

The drawing shows the socket made of two parts, the lower end, which is threaded to receive the lamp, being adapted to slide within the upper portion that is attached to the fixture. An upwardly-projecting spring finger, the lower end of which is attached to the inside of the lower shell, has its V-shaped upper end normally resting within a recess formed through the insulating material, so that when the bulb is pushed upward the V-shaped end is caused to snap over and engage with one terminal, while a spring finger on the opposite side of the insulating block contacts with the central terminal of the bulb.

It will be observed that by this arrangement both terminals are out of the circuit when the electricity is cut off. By loosening the two screws which hold the shells together the entire working parts may be withdrawn, together with the insulating block, affording a convenient and readily accessible means for attaching or repairing the wires.—J. S. ZERBE.

Curious Circuit for Audion On a Wireless Set

IT has often been said that it is not possible to use an audion bulb in connection with a simple double slide tuner. But experiment has proved that a hook-up may be tuned very closely

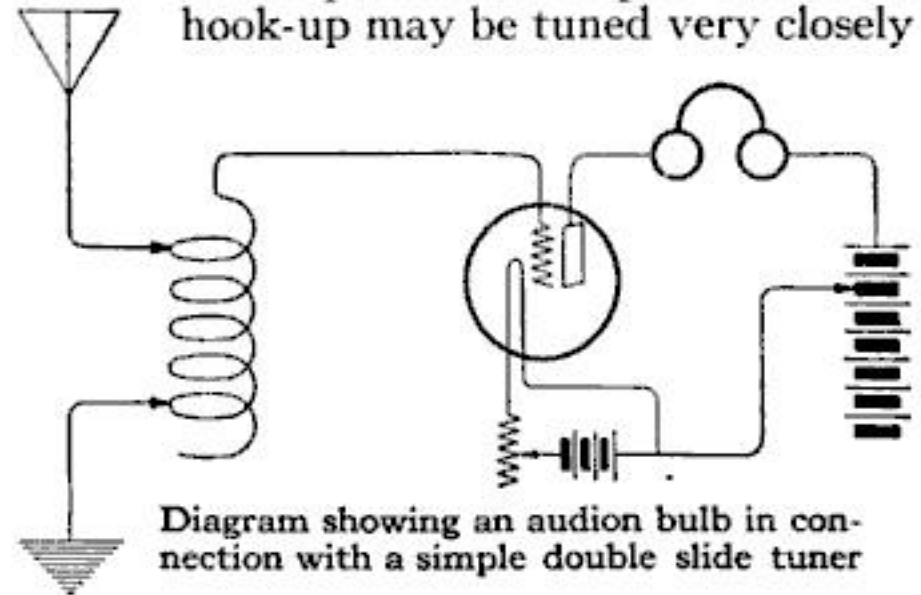


Diagram showing an audion bulb in connection with a simple double slide tuner

and accurately, the strength of signals from all stations being much greater than when the same audion is used with a receiving transformer. On a single-wire aerial 50 ft. high and 150 ft. long, the time signals from Arlington were received over 500 miles under all weather conditions. As will be recognized by those familiar with vacuum bulb circuits, the arrangement shown is very different from the normal arrangements on the usual wireless set.

Conversion of Kilometers to Nautical and Statute Miles

WIRELESS telegraph transmission distances are often stated in kilometers, nautical miles or statute miles. To convert the number of kilometers to nautical miles, multiply by fifty-four and point off two decimal places. To convert from kilometers to statute miles, multiply by sixty-two and point off two places. If the distance is given in statute (or land) miles and you want it expressed in kilometers, multiply the number of miles by 161 and point off two decimal places.

An Experimental Wireless Aerial Made of Zither Strings

WHILE experimenting with several different types of novel aerials I found that by connecting together all the strings of a zither and substituting it for the aerial with an inductive coupler, fixed condenser, silicon detector and a pair of 2000-ohm telephones, I could hear a number of local stations very clearly.—H. DROBE.

The Effect of Electricity and Music on the Human Organism

THE effect of music upon the human organism, whether calming, exciting or otherwise, can be reproduced in a remarkable manner by means of electric currents. Dr. M. Dupont is responsible for much of the successful research in this direction and has obtained results that are not only interesting but of probable educational and medicinal value. Music consists of sound vibrations at certain regular intervals. For a high note the vibrations are very rapid, while for a low note they are slower. To produce musical effects by electricity the alternating current is employed, made up of periods, the frequency of which corresponds with the number of vibrations of the sound; that is to say, with the pitch. Upon passing the alternating current through the body in the form of a mild shock an effect is produced similar to the physical thrill of appreciation for a musical performance.—H. J. GRAY.

To Prevent the Ears from Perspiring When Using Telephones

NO doubt the wireless operator has often had the annoying experience of perspiring ears. This inconvenience can be easily overcome in the following manner: Take a small piece of paper slightly larger than the receiver and place it between the receiver and the ear. I have found this to stop all perspiration without impairing the hearing.—W. T. DERR.

A Rain Alarm Made of a Broken Electric Globe


HOW often the rain pours into a window at night and we know nothing of it until we awake and find the floor and carpet damaged! This can be avoided by installing a simple rain alarm which will ring an



The electric lamp socket on a wood base and the connections with the binding posts

electric bell. To construct such an alarm proceed as follows: Remove the upper part of a carbon filament lamp by winding

a piece of cotton string around the lamp just above where the platinum wires come through the stem. Saturate the string with kerosene, applying a lighted match, and, while the glass is hot, dip it into water.

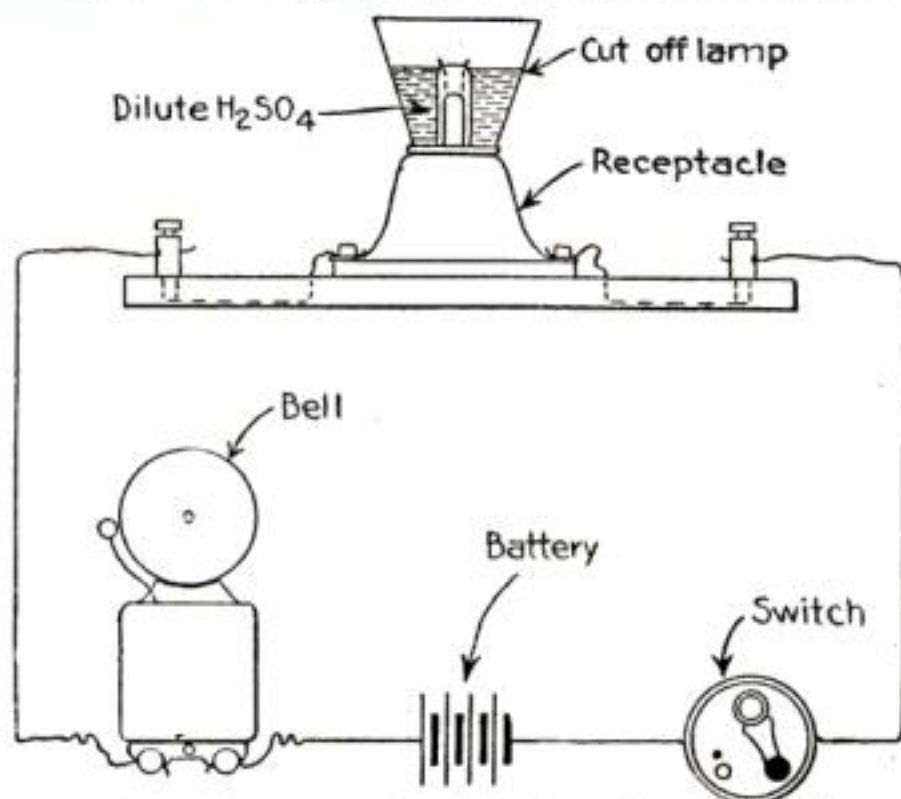

Wiring diagram showing the alarm gage installed in a battery circuit for ringing bell

Screw the lamp into a porcelain receptacle mounted on a board. Make connections with a bell and two dry cells, as shown. Then place the lamp outside the window and fill almost to the platinum tips with dilute sulphuric acid. When a few drops of rain fall into the lamp, the solution, which is a good conductor, will cover the platinum tips and form a circuit, and thus ring the bell. The switch should be put near the bed where it can be turned on and off conveniently.—WM. WARTHEN.

Mounting Tinfoil on Glass Condenser Plates

A GOOD shellac for fastening the foil to the glass in transmitting condensers may be made by dissolving as much powdered rosin as possible in 1 oz. of turpentine and thinning the mixture by the addition of $\frac{1}{2}$ oz. of alcohol. Only a very small amount of rosin will be needed.

About three drops of shellac should be put in the center of the surface of the glass and rubbed around well. Place the foil on the glass and roll it fast with a photographic print roller. The foil must be placed on at once as the mixture dries quickly. When this varnish is used the plates may either be stacked or made into an open rack condenser. If plain turpentine is used the foil will not stick so well and consequently the plates must always be stacked.—SAMUEL W. HUFF.

How Germany's Secret Service Wireless Stations Are Being Weeded Out

THAT there are secret service wireless stations of Germany in and about our large cities and important harbors, there is not the slightest doubt. At the time the merchant submarine "Bremen" was to arrive from Germany, it will be remembered, German agents prepared moorings for her at New London, Connecticut. Neither the Government wireless stations nor our commercial stations received any communications from this submarine. Evidently, secret stations, whose messages we could not hear, must have kept in touch with her.


These stations, we can rest assured, have not dismantled, but are working now. They await only the opportunity to report the sailing of a Europe-bound ship to a submarine waiting offshore. Unquestionably, such a menace must be weeded out. Our Government has not been idle. According to reliable information, it has already located several of these stations. The problem is not an easy one, and is one entirely of wireless engineering.

William Dubilier, one of our most prominent experts, believes that the Germans manage to keep their antennas concealed by stringing them inside high non-metallic structures; as, for instance, a hollow wooden flagpole. Though but one wire could be strung inside a flagpole, what would be lost in antenna efficiency could be partly compensated for by the increased power of the station. Of course, these spies would not be compelled to use an aerial at all. They

could use a close circuit system having two grounds. But this is not likely. The other method is more efficient and lends itself to better selectivity.

From the antenna concealed in the flagpole, the spies could run the aerial lead directly through the roof and into the garret of the building, without exposing it. These instruments, we can take it for granted, are the best that German money can buy. The operators obtain their unusual selectivity probably by the use of a double heterodyne or ultra-ultra system. That is, they superimpose a number of oscillation circuits one upon the other between the exciting transformer and the aerial and ground connections. The various ways in which each of these many circuits can be tuned are almost unlimited. The waves such a system would send out could be efficiently received only by a receiving system of similarly complex configuration. The usual station which has not these superimposed circuits could not receive the signals distinctly.

These facts give some idea of the task our wireless engineers are up against. First, they must obtain a circuit which will receive these secret signals—a most difficult task which would involve the finding of the exact number of the superimposed circuits and the exact configurations! Second, they must locate the stations with some sort of direction-finder using this type of circuit. The methods used with these finders would then be similar to that explained in a previous article on the direction-finder, on page 232 of the February 1917 issue of the POPULAR SCIENCE MONTHLY.

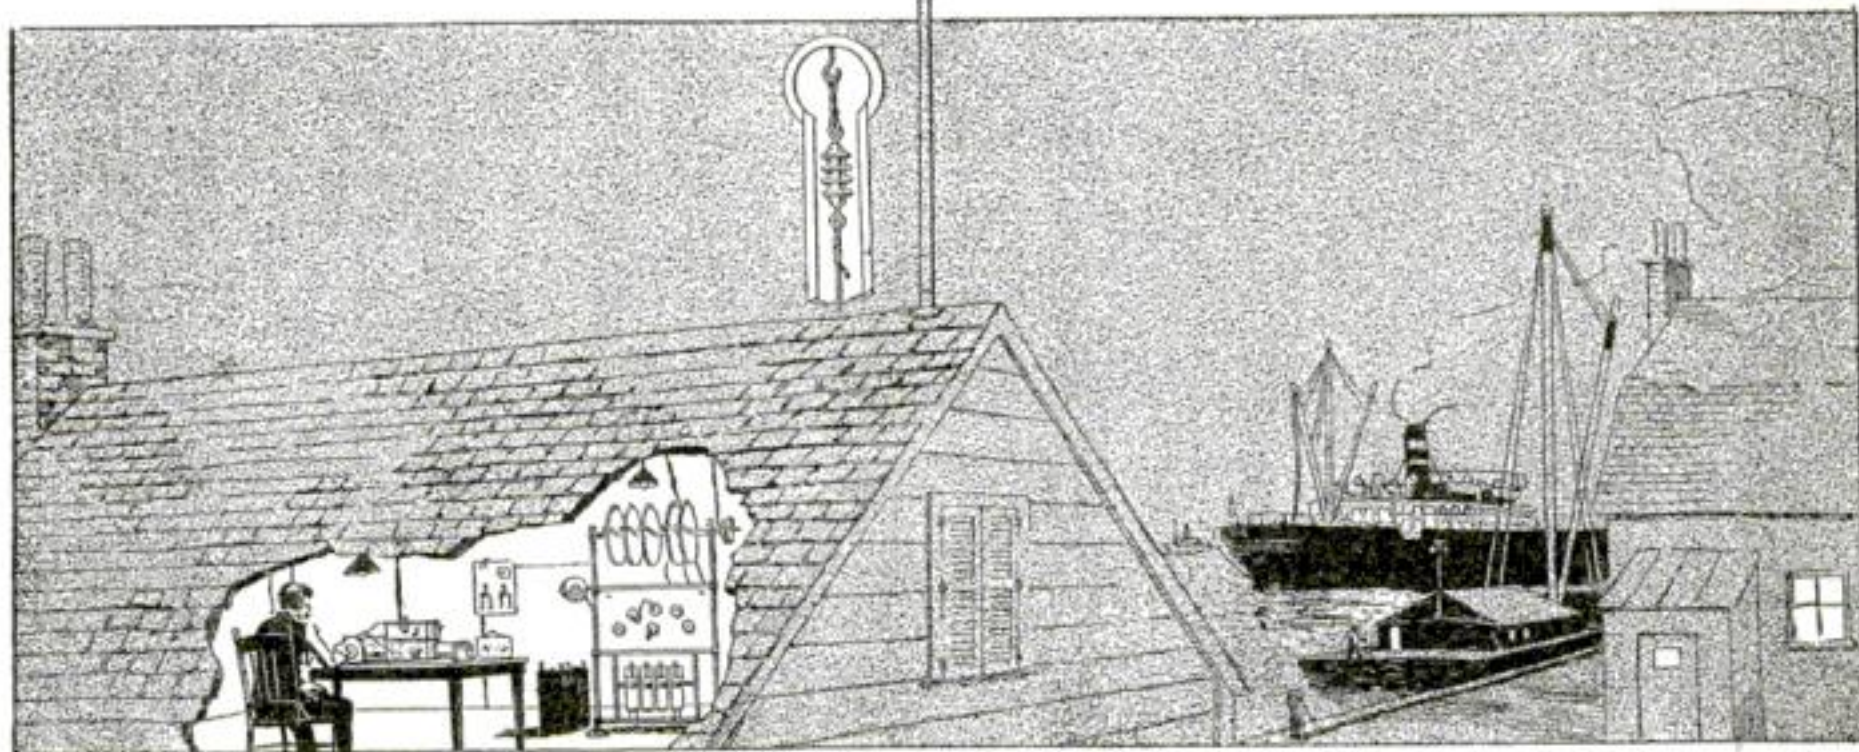


The Germans conceal their aerial in the hollow of the flag pole. Their complex waves can be received only by submarines and other stations fitted out like themselves

Electric Experimenting Table Made from an Old Commode

An old commode such as is very often discarded or sold for little or nothing can be very easily and cheaply transformed into a high class electrical experimenting workbench in the following manner. First procure a nice smooth board and nail it firmly to the two uprights *A*, which are found on nearly all old commodes. This forms the switchboard *B*, upon which all switches, rheostats, meters, etc., can be conveniently mounted.

In the accompanying drawing, a very convenient arrangement is shown. The dry cells, storage battery, or transformer is placed in the little cupboard *C*, at the bottom of the stand, from whence the two wires lead to the switchboard and are there connected as the user may see fit. All the wires are run behind the two uprights *A*, so as to make all the wiring invisible, which adds much in neatness.


The terminals for connecting motors and other experimental apparatus are placed upon the little back board *D*. Old battery binding posts may be used for this purpose.

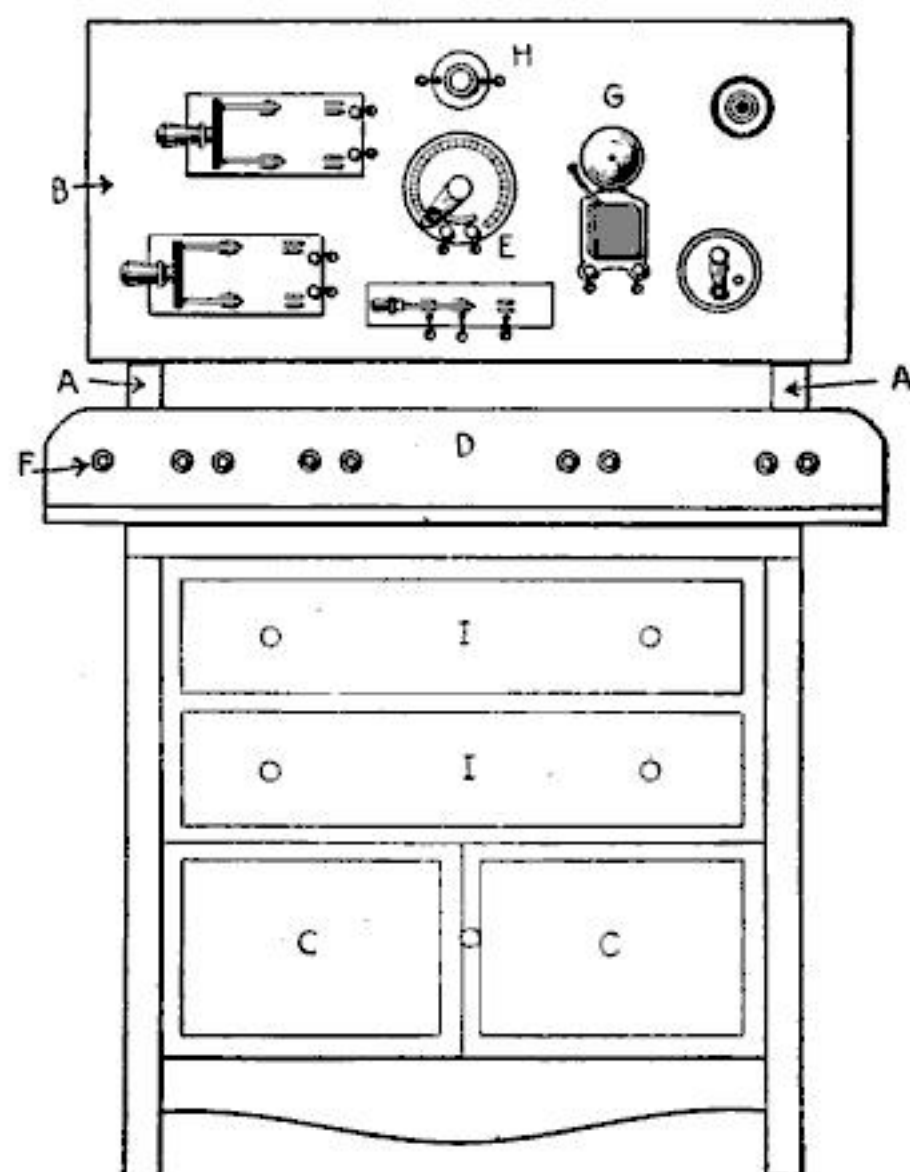

A board placed on the towel hanger supports of a commode for an instrument board

Each terminal is operated by a switch on the board so that it is not necessary to disconnect a wire in order to shut off the

current. It is also very convenient to have one of the terminals connected in series with a rheostat *E*, so that the quantity of

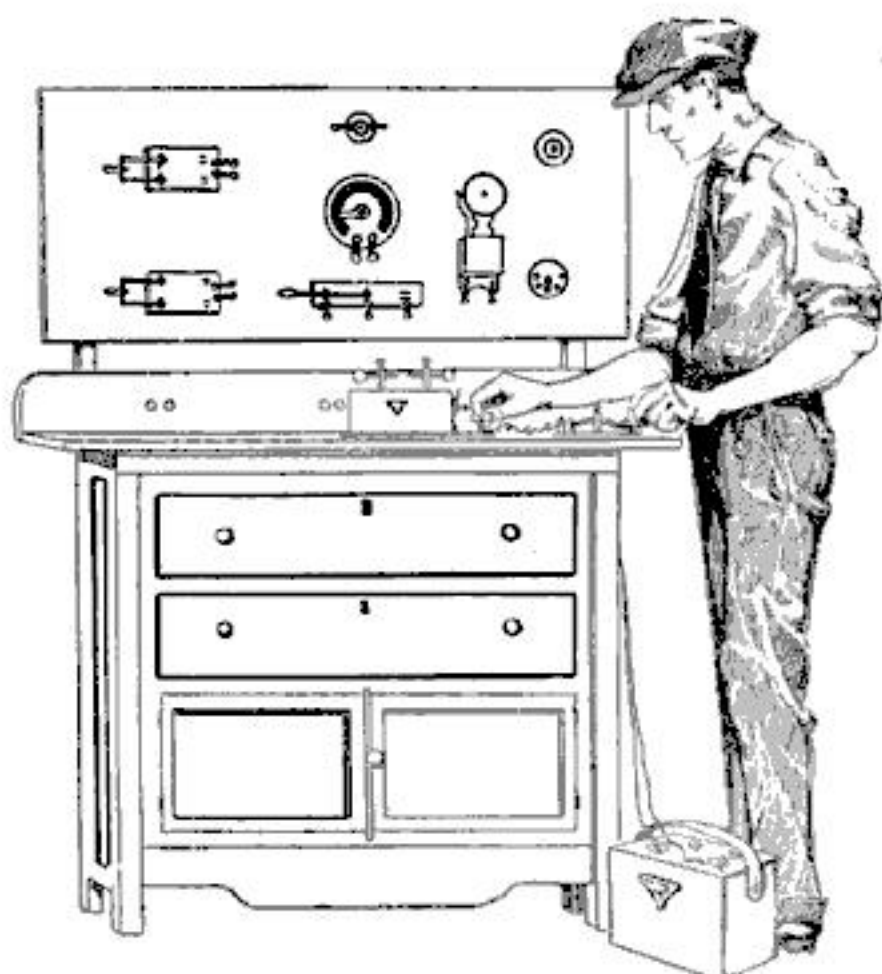

All instruments and tools may be kept in the drawers while the top is used for a table

current can be regulated. A ground connection *F* might also prove handy for various experiments.

A call bell *G* and small electric light *H* can also be mounted on the board. For anyone possessing a wireless telegraph set, this stand is doubly convenient, as the aerial switch can be placed on the board and the instruments mounted directly on the top of the stand, if desired. Innumerable other connections and uses will readily present themselves, depending on the apparatus possessed.

Tools and instruments can be kept in the drawers *I* and thus be always handy and out of the way. A small hand vise can be fastened on the stand if needed. The principal advantage of it all is that everything is conveniently contained in one unit.—J. EDWARD WHITE.

Panels Made Out of Rubber Storage Cells for Radio Apparatus


IN making panel facings for loose couplers or cabinet sets cut up an old hard rubber storage-battery case and use it for the switch-panel facing. When drilling be careful not to apply too much pressure. A plane may be used on this material if great care is taken; but it is very brittle and will break easily. It may be polished with sandpaper.

Japan's Commercial System of Wireless Telephony

ALTHOUGH it is not generally realized, Japan has been one of the most diligent countries in making wireless telephony a commercial possibility. The "T-Y-K" radiophone system which the Japanese have developed is unusual in simplicity and compactness. It contains no very intricate circuits, nor does it use a delicate air-sealed spark-gap, as in other telephone systems. The few adjustments that are necessary can be made by almost anybody, and the spark-gap will work while exposed to the air, without deterioration. These facts have made the system so practical that Japan has already established wireless communication between her important islands by means of it.

The spark-gap electrodes are made of oxide of iron, brass, aluminum, and similar materials which are practically indestructible. The electrode surfaces are small and are placed nearly

touching each other, so that the spark-producing potential can be comparatively low. Thus, the voltage of the exciting generator is slightly more than one hundred, though as much as five hundred volts have often been used. As soon as a potential is produced across the gap, an oscillating circuit that is coupled to the gap becomes simultaneously charged. Once a spark jumps across the gap, the natural tendency of both the inductance and the capacity of the oscillating circuit is to send a current from one to the other. The result is that each is rapidly charged and discharged, the current crossing the gap at a rate of about 120,000 times a second, producing one spark with every surging. The surging in the primary circuit are then induced in the aerial and microphone circuit which is coupled to it. The result is that the aerial radiates its wireless waves, which are modulated by

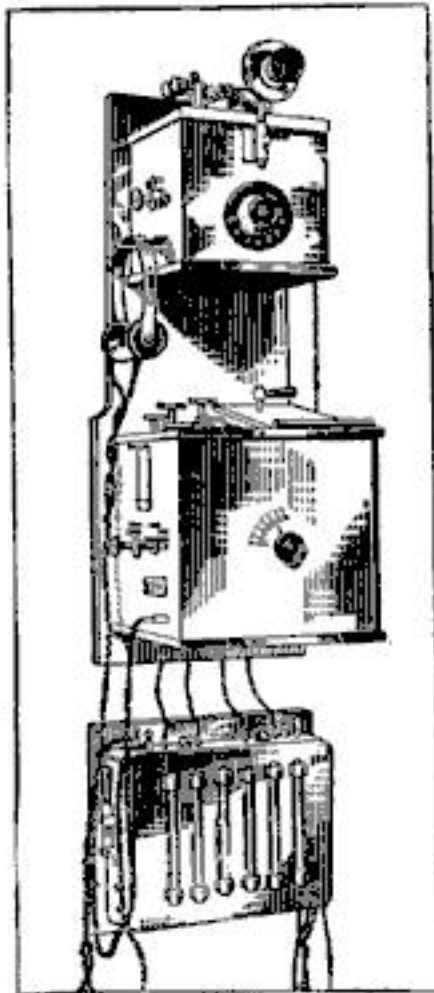

A complete Japanese T-Y-K installation

talking into the microphone transmitter.

But all this depends upon the formation of a first spark which will release the charge of the oscillating circuit. The resistance

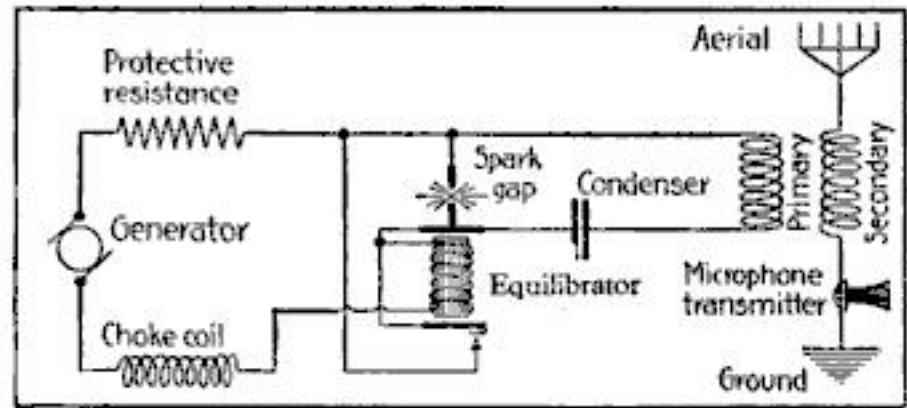


Diagram of connections: The transmitting system uses an air-exposed spark gap. A crystal detector system is used for receiving

between the two electrodes—caused by the insulating layers of air and of the oxide formed on the electrodes—ordinarily prevents this. So an equilibrator is used for temporarily raising the potential in the spark-gap circuit. The equilibrator consists of a strong electromagnet which, just as soon as a current begins to build up in it, attracts the armature of a circuit-breaker. The circuit-breaker is sharply opened, and the inductance discharges at high potential, supplying the necessary potential across the spark-gap.


Since the equilibrator works automatically, only the simple adjustments of the oscillating circuits require attention. The waves the system sends out, being of relatively low frequency, can be received by the ordinary crystal detector. Using it, a maximum range of thirty to forty miles has been obtained.

A Crystal Detector Holder for Wireless Apparatus

A SIMPLE clip to hold the mineral consists of a straight piece of brass sheeting with a U-shaped piece of spring brass soldered on at one end. Another and better device for holding the mineral is a reflector from an old tubular flashlight of the larger size. Clean off the enamel and polish up the brass. Fit a piece of wood into the socket and drill a hole in it for a machine screw which passes through into the base of the detector. A large brass washer will be required under the head of the machine screw. Drill and tap out three holes through the side of the cup for the set screws which clamp the mineral. The cup will hold odd-shaped minerals of various sizes and can be turned around at will.

A Trussed Aerial Spreader for Long Wires

ALIGHT and strong spreader is very desirable when the aerial reaches over 200 ft. in length. While bamboo answers the purpose for spreaders shorter than 6 ft., it does not do for longer ones.

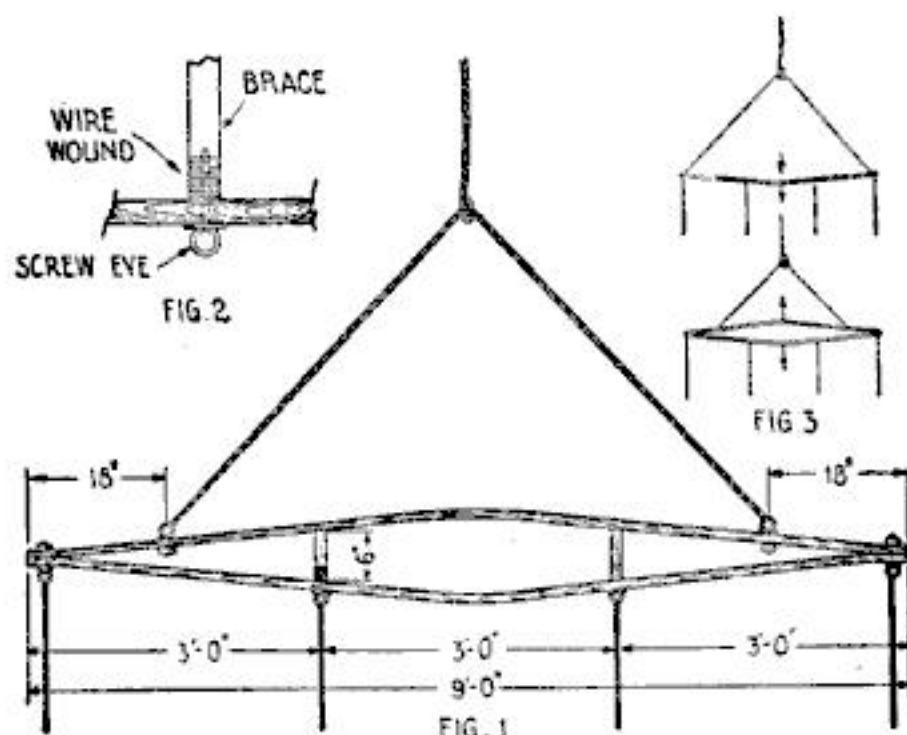

A light frame trussed so that it will be strong enough to hold a large aerial

A truss-built spreader fills the conditions admirably. Select two straight-grained pieces of spruce 9 ft. 3 in. long, by 1 in. square and two braces 6 in. long by 1 in. square. The pieces are assembled as shown in Fig. 1. The detail showing how the braces are fastened to the spreader-piece on the side where the aerial wires are attached is seen in Fig. 2. The other ends of the braces are fastened with wood screws. The rope-bridle is fastened 18 in. from each end, to equalize the strain, as shown in Fig. 3. The arrows denote the line of strain. A spreader built with these dimensions is sufficiently large for an aerial 300 ft. in length.—E. R. THOMAS.

Position of Wireless Waves Passing Over Land

WHEN radio waves travel along the surface of the sea, or of any other good conductor, their fronts stand up nearly vertically. When they pass across stretches of poorly-conducting earth, however, the tops tend to gain and the whole wave-front tips forward in the direction of motion. Resulting currents in the surface of the earth cause resistance losses, and the waves rapidly become weaker. This is why it is more difficult to send wireless signals over ground than over salt water.

Cloudy Days Best for Wireless Wave Signals


MEASUREMENTS made at the University of North Dakota showed that on the night following a cloudy day signals were received much more clearly than on nights following days of bright sunlight. It appeared that the cloudiness was most effective when it covered the territory lying between the sending and receiving stations.

Improving the Tone of a Test Buzzer Used on Wireless Detector

THE tone of a buzzer used in finding a sensitive spot on the crystal detector can be made high-pitched by inserting a piece of paper, folded four times, between the contact spring and the bar next to the magnet. Also insert a folded piece between the cone of the first coil and the bar.

Simple Construction of a Rotary-Gap Disk

IN the accompanying illustration is shown a new type of rotary-gap disk which will give unusually good results. It is very easy to construct. First procure a piece of $\frac{1}{8}$ -in. sheet fiber and cut out a disk 9 in. in diameter. With a 4-in. radius draw a circle on this and divide it off into 8 equal

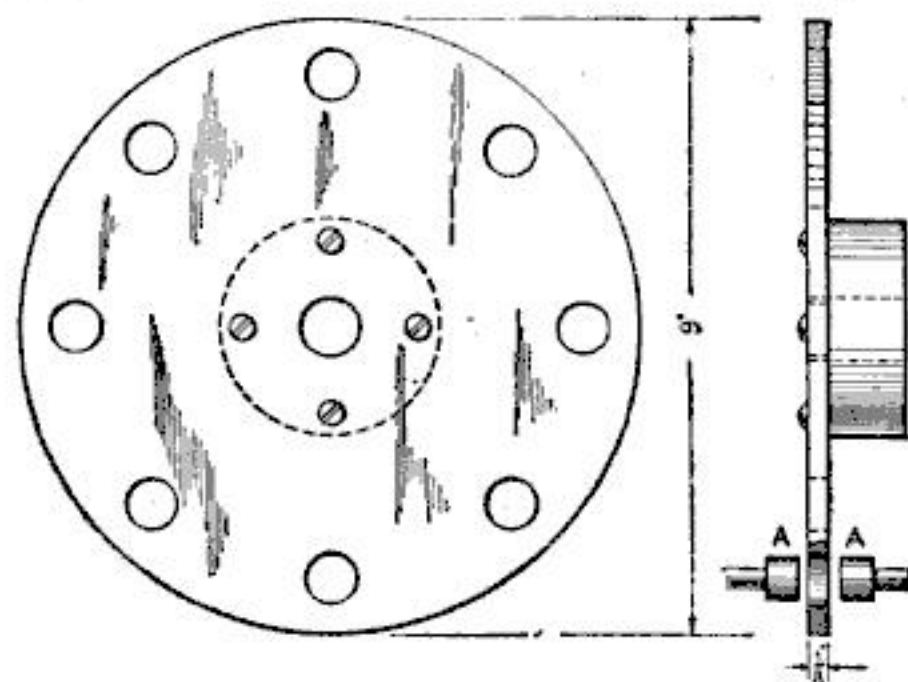

Holes in a fiber disk to allow the spark to jump between the electrodes as it turns

parts. Drill holes on these marks slightly larger than the gap-electrodes and drill a hole in the center for the shaft. Mount the disk on a motor in the usual way with a set-screw or clamp, and mount a stationary gap as shown at A. Every time a hole is passed, the gap is permitted to spark. More holes can be added if desired, depending on the speed of the motor.

The Construction of a Magnetic Break Key

With it the lightest kind of a Morse key may be used for sending

By T. Lambert

THE average experimenter's "break key" consists of a number of springs, contacts, etc., which are attached to his regular transmitting key in a clumsy manner. To send clearly a code with key contacts $\frac{1}{4}$ in. apart is next to impossible. With the relay-key described herein it is possible to use the lightest kind of a Morse key for sending, since all the clumsy contacts of the breaks are on the heavier magnetic key. Further, no heavy current is handled by the small key and thereby arcing and sticking are eliminated.

A key as described has been in use in my amateur station for some time and has never given any trouble in holding the detector-adjustment, even with the most sensitive minerals, such as galena and cerusite.

The completed instrument is shown in the illustration. Four spring-contacts are employed, besides the alternating current break. The pair at the right disconnect the detector from the receiver when depressed. One of the contacts at the left shorts the telephones while the other one grounds the entire receiver while sending. It will be seen from diagram *B* that the receiving-tuner's primary is placed in series in the ground-lead of the oscillation-transformer.


When sending, the high voltage currents from the transmitter pass directly across

to the ground through the last mentioned contacts on the key. Some stray current may find its way into the receiver but will not damage either telephones or detector because they are amply protected by the other contacts. There is absolutely no danger of shock as all receiving apparatus is on the grounded side of the oscillation-transformer.

The magnet cores are shown at *C*. A good grade of soft iron should be used, as it is less liable to hold residual magnetism. The cores are threaded to fit the end pieces snugly. The windings can be made directly on the cores after a layer of tape is placed, but it is preferable for ease in winding to turn out two bobbins on a lathe, as shown at *D*, and wind on them. Use number 20 D. C. C. wire and wind on eight or ten layers, placing a heavy sheet of paper between the layers. On the final layer glue a thin piece of ebonite to give it a finished appearance.


The brass crosspiece which holds the screw for adjustment of the tension of the spring *E* (page 159) is shown at *F*. The piece *G* is of hard rubber and supports the stationary primary contact as well as the yoke *H* for regulating the play of

the key. It is attached to the top of the magnets with two machine-screws. The armature support is cut from $\frac{1}{4}$ -in. brass. The contact and crosspiece holes are best located after it has been set up on its pivot *J*. This is also of brass, cut to the

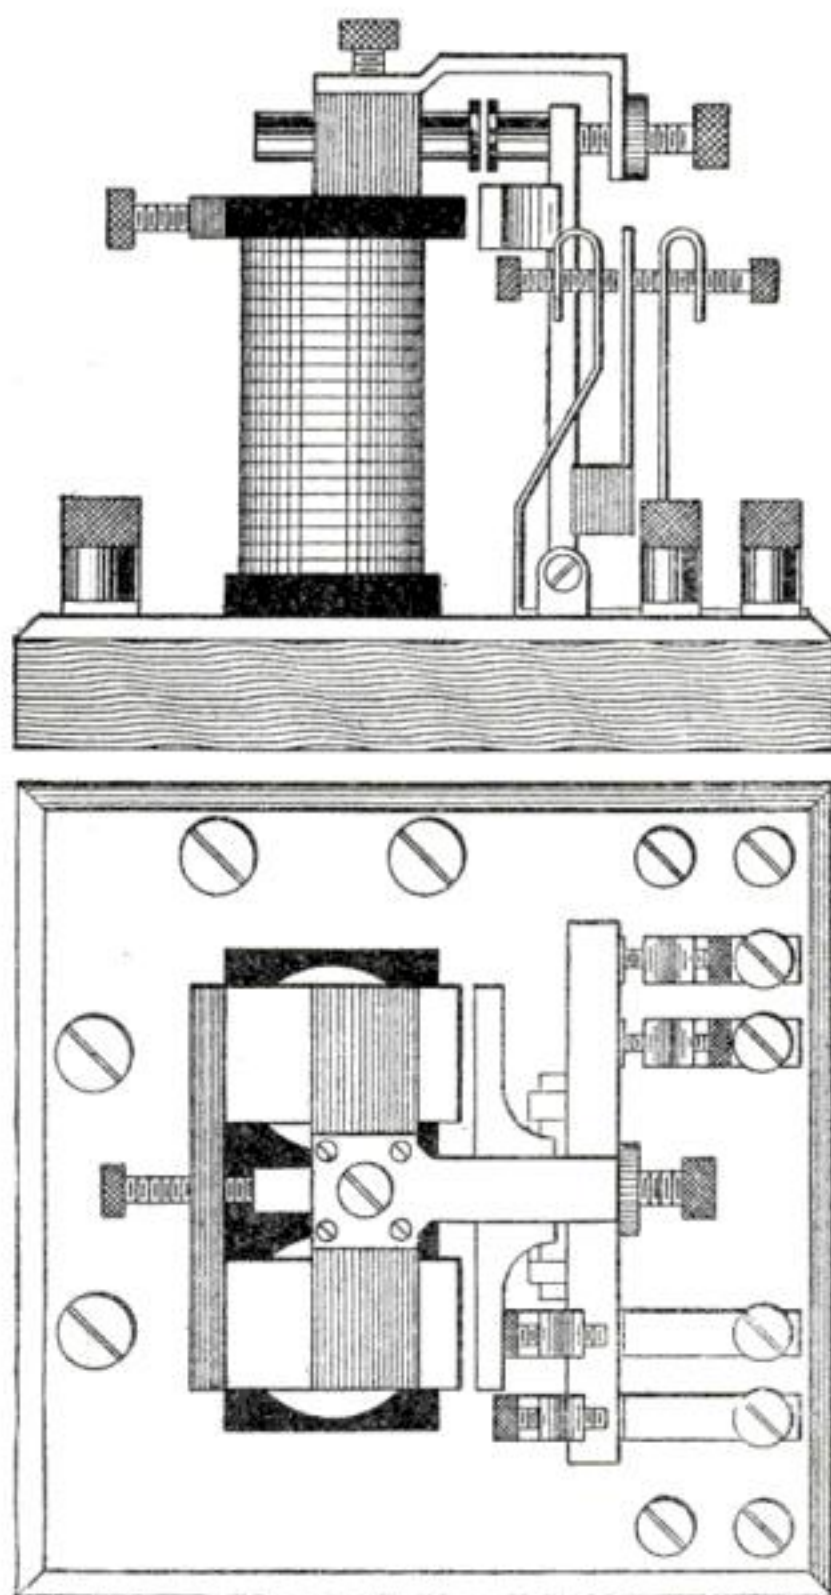

Four contact springs besides the A. C. break are employed in this magnetic break key

dimensions shown. The easiest way to construct the pivot is to place the armature in the position it will occupy when completed, and then drill a 1/16-in. hole through both pieces and insert a piece of steel rod of that size. The armature itself is shown at *K*. This is of soft

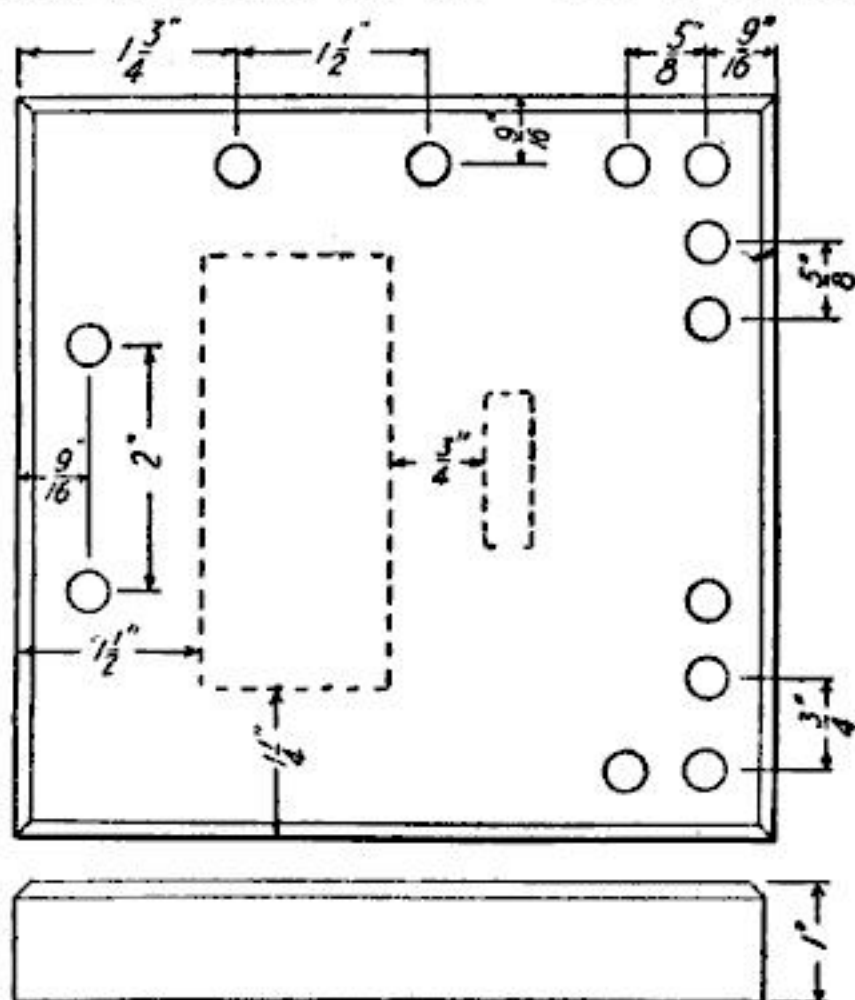

A—Detail of the break key base giving dimensions for the locations of the parts

iron and can be attached to the armature with one machine-screw.

For supporting the contact-springs a hard rubber crosspiece, *L*, is employed. This is attached to the armature by a machine-screw. Holes are drilled in it to receive the machine-screws holding the phosphor-bronze springs, *M*, in place. A brass yoke is attached to the hard rubber crosspiece *G*, and holds the setscrew for adjusting the play of the armature. In the large end is drilled a hole of such size as to permit a 14/20 setscrew to pass without touching. Four smaller holes in the corners are used for attaching to the rubber piece.


A brass strip is bent to the shapes shown at *N* and supports the contact-screws. These are ordinary 8/32 brass screws. The loop at the upper end of these supports provides an automatic lock nut to prevent the screws from turning when once set.

For the contact-pieces 5/16 in. brass rods with dimes soldered on the ends are used. These are shown at *O*. If one is willing to go to the expense he can have silver plugs made by a jeweler, but in actual practise it will be found that dimes,

when filed smooth on the faces, will carry all the current employed in most stations. The shorter contact has a threaded stud which screws into the armature. The other one is made adjustable by means of a setscrew in the hard rubber crosspiece. A good way to get the dimes together in the same plane is to set the brass shanks in their proper places and clamp the two dimes between them and then solder. On separating the pieces it will be found that they are in perfect alinement and meet exactly when the key is in use.

The various parts are assembled on a wooden base of the dimensions shown at *A*. Heavy binding-posts are mounted as shown in the drawing of the completed instrument and the connections from the moving springs brought down to them by flexible cord. The magnet-leads are brought to the posts in the rear and the main break-contacts to the side posts. The dotted lines are the locations of the magnets and pivot. For setscrews, fillister head brass machine-screws, about 8/32 size may be used.

The connection with the other apparatus is shown in *B*. The detector in this illustration is shown at *D* and should be placed as close to the key as possible, since long leads have induced in them currents that are liable to throw the crystal out of adjustment and make the break-in useless. A battery of about ten volts should be used

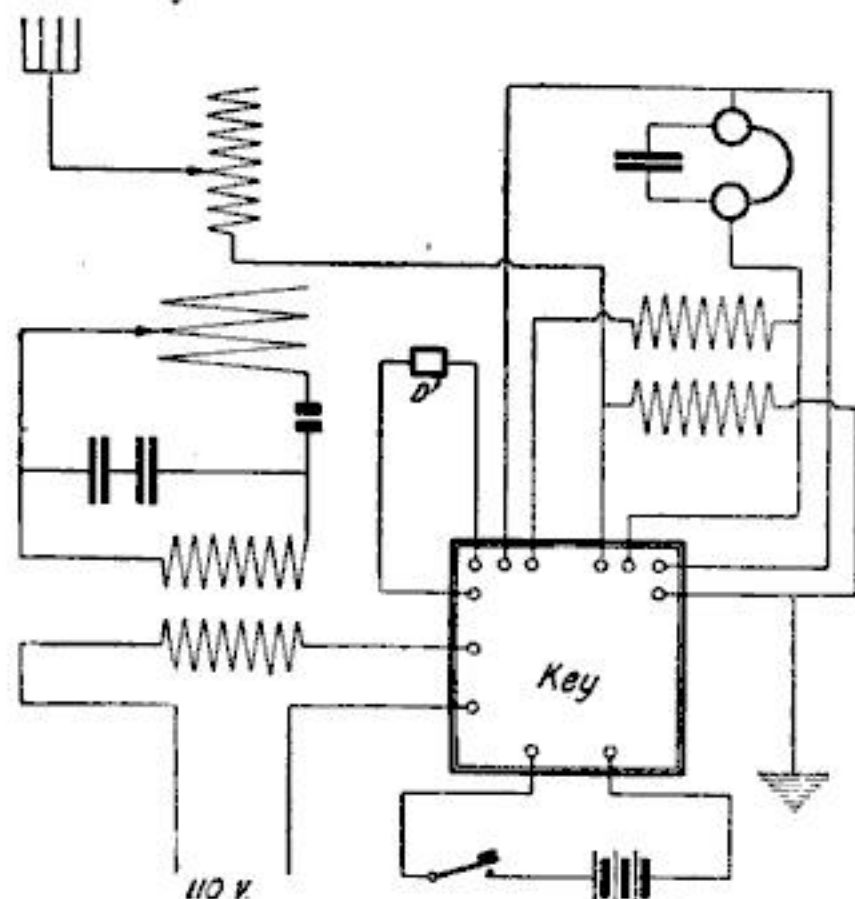


B—The receiving tuner's primary is placed in series in the oscillation-transformer

on the magnets. Less would be sufficient but would not give the snappy action so much desired.

The contacts should be gone over frequently with very fine sandpaper, as a poor contact is liable to cut down the efficiency of the receiver to no small extent. The left contact-screws are adjusted to touch the springs when the key is depressed while the right hand pair are to make

Loading Coil in Series with the Secondary

WHEN a low resistance detector is used, it is a good plan to tune the secondary circuit by using a comparatively small inductance coil and a large con-

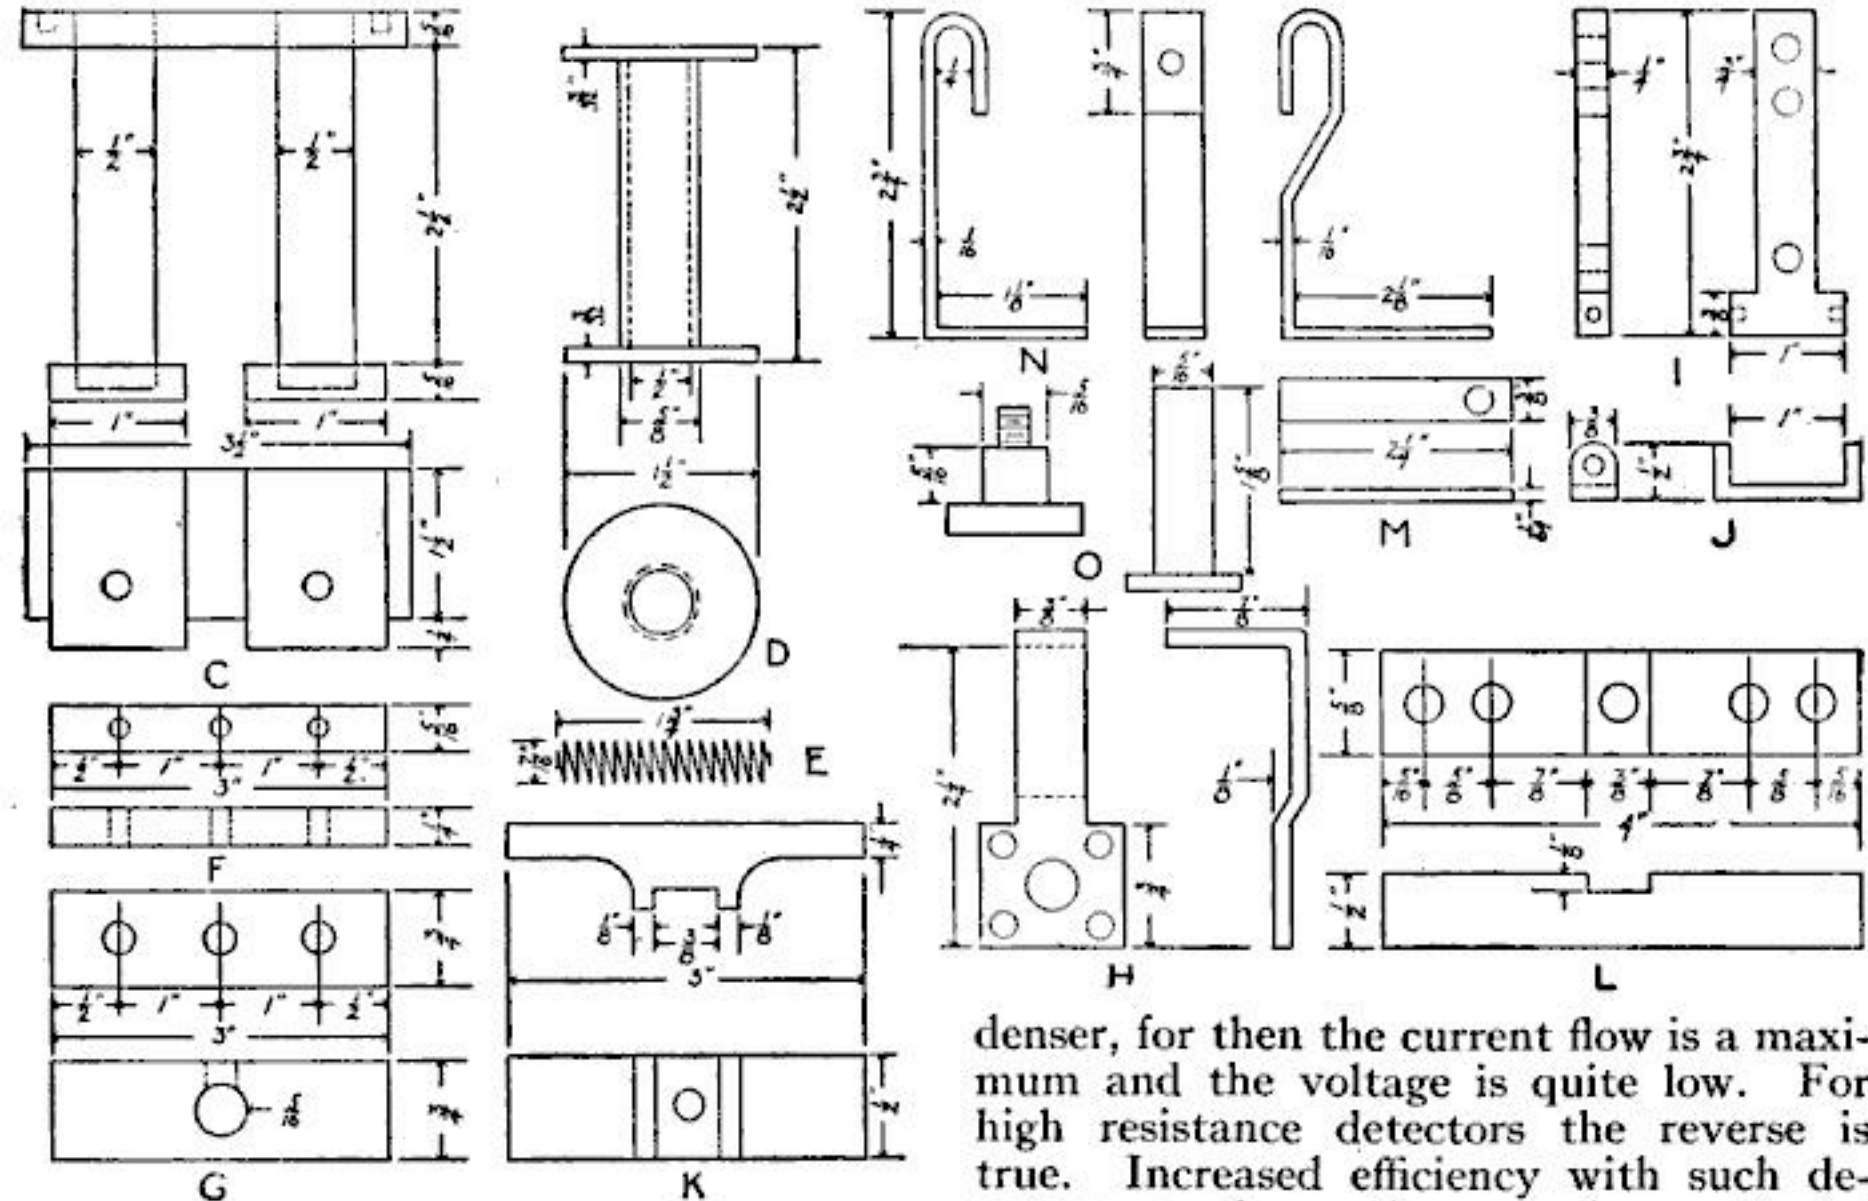

Detail of the parts that enter into the construction of the magnetic break key

contact when the armature has come back, and to break the contact when it has been drawn to the magnets.

A little experience will make it possible to get an adjustment where there is no sparking at the contacts and no noise in the telephones.

I doubt if anyone, after using a key such as described, will ever willingly go back to the old clumsy aerial switch.

An Emergency Form for Winding Motor Fields

RECENTLY my rotary spark-gap, 110-volt A. C. motor burned out one of its fields. As I was in a hurry to use it I tried a quick method of rewinding the coil by driving a series of nails into a wood face-plate on a small lathe and winding the wire on them. After winding the coil I bent the nails together so that the coil could be slipped off.—EDWARD MCCLURE.


denser, for then the current flow is a maximum and the voltage is quite low. For high resistance detectors the reverse is true. Increased efficiency with such detectors as the audion can frequently be secured by inserting a loading coil in series with the secondary, and correspondingly reducing the capacity of the tuning condenser. This applies the highest possible voltage to the grid.

Effect of the Moon and Season on Wireless in the Tropics

WHILE stationed in the tropics for several years as a wireless operator, I observed that in the periods of a full moon, or thereabouts, the atmospheric interferences are slight and the ether seems to carry the wireless waves with less absorption than when the moon is in its quarter periods, or thereabouts. With a full moon, and using the same receiving set, I could receive from stations that were about 200 miles farther away than those which could be heard when the moon was in its first or last quarter. Also, during the winter months from about the first of December to April, there seemed to be better atmospheric conditions.—J. M. COHEN.

Magnetic Brake for a Wireless Rotary Gap

THE radio experimenter who uses a rotary spark gap in connection with his sending apparatus is usually troubled with interference in his receiving set caused

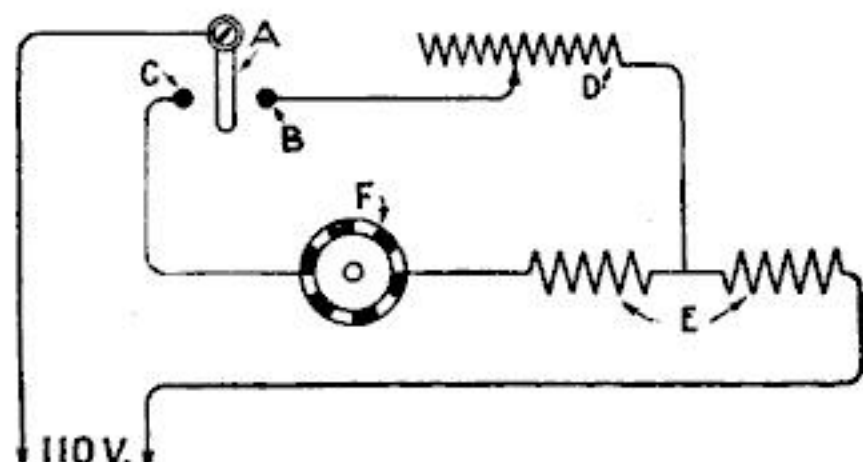

Eliminating the interference of inductive noises from the motor of a rotary gap

by the inductive noises from the motor of the rotary gap, which if well balanced takes some time to come to a full stop.

In the drawing, *A* represents the blade of a single pole, double throw, switch. The figures *B* and *C* are the two jaws of the switch. The figure *D* represents a rheostat by means of which the length of time necessary for the motor to come to a full stop may be regulated. At *E* and *F* are the fields and armature of a series-wound motor.

The action is as follows: To start the motor, throw the blade *A* to contact *C*. When through sending, throw blade to contact *B*, which causes the current from the line to flow to one field through the rheostat *D*, and results in stopping the motor in two to three seconds. After the motor has stopped, disengage the switch blade from jaw *B*, otherwise a waste of current will result.—PAUL J. HOFFMAN.

Adjusting the Detector of a Receiving Set

WHEN the crystal or other detector of a wireless telegraph receiver is adjusted by the use of an ordinary buzzer set up near the instruments, it is often noted that the point of contact which gave loudest response to the buzzer is not that which is most sensitive for receiving signals from long distances. The most sensitive spots sometimes do not give loud sounds when the local buzzer is operated.

This has been noted by many experimenters who have electrolytic and crystal detectors in use side by side; generally the crystal will give the loudest signal when the

buzzer is worked, but the electrolytic will prove better for receiving from stations far away. This is because the character of the test impulses produced by the ordinary buzzer is quite different from the radio frequency-currents set up in the receiving aerial by the distant station.

In a patent (No. 1,176,925) issued during 1916 to G. W. Pickard, there is shown a method of avoiding this difficulty. As indicated in the drawing here reproduced, a buzzer having armature *A*, contact *B* and magnet *C* is connected in series with battery *D* and test key *E*. Across the vibrating contact is shunted a high-frequency oscillating circuit comprising the condenser *F* and the inductance *G*. This last named element is coupled variably to the secondary *H* of the receiving oscillation-transformer, which has the usual tuning condenser, detector, blocking condenser, telephones and potentiometer arranged as shown. The shunt oscillation circuit *F*, *G*, is adjusted to produce feebly damped groups of radio frequency-current corresponding to the wavelength most used at the receiver.

When the buzzer is put into operation by pressing the key *E*, there are generated in the transformer secondary radio frequency-currents corresponding to those received in actual radio telegraphic practice. The groups produce tone signals, of the buzzer interruption-frequency, in the telephones. The loudness of these signals depends upon the coupling between the coil


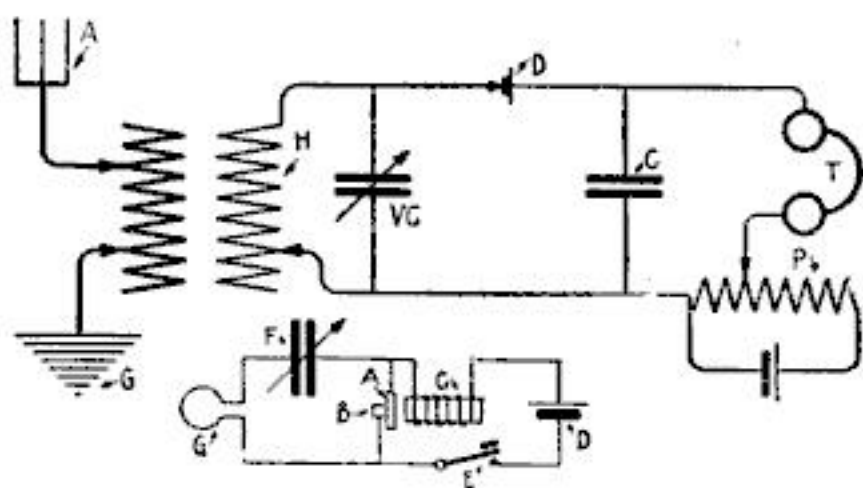


Diagram of connections for buzzer exciter which permits accurate setting of the crystal

G and the secondary, and upon the true sensitiveness of the detector. By selecting the point of crystal which gives loudest responses to such excitation, when the buzzer coupling is set to produce an intensity corresponding to that of the station which it is desired to receive, the operator may have entire confidence that his detector is properly prepared to do the best work.

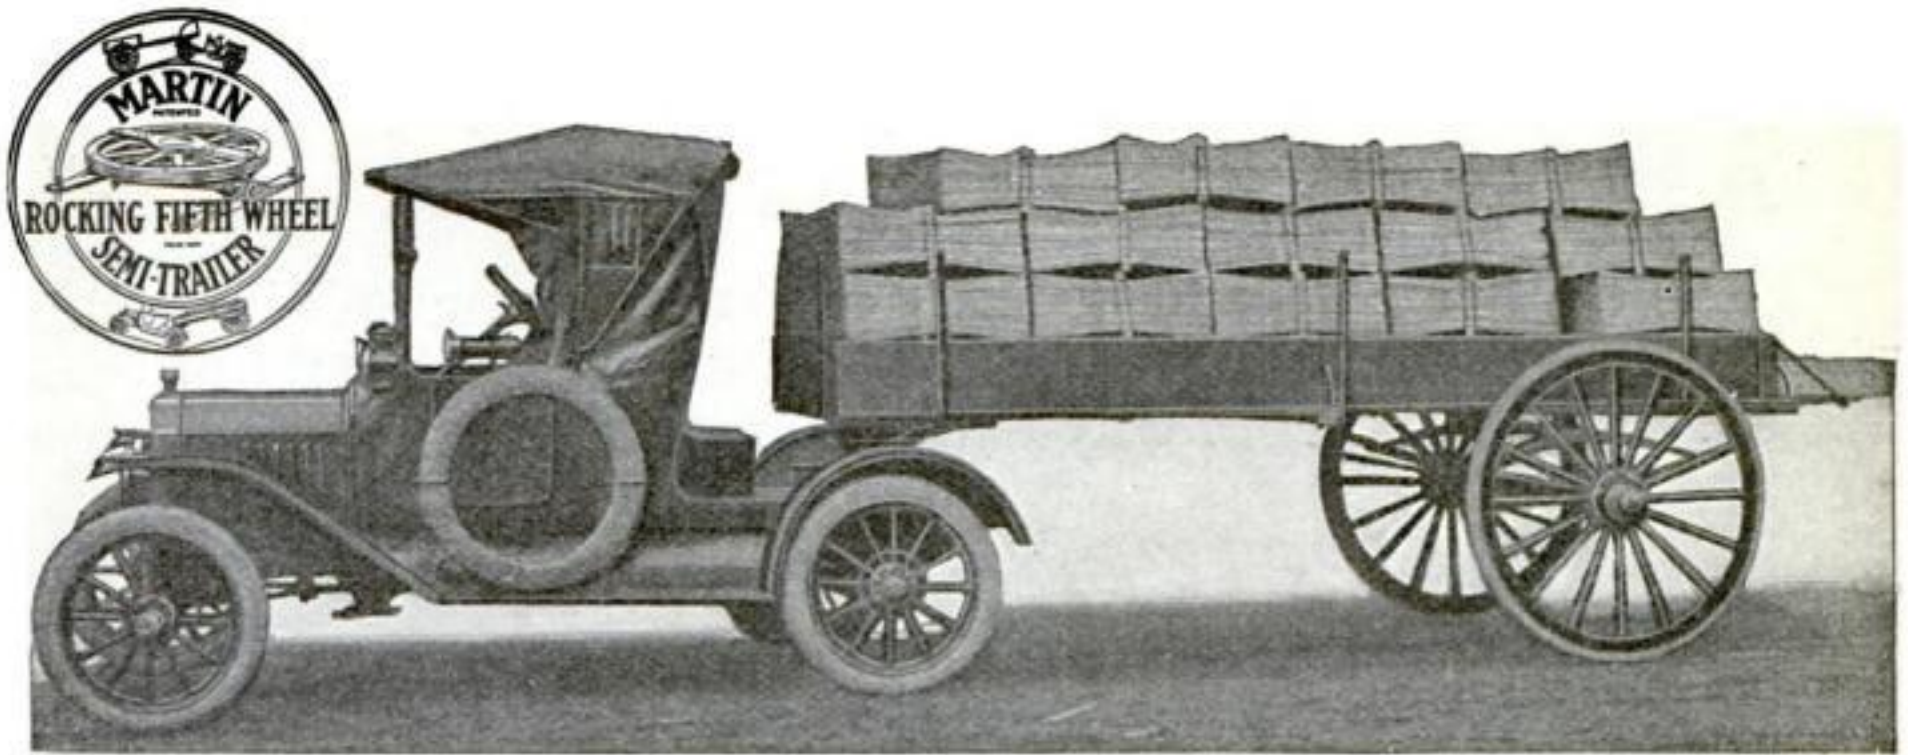

Transform Your Runabout into a One-Ton Truck

DID you ever realize how much more *pulling* than *carrying* power your runabout or truck has? This principle is just as true of a motor vehicle as it is of a locomotive. What comparison is there between what a locomotive could carry and what it draws?

A Martin Semi-Trailer attached to your runabout by means of a Martin Rocking Fifth Wheel makes a 1-ton truck capable of standing up at a speed of 20 miles an hour without any strain on the car's mechanism. Easily handled, backed and turned in narrow quarters.

Martin Semi-Trailer \$225
With Fifth Wheel Complete, 1-Ton Capacity

The Fifth Wheel rocks with a fore and aft motion, making it possible for all six wheels to stay on the ground and for the load to adjust itself to the unevenness of the road, without any side sway nor any danger of tipping.

Other equipment for heavier capacities up to 10 tons.

Write for full particulars

Martin Rocking Fifth Wheel Co.
81 Main St. Springfield, Mass.

A Hot Summer Task Made Easy and Cool

The high cost and scarcity of servants make it imperative that you simplify your laundry work. Do it the easy way—the *cool* way—the economical way—with a

Western Electric Washer and Wringer

When you experience the saving in labor and time, and particularly when you realize that the old way rubs the life out of the fabrics, you will find this machine an investment that will soon pay for itself.

In the Western Electric Washer the clothes are gently *rocked* back and forth through hot suds. Since there is no rubbing, the clothes do not wear or tear. And the cost of electricity for one week's wash is only about three cents! The step-saving electric iron will complete the week's work in quick time and with none of the discomforts of ironing the old way.


*If you are an efficient Home Manager,
get all the Facts about this Labor Saver.*

Just write for Booklet No. 102-AT and we will tell you about our No-Cost Trial Plan.


WESTERN ELECTRIC COMPANY
INCORPORATED

195 Broadway
New York, N. Y.

Houses in all
Principal Cities

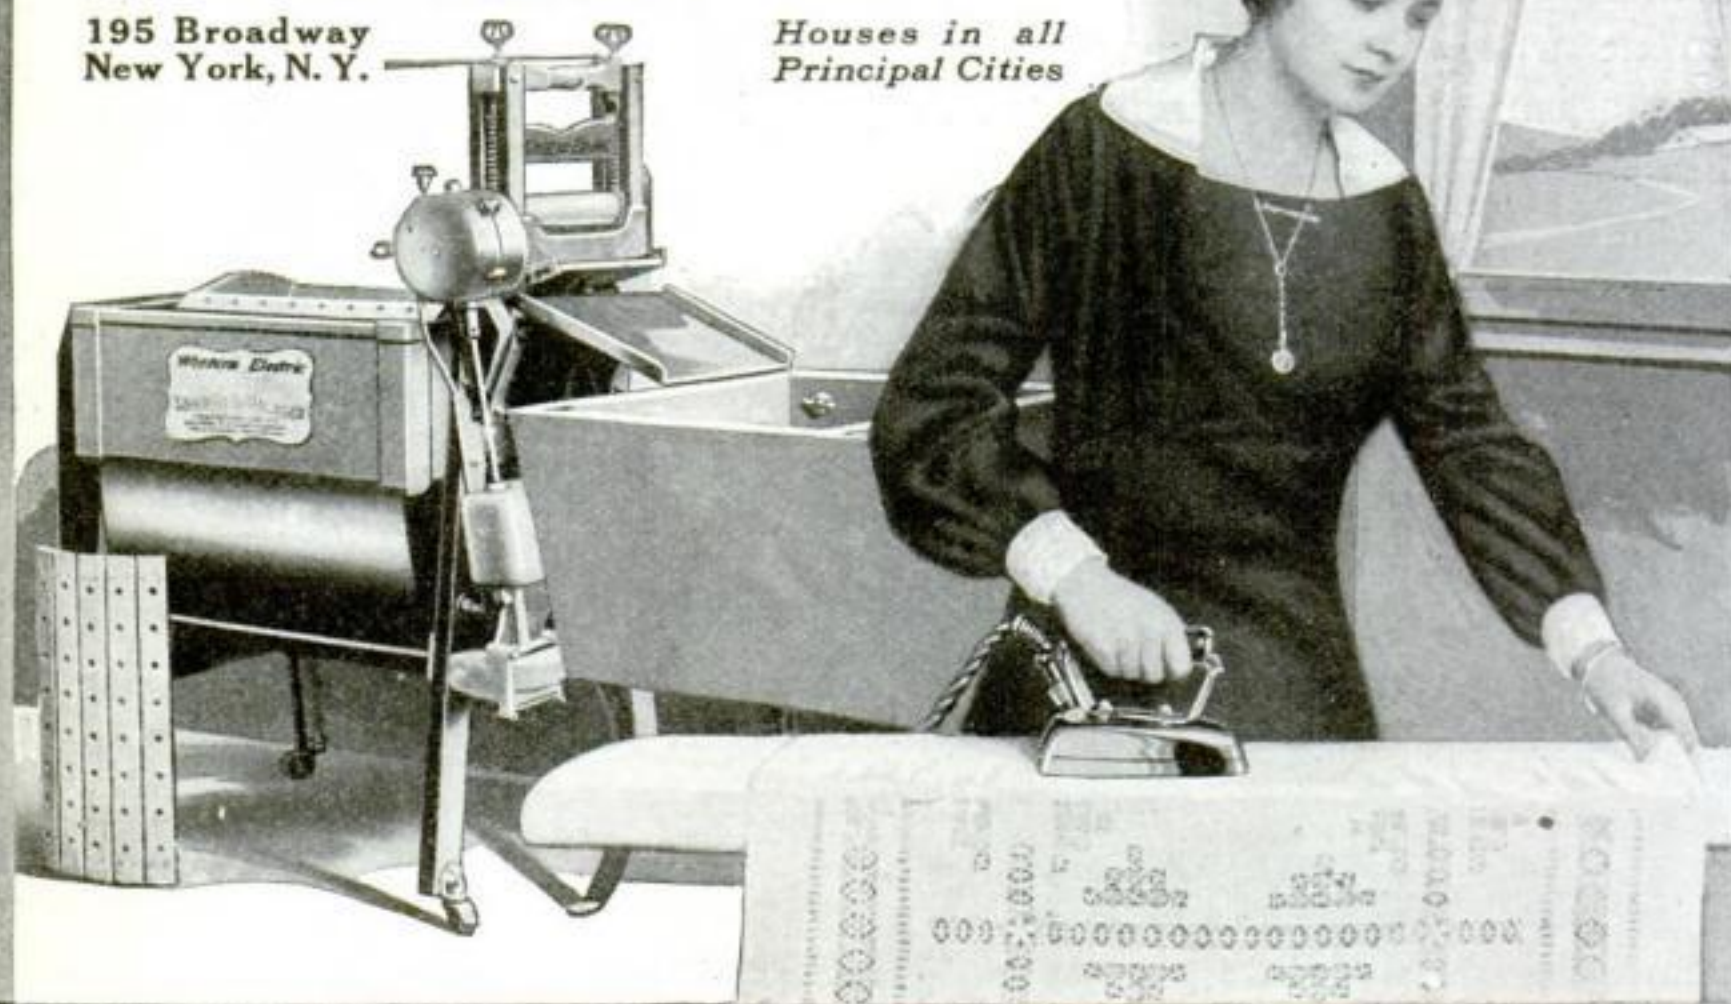

When writing to Advertisers please mention Popular Science Monthly

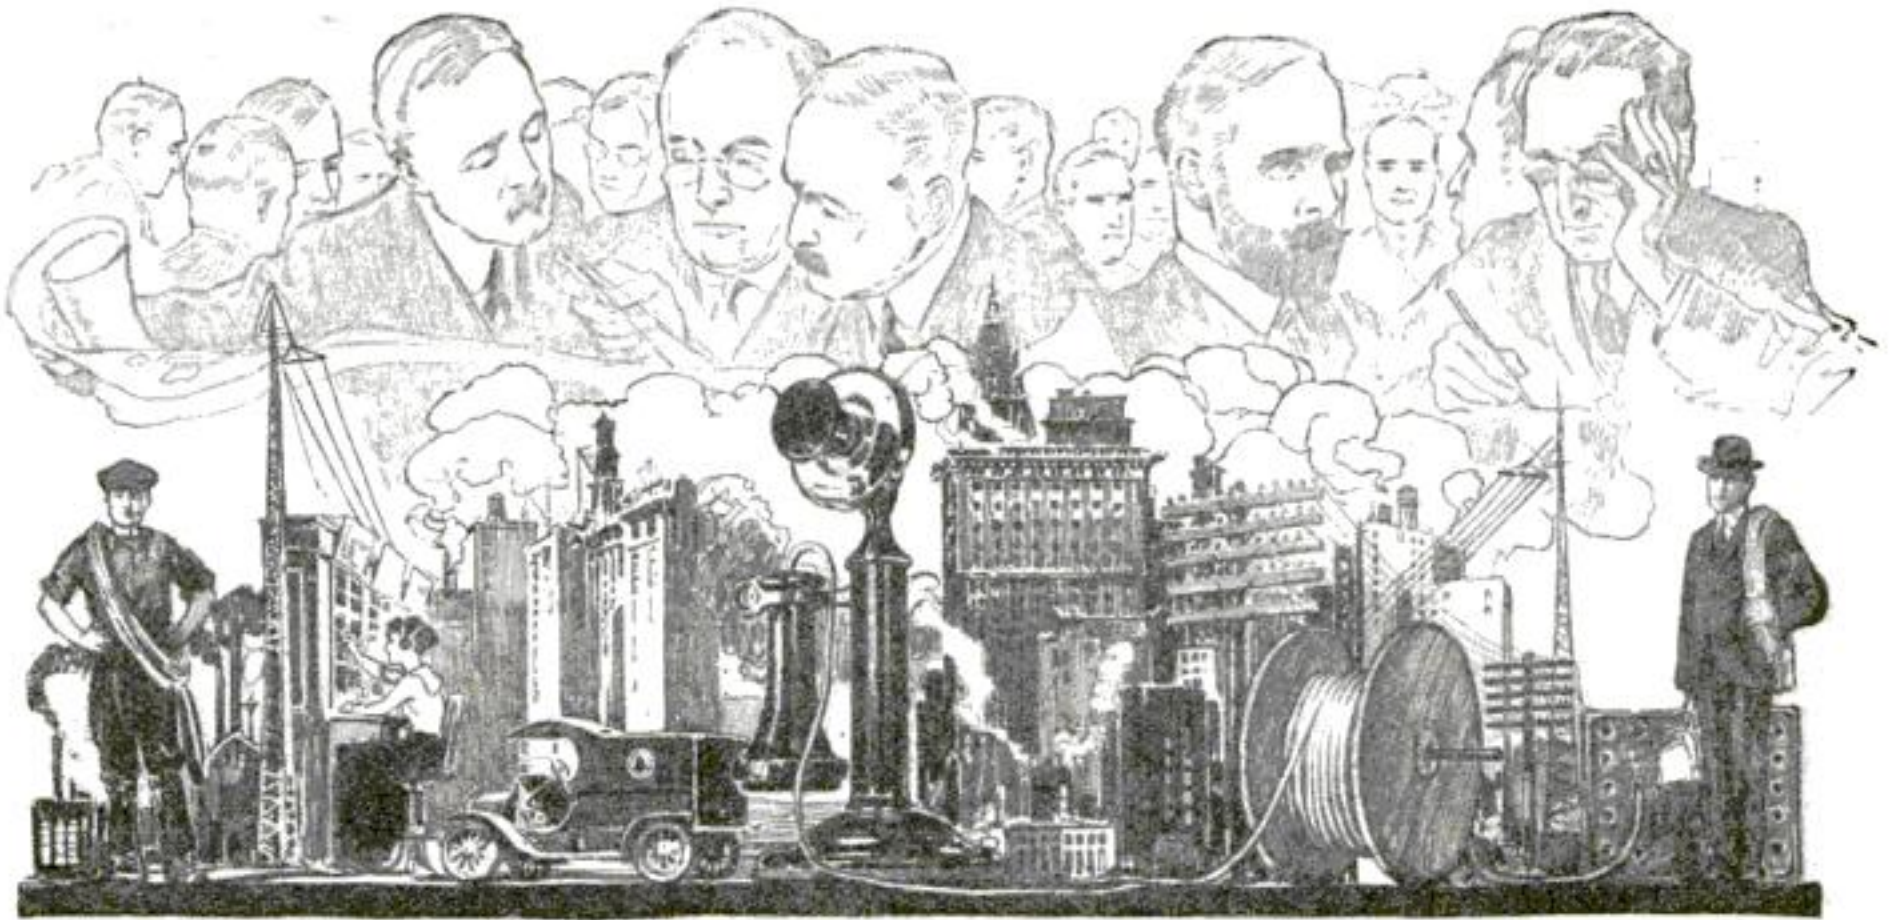

Our Real Reserves

Grim war today drags whole nations in its wake. The organized machinery of the government and the army and the navy in all their power cannot fight unaided. They constitute only in small part the country's real forces.

The bones and sinews of campaigns are supplied by our developed farms and specialized farm machinery; our highly organized steel industry, factories and mines; our facilities of transportation and communication. Railroads, telephone and telegraph systems link together and speed up the many activities of the nation.

But these material resources are not the whole. Back of each industry and activity there must be organizations of human beings, requiring years of patient training and actuated by the spirit of loyal service.

This spirit and training for service in the common welfare constitutes above all else the real strength of a Republic and insures victory. Joining all the country's resources is a fine spirit, a thorough training, a great, sustained concentration of real effort typified by the Bell Telephone System.



AMERICAN TELEPHONE AND TELEGRAPH COMPANY
AND ASSOCIATED COMPANIES

One Policy

One System

Universal Service

When writing to Advertisers please mention Popular Science Monthly

EVEREADY DAYLO



The light that says
"There it is!"

Bring the trouble to light *by bringing the light to the trouble.* It's easy when you have an Eveready DAYLO. Its searching rays let nothing escape them. You can use this portable electric light anywhere, *with perfect safety*—close to the carburettor, near an open gasoline tank, in a closet hung with flimsy garments or in a cellar full of escaping gas. Eveready DAYLO cannot cause fire.

Its abundant light is always at your *instant* command. And because it is fitted with an Eveready TUNGSTEN battery the service is long-lived, economical and always dependable.

Eveready DAYLOS are made in 77 styles, at prices from 75 cents up (in Canada 85 cents up) and sold by the better electrical, sporting goods, hardware, drug and stationery stores everywhere. There's an Eveready DAYLO for your pocket, your traveling bag, your car and your home. Get one today for your greater comfort and safety.

* * *

AMERICAN EVER READY WORKS
 Long Island City of National Carbon Co., Inc. New York
 CANADIAN NATIONAL CARBON CO., Limited,
 Toronto, Ontario

*and saves
 fumbling around
 in darkness*

*when something
 goes wrong with
 your motor at
 night*

*when you mislay
 the pliers or the
 wrench*

*when you've got to
 change a tire
 quickly*

*when you drop the
 key to the garage
 or the stable*

*when a thunder
 storm puts your
 house lights out of
 commission*

*when you must
 find the first-aid
 kit, quick!*

*when a storm
 breaks in the
 middle of the
 night*

*whenever you need
 light—safe, de-
 pendable, effec-
 tive light—that
 cannot blow out,
 set fire or fail, you
 need an Eveready
 DAYLO.*



Don't ask for a "flashlight"—get an Eveready DAYLO



When writing to Advertisers please mention Popular Science Monthly



*American Institutions
—Baseball and B.V.D.*

JUST as Baseball is the great American Game, so B.V.D. is the great American Underwear. It is made to fit the American climate, the American figure and the American idea of personal efficiency through cool comfort.

In our own modernly equipped cotton mills at Lexington, N.C., the fabric from which these Loose-Fitting B.V.D. undergarments are made, is produced in a scientific manner from selected cotton to insure durability in wash and wear.

In our own B.V.D. Factories the garments are skilfully cut, strongly stitched, accurately finished—to fit and be cool and comfortable all day long.

*If it hasn't
this Red
Woven Label*

MADE FOR THE
B.V.D.
BEST RETAIL TRADE

(Trade Mark Reg. U. S. Pat. Off. and Foreign Countries)

B.V.D. Coat Cut Undershirts
and Knee Length Drawers,
50c. the Garment. B.V.D.
Closed Crotch Union Suits
(Pat. U.S.A.) \$1.00 the Suit.

*It isn't
B.V.D.
Underwear*



THE B.V.D. COMPANY, N.Y.

When writing to Advertisers please mention Popular Science Monthly

Give Your Feet a Vacation This Summer

Every day is vacation day for feet incased in stylish, comfortable Keds. They are durable and modish for office wear, smart and dressy for vacation and week-end trips and easy and comfortable for after-hours recreation. Women and children love to wear them around the home, in the park, everywhere.

Keds

mean pleasing comfort for all the family. The new styles are many and varied, but in all there are the same smart, attractive features—tops of soft, flexible canvas, springy rubber soles, high or low rubber heels. Give every member of your family

a pair of Keds. They'll wear longer than any shoe at anything like the price. The reputation of the largest rubber manufacturer in the world is back of every pair of Keds. Ask to see the three leading grades at your dealer's.




United States Rubber Company

New York



When writing to Advertisers please mention Popular Science Monthly

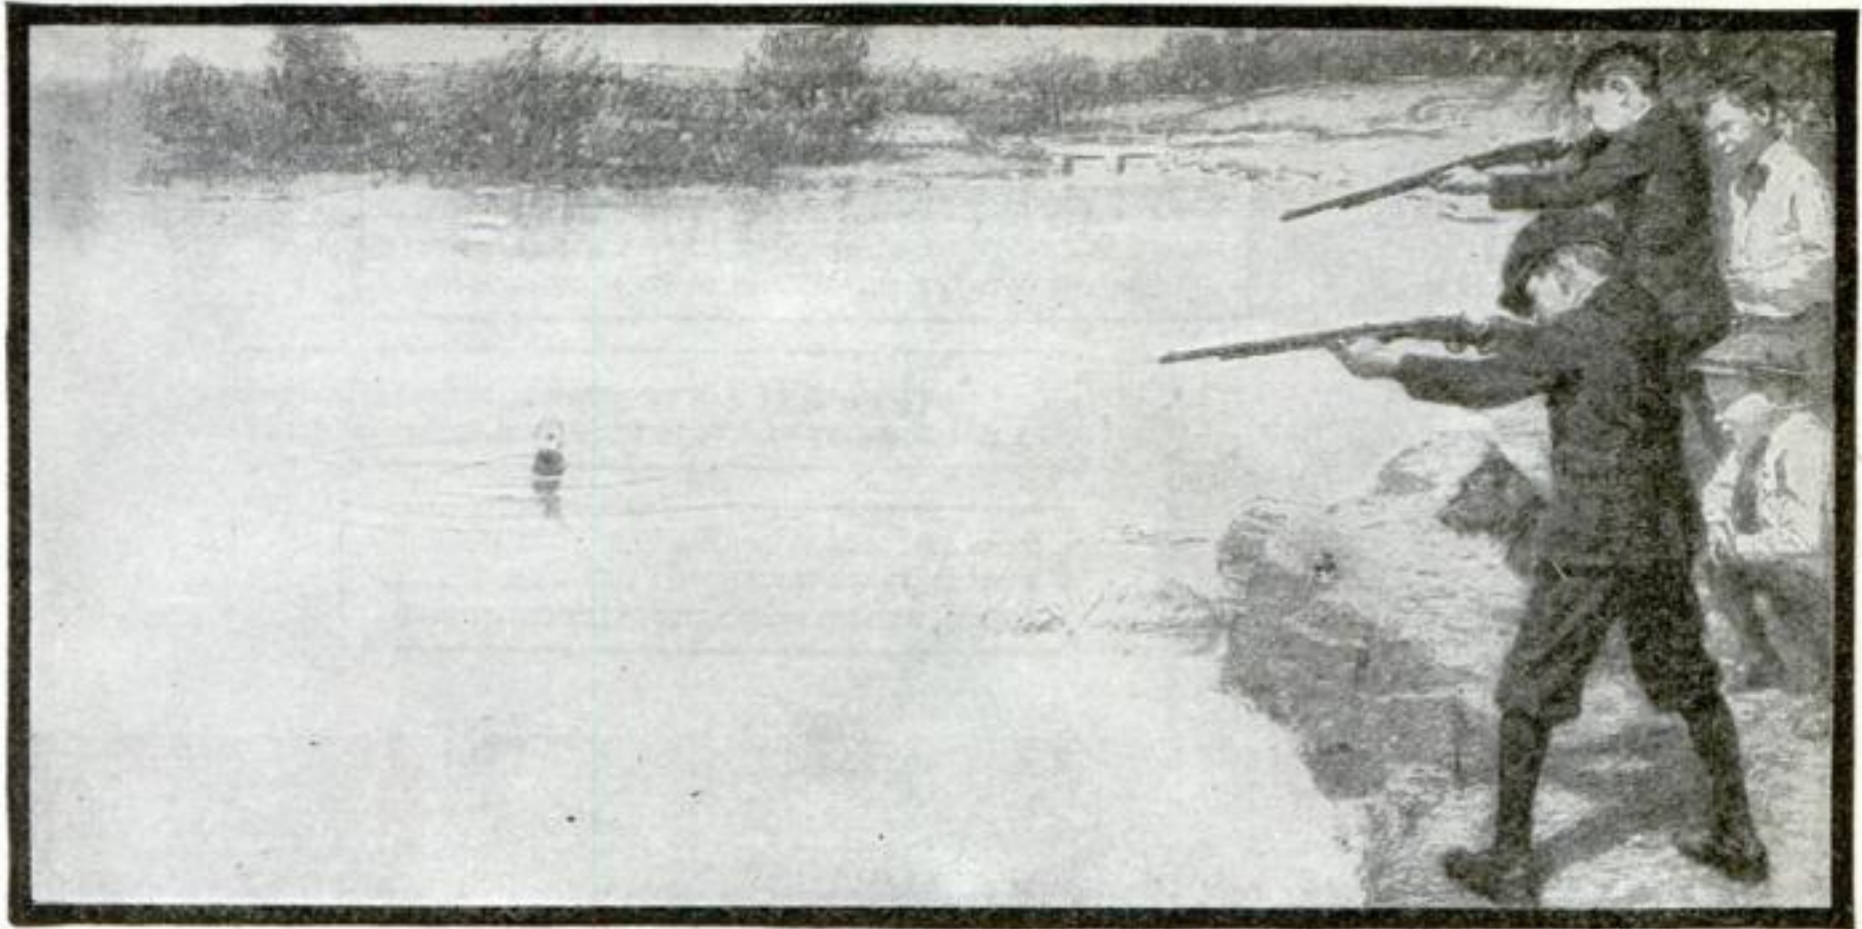

Remember what a Winchester meant to you as a boy—

What would you give to live over again just *one* of those carefree days you spent with a Winchester and your boyhood chums?

How much fun you got out of your gun in those days! Now it's the boy's turn. Will you deny him one of the greatest joys and benefits you had at his age?

A boy's natural interest is going to make him get his hands on a gun sooner or later, so the sooner he learns how to use a gun safely the better.

Your boy will want a Winchester Medal

Our plan of awarding silver and gold medals to boys for skill with a rifle will make your boy form the habit of getting to the top of the heap in anything he does. Girls are also eligible for this contest.

Model 06. Take-down repeating .22 rifle. Shoots 3 sizes of ammunition. 20" round barrel.



Model 02. Hammerless, take-down, single shot .22 rifle. 18" round barrel.

WINCHESTER

World Standard Arms and Ammunition



BOYS AND GIRLS Winchester Medals for Skill with the Rifle

The Gold "Sharpshooter" Medal goes to the boy or girl under 16 who makes the first grade score with a Winchester.

The Silver "Marksman" Medal goes to the boy or girl who makes the second grade score.

Go to your dealer today; he will give you a sample target and booklet explaining the full conditions of the contest. This booklet also tells you how to get the best results from your Winchester. The dealer will also supply you with plenty of targets.

If your dealer cannot supply you, write to the Winchester Repeating Arms Co., Dept. 24, New Haven, Conn.

There is a place near you, either in the open or at a club, where you can shoot. If you do not know where to shoot, write to us and we will tell you where and how you can, or we will help you organize a club.


Your chance to make a pal of your son

The next time he pleads with you for a Winchester, say "Yes." It will make you feel pretty good to see the way his face will brighten up and to hear the whoop of joy.

Winchester rifles have been the standard for over 50 years. More Winchesters are used by experts than all other guns put together. You will be surprised what a good gun you can get for a low price. Your dealer will be glad to show you his stock of Winchesters, or send to us for our catalog. Winchester Repeating Arms Co., Dept. 24, New Haven, Conn.

Model 90. Take-down repeating .22 rifle. 24" octagon barrel. The standard gallery target rifle for 25 years.

Model 04. Hammerless, take-down, single shot .22 rifle. 21" round barrel.

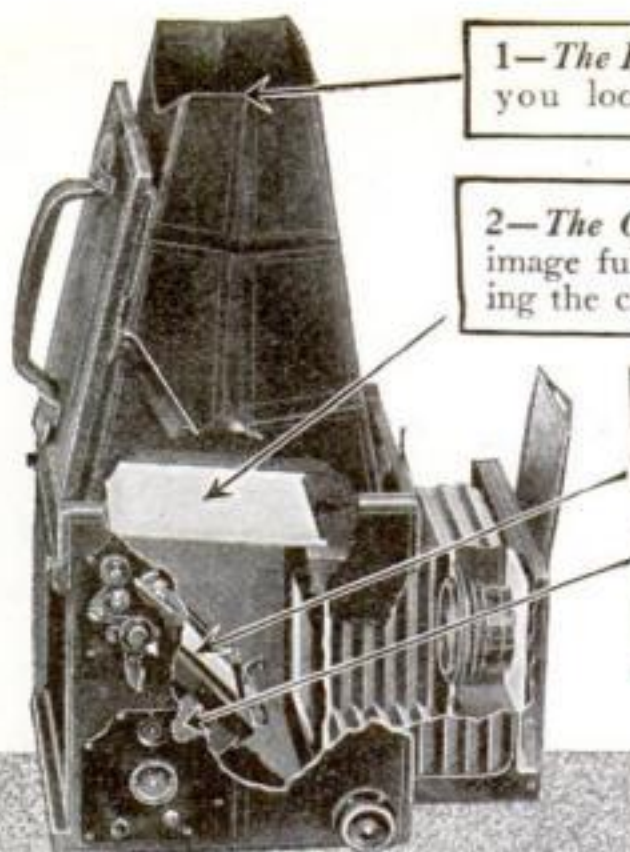

1—The *Focusing Hood* into which you look to see the picture.

2—The *Ground Glass Screen* where you watch the image full negative-size—focusing it exactly, adjusting the composition up to the instant of exposure.

3—The *Swinging Mirror* which reflects image in full negative-size onto the ground glass screen.

4—The *Focal Plane Shutter* gives not only a wide range of speeds but also **FULL**-timed, uniform exposure of the entire plate.

GRAFLEX Camera



HOW the GRAFLEX shows the object *actual* negative-size, *in focus* up to the instant you snap the shutter—how it makes the *most* of lens-power and exposure-time—and why you can be certain of **GOOD** pictures even on a rainy day is told on pages 3 to 5 of the 64-page GRAFLEX Catalog. Get a copy from us or your dealer.

**FOLMER & SCHWING
DEPARTMENT**

Eastman Kodak Company
Rochester, N. Y.



When writing to Advertisers please mention Popular Science Monthly

The King of Sports

Invigorating—spontaneous—and interesting to the last degree—is trapshooting. It is the sport of Kings and the king of sports—replete with excitement and exhilaration.

Winging the wily clay pigeon has become quite *de rigueur* in smart country places and has proven a welcome boon to both host and hostess in the entertainment of house parties.

*The "Sport Alluring" Booklet
No. 530 on request.*

E. I. Du Pont de Nemours & Co.,
Wilmington, Delaware



When writing to Advertisers please mention Popular Science Monthly



Where a slip means ruin!

Big hoists that lift a hundred-ton load with ease and precision are controlled by brakes that must not slip, crush or burn. The motorist, too, knows that a safe brake band is the best protection to his life and his car. And both the giant hoist and the motor-car have brakes lined with

JOHNS-MANVILLE

Asbestos

Resistant to heat,



water, wear and weather

TO MANY FIELDS, in many forms, this wonderful substance brings safety—roofings that resist fire and time, and wrappings for electric wires—theatre curtains and flame-proof clothing. Fashioned from natural

COVERS
THE CONTINENT

rock, J-M Asbestos today serves man in countless homes and industries. The list of J-M Products below is but an outline, but it tells the story. Asbestos in useful form—this is Johns-Manville's achievement.

H. W. JOHNS-MANVILLE COMPANY

New York City

10 Factories—Branches in 55 Large Cities

Asbestos Fabrics, Packings, Roofings, Shingles, Brake Linings, Building Materials, Electrical Devices, Heat Insulations, Refractory Cements, Waterproofing.

The Motor Car



The Farm



The Home



Industry



Power Plants



Transportation



Roofings



**When you think of Asbestos you think of
Johns-Manville**

When writing to Advertisers please mention Popular Science Monthly


Oxy-Acetylene Welding and Cutting

**Makes steel barrels stronger, neater—
at lower cost**

THE steel barrel is just one of the thousands of manufactured metal products which are made stronger, neater, better and at less cost by using oxy-acetylene welding in place of rivets, bolts and threaded joints.

In thousands of American factories—in the manufacture of automobiles, farm implements, engines, metal furniture, delicate tools and instruments—this process is used in routine production. To secure its economies and advantages many manufacturers have even made sweeping changes in the design of their products.

If you use bolts, rivets or threaded joints in the construction of any product, let us show you what welding can accomplish. This process is saving millions of dollars for railroads, factories, foundries, machine shops, garages, in quick repairs to broken machinery parts, tools, and defective castings.

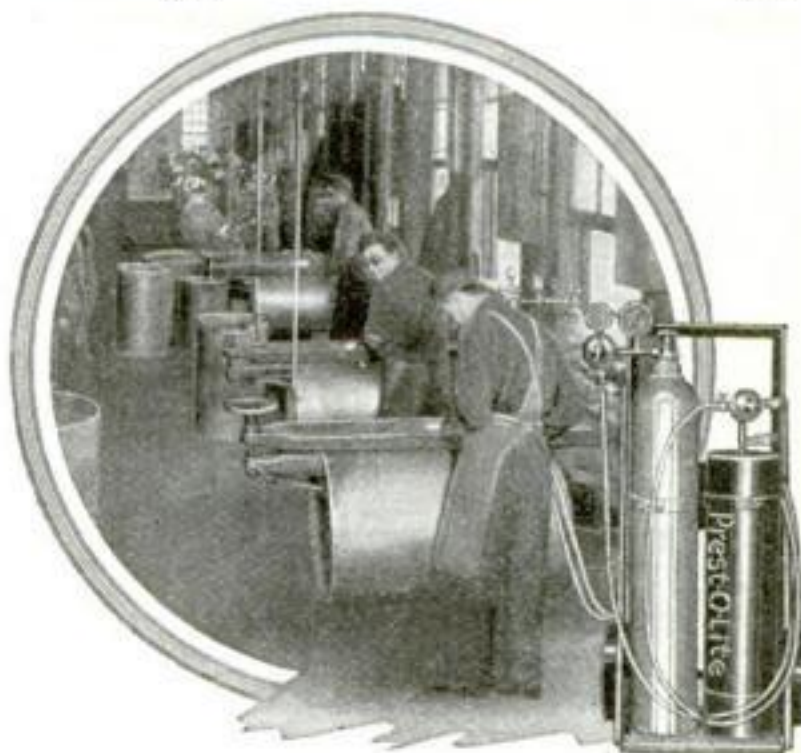

Above illustration shows part of large department devoted to welding seams of steel barrels by the Prest-O-Lite Process.

Prest-O-Lite PROCESS

Employs both gases (acetylene and oxygen) in portable cylinders. Prest-O-Lite Dissolved Acetylene (ready-made carbide gas) is backed by Prest-O-Lite Service, which insures prompt exchange of full cylinders for empty ones. Provides dry, purified gas, insuring better welds, quicker work, and lower cost, and also avoids the large initial outlay and heavy depreciation incurred in making crude acetylene in a carbide generator.

Necessary equipment is not expensive. We furnish high-grade welding apparatus for \$75 (Canada \$100); acetylene service at additional cost. Adaptable for oxy-acetylene cutting by the addition of special cutting blow-pipe. Thorough instructions are furnished free to every user of Prest-O-Lite Dissolved Acetylene—any average workman who understands metals can learn the process quickly and easily.

Send today for illustrated literature and data, showing specific instances of savings made by welding—savings that may be made for your shop or factory.

Extra profits for repair shops and garages


Repair shops and service garages everywhere are finding oxy-acetylene welding a ready money-maker. Broken or worn parts are made good as new—easily, quickly and at small cost. This kind of service and the savings made on repairs attract many new customers. At moderate charges your profits are too large to overlook. Necessary equipment is not expensive. Write us today for full details.

The Prest-O-Lite Co., Inc. U. S. Main Office & Factory: 830 Speedway, Indianapolis
Canadian General Office, Dept. A.3. Toronto, Ontario

59 Branches and Charging Plants in Principal Industrial Centers



World's Largest Makers of Dissolved Acetylene

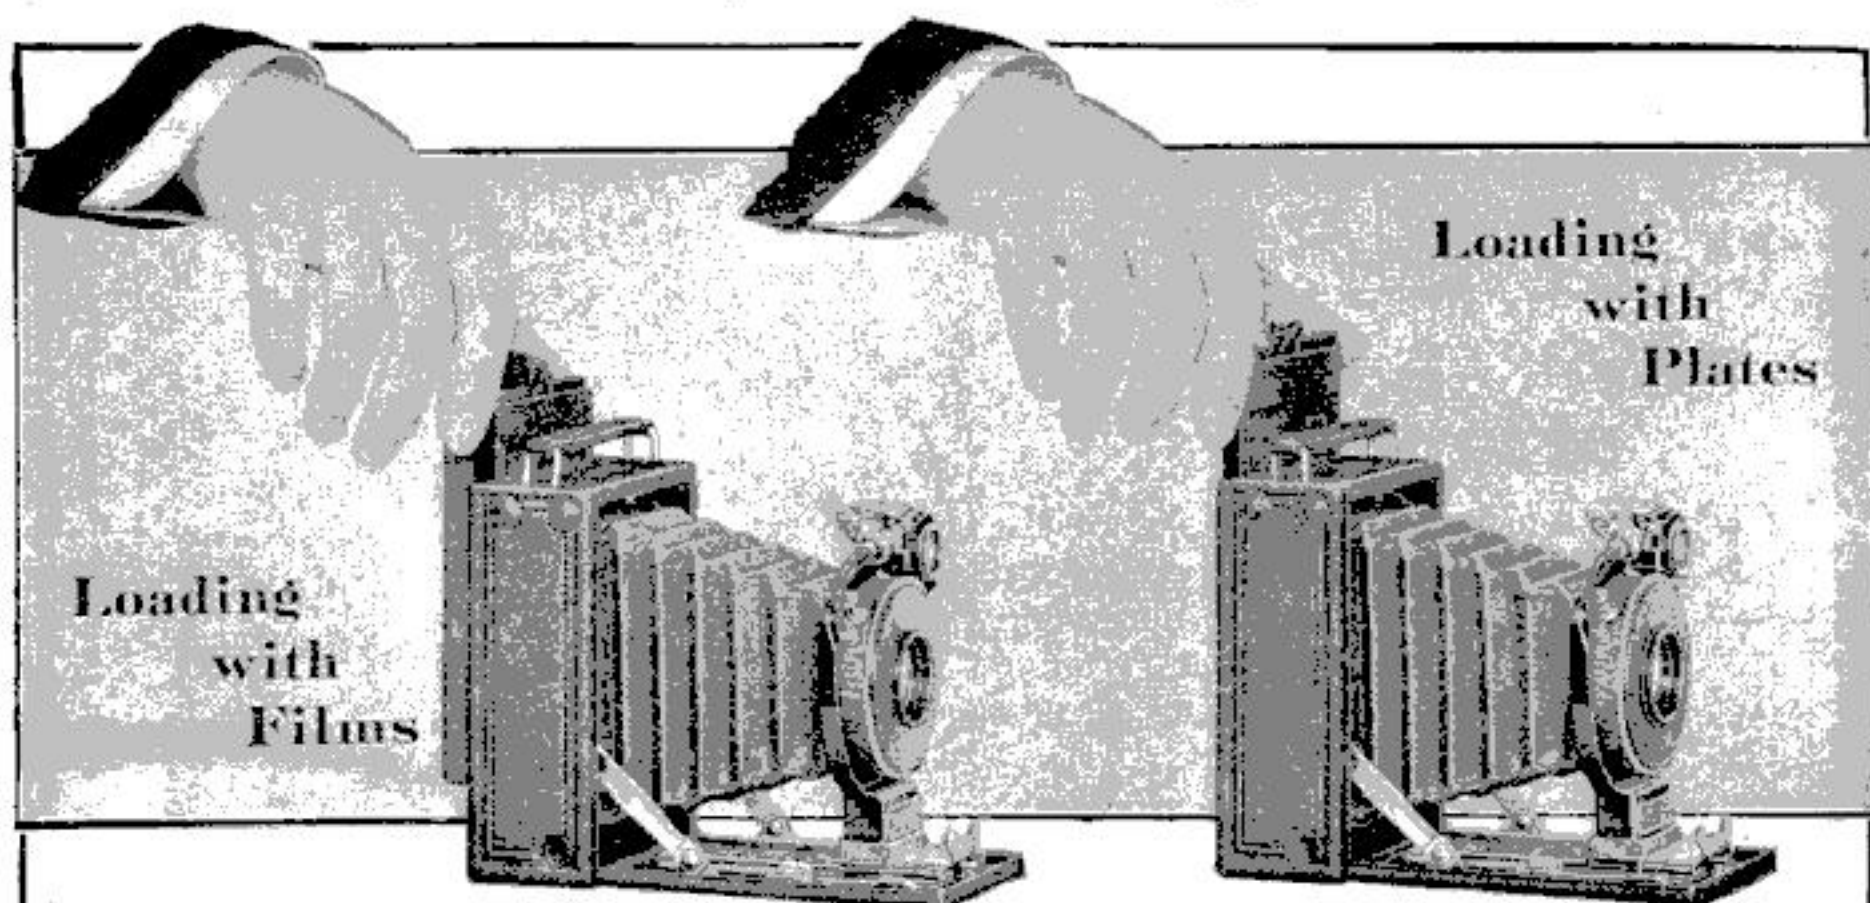

Really two cameras in one

PREMO No. 12

And it is such a small, such a thoroughly capable one, too. It is at once a plate or a daylight loading film camera. One method may be employed as easily as the other. It's just as the user chooses.

Focusing and composing may be done by use of finder and focusing scale, or at any time, for absolute accuracy the ground glass screen is easily used with either film or plates.

The camera makes $2\frac{1}{4} \times 3\frac{1}{4}$ pictures, it measures $1\frac{5}{8} \times 3\frac{1}{4} \times 4\frac{5}{8}$ inches, it weighs but 24 ounces, but it is so cleverly constructed that it will accommodate a three-hundredth of a second shutter, and the best and speediest of anastigmat lenses, including the Kodak Anastigmat $f.6.3$, and the B. & L. Ic Tessar $f.4.5$. With such equipments

and its careful, accurate mechanical construction, the Premo No. 12 offers the very limit of photographic efficiency—it will make good pictures wherever amateur pictures can possibly be made.

The negatives, while of good size for contact prints, are of such quality that enlargements may be made from them to any reasonable size.

For those who do not care for the high speed lenses, the same camera is supplied fitted with Kodak Ball Bearing shutter and either Rapid Rectilinear or Kodak Anastigmat lens, $f.7.7$.

Thin, smooth, richly finished, this will make a faithful, unobtrusive biographer of your personal experiences.

Price, \$15.00 to \$56.00.

Premo catalogue free at your dealer's, or mailed by us on request.

Rochester Optical Department, Eastman Kodak Co., Rochester, N. Y.

Ho! For the Open Road!


¶ What is more delightful than spinning along cool, shady country roads away from the heat and grime and dust of the hot city?

¶ Especially if your bike is equipped with **GOOD** tires—tires as soft as cushions and as tough as a rubber ball—tires that defy the road—**United States Bicycle Tires**—all twelve and one, at least, to meet all your needs.

¶ Have you written for the pin yet? Fill in the coupon below **NOW**. It costs nothing.

United States Tire Company

1793 Broadway, New York

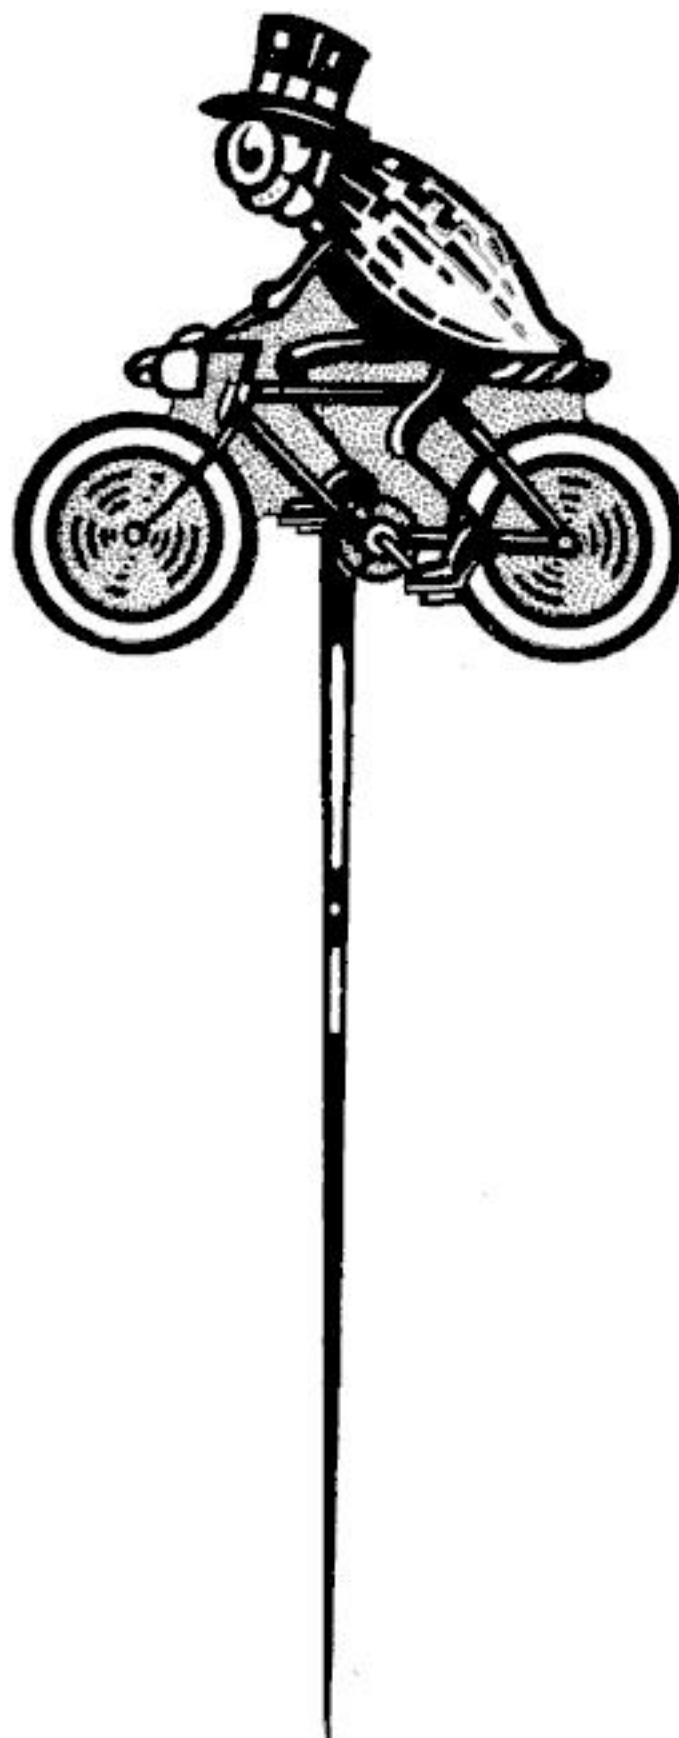

----- Fill Out — Tear Out — Mail TO-DAY -----

Gentlemen:

Please tell me how to get one of your beautiful green-gold bicycle bugs free.

Full Name:

Address:

Name of Nearest Dealer:

Address of Nearest Dealer:

When writing to Advertisers please mention Popular Science Monthly

Join the "Regular" Smokers— "Roll Your Own"

For three generations Uncle Sam's "Regulars" have "rolled their own" with good old "Bull" Durham tobacco. It's the *only* smoke for our fighting men on land and sea. No Soldier Boy's or Jack Tar's equipment is complete without the "Makings." Americans who "hold their own" like to "roll their own."

GENUINE "BULL" DURHAM TOBACCO

You can make for yourself, with your own hands, the mildest, most fragrant, most enjoyable cigarette in the world—and the most economical. Machines can't imitate it. The only way to get that freshness, that flavor, that lasting satisfaction—is to "roll your own" with good old "Bull" Durham tobacco.

Guaranteed by
The American Tobacco Co.



*The "Makings"
of a Nation*

A Suggestion to Pipe Smokers

*Just try mixing "Bull"
Durham with your favorite
pipe tobacco. — It's like
sugar in your coffee*

Armored motor cars of the Eighth Brigade, U. S. Regulars, photographed at Fort Bliss, El Paso, Texas. Look for the famous muslin sack.



When writing to Advertisers please mention Popular Science Monthly



Nujol the Internal Cleanser

MCARTHY

The Athlete's First Principle Is To Keep His System Clean

He doesn't allow food to ferment in his intestines. He doesn't give his body a chance to absorb poisons.

He knows—and your doctor will tell you—that anything from a headache to the most serious illness may result from such absorption.

Nujol removes poisons from the system, and gives the tissues of the body a chance to build up and resist disease.

Nujol is not habit-forming, does not gripe, relieves straining, does not weaken nor upset the stomach, is absolutely pure and harmless, and is delightful to take.

It is especially fine for young mothers, as it is not absorbed into the system, and therefore in no way affects the child.

Nujol is sold only in pint bottles, bearing Nujol trade-mark, never in bulk.

The Standard Oil Company (New Jersey) has used its world-wide resources in producing Nujol, and its reputation is behind the product.

Nujol is absolutely distinctive and individual. There is no other product on the market like it.

STANDARD OIL COMPANY

(New Jersey)
Bayonne Dept. 87 New Jersey

Please send me booklet on the treatment of constipation
Write your name and address plainly below

Name.....Address.....City.....State.....

When writing to Advertisers please mention Popular Science Monthly

Put Vim in Jaded Muscles

by stimulating and arousing the circulation with light applications of Absorbine, Jr., rubbed in thoroughly. This invigorating liniment acts quickly and surely. It is fragrant and pleasant to use—leaves no greasy residue on the skin.

Absorbine Jr.
THE ANTISEPTIC LINIMENT

As Absorbine, Jr., is a powerful germicide, as well as a liniment, it is effective for prophylactic and aseptic uses; it destroys the germs in cuts and sores; it may be diluted and used successfully as an antiseptic and germicide for the mouth and throat.

Farmers and mechanics will find Absorbine, Jr., especially valuable in taking care of little injuries that are "part of the day's work," and in relieving soreness and strains.

Athletes will find it efficient for limbering sore, stiff muscles. A good formula for a rubdown is one ounce of Absorbine, Jr., to a quart of water or witch hazel.

Absorbine, Jr., will not destroy tissue—it is positively harmless. It is composed of vegetable extracts and essential oils—contains no acids or minerals.

Get a bottle today and keep it in your desk, in your traveling-bag, in your medicine-cabinet or in the side pocket of your automobile. It is health insurance of a high type.

**\$1.00 a Bottle
at druggists or postpaid**

A Liberal Trial Bottle

will be sent to your address upon receipt of 10c in stamps

W. F. YOUNG, P.D.F.
245 Temple St., Springfield, Mass.



Acetylene Blow Torch Prest-O-Torch

Quicker and cheaper than
a gasoline blow-torch for
brazing and soldering

For factories, repair shops, linemen, dentists, jewelers, the Prest-O-Torch saves time and money. Used with Prest-O-Lite Tanks—ready-made gas. Intense, concentrated flame instantly lighted. No depreciation, safe and convenient. Style "A", price, 75c (Canada, 85c) will braze up to 3/8 inch round rod. Style "C" for heavier work, \$2.25 (Canada, \$2.75). Special styles for dentists. Write for literature or send order now. Money refunded if not satisfied.

The Prest-O-Lite Co., Inc. 844 Speedway
Indianapolis, Ind.
Canadian General Office, Dept. A-11, Toronto, Ont.

LEEDAWL COMPASS

the only
**Guaranteed
Jewelled
Compass
for \$1.00**

If not at Dealer's
Remit Direct

Taylor Instrument Companies

ROCHESTER N.Y.

Makers of Scientific Instruments of Superiority



Save Your Worn Tires

European Motorists are getting from 10,000 to 15,000 miles from a set of tires by "half-soleing" them with Steel-Studded Treads—You can do the same. Durable Treads are guaranteed 5000 miles without puncture.

We deliver free without a cent deposit
prepay express and allow you to judge. Applied in your own garage in 30 minutes without special tools.

Special discount to motorists in new territory on first shipment direct from factory. Write for sample and guarantee. Be sure and state tire sizes.

THE COLORADO TIRE & LEATHER CO.

749 Tread Bldg., Denver, Colo.
G-49 Transportation Bldg., Chicago, Ill.
720-497 Woolworth Bldg., New York City

**GUARANTEED 5000 MILES
WITHOUT PUNCTURE**

No. 68 Carleton Generator

7 Volts 7 Amperes (49 C. P.)

solves the lighting problem.

Steady light with or without storage batteries. Special brackets for Ford, Saxon and Metz cars, but easily applicable to any car, cycle, boat or miniature stationary plant. Highest quality construction and moderate price; not to be confounded with cheap, permanent magnet generators. Also Automatic Cutouts, Storage Batteries, Governors and Ammeters. Descriptive Bulletin explains.

SPECIAL 12-Volt, 10-Ampere Generators for boats or stationary work.

Local demonstrating agents wanted where there are no dealers.

The Carleton Company

178 SUMMER, BOSTON



414 PAGES

145 ILLUSTRATIONS

I.C.S.
HANDBOOK

I.C.S.
ELECTRICAL ENGINEER'S
HANDBOOK

50¢

ELECTRICITY!

HERE'S just the book on Electricity that you need to answer your many questions—to solve your knotty problems, to teach you new kinks, to be your memory for tables, rules, formulas and other Electrical and Mechanical facts that some people try to carry in their heads—and fail.

With this "Little Giant" I. C. S. Electrical Engineer's Handbook in your pocket, tool chest, on your work bench, drawing table or desk, an hour or a day need not be lost "digging up" some forgotten rule, some unfamiliar fact; you'll just turn to the very complete index and get

it "in a jiffy." Just a few of the subjects treated are:

Electricity and Magnetism; Electrical Symbols; Batteries; Circuits; Magnets; Direct and Alternating Currents; Dynamos and Motors; Belts; Shafting; Electroplating; Electrical Measurements; Meters; Arc and Incandescent Lamps; Mercury Arc Rectifiers; Transformers; Insulation; Electric Cars; Single and Multiple-Unit Control; Transmission; Rail Welding; Tables of Wires—Sizes, Capacities, etc.—Mathematical Rules, Formulas, Symbols; Tables of Constants, Equivalents, Roots, Powers, Reciprocals, Areas, Weights and Measures; Chemistry; Properties of Metals; Principles of Mechanics; First Aid, etc.

The Electrical Engineer's Handbook is one of 22 I. C. S. Handbooks covering 22 Technical, Scientific and Commercial subjects, all crowded with value. They have the contents of a full-size book condensed into pocket-size ready to go with you anywhere and be at your instant command. They are substantially bound in cloth, red edges, goldleaf stamping, printed from new, clear, readable type on good quality book paper. There is an illustration at every point where a picture will help. Hundreds of thousands have been sold on a money-back guarantee of satisfaction.

The former price of these Handbooks was \$1.25, but **THIS MONTH** you can buy **50c** each, the ones you want for only **50c** postpaid

(For 10c extra we will send a cloth-covered protecting case.)

You Run No Risk! Money Back if Desired!

International Correspondence Schools

Box 5803, Scranton, Pa.

INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 5803, SCRANTON, PA.

I enclose \$_____ for which send me postpaid the Handbooks marked X, at 50c. each. I may return any or all and get my money back within ten days from receipt:

- | | |
|--|---|
| <input type="checkbox"/> Electrical Engineer's | <input type="checkbox"/> Advertiser's |
| <input type="checkbox"/> Teleph. and Teleg. Engineer's | <input type="checkbox"/> Business Man's ★ |
| <input type="checkbox"/> Mechanic's | <input type="checkbox"/> Bookkeeper's |
| <input type="checkbox"/> Steam Engineer's | <input type="checkbox"/> Steno. and Correspondent's |
| <input type="checkbox"/> Westinghouse Air Brake | <input type="checkbox"/> Salesman's |
| <input type="checkbox"/> Civil Engineer's | <input type="checkbox"/> Window Trimmer's |
| <input type="checkbox"/> Coal Miner's | <input type="checkbox"/> Cotton Textile Worker's |
| <input type="checkbox"/> Concrete Engineer's | <input type="checkbox"/> Farmer's |
| <input type="checkbox"/> Building Trades | <input type="checkbox"/> Poultryman's |
| <input type="checkbox"/> Plumber's and Fitter's | <input type="checkbox"/> Mariner's |
| <input type="checkbox"/> Chemist's | <input type="checkbox"/> Automobile |

Name _____

Street and No. _____

City _____ State _____



"What y' Doin' Now, Bill?"

You don't have to ask that question of a **trained** man, because you **know** his position is a permanent one—that he is not at the mercy of conditions that affect the **untrained** man.

You can always be sure of a good position and a good salary if you have the **special training** that puts and keeps you in demand. The International Correspondence Schools will bring **special training** to you, no matter where you live, or how little spare time or spare cash you have.

To learn **how** the I. C. S. can help you, and how you can easily qualify for success in your **chosen occupation**, mark and mail the attached coupon today. Doing so costs you only the postage. You assume no obligation. If you **think** you're ambitious, marking the coupon will **prove** it. Do it NOW.

INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 5804 SCRANTON, PA.

Explain, without further obligation on my part, how I can qualify for the position before which I mark X

- | | |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEERING | <input type="checkbox"/> SALESMANSHIP |
| <input type="checkbox"/> Electric Lighting & Railways | <input type="checkbox"/> ADVERTISING |
| <input type="checkbox"/> Telephone Expert | <input type="checkbox"/> Window Trimming |
| <input type="checkbox"/> MECHANICAL ENGINEERING | <input type="checkbox"/> Show Card Writing |
| <input type="checkbox"/> Mechanical Drafting | <input type="checkbox"/> Lettering and Sign Painting |
| <input type="checkbox"/> Gas Engines | <input type="checkbox"/> ILLUSTRATING |
| <input type="checkbox"/> CIVIL ENGINEERING | <input type="checkbox"/> BOOKKEEPING |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> Stenography and Typewriting |
| <input type="checkbox"/> MINE FOREMAN AND SUPT. | <input type="checkbox"/> Higher Accounting |
| <input type="checkbox"/> STATIONARY ENGINEERING | <input type="checkbox"/> Commercial Law |
| <input type="checkbox"/> ARCHITECTURE | <input type="checkbox"/> GOOD ENGLISH FOR EVERYONE |
| <input type="checkbox"/> Building Contractor | <input type="checkbox"/> Teachers Course |
| <input type="checkbox"/> Architectural Drafting | <input type="checkbox"/> English Branches |
| <input type="checkbox"/> Concrete Engineering | <input type="checkbox"/> CIVIL SERVICE |
| <input type="checkbox"/> Structural Engineering | <input type="checkbox"/> AGRICULTURE |
| <input type="checkbox"/> PLUMBING AND HEATING | <input type="checkbox"/> POULTRY |
| <input type="checkbox"/> AUTO RUNNING | <input type="checkbox"/> Chemistry |
| | <input type="checkbox"/> Spanish |
| | <input type="checkbox"/> German |
| | <input type="checkbox"/> French |
| | <input type="checkbox"/> Italian |

Name _____

Present Occupation _____

Street and No. _____

City _____ State _____

When writing to Advertisers please mention Popular Science Monthly

Pulls you out of trouble

Carry this little Pull-U-Out in your tool box and you will be independent of road conditions. With it a boy can, unaided, pull a 5000 lb. car out of ditch or mud. Pays for itself on its first job. Besides pulling autos out of trouble it will do all kinds of lifting and pulling in the factory, garage, on the farm or construction job, etc.

Consists of a winding drum, lever crank, 40 feet of steel cable, two 7 ft. chains and 3 stakes. Weighs only 28 lbs and goes in space 4x8x14 inches.


A pressure of only 30 lbs. on the handle will lift a ton



Cheaper and better than a chain block. Does jobs no other machine can do.

WRITE FOR BOOKLET—VERY INTERESTING Tells how and why this marvelous little Pull-U-Out works.

Pull-U-Out Sales Co., 2042 Market Street, St. Louis, Mo.

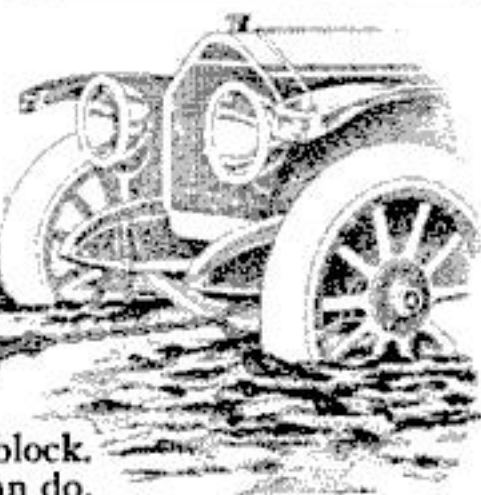

Flows Straight to Every Friction Point and—

reduces friction to an irreducible minimum! That's why 3-in-One is the universal lubricant for typewriters, sewing machines, magnetos, motors, commutators, cash registers, fishing reels, lawn mowers, clocks, hinges, automatic tools, adding machines, locks. It makes everything with frictional parts work easier and last longer.

3-in-One

is the one right oil for all delicate mechanisms. Because it is a pure oil compound that never gums and never heats up or smokes at any rate of speed. Because it doesn't collect dirt (as mineral oils do) but actually works out dirt and grease.

Also use 3-in-One for wiping all metal surfaces. It prevents rust and tarnish.

Sold at all stores—10c, 25c, 50c.

FREE—Liberal sample of 3-in-One Oil and Dictionary of Uses.

Three-in-One Oil Co.
165 KCG Broadway, N.Y.



PRESTO!



OLD CAR

Effecto
AUTO
FINISHES

A little time, Effecto, and presto, your car looks like new! Made in seven colors, Clear Varnish and Top and Seat Dressing. Sold by paint, hardware and auto accessory dealers. Send for Color Card. Pratt & Lambert, Inc. 155 Tonawanda St., Buffalo, N. Y. In Canada, 101 Courtwright St., Bridgeburg, Ontario.

MADE BY THE MAKERS OF

PRATT & LAMBERT VARNISHES

The Book of 100 Houses

Sent free to anyone who intends to build.

This book contains photographic views of over 100 houses of every variety and style of architecture (from the smallest bungalows and camps to the largest residences) that have been built in all parts of the country, under widely varying conditions of climate and surroundings, and stained with the rich, velvety shades of

Cabot's Creosote Stains

and with the soft, cool, brilliant white of

Cabot's Old Virginia White.

They are designed by leading architects and the book is full of ideas and suggestions that are of interest and value to those who are planning to build.


SAMUEL CABOT, Inc., Manufacturing Chemists
16 Batterymarch St., Boston, Mass.



Walls finished with Cabot's Old Virginia White
Roof stained with Cabot's Creosote Stain
Pierson & Goodrich, Architects, N. Y.

When writing to Advertisers please mention Popular Science Monthly

All that a "linen" collar is
—and more

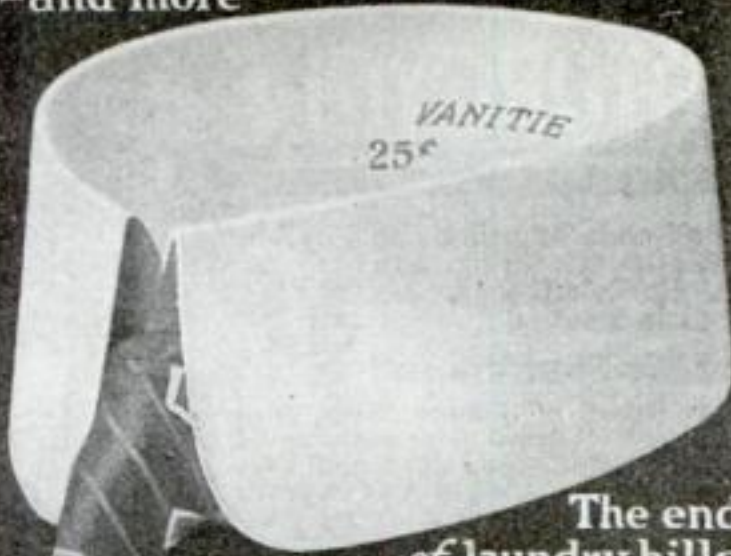

The end
of laundry bills

CHALLENGE CLEANABLE COLLARS

Best for summer months. Indispensable for motoring. Ever-white, stitched edge effect, dull linen finish—and instantly cleanable, with soap and water.

Positively no-wilt

A \$5 to \$10 annual saving—and real comfort. All accepted styles, half-sizes. At your dealers or samples by mail 25c each. Style booklet on request.

THE ARLINGTON COMPANY
725 Broadway, New York



FINCK'S "DETROIT-SPECIAL" OVERALLS "They Wear Like a Pig's Nose"



Probably we've got more good friends among the readers of Popular Science Monthly than among almost any other body of men.

It shows that you men appreciate extra wear and extra comfort in your overalls and work-garments—and you give them pretty hard service, too.

If you haven't tried them yet, get a pair from your dealer to-day. If he hasn't them, we'll forward by prepaid parcels post on receipt of size and price.

W. M. FINCK & COMPANY

1161 Gratiot Ave., Detroit, Michigan

Overalls	-	-	\$1.50
Jackets	-	-	1.50
Combination Suits			3.00



ROYAL GORGE, COLORADO

Come West for your Vacation

A vacation is no longer an expense or a luxury. It's a health and efficiency measure.

Make this year's vacation a worth-while, outdoor western one. There's Colorado with dozens of ideal vacation points; Salt Lake City and the great Intermountain country; Yellowstone Park, the Pacific Northwest and California with its national parks, Yosemite and Sequoia.

Trips can be made to any one of these places separately, or they may all be combined in one grand tour. Best reached through St. Louis and Kansas City by the

Missouri Pacific

The most picturesque route between the Mississippi and the Rockies.

THE Scenic Limited

Superb, fast, steel train leaves St. Louis daily for Kansas City, Pueblo, Colorado Springs, Denver, Royal Gorge, Glenwood Springs, Salt Lake City and San Francisco.

Write for full information, rates, reservations and beautifully illustrated travel literature.

C. L. STONE, Passenger Traffic Manager
St. Louis





**"There
She Goes!"**

Why Didn't I Use NEVERLEAK TIRE FLUID

Boys! why take chances? Why waste time fixing punctures? Why pump, pump, pump, trying to keep up a porous tire. Get all the fun out of your bicycle, and save money on your tires.

A 25c Tube of Neverleak Tire Fluid

—heals punctures instantly—keeps porous tires up to pressure—increases the mileage of your tires—doubles the life of new tires.

Your bicycle dealer knows the value of Neverleak. For 25 years it has been the "Old Reliable" with tire manufacturers, repairmen, and hundreds and thousands of riders. Get a tube or two today from your nearest bicycle store, and find out what it means to get rid of all tire troubles.

**BUFFALO SPECIALTY COMPANY
BUFFALO, N. Y.**



\$100 a week pays for the Black-Beauty-Bicycle



JUST THINK OF IT—here's the classiest bicycle ever built—and yours at the unusual terms of \$1 a week. What's more, we ship freight prepaid.

DIRECT FROM FACTORY—ON APPROVAL

You take no risk, for if you don't like the Black Beauty, send it back at our expense—you're not out a penny.

5-Year Guarantee

All sizes, all styles, and a tool kit free. Get color catalog now.

WRITE US TODAY.

HAVERFORD CYCLE CO.,
Est. 1896. Dept. G Phila., Pa.

When writing to Advertisers please mention Popular Science Monthly

MAKE YOUR BIKE A MOTORCYCLE

at a small cost, by using our attachable outfit. Fits any Bicycle. Easily attached. No special tools required.

"Used His Four Years"


Harry A. Hyatt, of Boreas River, New York, writes: "About four years ago I received my motor attachment, and wish to say that I am satisfied with it in every way, for it has certainly given me good service. Anyone wanting a motorcycle or attachment, I would recommend them to the Shaw Manufacturing Co."

FREE BOOK Write today for bargain list and free booklet, fully describing the SHAW Bicycle Motor Attachment. Motorcycles all makes, new and second-hand, \$35.00 up.

SHAW MANUFACTURING CO.
Dept. 169 GALESBURG, KANSAS



BUILD THIS CAR OR BUY IT Lowest Priced Car in the World

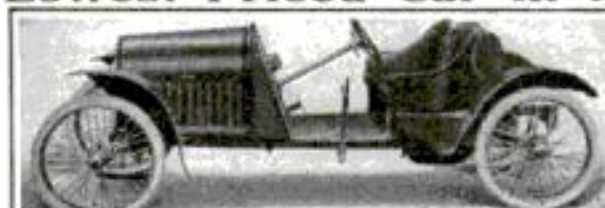

Very fast. Economical. Seats two full grown persons. Not a toy. Complete Detailed Drawings, 35c. Catalog 10c. Also CYCLOCAR PARTS at very low prices. Discount to Agents.

TRIBUNE ENGINEERING CO., Dept. M. Owego, Tioga Co., N. Y.

CONVERT YOUR BICYCLE INTO A MOTOR-CYCLE



Motor fits any wheel.

BEST, MOST RELIABLE. Best hill climber. More STEFFEYS

in use than all others. Stamp for circulars.

Steffey Mfg. Co., Dep't S., 5025 Brown Street, Phila., Pa.

"NO-LEAK-O"



See That Groove?

Oil makes a perfect seal, nothing else will. That's why more power, no carbon, no gasoline or coal oil, in the oil pit injuring lubrication. Ask your dealer or write for booklet S. Ford size or under 50 cents. Discount to the trade.

AUTOMOBILE ACCESSORIES CO., Baltimore, Md.

\$40 Motorcycle Bargains



Single and Twins. Hendersons, Harleys, Indians, Excelsiors, Kultures, Emblems, Thors, Popes. All makes guaranteed. A-1 shape, tuned up ready to ride. \$35 to \$100. Motorcycle tires \$3. Lamps \$5. Automobile tires \$3. Bicycles \$5. Tandems \$20.

Bicycle tires \$1. Bicycles and motorcycles at Factory Prices. Old motorcycles taken in trade. Highest prices allowed for them. Swap in yours. Send for Catalog, Free.

DENINGER, The Price Cutter, 334 North St., Rochester, N. Y.

Dealers
Wanted.



—GRIND YOUR OWN TOOLS
—SHARPEN YOUR OWN CUTLERY
—POLISH YOUR OWN SILVER
and save money with a

Universal Motor

It Pays for Itself

Attached to any socket will run electric fan, sewing machine and perform many other household or shop duties. Complete with emery, wheel, buffer, cord and plug for \$6.00. This offer may never be repeated—write today.

\$6


RACINE UNIVERSAL MOTOR CO.
609 Monadnock Bldg., Chicago

Makers of Fans, Vacuum Cleaners, Motor Appliances of All Kinds

A SYMBOL OF ECONOMY

The
Excelsior
Lightweight

Price
\$140.00

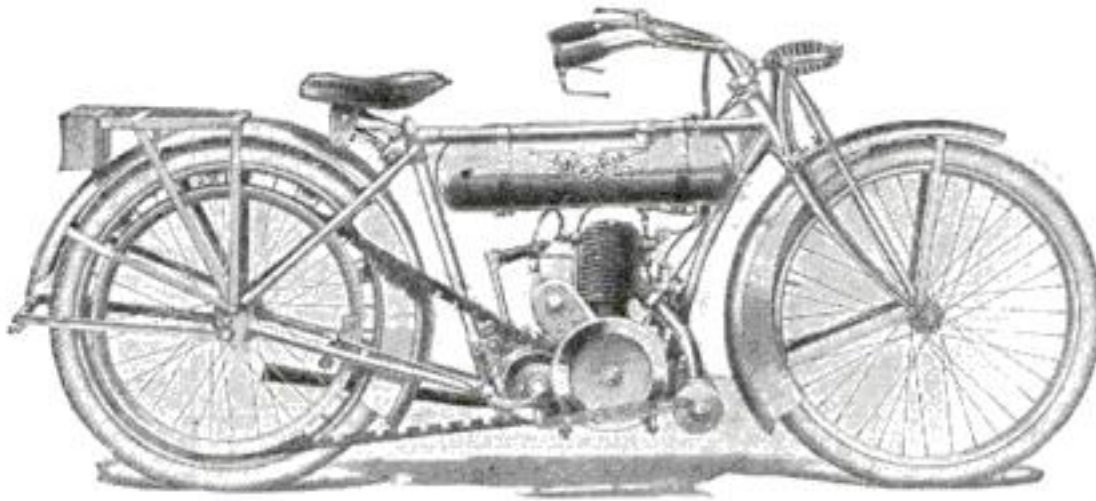

Two Speed,
Foot Starter,
Free Motor
Clutch,
Handle Bar
Control; A
Regular
Machine

EFFICIENT ECONOMY

Will be the keynote in the new order of things

This does not mean the "Lunatic Economy" which says, "That costs too much; I can't afford it" without figuring the returns, but means comparing the cost of any commodity with the true value and benefits derived from its use. In short, it is getting a dollar's worth for every dollar expended, whether for pleasure or utility.

The EXCELSIOR LIGHTWEIGHT stands ready to furnish, in first cost and upkeep,

the Most Economical as well as a Safe, Clean, Comfortable, Convenient and Rapid means of transportation—for all classes—from Anyplace to Everywhere.

If there's not a dealer in your town who can show you all the merits of the EXCELSIOR Lightweight, just drop us a Postal Card and we'll send you our new catalog, fully describing this and our heavier models.

EXCELSIOR MOTOR MFG. & SUPPLY CO., 3709 Cortland Street, CHICAGO, Ill.

Delivered TO YOU FREE

No other concern will offer you such values or such terms. Make your choice from

44 styles

colors and sizes in the famous "Ranger" line of bicycles freight prepaid to your town. Sent on approval for **30 DAYS' FREE TRIAL.**


From our new big catalog select the particular style of RANGER bicycle you desire. We pay return charges if you decide not to keep it. You get one month riding test at our expense. **LOW FACTORY PRICES** direct to you from the largest, oldest and most successful bicycle concern in the country.

TIRES

Lamps, Horns and parts for all bicycles at half usual prices.

Send No Money

but write today for this big free catalog, also full particulars of new 30-day free trial offer. Do not buy until you receive it. **WRITE NOW.**

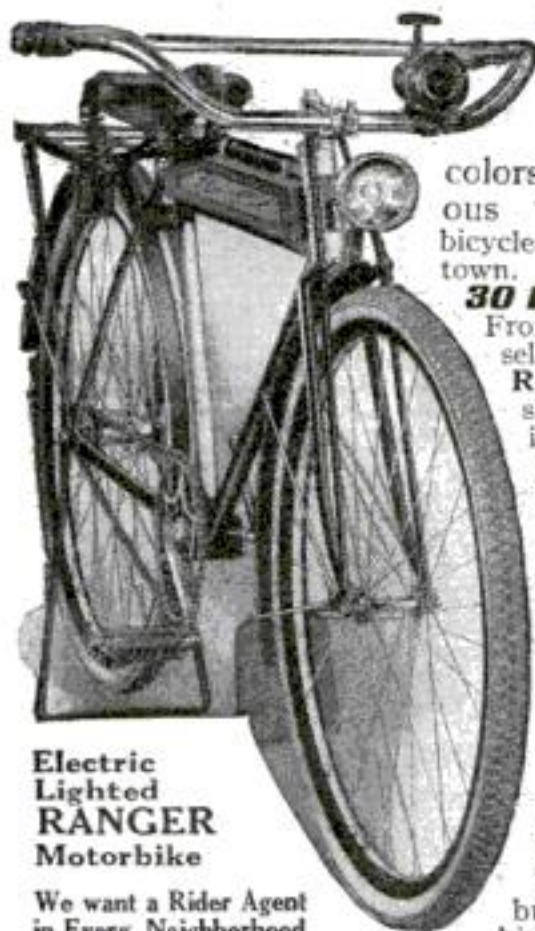

Electric
Lighted
RANGER
Motorbike

We want a Rider Agent in Every Neighborhood

MEAD CYCLE COMPANY
Dept. L-109, Chicago

When writing to Advertisers please mention Popular Science Monthly

LOCK YOUR FORD AGAINST THEFT



FEEL absolutely sure that *no one* can steal your car. Guard against the acts of countless vandals who prey upon thoughtless car owners.

For the small sum of \$5.00 you can secure real theft insurance in a

Safeguard Lock

It *does* what all others *claim* to do—makes your car impossible to drive. Renders the steering wheel helpless until YOU wish to drive—no one can smash or pick it because—

We Furnish FREE a new pinion shaft with each lock that is so constructed that extra strength and protection is guaranteed. Anyone can install the lock in a few minutes. Money back guarantee certificate with each lock. Write today for thirty day trial—tomorrow may be too late.

THE RELIANCE CO.
428 W. 38th St. CHICAGO



\$5.00

Dealers
Wanted



"Think Beyond Your Job!"

"There is not a man in power at the Bethlehem Steel Works today," says Charles M. Schwab, in the American Magazine, "who did not begin at the bottom and work his way up. Eight years ago Eugene Grace was switching engines. His ability to *out-think* his job, coupled with his sterling integrity, lifted him to the presidency of our corporation. Last year he earned more than a million dollars. . . . Jimmie Ward, one of our vice-presidents, used to be a stenographer. The fifteen men in charge of the plants were selected, not because of some startling stroke of genius, but because day in and day out, they were *thinking beyond their jobs*."

If you want to be somebody, to climb to a position of responsibility, *get ready for it*. Do what you are doing *now* better than the men beside you, and *train for the job ahead*. You can do it—in spare time—through the International Correspondence Schools.

For 25 years men with ambition and I. C. S. help have been making spare hours the stepping-stones to successful careers. Last year more than 5,000 reported that their studies had won for them advancement and increased salaries. Over 130,000 men in offices, shops, stores, mines and mills and on railroads all over America are preparing in the I. C. S. way to take the next step upward.

Join them! All you need is just ordinary brains, the will to do, and the firm resolve to *think ahead of the job you now hold*. The I. C. S. are ready to make the rest easy. Make your start. Mark and mail this coupon.

TEAR OUT HERE
INTERNATIONAL CORRESPONDENCE SCHOOLS
 BOX 5806, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, *before* which I mark X.

- | | |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEER | <input type="checkbox"/> SALESMANSHIP |
| <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> ADVERTISING |
| <input type="checkbox"/> Electric Railways | <input type="checkbox"/> Window Trimmer |
| <input type="checkbox"/> Electric Wiring | <input type="checkbox"/> Show Card Writer |
| <input type="checkbox"/> Telegraph Engineer | <input type="checkbox"/> Sign Painter |
| <input type="checkbox"/> Telephone Work | <input type="checkbox"/> Railroad Trainman |
| <input type="checkbox"/> MECHANICAL ENGINEER | <input type="checkbox"/> ILLUSTRATING |
| <input type="checkbox"/> Mechanical Draftsman | <input type="checkbox"/> Cartooning |
| <input type="checkbox"/> Machine Shop Practice | <input type="checkbox"/> BOOKKEEPER |
| <input type="checkbox"/> Gas Engine Operating | <input type="checkbox"/> Stenographer and Typist |
| <input type="checkbox"/> CIVIL ENGINEER | <input type="checkbox"/> Cert. Public Accountant |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> TRAFFIC MANAGER |
| <input type="checkbox"/> MINE FOREMAN OR ENGINEER | <input type="checkbox"/> Railway Accountant |
| <input type="checkbox"/> Metallurgist or Prospector | <input type="checkbox"/> Commercial Law |
| <input type="checkbox"/> STATIONARY ENGINEER | <input type="checkbox"/> GOOD ENGLISH |
| <input type="checkbox"/> Marine Engineer | <input type="checkbox"/> Teacher |
| <input type="checkbox"/> ARCHITECT | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Contractor and Builder | <input type="checkbox"/> Mathematics |
| <input type="checkbox"/> Architectural Draftsman | <input type="checkbox"/> CIVIL SERVICE |
| <input type="checkbox"/> Concrete Builder | <input type="checkbox"/> Railway Mail Clerk |
| <input type="checkbox"/> Structural Engineer | <input type="checkbox"/> AUTOMOBILE OPERATING |
| <input type="checkbox"/> PLUMBING AND HEATING | <input type="checkbox"/> Auto Repairing |
| <input type="checkbox"/> Sheet Metal Worker | <input type="checkbox"/> Navigation |
| <input type="checkbox"/> Textile Overseer or Supt. | <input type="checkbox"/> AGRICULTURE |
| <input type="checkbox"/> CHEMIST | <input type="checkbox"/> Poultry Raising |
| | <input type="checkbox"/> Spanish |
| | <input type="checkbox"/> German |
| | <input type="checkbox"/> French |
| | <input type="checkbox"/> Italian |

Name _____
 Present Occupation _____
 Street and No. _____
 City _____ State _____

When writing to Advertisers please mention Popular Science Monthly

"Bristol" Steel Fishing Rods

**"It Is My
Patriotic
Duty**

to keep myself physically and mentally fit. I owe my country 100% efficiency in order that the burden of war may be borne with the least disturbance to prosperity.

I am going to take two weeks off in the great outdoors with my kit of "Bristol" Rods and Meek Reels and rest up and fish and come back full of the joy of living and the zest of fighting."

16000 sporting goods dealers handle "Bristol" Rods and Meek Reels. If your dealer cannot supply you, order from us at catalogue prices.

Meek and "Bristol" Catalogues FREE

THE HORTON MFG. CO., 197 Horton St., Bristol, Conn.

SAVE 25% to 60%

On GRAFLEX — KODAKS — ANSCO, REXO AND PREMO CAMERAS

10-DAY FREE TRIAL GUARANTEE

If unsatisfactory, money will be refunded in full. Complete Line of Motion Picture Cameras.



Write at Once for Our Free BARGAIN BOOK and CATALOG

listing hundreds of slightly used and new cameras, also supplies of every description. No matter what camera you want, we can save you money. Compare our prices with others on slightly used and new cameras and we know you will be another one of our satisfied customers. Our prompt and fair dealing will please you. Established in the Photographic Business over 16 years. (5)

CENTRAL CAMERA CO., 124, S. Wabash Ave.
 Dept. 131X, Chicago, Ill.



AL-COOL FAN

\$12.50

The wireless breeze builder — runs without electricity. Driven by a self-contained air motor. Operates

anywhere with alcohol or gas. More economical and usable than an electric fan. Absolutely safe. Simple—substantial—18 inches high. A new—wonderful—necessity. Price \$12.50. Cash with order. Send for one today. Dealers and Agents Wanted

The AL-COOL FAN CO., 10605 Corliss Ave., Chicago, Ill.

A Baseball Jersey



Be the First in Your Club

School, City or Town, to wear this pure, all wool sweater, double collar and cuffs. Your choice in colors. This jersey was selected by 10,000 of my customers for last season. Your chum will recommend it. Send for my big illustrated catalogue. Write me and learn my offer for your club's order. Popular Prices. Best Grade Sporting Goods—Baseball, Basketball, Tennis, Golf, Football, etc.

WRITE ME NOW

JACK SHANNON CO., Dept. 50, 54 E. Monroe St., Chicago



Write Now Save money on any Camera, Kodak Lens, Motion-Picture Outfit or photo accessory. 10 days' free trial—money-back guarantee. Eastman, Ansco Speedex, REXO Speed film at cut prices. Send for catalog now.


David Stern Company

"In Business Since 1885"

722 Davisco Bldg.
 1047 Madison St., Chicago, Ill.



Save Camera Money

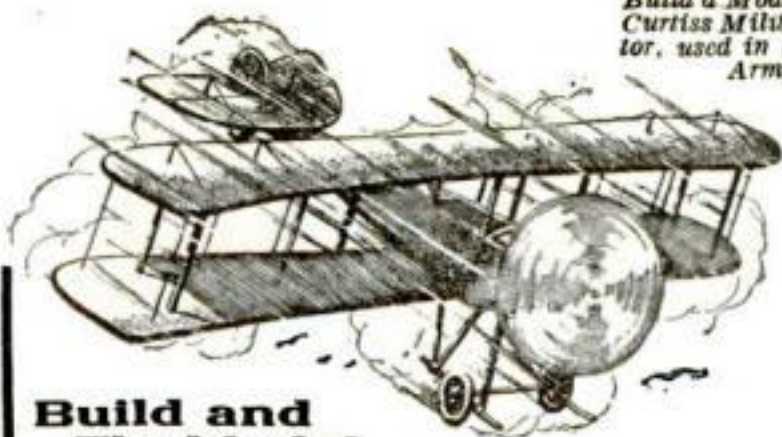

Build a Model of This
Curtiss Military Tractor,
used in the U. S.
Army.

Build and
Fly Model

War Aeroplanes

that are perfect copies of real, war-famous airships; that rise from the ground by their own power and fly 50 to 100 feet in the air. It's easy! With "IDEAL" Accurate Scale Drawings and Building and Flying Instructions any bright boy can construct a 3-foot Model Aeroplane that will fly. Send today for Drawings and Instructions for the one you want to build—

Curtiss Military Tractor
Bleriot Monoplane
Nieuport Monoplane
Taube Monoplane

25c

EACH
(8 for \$1.75)

Wright Biplane
Curtiss Hydroplane
Curtiss Flying Boat
Cecil Peoli Racer

"IDEAL" Aeroplane Construction Outfits, containing all parts and materials needed to build these Aeroplanes, are sold by leading Toy, Sporting Goods and Department Stores. Ask your dealer for "IDEAL" Aeroplane Construction Outfits.

Send 5c For This

Aeroplane Catalogue

Tells about Model Aeroplanes and how they are built. About Racing Aeroplanes and Flying Toys. Lists all kinds of parts and supplies to build them with. 48 pages for five cents. Send for it today!

IDEAL AEROPLANE & SUPPLY CO.
80-86 West Broadway : : : New York



Get this LA Engine Book



—it gives valuable information about motor boat engines. It describes the full line of L-A inboard and outboard motors and tells of the 30 days' free trial plan. Write for your copy today.

LOCKWOOD-ASH MOTOR CO.
1451 Horton Ave., Jackson, Mich. (25)

Has The Motor Boat Bug Got You?



Health and happiness are assured with one of the new popular priced Gray motors in your boat. Select your boat from our 1917 Boat Builders Catalog showing products of 200 leading boat builders. Select your engine from our new complete Engine Catalog. Both books FREE. Send today.

GRAY MOTOR COMPANY
748 Oakland Ave., Detroit, Mich.

Order Your "Old Town" Now and Enjoy the Hot Days

Quick, prompt delivery

"Old Town Canoes"

will carry you swiftly and safely everywhere. Note the superb construction. Built to last, light, swift, beautiful and safe. No trouble, easy to paddle and manage. Order now from dealer or factory. \$34 up. Catalog on request.

Old Town Canoe Co.
1697 Main St.,
Old Town,
Maine,
U.S.A.

An unusual photograph of an "Old Town Canoe" hull before canvas is put on, showing long length planks.



Boat in Comfort

Jump into your rowboat, start your Caille 5-speed rowboat motor, and you can go anyplace without the slightest effort. Skip over to the farthest fishing grounds or skim around the lake and breathe in the vigorous fresh air. You'll find this motor always dependable, runs 7 to 10 miles an hour and 4 hours on 1 gallon of gasoline.



Has Five Speeds

Fast speed, trolling speed, neutral, slow and fast speed reverse accomplished without altering speed of motor. When set in neutral, the boat stands still while motor remains running. Trappers find this motor a great time and labor saver.

Train Your Boy

Teach him how to handle small boats—develop his self-reliance. This is the ideal motor for him and perfectly safe. Splendid for yacht tenders, too.

Dealers Wanted

We also build the famous Caille Perfection inboard motors up to 30 H.P., 2 and 4 cycle, 1 to 4 cylinders. When writing be sure to give dimensions, style and purpose of boat to be powered.

Caille Perfection Motor Co.
1514 Caille St., Detroit, Mich.



When writing to Advertisers please mention Popular Science Monthly



DOUBLE GRIP Boston Garter

Velvet Grip

Number 835
Satin Pad, Cable Web
35 cents a pair

This is not a 25 cent garter selling for 35 cents — it is the most luxurious and the most efficient garter to be had for less than 50 cents.

GEORGE FROST COMPANY, MAKERS, BOSTON

Your Concrete Floors Shall Never Dust Again

You can dustproof them and waterproof them by simply flushing on the colorless liquid chemical hardener

LAPIDOLITH

TRADE MARK

For Every Concrete Floor

Lapidolith acts chemically on the Portland Cement converting it into a granite-hard mass, creating an unbreakable grip on the sand so that the friction of walking and trucking cannot grind it out.

Let us refer you to users of Lapidolith in your city and in your line.

Today send for sample flask, Lapidolized block and book of testimonials, proof-in-advance.

DEPT. 24

L. SONNEBORN SONS, Inc.

Manufacturers of Cemcoat,
the Washable Wall Coating

264 PEARL STREET, NEW YORK



**Square
Deal
Miller
says**



**WALTHAM
ELGIN
HOWARD
ROCKFORD
ILLINOIS
HAMILTON**

**Any Watch YOU WANT
on CREDIT**

One Customer Writes: "I have had my watch just a year today and our watch inspector says its the best time keeper on the road. Please find enclosed my last monthly payment of \$1.00." We have thousands of such letters on file from satisfied customers, who have bought from us on

**30 Days Trial Express Paid
No Money Down**

You take no chances with me. I am 'Square Deal' Miller and I trust the people. That is why I am doing the greatest credit Watch, Diamond and Jewelry business in the world.

Watches Guaranteed for 25 Years

I Smash the Terms

NO REFERENCES DEMANDED

My terms will surely suit you. You get unlimited credit. **A Charge Account** the same kind of credit you get from your grocer. No matter where you live or what your income might be, you can now own the finest of watches, a beautiful diamond or any rare jewelry and never miss the money.

Catalog FREE Send me your name and address so I can mail you Free and postpaid the most beautiful catalog of its kind ever printed. I want you to have this book. It's a gem. Write TODAY.

SQUARE DEAL MILLER, Pres.

MILLER-HOEFER CO.

880 Miller Bldg., Detroit, Mich.

Write today for
our 168 page
FREE Book on

Deafness

and learn how Perfect Hearing is now being restored in every condition of deafness or defective hearing. Our "Little Wireless Phones for the Ears" require no medicine but effectively replace what is lacking or defective in the natural ear drums. They are simple devices, which the wearer easily fits into the ears where they are invisible. Soft, safe and comfortable.

WILSON EAR DRUM CO., Incorporated
939 Inter-Southern Bldg. LOUISVILLE, KY.

**Don't Tell and They Will
Think It's a Diamond!—**

LACHNITE Gems have the eternal fire of diamonds and stand all diamond tests. 10 Days' Free Trial. If you can tell it from a diamond, send it back. Set in solid gold. Pay as you wish. Terms as low as \$1.50 a day. Write for Free Booklet showing all newest mountings. No obligation whatever. Write today.

HAROLD LACHMAN COMPANY — Dept. #120
12 North Michigan Avenue Chicago, Illinois



Play This Saxophone While You Pay



Get this Saxophone on six days' free trial. Then, if you decide to buy, pay only a few dollars a month.

WURLITZER

220 years of instrument making.

The House of Wurlitzer is now making a direct money saving offer to you. All kinds of instruments. We supply the U. S. Government. New 194 page catalog free. This Saxophone is a special value, and sent you on a remarkable offer. Generous allowance on old instruments.

One Week Free Trial

Try this instrument six days free. Learn how easy it is to play a Saxophone. Get our special offer.

Write Today Send today for the special booklet. No obligations. Write today. We will send our 194 page catalog too, if you wish it. First send us your name and address.

The Rudolph Wurlitzer Company

Dept. B423 — E. 4th St., Cincinnati, Ohio — S. Wabash Ave., Chicago, Ill.

When writing to Advertisers please mention Popular Science Monthly



"I Got the Job!"

"I'm to be Manager of my Department starting Monday. The boss said he had been watching all the men. When he found I had been studying at home with the International Correspondence Schools he knew I had the right stuff in me. Now we can move over to that house on Oakland Avenue and you can have a maid and take things easy. I tell you, Nell, taking that course with the I. C. S. was the best thing I ever did."

Spare-time study with the I. C. S. is winning promotions for thousands of men and bringing happiness to thousands of homes all over the world. In offices, shops, stores, mines, mills and on railroads, I. C. S. trained men are stepping up to big jobs, over the heads of older men, past those whose only qualification is long service.

There is a Job Ahead of YOU

Some man is going to be picked for it. The boss can't take chances. He is going to choose a trained man with sound, practical knowledge of the work.

Get busy right now and put yourself in line for that promotion. You can do it in spare time in your own home through the International Correspondence Schools, just as nearly two million men have done in the last twenty-five years, just as more than 100,000 men are doing today.

The first step these men took was to mark and mail this coupon. Make your start the same way—and make it right now.

INTERNATIONAL CORRESPONDENCE SCHOOLS BOX 5807, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.


- | | |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEER | <input type="checkbox"/> SALESMANSHIP |
| <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> ADVERTISING |
| <input type="checkbox"/> Electric Railways | <input type="checkbox"/> Window Trimmer |
| <input type="checkbox"/> Electric Wiring | <input type="checkbox"/> Show Card Writer |
| <input type="checkbox"/> Telegraph Engineer | <input type="checkbox"/> Sign Painter |
| <input type="checkbox"/> Telephone Work | <input type="checkbox"/> Railroad Trainman |
| <input type="checkbox"/> MECHANICAL ENGINEER | <input type="checkbox"/> ILLUSTRATING |
| <input type="checkbox"/> Mechanical Draftsman | <input type="checkbox"/> Cartooning |
| <input type="checkbox"/> Machine Shop Practice | <input type="checkbox"/> BOOKKEEPER |
| <input type="checkbox"/> Gas Engine Operating | <input type="checkbox"/> Stenographer and Typist |
| <input type="checkbox"/> CIVIL ENGINEER | <input type="checkbox"/> Cert. Public Accountant |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> TRAFFIC MANAGER |
| <input type="checkbox"/> MINE FOREMAN OR ENGINEER | <input type="checkbox"/> Railway Accountant |
| <input type="checkbox"/> Metallurgist or Prospector | <input type="checkbox"/> Commercial Law |
| <input type="checkbox"/> STATIONARY ENGINEER | <input type="checkbox"/> GOOD ENGLISH |
| <input type="checkbox"/> Marine Engineer | <input type="checkbox"/> Teacher |
| <input type="checkbox"/> ARCHITECT | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Contractor and Builder | <input type="checkbox"/> Mathematics |
| <input type="checkbox"/> Architectural Draftsman | <input type="checkbox"/> CIVIL SERVICE |
| <input type="checkbox"/> Concrete Builder | <input type="checkbox"/> Railway Mail Clerk |
| <input type="checkbox"/> Structural Engineer | <input type="checkbox"/> AUTOMOBILE OPERATING |
| <input type="checkbox"/> PLUMBING AND HEATING | <input type="checkbox"/> Auto Repairing |
| <input type="checkbox"/> Sheet Metal Worker | <input type="checkbox"/> Navigation |
| <input type="checkbox"/> Textile Overseer or Supt. | <input type="checkbox"/> AGRICULTURE |
| <input type="checkbox"/> CHEMIST | <input type="checkbox"/> Poultry Raising |
| | <input type="checkbox"/> Spanish |
| | <input type="checkbox"/> German |
| | <input type="checkbox"/> French |
| | <input type="checkbox"/> Italian |

Name _____

Present Occupation _____

Street and No. _____

City _____ State _____

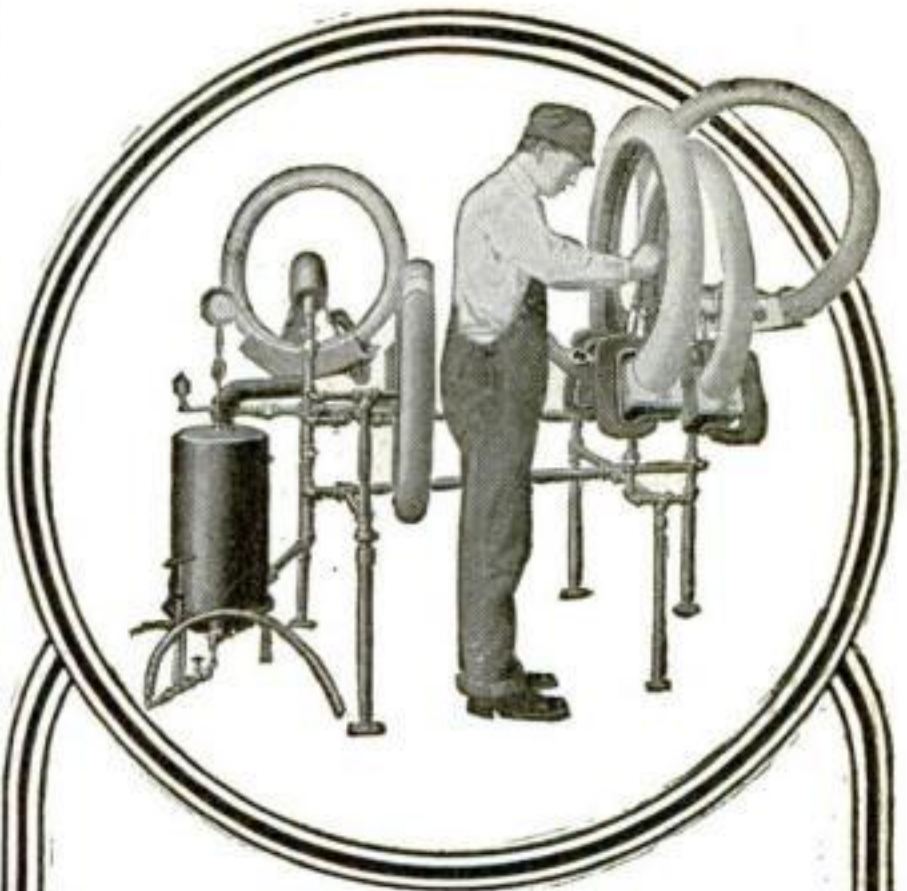

Make This Your Business At \$3,000 Per Year

Repairing and Retreading Automobile Tires. There isn't a business you could get into that offers such sure possibilities of **success and fortune**. One man and a Haywood Tire Repair Plant can make **\$250 a month and more**. Scores already have done it and this year there is a greater demand than ever for tire repair work.

15 Million Tires to Repair

That's not a myth nor some man's dream. It's an actual fact. Tire factories everywhere are building new buildings—enlarging their plants for the biggest period of prosperity in the automobile business. **15 million tires will be built and every one will need repairing.**

Punctures and Blow Outs Are Common

Why not cash in on this opportunity? Start in the business while it is yet young. A business that's growing and getting bigger and better. As it grows it will make big money for you.

No Experience Necessary

No previous training, no apprenticeship, is required to enter this business.—not even the faintest knowledge of tires. If you have a little mechanical turn of mind, you can quickly become an expert. We teach everything. **You learn in a week.** Handle all kinds of jobs—figure prices at big cash profits. Nothing is easier to master completely.

A Rich Opportunity

Awaits ambitious men everywhere. No city too large—no town too small—everywhere the same opportunity exists. **A Moderate Investment** starts you. Get one machine and build the business from there. Business comes easy. We show how to get it. You grow and grow. You're soon a **Real Manufacturer—A Success**—a mighty big factor in your community.

Write for the Facts

INVESTIGATE. Send the coupon below, a letter or postal. This brings full information—and a big interesting catalog. Tells all about tires and how to repair them. Shows how to make money—to become independent. Do this today—**NOW**—before you forget it.

HAYWOOD TIRE & EQUIPMENT COMPANY
1116 Capitol Avenue INDIANAPOLIS, IND.

FREE CATALOG COUPON

HAYWOOD TIRE & EQUIPMENT CO., 1116 Capitol Ave., Indianapolis, Ind.
Gentlemen:—Please send me your catalog, details and plans for starting ambitious men in the Tire Repair business.

Name _____

Address _____

When writing to Advertisers please mention Popular Science Monthly

Take Pictures with—

The EXPO WATCH CAMERA



A camera that closely resembles a watch in size and appearance—takes pictures $\frac{3}{8} \times \frac{7}{8}$ inches as shown on margin. Easy to operate. It's a camera for both amateur and professional.

Surprise Your Friends

Take their picture in the act of doing some funny stunt. Next time you see them produce the print. You will have a lot of fun over their bewilderment and catching people in queer and awkward positions. Carry the EXPO about in your pocket—easily concealed in the palm of the hand—picture can be taken unobserved. Produces clear, sharp negatives, indoors or outdoors equal to any camera on the market.

One Cent a Picture

The EXPO loads in daylight with a 25 exposure film costing 25c. A whole day's outing picture taking can be had for the small sum of 1c a picture. Films are also made in 10 exposures for 15c. Photos may be enlarged to any size. We have Automatic Enlargers specially made for the purpose, that may be had any time.

\$2.50

For EXPO WATCH CAMERA, postage 10c extra. Films 25 Exposures 25c—10 Exposures 15c. Leather Pocket Carrying Case 35c. JOHNSON SMITH & CO., 7185 N. Clark Street, CHICAGO

Quick as a Flash

The EXPO takes pictures through the stem, where the rapid fire lens is located. Equipped with a time and instantaneous shutter. Weighs but three ounces and is highly nickel-plated. Endorsed and in constant use by the police, newspaper reporters, detectives and general public. Important evidence can be secured with a camera of this kind. Sold under a positive guarantee. Delivered to any address in the world.

Johnson
Smith & Co.
7185 N. Clark St.
Chicago, Ill.

Please send me one EXPO
WATCH CAMERA for which
I enclose \$2.50 and 10c to
cover postage.

Name _____

Street Address _____

City _____



A Pointer from West Point



Lifetime Valet Service—Less than 1c a Month

TAKE a tip from West Point Cadets, the best turned out men in the world—press your trousers by a Heatless method, as they do. Don't let the tailor scorch your trousers with hot iron while the wet steam rots the cloth. Get the famous West Point trouser crease, knife like from belt to boot—by automatic heatless pressing. It's only \$1.00 for

Leahey's HEATLESS Trouser Press

U.S. Letters Patent 1,112,922

No operating cost for this wonderful money-saver. First cost the last cost. No worry, no inconvenience, no loss of time, no skill required.

New Trousers for Old

every day of your life. Be spick and span—be envied for your appearance. Good appearance pays banker or clerk.

Less than a Penny a Month

Makes you the best-groomed man in your set for the rest of your life. It's a Creaser, a Presser, a Stretcher and a Hanger, all combined in one.

Fold the HEATLESS Press with trousers in it, in suitcase, closet—over back of chair—ANYWHERE! Your trousers last 50% longer.

Cut Out Tailor's Bills

Takes one minute to put trousers in Heatless Press. Automatically ready in the morning. This press pays for itself the first month in tailor's bills saved.

Try It—At Our Risk

At your dealer's—or mail the coupon. One dealer sells 36,000. Dealers, write at once.

MONEY BACK COUPON GUARANTEE

Trouser Press Dept., Auto Vacuum Freeze Co., 18a W. B'way, New York City
Enclosed find \$1, for which please send me postpaid one Leahey's HEATLESS Trouser Press. If at the end of 10 days I do not wish to keep it, I will return it to you and you will return my dollar.

Name _____

Address _____

State whether slim or medium.

When writing to Advertisers please mention Popular Science Monthly

DIAMONDS \$2 A MONTH

OWN A DIAMOND NOW! OUR CATALOG TELLS HOW

21 Jewel ELGIN Only \$2.50 a Month

Sent on Approval with lowest price ever made on a genuine 21 Jewel Elgin. See Special Offer with our Free Catalog.

Why Pay Cash? Our New Easy Payment Plan Helps Thousands and Will Help You—


Our New Catalog teems with Watch Bargains. It shows the very watch you have always wanted at the low price and Easy Terms you can afford to pay. A Guaranteed \$10 Elgin as low as \$7; \$25 Thin Models at \$17.50; and on Railroad Watches, we save you a third.

Free Catalog Write for it Today.

will do. This New Book will post you. It tells you just what you want to know about Watches, Diamonds and Jewelry.

HARRIS-GOAR CO., Dept. 124, Kansas City, Mo.

The House that sells more Elgin Watches than any other Firm in the World.

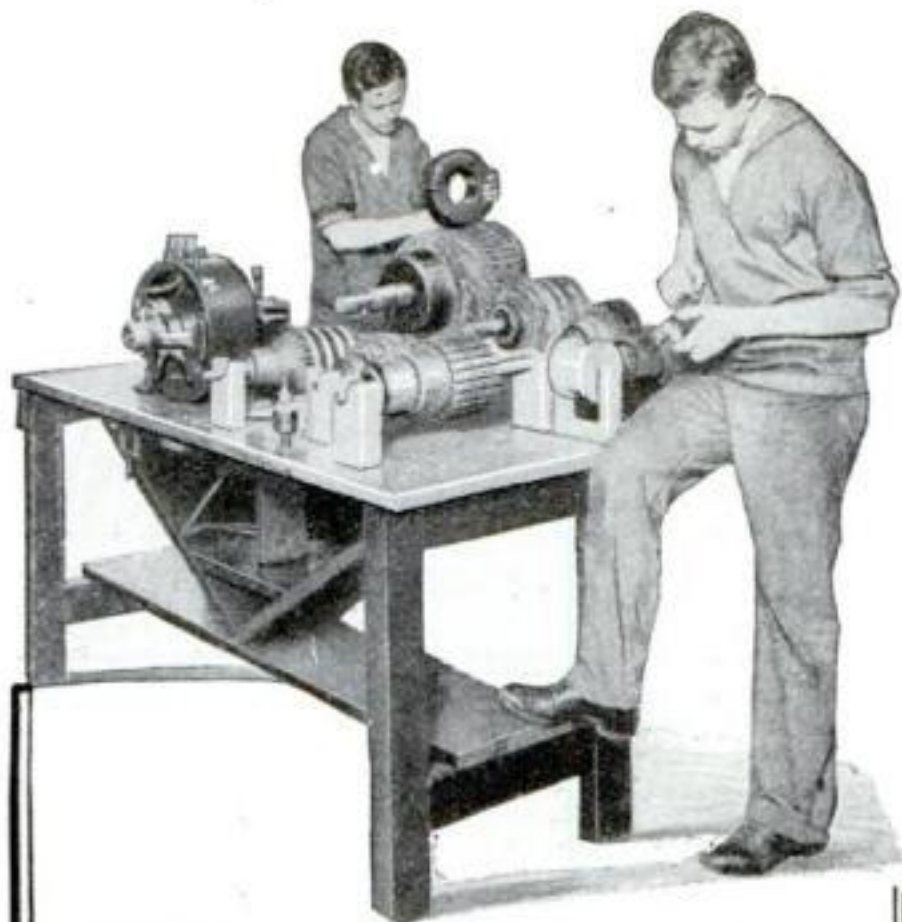

"The Construction of Small Alternating Current Motors"

By A. E. Watson, E. E., Professor of Electrical Engineering in Brown University, Providence, R. I.

This book contains complete instructions for building small alternating current motors in several sizes. The designs will be found to be in harmony with those of the very best manufacturers.

Some of the subjects taken up are "Characteristic features of alternating current motors," "Construction of a one-half horse-power, single-phase induction motor," "Construction of a one-kilowatt, two-phase or three-phase alternating current generator or a one horse-power synchronous motor," "Procedure in testing and using an alternating current generator or synchronous motor," "Construction of a one-half horse-power single-phase compensated series motor."

Clear, concise directions and careful drawings are features of this book. 79 Pages, 47 Illustrations. Price, \$1.00

Book Department

Popular Science Monthly

239 Fourth Avenue, New York City



For a World of Uses

Here's a most wonderful little gasoline engine—a perfect marvel of $\frac{1}{2}$ and 1 horsepower for a hundred and one uses. This remarkable little

Maytag Multi-Motor

solves the problem of low-cost power for the small power user. No other engine of its size offers such wonderful combination of simplicity, efficiency and economy. The same little engine that amazed the power washer world by its marvelous service on the famous Maytag Multi-Motor Washers.

One-half h. p. \$30.00—One h. p. \$37.50

For the small power user, nothing has yet been conceived that offers a wider range of usefulness than the Multi-Motor. No matter what your problem is, if a $\frac{1}{2}$ or 1 h. p. engine will do it, a Maytag will not disappoint you.

You can't question its reliability—you can't beat its economy—you can't find its equal in any engine of the same rated horsepower. The name Maytag assures you of that.

Don't be content with anything less. Lightest weight, $\frac{1}{2}$ h. p., 35 pounds; 1 h. p., 65 pounds. Easy to carry and quickly connected for use. Smallest number of parts—no gears, cams or valves to cause trouble. If your dealer can't supply you, we will ship direct. Buy now and avoid possible advance in prices.

THE MAYTAG COMPANY 75
Dept. 220 NEWTON, IOWA

World's Foremost Builders of Washing Machines

JOBBER AND DEALERS: Write for Multi-Motor Proposition. It pays.



Red Seal Dry Batteries Are Guaranteed

to give absolute satisfaction for Automobiles, Motor Boats, Gas or Gasoline Engine Ignition, Medical Batteries, Telephone, Door Bells, Annunciators, Wireless Apparatus or any other open circuit work.

ASK YOUR DEALER

Send for Our New Edition of Our Catalog A28
Ready About July 1st

It will be pocket size, 8x 4½ and will contain 248 pages with over 1,100 illustrations, describing in plain, clear language all about Bells, Push Buttons, Batteries, Telephone and Telegraph Material, Electric Toys, Burglar and Fire Alarm Contrivances, Electric Call Bells, Electric Alarm Clocks, Medical Batteries, Motor Boat Horns, Electrically Heated Apparatus, Battery Connectors, Switches, Battery Gauges, Wireless Telegraph Instruments, Ignition Supplies, etc.

Send for a copy now

MANHATTAN ELECTRICAL SUPPLY COMPANY, Inc.

NEW YORK, 17 Park Place CHICAGO, 114 So. 5th Ave. ST. LOUIS, 1106 Pine St. SAN FRANCISCO, 604 Mission St.



The Electrical Experimenter



BOYS!

Here is **THE** electrical magazine for you. For the Dabbler and the "How-to-make-it" fiend. Chuck full of experiments and the latest electrical doings. Non-technical—in plain English. One of the foremost authorities on **WIRELESS** in U. S.

200 Illustrations, 90 big pages, over 100 articles.

One copy will convince you.

At All News Stands 15c

\$1.50 a year. (Foreign \$2.00)

Send 25c for 3 numbers

THE ELECTRICAL EXPERIMENTER

235 Fulton St., New York

LEARN TELEGRAPHY



at home in shortest possible time. Morse or Wireless. **OMNIGRAPH AUTOMATIC TRANSMITTER**, connected with Sounder or Buzzer, sends you messages at any speed, just as expert operator would. Adopted by U. S. Govt. 6 styles. Catalog free.

OMNIGRAPH MFG. CO.

39-H Cortlandt St., New York.

Super-Sensitive Microphone Only \$7.50

This instrument is offered at an extremely low price. It is excellent for building your own amplifier. Can also be used in many experiments where a sensitive microphone is required.



DETECTAGRAPH, \$15

This detecting instrument of marvelous sensitivity can be used for detecting secret conversations. Outfit consists of Sensitive Transmitter, 25-ft. Black Cord, Receiver, Headband, Case and Battery.

Send for One Today and Convince Yourself




DETECTAGRAPH \$15

MICROPHO-DETECTOR COMPANY

GASTON BOISSONNAULT, President

25 CHURCH STREET, NEW YORK

Makers of Super-Sensitive Microphone Apparatus

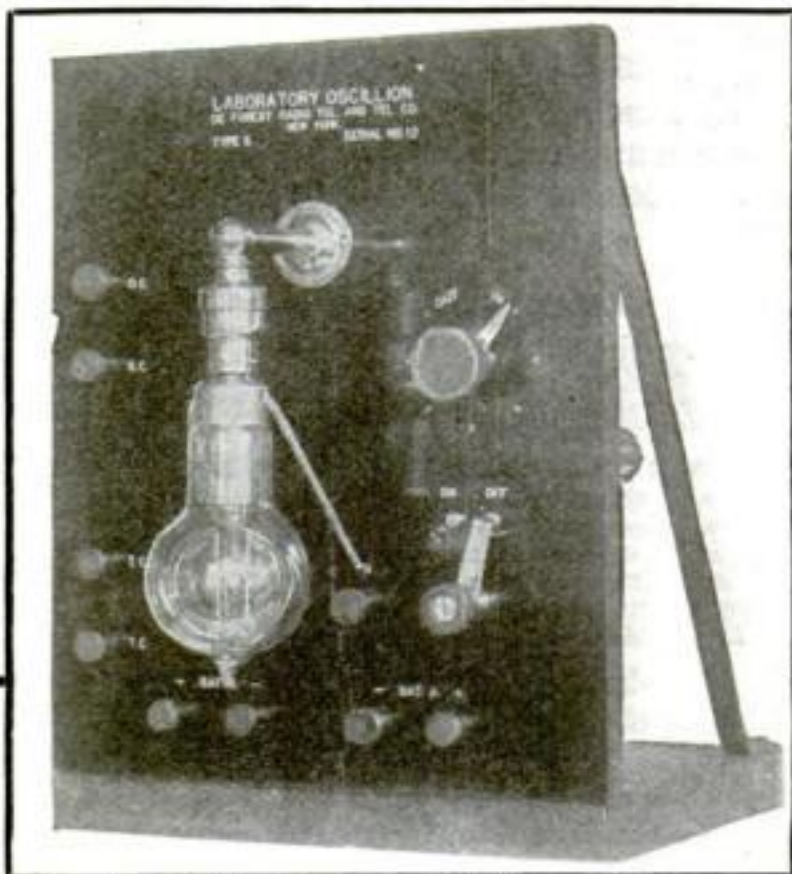

Type S Laboratory Oscillation, \$60.00

DeForest "Oscillation"

(Oscillating-Audion)

Generator of absolutely undamped oscillations of any frequency. Permits Radio Telephone speech surpassing in clearness that over any wire. For Laboratory and Research Work has a field utterly unfilled. Patents issued and pending. Prices and particulars from

DeForest Radio Tel. & Tel. Co. 1391 Sedgwick Ave., Highbridge, N.Y. C.

AT LAST! Electromagnetic waves of any length from an incandescent lamp.

THE "ELECTRO" TELEGRAPH

is not a toy, but a practical, honestly built telegraph outfit, which not only sounds but works like the big commercial instruments. By studying the code for 30 days you can become a first-class telegraph operator. Such operators are in big demand now. Outfit consists of TWO complete telegraph instruments each measuring 3½x2½x2½. All metal parts are highly nickel plated, including key lever. Note hard rubber knob. Telegraph Code Chart, telegraph blanks and connecting wire comes with set, but no batteries. Outfit works on 2 dry cells, (one cell for each instrument). The "Electro" is the ONLY Outfit that works both ways, each station can call; no switches, no extras. Nothing to get out of order. Guaranteed to please you or money back.

TELEGRAPH CODES.

ALPHA BETA GAMMA

DELTA Epsilon ZETA

ETA THETA IOTA

KAPPA LAMDA MU

NU Xi Omicron

PHI PSI OMEGA

Upsilon Phi Chi

Psi Chi Psi

Chi Psi Chi

Psi Chi Psi

Chi Psi Chi

Psi Chi Psi

Chi Psi Chi

Psi Chi Psi

Chi Psi Chi

Psi Chi Psi

Chi Psi Chi

Psi Chi Psi

Chi Psi Chi

Psi Chi Psi

Chi Psi Chi

Psi Chi Psi

Chi Psi Chi

Psi Chi Psi

Chi Psi Chi

Psi Chi Psi

Chi Psi Chi

Psi Chi Psi

Chi Psi Chi

Psi Chi Psi

Price Complete as illustrated - **\$1.00**



At all good dealers and department stores. If your dealer cannot supply you send us \$1.00 for outfit and add mailing charges for two pounds, otherwise we ship express collect. Goods shown here are only a fraction of our wonderful assortment illustrated and described in our great 228-page **ELECTRICAL CYCLOPEDIA**; contains more information than most electrical works. Also contains twenty coupons for free Wireless Course. **CYCLOPEDIA SENT FREE** on receipt of 4c to cover postage. **SEND FOR YOUR COPY TODAY.**

ELECTRO IMPORTING CO., 229 Fulton Street, New York City

When writing to Advertisers please mention Popular Science Monthly

JAPANESE ROSE BUSHES

The Wonder of the World

Japanese Rose Bushes bloom all the year round. Just think of it. Six weeks after planting the seed, the plants will be in full bloom. It may not seem possible, but we positively guarantee it to be so. They will bloom every ten weeks, Summer or Winter, and when three years old the bush will be a mass of roses, bearing from five hundred to a thousand roses on each bush. The flowers are in three shades—white, pink, and crimson. The plants will do well both in and out doors. We guarantee at least three bushes to grow from each packet of seed. Price, 10c packet, 3 pkts. for 25c postpaid.

Chinese Fragrant Tree Fern

Just introduced; noted for its rapid growth. An exceptionally pretty ornamental plant. Foliage is rich dark green. Forms grand pyramidal bushes about five feet high. Branches very desirable for decorative purposes, wreaths, etc. Seeds 15c pkt., 3 for 40c.

Weather Plant

NATURE'S WEATHER PROPHECY By mysterious changes that take place, this remarkable plant accurately forecasts the weather many hours in advance. Will grow anywhere all the year around. An interesting house plant. Bears large, fragrant, pink, butterfly shape flowers. Seeds, 15c packet, 3 for 40c, postpaid.

GROUND ALMONDS

Amazingly Prolific—Easily Grown From Seed

The Ground Almond has a flavor that is MOST EXCELLENT, resembling the coconut. The meat is snow white, covered with a shell or skin of brown color. It grows close to the surface and anything from 200 to 300 Almonds may be expected from a single nut. There is no trouble whatever in growing anywhere and in any kind of soil. May be planted any time, and in eight or ten weeks from time of planting you will have an ENORMOUS CROP of the MOST DELICIOUS ALMONDS YOU EVER TASTED. Seeds, 15c Pkt.

Perfume Plant

Blooms only at night, giving forth the most delightful scented fragrance for quite a distance. Causes much comment. For house or garden. Also valuable because of rare perfume made from it. SEEDS, 10c pkt., 3 for 25c.

SENSITIVE PLANT

Marvel of the Philippines. Leaves curl, fronds droop when touched. Apparently resents interference. A handsome shrub for house or garden; very curious and interesting. SEEDS, 15c pkt., 3 for 40c.

Calabash or Pipe Gourds

A luxuriant and rapid growing climber; thrives anywhere. Produces the ornamental gourds from which the famous African calabash pipes are made. Grow this interesting vine and make your own. Seeds, with full instructions, 15c. 3 pkts. for 40c.

Japanese Nest Egg Gourd

Very curious. Produces fruit same size, shape and color of nest eggs. Matured fruit does not crack. Will serve for years as a nest egg, stocking darning, ornamental purposes, etc. SEEDS, 15c pkt., 3 pkts. for 40c.

MAMMOTH PEANUTS

Peanuts can be easily cultivated. Their culture is very simple and exceedingly interesting. Mammoth Peanuts grow to an astonishing size. It is a good producer, very prolific, and the giant nuts have a thick, heavily ribbed protecting shell. The plant is very attractive, the leaves being of odd shape and a handsome green shade, tinted through the center with white. You will derive much pleasure cultivating this interesting species. SEEDS, 15c pkt., 3 pkts., for 40c.

Shoo Fly Plant

A very remarkable botanical curiosity you should have. Though quite odorless, flies will not remain in a room where it is grown. Bears very pretty blossoms; blooms summer and winter. Grows rapidly from seed. SEEDS 15c packet, 3 for 40c. postpaid.

JAPANESE CLIMBING CUCUMBER

Unusually strong and vigorous growing vine. Attains twice the size of ordinary varieties. Grows readily on fences, poles, trellises, etc. One hill will keep an entire family supplied all summer. SEEDS, 15c, 3 pkts. for 40c.

HERE ARE A FEW OTHER SEED NOVELTIES YOU SHOULD CULTIVATE: Price 15c packet

Japanese Kudzu Vine (Jack and Beanstalk)
Chinese Balloon Flower
Purple Feather Grass (Ornamental)
Curious Ferns (grown from seed)
Bird of Paradise Flower
Japanese Hop Vine
Caster Oil Plant
Ornamental Cotton

Job's Tears (Great Curiosity)
Cathedral Bells
"Tiger" Flower
Snake Cucumber
Emerald Isle Kale
Famous Passion Flower Vine
Fuchsias
Ornamental Gourds
Bouquet, or Red Cluster Pepper


Salsify, or Oyster Plant
White Velvet Okra
Bush Musk Melon (Luscious)
Enormous Sweet Peas
Snowball Cauliflower
Mexican Firefly Plant
Butterfly Pea
Matchless Giant Tomato
Grand Rapids Lettuce
Giant Spider Plant
Great Banana Plant



NITTO'S PLANT & FLOWER FOOD

NITTO'S PLANT FOOD is clean, odorless, and highly concentrated. It is used in liquid form on all kinds of plants, shrubs, roses, ferns, bulbs, berries, lawns, fruit, flower and vegetable gardens. It changes ill-nourished plants into LUXURIANT BEAUTIES, producing masses of blooms that will equal any. Causes plants to bloom early and ahead of others. Your friends will marvel at your success. Makes no difference how healthy or how delicate your plants may be, Nitto's Plant Food will bring out New Foliage and Flowers, and cause a Marvelous Transformation. 15c, 3 for 40c

JOHNSON SMITH & CO., 7185 N. Clark St., CHICAGO

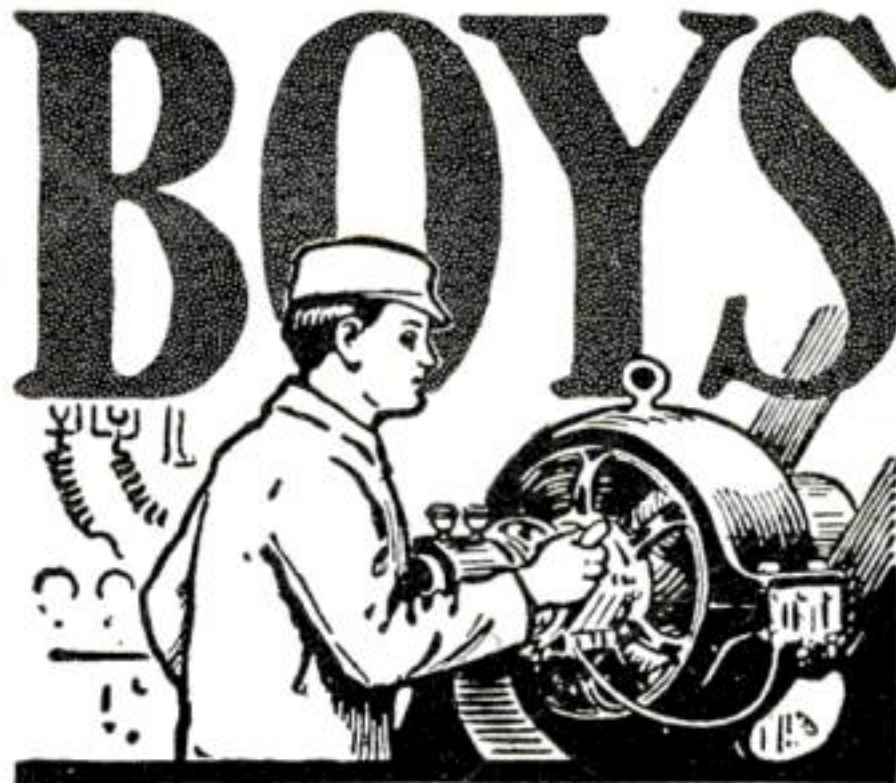

Big Money in Electricity

The electrical industries offer wonderful opportunities to boys with a liking for Electricity. The salaries paid to trained men are large, promotion comes rapidly and, best of all, the work is fascinating.

The discovery and development of new lines (such as wireless telegraphy and telephony), from time to time, promise attractive and paying fields to those who wish to specialize. The *will to do* and *Special Training* will bring success to you.

The International Correspondence Schools can help you to become an expert in electrical work, no matter what branch you like best. Thousands of young men have already won success through I.C.S. help. You can do as well as anybody, *if you try*. Everything is made so clear that you can learn in your spare time, regardless of where you live or what your work. No books to buy.

There's big money in Electricity. Get after it by marking and mailing the Coupon today. *Finding out costs you nothing.*

INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 5805 SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

- | | |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEER | <input type="checkbox"/> CHEMICAL ENGINEER |
| <input type="checkbox"/> Electrician | <input type="checkbox"/> SALESMANSHIP |
| <input type="checkbox"/> Electric Wiring | <input type="checkbox"/> ADVERTISING MAN |
| <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> Window Trimmer |
| <input type="checkbox"/> Electric Car Running | <input type="checkbox"/> Show Card Writer |
| <input type="checkbox"/> Heavy Electric Traction | <input type="checkbox"/> Outdoor Sign Painter |
| <input type="checkbox"/> Electrical Draftsman | <input type="checkbox"/> RAILROADER |
| <input type="checkbox"/> Electric Machine Designer | <input type="checkbox"/> ILLUSTRATOR |
| <input type="checkbox"/> Telegraph Expert | <input type="checkbox"/> DESIGNER |
| <input type="checkbox"/> Practical Telephony | <input type="checkbox"/> BOOKKEEPER |
| <input type="checkbox"/> MECHANICAL ENGINEER | <input type="checkbox"/> Stenographer and Typist |
| <input type="checkbox"/> Mechanical Draftsman | <input type="checkbox"/> Cert. Public Accountant |
| <input type="checkbox"/> Machine Shop Practice | <input type="checkbox"/> Railway Accountant |
| <input type="checkbox"/> Gas Engineer | <input type="checkbox"/> Commercial Law |
| <input type="checkbox"/> CIVIL ENGINEER | <input type="checkbox"/> GOOD ENGLISH |
| <input type="checkbox"/> Surveying and Mapping | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> MINE FOREMAN OR ENGINEER | <input type="checkbox"/> CIVIL SERVICE |
| <input type="checkbox"/> Metallurgist or Prospector | <input type="checkbox"/> Railway Mail Clerk |
| <input type="checkbox"/> STATIONARY ENGINEER | <input type="checkbox"/> Textile Overseer or Supt. |
| <input type="checkbox"/> ARCHITECT | <input type="checkbox"/> AGRICULTURE |
| <input type="checkbox"/> Architectural Draftsman | <input type="checkbox"/> Navigator |
| <input type="checkbox"/> PLUMBING AND HEATING | <input type="checkbox"/> Poultry Raising |
| <input type="checkbox"/> Sheet Metal Worker | <input type="checkbox"/> Automobiles |

Name _____

Present Occupation _____

Street and No. _____

City _____ State _____

If name of Course you want is not in this list, write it below.

When writing to Advertisers please mention Popular Science Monthly



Were \$50. NOW \$33.

14K Engagement Solitaire \$2.50

Price complete with 1-8 Carat Diamond, \$8.00, \$9.33, \$11.88, 1-4 Carat Diamond, \$17.25, \$23.88, \$29.00, 3-8 Carat Diamond, \$29.00, \$42.50, \$57.50, 1-2 Carat Diamond, \$42.75, \$65.00, \$78.00. Choice of 3 qualities.

I import Diamonds direct from cutters in vast quantities. I sell direct to the people who wear Diamonds and by so doing I wipe out the profits of many middlemen. Therein lies the secret of my remarkably low Diamond prices which are less than established jewelers must pay wholesale. I actually save you 35%. I personally grade every Diamond in our vast stock. This is your assurance that you get exactly what we promise, exactly what you expect in fine quality and money's worth.

Send No Money I Ship for Free Examination

any Diamond you select by any express or to any bank to prove that I sell the same Diamond for 35% less money or a bigger Diamond for the same money.

I Give the Only Bankable Money Back Guarantee

The only Diamond Guarantee that you can take to any bank and cash in your Diamond investment if you wish to. It's a legal certificate of carat weight, quality and value. Permits exchange at full value at any time.

1917 DeLuxe Book of Diamonds

FREE Mail coupon and get this handsome free book. Contains true facts about Diamond qualities and values, and thousands of beautiful illustrations of 1917 Diamond Jewelry. References: Lake and State Bank, Chicago; Dun, Bradstreet, your banker, 100,000 satisfied customers all over America.

Barnard & Co., Chicago

BARNARD & CO.,
Dept. 1788-S
N.W. Cor. State & Monroe
Chicago, Ill.

Without expense or obligation please send me, Free postage paid, your 1917 DeLuxe Diamond Book.

Name.....

Address.....

New Complete Line of Small Motors, Dynamos, etc.

See Later Announcement

ADAMS-MORGAN COMPANY 12 Alvin Place, Upper Montclair, N.J.

WIRELESS

for the College or Prep. School man, High School graduate, etc. The U. S. Gov't needs you in its Naval Reserve and Signal Corps. Attractive openings. Special three months Summer course starting June 25th prepares you for either Gov't or Commercial Service. Endorsed by U. S. Gov't and Marconi Co. Day and Evening classes.

Send for special literature

EASTERN RADIO INSTITUTE

899A BOYLSTON ST.

BOSTON, MASS.

THE \$15 MICROPHO DEAF-PHONE

Is a super-sensitive instrument which has been developed to meet the demands for a practical and efficient hearing device at an extremely low price. This instrument of marvelous sensitivity is a great benefit to all those who are afflicted with impaired hearing as it has perfect clarity of tone and articulation. The outfit consists of: One Super-Sensitive Transmitter with cord connector; One Super-Sensitive Ear Piece with small black cord; One Black Single Headband; Black Case and Two Small Batteries. The Transmitter is 2 3/8 inches in diameter, 5/8 of an inch thick, and weighs less than three ounces.

Price Complete, \$15.00.

Write today for free booklet

MICROPHO-DETECTOR CO., Inc.

GASTON BOISSONNAULT, President
25 Church Street Tel. Cortlandt 7290 NEW YORK



You Need a Good Flashlight

Along poorly lit streets, in dark hallways, or gloomy corners, a safe, sure steady stream of brilliant white light is mighty handy. With a FRANCO Flashlight and a Radio Battery, there's no danger of starting fires, blowing up or blowing out—you get real flashlight efficiency.

Franco Flashlights



and Radio Batteries are all definitely guaranteed. Made in seventy-five styles—you are bound to like some of them. Send for illustrated booklet and name of nearest dealer.

Interstate Electric Novelty Co.
104-114 S. 4th St., Brooklyn, N. Y.

Does The Socket Chafe Your Stump?

If so, you are NOT wearing

Buchstein's Vulcanized Fiber Limb which is soothing to your stump, cool, neat, light, walls not much thicker than a silver dollar, strong.

Guaranteed 5 Years.
Sold on easy payments to good people.

P. Buchstein Co., 113 6th St., S., Minneapolis, Minn.

Violet Ray Treatment

Restores, Beautifies, Benefits, Relieves

Anyone can now enjoy this wonderful, invigorating, electrical treatment. Electrical energy transmitted without shock or pain, to any part of the body in the privacy of their home, with our




Vi-Ray-O

The true Violet Ray generator. Endorsed by leading physicians and satisfied users everywhere.

Write for our 68-page illustrated Free book—Vi-Ray-O. It tells of the soothing, delightful, nerve toning and health giving Violet Ray and all details about our wonderful Vi-Ray-O instruments.

With it comes our special 10 day offer. — Write today.

Western Coil & Electrical Co., Box 19, Racine, Wis.




DIAMONDS ON CREDIT

BEAUTIFUL DIAMONDS SENT ON APPROVAL

NO MONEY DOWN—Order any diamond from our catalogue; we will send it, all charges paid. After you have made a thorough examination and are satisfied as to the quality and value, pay 20 per cent of the price and only 10 per cent per month thereafter. If not satisfactory, return it at our expense. Don't pay a cent until you are satisfied. Certificate furnished guaranteeing the quality of every diamond. Your Diamond purchased from us can be exchanged at a yearly increased value of 7 1/4 per cent on a larger purchase. Own a genuine Diamond. Send for our Catalog DeLuxe No. 47B. It's free. L. W. SWEET & CO., Inc., 2 & 4 Maiden Lane, New York City

When writing to Advertisers please mention Popular Science Monthly



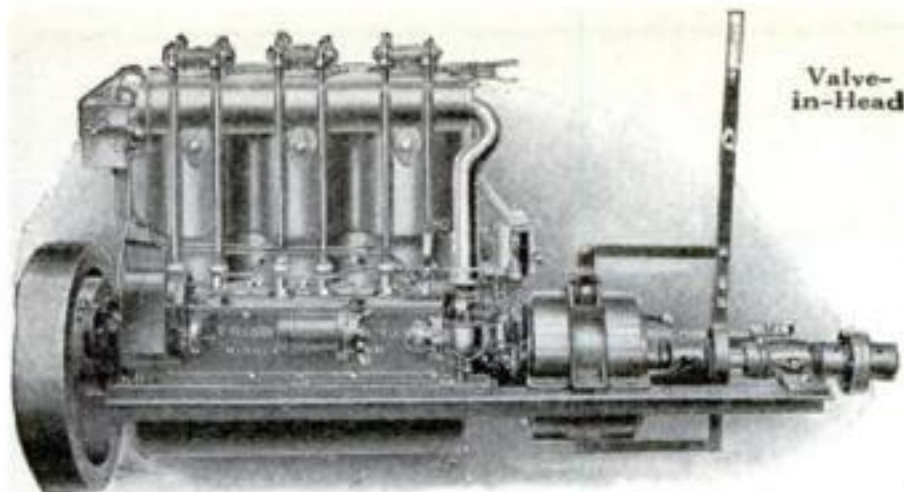

For the Boat You Intend to Build. Frisbie: The Friendly Motor. Why not choose your motor now and build the boat around it? We will gladly send our catalogue and help you in any way. Write now.

FRISBIE MOTOR CO., 25 Center Street, Middletown, Conn.

Learn Aviation

Learn at home! The U. S. Government will spend 60 million dollars on aviation. Right now we need thousands of flying men. And there is even greater need for Airplane Designers; Builders; Salesmen; Assemblers; Repairmen; Inspectors; Instructors; Mechanics. This course gives you all the basic training for these positions.

Write Today! Get our Special Offer. Learn how you can get free a flying model and all materials to build your own model. Don't fail to write us today!

National Aero Institute. Dept. B-920 Morton Bldg., CHICAGO

Learn Watch Repairing

Be a watchmaker—you can learn this profitable trade by correspondence in a few weeks in your own home by the DeSelms Chart System. After you complete the course you will know a watch from A to Z. You will know just what the matter is and how to repair one. When you graduate you will be a practical watchmaker and repairer and competent to fill any position. Positions for our graduates.

Ask for our Free Book. It explains our system and terms.

THE DeSELMS WATCH SCHOOL
687 Perry St., ATTICA, IND.



IF YOU STAMMER

Attend no stammering school until you get my big FREE book and special rate. Largest and most successful institution of its kind in the world. Two large modern school buildings fully equipped for treatment of stammering under my advanced natural method. No sing songing or time beating.

Established 14 years. Known everywhere as the best. Personal instruction given each student. Write today for full particulars. Lee Wells Millard, Pres. North-Western School for Stammerers, 2318 Grand Ave., Milwaukee, Wis.

"Handy Electrical Dictionary"

Contains upward of 4,800 words, terms and phrases employed in the electrical profession, with their definitions given in the most concise, lucid and comprehensive manner. Although the book is small enough to fit in the vest pocket, we venture the assertion that there is contained within its covers more reliable and useful information for the electrician, than was ever before published in a single volume. Full Leather, Gold Edges, Indexed. Price 50 Cents. Popular Science Monthly, 239 Fourth Ave., New York City.

Book on Law Free



Write today for our new 171-page book on "The Power of Law Training". It carries a vital and inspiring message to every ambitious man. Find out about the opportunities that await the law trained man. Find out how you can learn from masters of the law right in your own home. No obligations. The book is free.

Write today—now while we are making a special reduced price offer.

AMERICAN CORRESPONDENCE SCHOOL OF LAW
1207 Manhattan Bldg. Chicago, Illinois

Driver Agents Wanted

Five-Pass., 34.7 H. P. Drive and demonstrate the Bush Car. Pay for it out of your commissions on sales, my agents are making money. Shipments are prompt. Bush Cars guaranteed or money back.



Write at once for my 48-page catalog and all particulars. Address J. H. Bush, Pres. Dept. 780

114-inch Wheelbase
Delco Ignition—Elect. Stg. & Ltg.
BUSH MOTOR COMPANY, Bush Temple, Chicago, Ill.

The Burlington Smashes

Mail the Coupon TODAY for Free Watch Book

All Watch Competition **Look!**



21 Ruby and Sapphire Jewels—
Adjusted to the second—
Adjusted to temperature—
Adjusted to isochronism—
Adjusted to position—
65 year gold strata case—
Genuine Montgomery Railroad Dial—
New ideas in Thin Cases.

Every fighting vessel in the U. S. Navy has the Burlington Watch aboard. This includes every torpedo boat—every submarine as well as the big Dreadnoughts. Some have over 800 Burlingtons aboard.

\$2.50

Only 2 A Month

And all of this for \$2.50 — only \$2.50 per month—a great reduction in watch price—direct to you—positively the exact prices the wholesale dealer would have to pay. Think of the high-grade, guaranteed watch we offer here at such a remarkable price. And if you wish, you may pay this price at the rate of only \$2.50 a month. Indeed, the days of exorbitant watch prices have passed.

See It First!

You don't pay a cent to anybody until you see the watch. You don't buy a Burlington watch without seeing it. Look at the splendid beauty of the watch itself. Thin model, handsomely shaped—aristocratic in every line. Then look at the works! There you will see the masterpiece of watch makers skill. A timepiece adjusted to positions, temperature and isochronism.

Free Watch Book

Get the Burlington Watch Book by sending this coupon now. You will know a lot more about watch buying when you read it. You will be able to "steer clear" of the over-priced watches which are no better. Send the coupon today for the book and our offer.

Burlington Watch Co.

19th St. & Marshall Blvd., Dept. B-120
Chicago

Free Watch Book Coupon

Burlington Watch Co.
19th St. and Marshall Blvd.
Dept. B-120 Chicago, Ill.

Please send me (without obligations and prepaid) your free book on watches with full explanation of your cash or \$2.50 a month offer on the Burlington Watch.

Name.....

Address.....

When writing to Advertisers please mention Popular Science Monthly



Inquiries from Manufacturers and Other Buyers of Patents
Who Are Looking for Good Ideas

Protected by Owen Patents

Are constantly being received. Hundreds of ideas are wanted—a market exists for them today. **YOURS** may be one of them. Send for my free books and see for yourself—read the requests for inventions protected by me. Many are simple. You can help supply this demand.

As soon as my clients' rights are protected I aid in every practicable way, **without charge**, to sell. Their **applications** are advertised free—their patents are called to the attention of the proper prospective buyers—every necessary thing is done. Get my booklets and see.

THESE ARE FREE

You will incur no obligation by writing me. A simple request will bring them to you—the finest, most reliable and instructive patent books published. A postal will do.

"Successful Patents"—a 72 page guide book, tells how to proceed; describes my advantageous business methods; gives references, testimonials, etc.

"Stepping Stones"—gives hundreds of hints of inventions wanted; articles from interviews of noted authorities; tells the truth about prizes for inventions.

"Patent Promotion"—tells you how to sell; why some inventors fail; discusses the value of your idea; how I aid my clients; manufacturing aids furnished you; recent successful patents, etc.

"Patent Buyers"—Publishes letters, and abstracts of letters, from over 400 of the many manufacturers, and other patent buyers, who wish to buy, or obtain on royalty, **OWEN PATENTS** on innumerable inventions of interest to them.

You will also be sent from time to time, as new inventions are wanted, full information concerning them. Only in this way can you keep up to date.

Write For These Today Advice costs nothing. All communications confidential. Your work will receive my personal supervision—but my fees are no higher than others.

Results Speak Loudest—But Here Are Some References

Columbia National Bank,
Washington, D. C.
National Locktile Co.,
Washington, D. C.
The Carnahan Press,
Washington, D. C.
Lightning Gun & Cycle Works,
Oklahoma City, Okla.
Antholene Mfg. Co.,
Hutchinson, Kans.

National Rack Co.,
61 Hanover St.,
Boston, Mass.
The C. J. Loftus Co.,
13 Spring Common,
Youngstown, Ohio
Whitehead Hosiery Mills,
Burlington, N. C.
Dickinson Mfg. Co.,
Des Moines, Iowa.

A LARGE NUMBER OF OTHERS IN MY BOOKLETS.

RICHARD B. OWEN, 6 Owen Bldg., Washington, D. C.
New York Office:
22nd Floor, Woolworth Bldg.

Inventors submitting their inventions to me are protected in a tangible manner until their applications are filed.

NUTS FOR YOU TO CRACK

Invent something for which a **DEMAND EXISTS**—for which there is a **WAITING MARKET**. Here are abstracts from a few recent requests—**HUNDREDS** are published in full in my literature. Can you invent any of these? Watch this list each month.

One of the largest manufacturers in the electrical field has inquired of me for patents on "fan motors, alternating and direct current power motors, starting motors and lighting generators for automobiles and controller apparatus thereof, farm lighting outfits and everything pertaining to the electrical industry along the line of motors and generators, both alternating and direct currents up to and including 20 horse-power."

A large middle Western manufacturer of agricultural machinery has just inquired for patents on inventions in that field.

There is a most insistent demand for automobile accessories and allied inventions, many letters being received continually from those interested in the purchase of patents of this nature.

A Canadian manufacturer wants patents upon hardware specialties, but states that they are also "willing to consider any article made of metal in whole or in part."

SPECIAL FREE REPORT

Send sketch or model of your invention for free report on patentability, practicability, etc.

PATENTS TRADE-MARKS AND COPYRIGHTS

**LARGEST PATENT FIRM
IN THE WORLD**

SPECIAL OFFER

Free Opinion as to Patentability

Before sending your invention to any attorney or manufacturer or disclosing your invention, write for our free blank form **PROOF OF CONCEPTION** in order to protect your invention and secure your rights. This should be signed and witnessed and returned to us, together with a model or sketch and description of your invention, and we will give a **FREE OPINION** as to the patentability of the invention. If we report the invention patentable we will furnish a Certificate of Patentability.

VICTOR J. EVANS

This Certificate of Patentability, together with our blank form Proof of Conception will protect the inventor and serve as proof of the invention until the case can be filed in the U. S. Patent Office.

Obtaining Assistance for Inventors—Our certificate is of great assistance to inventors who require financial aid to obtain patents.

OUR FIVE BOOKS MAILED FREE

(See Coupon Below)

to any address. Send for these books—the finest publications ever issued for free distribution.

How to Obtain a Patent

Our illustrated eighty-page Guide Book is a book of reference for inventors and contains 100 mechanical movements, illustrated and described. Tells how to invent for profit.

What to Invent

Contains a valuable list of inventions wanted and suggestions concerning profitable fields of inventions; also information regarding prizes offered for inventions amounting to

One Million Dollars

Millions in Trade-Marks

Shows the value of Trade-Marks and information regarding unfair competition.

We Advertise Our Clients' Inventions Free in a list of Sunday newspapers, in manufacturers' journals and in World's Progress. Sample Copy Free. We save you time and money in securing patents. After the patent is granted we assist you to sell your patent.

List of Patent Buyers

Contains requests from manufacturers, mail order houses and promoters for patents secured by us and suggestions as to **New Ideas** they wish to purchase. We place our clients in touch with capital free of charge. We have recently received over 300 requests from manufacturers.


Foreign Patents

We have direct agencies in all the principal foreign countries and secure foreign patents in the shortest possible time and at the lowest cost. Write for our illustrated Guide Book on Foreign Patents, sent free to any address.

WANTED NEW IDEAS

Prepare Now to meet the Demands of Industry in All Fields for New Ideas and New Inventions. We are constantly receiving requests from manufacturers who consult us when purchasing patents for inventions in all lines. We invite manufacturers and promoters to address our Sales Department regarding the purchase or leasing of a number of meritorious patents secured by us.

VICTOR BUILDING

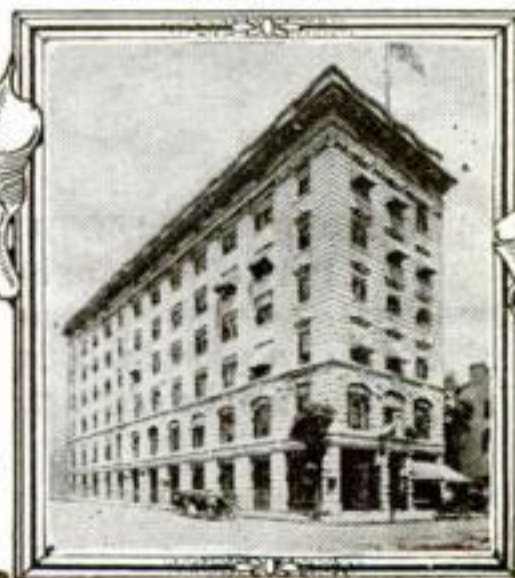

FREE COUPON!

VICTOR J. EVANS & CO.

New York Offices:
1001 Woolworth Bldg.

PATENT ATTORNEYS
Pittsburg Offices: 514 Empire Bldg.

Philadelphia Offices:
1429 Chestnut St.

Main Offices: 760 Ninth St., WASHINGTON, D. C.

Name _____ Address _____

When writing to Advertisers please mention Popular Science Monthly

U.S. PATENTS



FREE →

BOOK-BULLETINS & ADVICE

REGISTERED

ATTORNEYS

LANCASTER



& ALLWINE

274 OURAY BLDG.,

WASHINGTON, D. C.

Don't Lose Your Rights

We publish forms called "Evidence of Conception" by which you can establish your rights before sending the invention to anyone. It is your best protection. We issue up-to-date bulletins of improvements wanted; aid inventors to promote their rights; render reliable opinions free of charge and secure valuable patents and trade marks on reasonable terms. Personal service assured by our **Service Guarantee Contract**. References 2nd National Bank, Washington, J. P. Roth Packing Co., Cincinnati.

SIMPLY MAIL COUPON

LANCASTER & ALLWINE, 274 Ouray Bldg., Washington, D. C.

Send me free, book "Inventions—Patenting & Promoting," Bulletin of Improvements Wanted and blank form, "Evidence of Conception."

Name

Address



PATENTS

Send Sketch or Model of Your Invention for **Free Opinion as to Patentability** Our Certificate of Patentability is Evidence of

Conception of your invention and may prove valuable to you. Our Credit System enables you to file your application for Patent and proceed without delay. Every case receives personal attention of one or both members of the firm.

Patents we secure advertised at our expense in Leading Mechanical Magazine.

Write today for Free copy of 104-page book "How to Obtain a Patent and What to Invent"

Talbert & Parker, Patent Lawyers
4686 Talbert Bldg. WASHINGTON, D. C.



R. MORGAN ELLIOTT & Co.

PATENT ATTORNEYS

MECHANICAL, ELECTRICAL & CHEMICAL EXPERTS

714-722 WOODWARD BUILDING

WASHINGTON, D. C.

PATENTS SECURED OR ALL FEES RETURNED!

THAT
PAY
"Trade Mark"

ACTUAL FREE SEARCH
of Patent-Office Record as to
Patentability of your invention

With each favorable report we issue a
Contract to Return All Fees!

Send data at once by registered mail and we will promptly
advise how OUR CLIENTS PROCEED TO MAKE
FORTUNES. Over \$627,212.00 made by clients.

Patents Sold **FREE**: Read "Patent Sales Department" of our 190-page Guide Book, **FREE!**

Don't miss this book. Mail postal today.

E. E. VROOMAN & CO., 858 F Street, WASHINGTON, D. C.

HIGH-VALUE PATENTS

—the ONLY kind Wanted and BOUGHT by Manufacturers.
Send 8c. postage for new book of Extraordinary Incentive to Inventors
R. S. & A. B. LACEY, 50 Barrister Building, Washington, D. C.

PATENTS

Promptly secured. I assist you to market your invention. Send sketch or model for my honest advice. Prompt personal service. Booklet free.

J. R. KELLY, 742 Woodward Bldg., Washington, D.C.

Patents on Easy Payments

Send model or sketch for Free Search and opinion as to patentability. Write today for our free book of Inventions Wanted and How to Obtain Patent on Easy Fee Payments. We furnish our clients with list of patent buyers and assist inventors to sell patents.

C. C. HINES & CO., 592-A Loan & Trust Bldg., Washington, D. C.

PATENTS

TRADE MARKS. COPYRIGHTS

Difficult and Rejected Cases Solicited

Over 30 years' active practice. Experienced, personal, conscientious service. Write for terms—Book free. Address

E. G. SIGGERS

Box 1, N. U. Building,

Washington, D. C.

Protective Patents

procured promptly. Strictly professional service. No fee refund, no certificate guarantee no so-called prize or free search schemes used in our business. Inventor's 104 page Blue Book on Patents sent on request. **ROBB & ROBB, 240-244 Southern Building, Washington, D. C.**

MONEY IN PATENTS

We secure your patent or return our fee. Send sketch or model for free search of Patent Office Records and report on patentability. Manufacturers are writing for patents secured through us. Write for free book, "How to Secure Your Patent," and list of patents wanted. We assist in selling your patent.

P. H. PATTISON & CO., U. S. Patent Attorneys
418 Barrister Bldg., Washington, D. C.

When writing to Advertisers please mention Popular Science Monthly

Wanted—Ideas

Inventors! Send for these Remarkable FREE BOOKS, Today

"Inventions Needed"

This book lays before you a description of the active and profitable field of invention. It tells you the inventions the world needs today, the devices manufacturers are seeking for their business, the ideas for which the public will pay big money.

"How to Get Your Patent"

This book is a guide to the inventor. If you have invented something and desire to learn what it will cost you to get your patent and what you must do to find your market, read this book.

"Special Bulletin of Patent Buyers"

This bulletin contains letters from men who are seeking to purchase patents. We act as intermediary without one cent of charge, between the man who invents and the man who invests.

Send Model or Sketch and description of your invention for Free Opinion as to patentability

*Rejected and Difficult
Cases are Our
Specialty*

RANDOLPH & CO.


130 F St., N.W., Washington, D.C.

RANDOLPH & CO.

130 F St., N. W., Washington, D. C.

Gentlemen: Please send me without obligation on my part, the books indicated on margin of this coupon. (Write on margin of coupon, names of books desired.)

NAME.....
STREET.....
CITY.....STATE.....

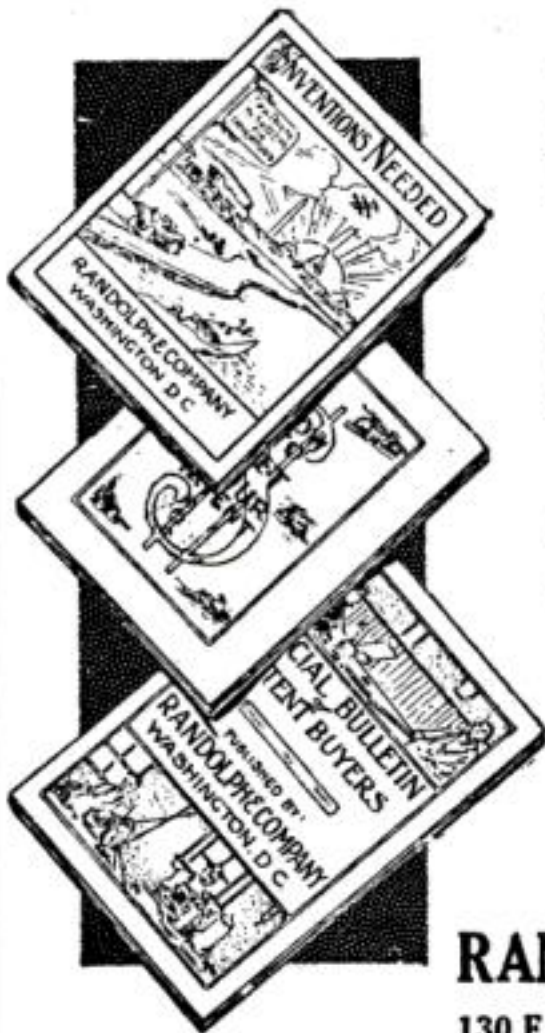

Reliable Prompt Service by a Competent Attorney. Inquiries Invited.

Norman T. Whitaker

Attorney-at-Law and Mechanical Engineer

Former Examining Official of the U. S. Patent Office

28 Legal Building - - Washington, D. C.

PATENTS

C. L. PARKER

Formerly Member Examining Corps, U. S. Patent Office.

PATENT LAWYER

McGill Bldg., WASHINGTON, D. C.

Patents, Trade Marks, Copyrights, Patent Litigation
Pamphlet of Instructions Sent Upon Request

Patents Secured or Fee Returned.

ACTUAL search Free. Send sketch or model. 1917 Edition, 90-page patent book free. Write for it. My free sales service gets full value for my clients. Prompt service. Personal service.

GEORGE P. KIMMEL, Patent Lawyer

219 Barrister Building, Washington, D. C.



Inventions Wanted!

Manufacturers constantly writing us for patents. List of inventions actually requested and book "How to Obtain a Patent" sent free. Send rough sketch for free report regarding patentability. Special assistance given our clients in selling patents. Write for details of interest to every inventor.

Chandlee & Chandlee, Patent Attorneys
Est. 21 Years. 1013 F St., Washington, D. C.

PATENTS

THAT PROTECT and PAY

Advice Free. Terms reasonable. Highest references. Best results.

Send sketch or model for FREE examination and opinion.

BONDED and recommended Patent Lawyer in the Rand-McNally Directory of Bankers and Attorneys, published by Rand-McNally & Co., Chicago, Ill. Recommended Patent Attorney in the Bankers Register and special list of selected lawyers published by the Credit Company, Pontiac Building, Chicago, Sharp & Alleman's Directory of Lawyers and Bankers, published at Philadelphia, and Martindale's American Legal Directory of New York City.

ALL BUSINESS GIVEN PROMPT AND PROPER ATTENTION

A large list of strong recommendations furnished free

WATSON E. COLEMAN, Patent Lawyer, 624 F St., Washington, D. C.

When writing to Advertisers please mention Popular Science Monthly



"Instruction by correspondence is the cheapest and best way for the poor man"

Thomas Edison

Edison is Right!!!

You admit the International Correspondence Schools are a good thing. You'd take a course right now "if"—"except"—

"If" what? If you weren't so "overworked," with such "long hours," or had more strength and energy? Wasn't it Edison who stayed up half the night educating himself in spite of every handicap you could ever have?

All big men who have made their mark in the world had the *ambition*—the *determination*—to improve their spare time, to train themselves for big work. You, too, can possess power, money and happiness if you'll only make the effort. The reward is great—it's worth it.

Here's all we ask: Merely mail this coupon. Put it up to us without paying or promising. Let us send you the details of others' success through the I. C. S., and then decide. Mark and mail this coupon now.

I. C. S., Box 5808, Scranton, Pa.

INTERNATIONAL CORRESPONDENCE SCHOOLS BOX 5808, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

- ☐ ELECTRICAL ENGINEER
- ☐ Electric Lighting
- ☐ Electric Railways
- ☐ Electric Wiring
- ☐ Telegraph Engineer
- ☐ Telephone Work
- ☐ MECHANICAL ENGINEER
- ☐ Mechanical Draftsman
- ☐ Machine Shop Practice
- ☐ Gas Engine Operating
- ☐ CIVIL ENGINEER
- ☐ Surveying and Mapping
- ☐ MINE FOREMAN OR ENGINEER
- ☐ Metallurgist or Prospector
- ☐ STATIONARY ENGINEER
- ☐ Marine Engineer
- ☐ ARCHITECT
- ☐ Contractor and Builder
- ☐ Architectural Draftsman
- ☐ Concrete Builder
- ☐ Structural Engineer
- ☐ PLUMBING AND HEATING
- ☐ Sheet Metal Worker
- ☐ Textile Overseer or Supt.
- ☐ CHEMIST

- ☐ SALESMANSHIP
- ☐ ADVERTISING
- ☐ Window Trimmer
- ☐ Show Card Writer
- ☐ Sign Painter
- ☐ Railroad Trainman
- ☐ ILLUSTRATING
- ☐ Cartooning
- ☐ BOOKKEEPER
- ☐ Stenographer and Typist
- ☐ Cert. Public Accountant
- ☐ TRAFFIC MANAGER
- ☐ Railway Accountant
- ☐ Commercial Law
- ☐ GOOD ENGLISH
- ☐ Teacher
- ☐ Common School Subjects
- ☐ Mathematics
- ☐ CIVIL SERVICE
- ☐ Railway Mail Clerk
- ☐ AUTOMOBILE OPERATING
- ☐ Auto Repairing
- ☐ Navigation
- ☐ AGRICULTURE
- ☐ Poultry Raising
- ☐ Spanish
- ☐ German
- ☐ French
- ☐ Italian

Name _____

Present Occupation _____

Street and No. _____

City _____ State _____

When writing to Advertisers please mention Popular Science Monthly

PATENTS

WRITE for Free Hand Books on Patents, Trade Marks, etc.—or send sketch, description or model of your invention—for free and confidential opinion regarding patentability.

Oldest firm of patent attorneys — 71 years' experience. **PROMPT, SKILLFUL SERVICE**—candid advice for the inventor. Patents procured through us receive free Special Notice in

SCIENTIFIC AMERICAN

MUNN & CO.

683 Woolworth Bldg., NEW YORK.
627-F Street, WASHINGTON, D. C.



EVERY INVENTOR

should have this book, "Patents and Patent Possibilities." It is chock-full of ideas and practical advice, telling what to invent and where to sell. Write for your copy today. It is **FREE**. I have requests for patents upon sound inventions of all kinds. Can you help supply the demand? My service is individual, prompt and efficient. (14 years' experience.) Every expedient is employed to secure patents at least possible cost.

H. S. HILL, 803 McLachlen Bldg., Washington, D. C.

Patents Secured or Fee Returned.

ACTUAL search Free. Send sketch or model. 1917 Edition, 90-page patent book free. Write for it. My free sales service gets full value for my clients. Prompt service. Personal service.

GEORGE P. KIMMEL, Patent Lawyer
210 Barrister Building, Washington, D. C.

OWN A DIAMOND!



Get One Free!

Our Free Coupon System tells how you too can own a Genuine Diamond. Write today for full particulars. Costs nothing to join our Monthly Diamond Clubs. Thousands do it and are always ahead. You are now given the opportunity to earn a Genuine **Diamond Ring Free** or pay at \$2 a Month as you prefer.

Free Catalog 160 pages—Diamonds—Watches—Easy Terms—all goods sent on approval. \$39.50 Diamond Engagement Club now being formed. Send your name at once! Answer quick!

HARRIS-GOAR CO.

Dept. 92

Kansas City, Mo.

"I Would Not Part with it for \$10,000"

writes an enthusiastic, grateful customer. "Worth more than a farm," says another. So testify over 100,000 Men and Women who have worn it.

The Natural Body Brace

Develops erect, graceful figure. Brings comfort, health, strength and pep.

Makes You Feel Good and Look Good

Replaces and supports misplaced internal organs; reduces enlarged abdomen; straightens shoulders; relieves backache, curvatures, nervousness, ruptures, etc., in both sexes. Fine after-operations. Write today for illustrated booklet, measurement blank and our very liberal free trial proposition. **HOWARD C. RASH, Pres. Natural Body Brace Co., 241 Rash Bldg., Salina, Kan.**



Highest Grade Underwood



For
\$39⁹⁶

Rent
or
Buy

A genuine, visible writing Underwood with famous back spacer, two-color ribbon and tabulator—at less than 1/2 manufacturer's price. Guaranteed for 5 years. Money refunded if not satisfactory.

10 DAYS' FREE TRIAL

It will enable you to write quickly, legibly. Keep carbon copies. Save arguments and lawsuits. Earn extra money typing manuscripts, scenarios, etc. You may rent, applying rent on purchase price—or buy, cash or easy payments. Send for Offer No. 77.

TYPEWRITER EMPORIUM Est. for a Quarter Century CHICAGO - ILL.

TYPEWRITERS



\$10 and up. All makes. Save \$25 to \$50

on rebuilt at the factory by the well-known "Young Process." Sold for low cash—installment or rented. Rental applies on purchase price. Write for full details and guarantee. Free trial.

YOUNG TYPEWRITER CO., Dept. 266, Chicago.

TYPEWRITERS

SUMMER PRICES

Our entire stock of latest models is offered at special prices for the summer only.

Factory Rebuilt Typewriters

All trademarked, and guaranteed for one year. Buy now and save as much as \$75. Branch stores in leading cities.

Write for Catalog and Summer Price-List
American Writing Machine Co., Inc., 339 Broadway, N. Y.



SUPERIOR SINCE 1904

Over 100,000 in Use
Mostly sold through
recommendation
For Personal Desk or
General Office
It checks mental calculations
Buy through your stationer
Write for 10-day Trial Offer
P. E. Ganche, A. A. M. Co.
148 Duane St., New York

Agents Wanted

Golden Gem
PORTABLE \$10
Adding Machine



Multiplies - Subtracts

BUY PLUMBING and HEATING SUPPLIES



at WHOLESALE

Will Save
You 30%

Don't pay retail prices. Full stock on hand for prompt shipment. Send for free catalog.

B. W. KAROL, 800-802 South Kedzie Ave., CHICAGO



CLASS RINGS

PINS-MEDALS-PENDANTS

Emblems for Schools, Clubs and Societies of every kind.

36-page Catalog Free

600 illustrations. Pins 25 cents and up. Save money for your associates.

C. K. GROUSE Co., Manufacturers
108 Bruce Ave., North Attleboro, Mass.

9170
Ring
Sterling
\$1.00 Each

K30
K10-50c
Pin

50c
Pin

10¢ a Day

now buys this superb

Farny Violin

AN exquisite instrument—perfect in tone and superbly finished. Made by the great French violin maker, Henri Farny, and now offered to you at the rock-bottom price. You may pay this rock-bottom price at the rate of only 10 cents a day. 10 days' free trial. Write for special circular—send coupon at once.

Your Choice of Instruments

This Farny violin is only one of the bargains we have to offer. Write today for our new Violin catalog. There you will find illustrated products of the leading violin makers of the world—Farny, Bader, Glier, Heberlein, Fiedler, Wurlitzer and many others. Violins of the highest grade, as well as those of moderate prices—all special values. Priced from \$2.70 to \$50.00, and from \$60.00 to \$250.00. Write now.

WURLITZER

200 years of instrument making

Get the benefit of our mammoth facilities for buying in large quantities. The house that supplies the United States Government now makes a startling money-saving offer direct to you. Write for circular.

10 Days' Free Trial

You cannot judge a violin by seeing it in a store or by playing upon it once. Play on one of these instruments in your own home, in your own way for one full week. Then you will be able to decide.

If you are not satisfied send it back at our expense. If you wish to buy, pay only the rock-bottom price—at the rate of only a few cents a day.



10c a Day

now buys this superb Lyric Cornet. Exquisite triple silver-plated long model Lyric Cornet direct to you on a startling offer. One week free trial before you decide to buy. Liberal allowance for old instruments. Write today for 194-page Catalog—showing 2561 instruments that you have to choose from.

Send the Coupon

Put your name and address on the coupon now and indicate catalogue matter you wish us to send you. Absolutely no obligation in sending the coupon. Do it now. Find out about the startling money-saving offer we are making. Write today—send Coupon or a Letter or a Post-card.

The Rudolph Wurlitzer Co.

Dept. B381
East 4th Street,
Cincinnati, O.
So. Wabash
Avenue,
Chicago

The Rudolph Wurlitzer Co.

Dept. B381
S. Wabash Av., Chicago
4th St., Cincinnati

- Gentlemen:—Please send me without obligations, free and prepaid the catalog matter checked below:
- ☐ The special violin circular.
 - ☐ Special low priced violins under \$15.00
 - ☐ Your 225 page illustrated catalog of musical instruments.
 - ☐ Catalog of music stands, cases and other stringed instrument accessories.
 - ☐ Art catalog of rare old violins.

Name _____

Address _____

When writing to Advertisers please mention Popular Science Monthly

Diamonds Watches

ON CREDIT

2000 ILLUSTRATIONS



Send Today for Your Catalog

This Handsome 116-Page Catalog contains over 2,000 illustrations of Diamonds, Watches, Jewelry. All the new, popular styles are shown—gorgeously beautiful Diamonds, artistic solid gold and platinum mountings—exquisite things—at prices to suit any purse. Select anything desired, either for personal wear or for a gift, then ask us to send it for your examination, all charges prepaid by us.

You See and Examine the Article Right in Your Own Hands

If you like it, pay one-fifth of price and keep it, balance divided into eight equal amounts, payable monthly. Send for Catalog today.

This Is the Ring She Wants

The Loftis "Perfection" Diamond Ring is our great special. Only fine, high-grade Diamonds, perfect in cut and full of fiery brilliancy, are used. Skillfully set in our famous Loftis "Perfection" 14k solid gold six-prong ring mounting. Our large Catalog shows

Wonderful Values at \$25, \$40, \$50, \$75, \$100, \$125


EASY CREDIT TERMS

Our prices on guaranteed Watches are lowest. All the new models are shown in Catalog. Any one you select will be sent for your examination, charges prepaid.



THE BEST GIFT OF ALL

LOFTIS BROS. & CO., National Credit Jewelers
 Dept. B 871 100 to 108 N. State St., CHICAGO, ILL.
 (Established 1868) Stores in: CHICAGO: PITTSBURGH: ST. LOUIS: OMAHA

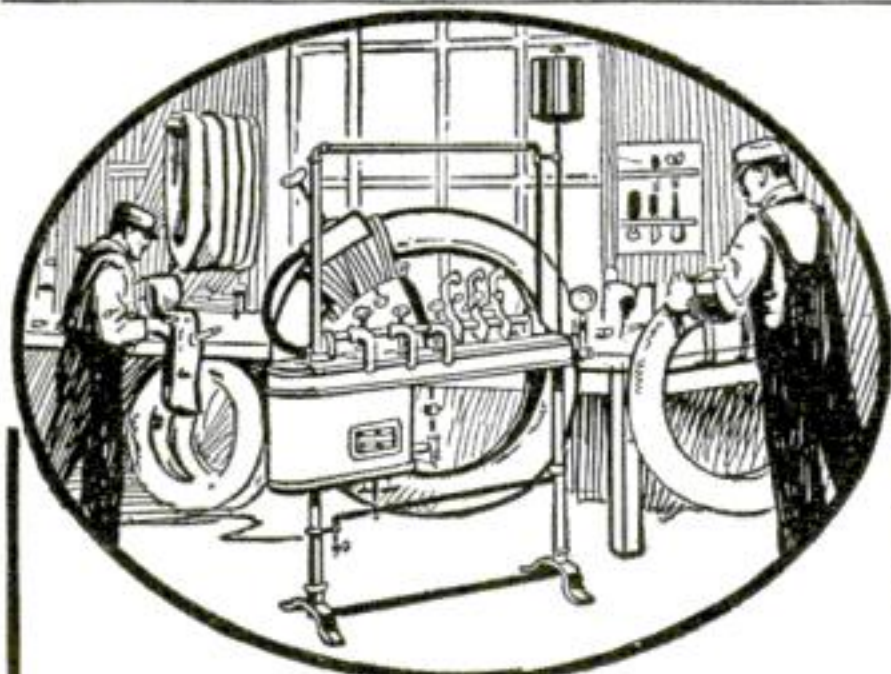

Big money for you

Think of the auto owners in your own locality who are eager to have their tires repaired! Open a repair shop with a Shaler Tire Repair Outfit. Earn \$250.00 per month. No experience necessary. We make it easy for you to start right away. You have your own business.

Free Book Tells How

Write for our wonderful book, "How to Open a Tire Repair Shop." It will open your eyes! Shows you how easy the work is. Shows you the big money that can be made. Write for this book today. A post card will do.

C. A. SHALER COMPANY
 2106 Fourth Street Waupun, Wis.

"Linene"

REVERSIBLE TRADE MARK



Send 2 Cents in U. S. stamps to pay postage and we will send you FREE a SAMPLE COLLAR of our New Style "Copley." State size wanted.

REVERSIBLE COLLAR CO., Dept. A, Boston, Mass.

DIVINE Red Devil Water Motor

4 inch size
6 inch size

A perfect small motor—made like the big turbines—wonderful power.

No muss—no fuss—no mechanical complications. Attach in cellar or at any faucet.

4-inch size for Polishing 6-inch size for Power

Only Motor to do This Work

For Mechanics, Tradesmen, Doctors, Dentists, Shop and Home



Anyone can install. We also supply pulley, emery and buffing wheel.

Booklet and Prices Sent Free

If You Will Write Today and give us size of faucet, water pipe and water pressure and work to be done. You must furnish information to get booklet.

Divine Water Motor Co., Dept. S., Utica, N.Y.

Here's Health and Power, Vim and Vigor



Do you want them? Strength that is more than mere muscular strength. The strength, health, power and vigor of youth is now within your reach through the White Cross Electric Vibrator. Be strong—be healthy—enjoy things the way you used to. Write—learn what vibration may do for you.

The White Cross Electric Vibrator

With this machine in your home you can give yourself the treatments for which specialists receive \$3.00 to \$5.00. Can be connected up as easily as an electric lamp. Or, if your home is not wired for electricity, it will run on its own batteries. See it—try it.

Write Today For Our Big FREE BOOK!

Just your name and address on a letter or post card is enough. We will send you, absolutely free and prepaid, our new book, "Health and Beauty." It tells you about vibration and about our special offer. Write today.

Lindstrom-Smith Co., Dept. B 120 1100 So. Wabash Ave., Chicago

UP-TO-DATE
NEW AND USEFUL

Pen or Pencil Clasp

with complete yearly calendar



Buy from your dealer or send 15c for sample and particulars. State which size clasp you want—for pen or pencil.

Full Size.

ARGUS MFG. CO.
128 S. Honore St., CHICAGO, ILL.

She

Prophy-lactic

Tooth Brush

Brush your Teeth this Way



Not This Way



When writing to Advertisers please mention Popular Science Monthly

Free—Six Big Issues of Investing for Profit



If you will simply send me your name. Special Introductory FREE Offer. Six fine Monthly Issues—each worth \$10 to \$100 to you.

How much do you know about the Science of Investment? Do you know the *Real Earning Power* of your money? What is the difference between the *Rental Power* and *Earning Power* of your money? Do you know how \$100 grows into \$2200?

Why you should get **Investing for Profit**: Only one man in a thousand knows the difference between the *rental* power and the *earning* power of his money. Few men know the underlying principles of incorporation. Not one wage earner in 10,000 knows how to invest his savings for profit, so he accepts a paltry 2% or 3% from his bank, while this same bank often earns from 10% to 30% or more on *his money*—or he does not know the science of investing and loses his all.

Russell Sage said: "There is a common fallacy that, while for legal advice we go to lawyers, and for medical advice we go to physicians, and for the construction of a great work, to engineers—financing is everybody's business. As a matter of fact, it is the most profound and complicated of them all."

So let me give you just a glimpse of the valuable investment information you will get in my six big issues, "The Little Schoolmaster of the Science of Investment," a guide to money-making:

The Science of Investment.	Capital Is Looking for a Job.
The Root and Branch of the Investment Tree.	The REAL Earning Power of Your Money.
How to Judge a Business Enterprise.	Investment Securities Are Not Investment Opportunities.
Where New Capital Put Into a Corporation Really Goes.	The Actual Possibilities of Intelligent Investment.
"Watering"—Its Significance.	The Capitalization of Genius and of Opportunity.
Idle Money vs. Active Money.	

Wait till you see a good thing—but don't wait till everyone sees it. You will then be too late. Never was a time more auspicious for a public campaign of education on the logic of true investment. A revolution in the financial world is now going on—to the profit of the small investor.

You are now face to face with your opportunity—if you have the courage to enter the open gate to the road of fortune.

I believe you will find much interest in reading my six issues of **Investing for Profit**. From

cover to cover it contains the fundamental principles of investment it has taken a lifetime to gather—from my own experience and from every available authoritative original source of information.

If You Can Save \$5 a Month or More

Don't invest a dollar in anything anywhere until you have read my wonderful magazine. **Investing for Profit** is for the man who intends to invest any money, however small, or who can save \$5 or more per month, but who has not as yet learned the art of investing for profit. Learn how \$100 grows into \$2200.

Use This Coupon for the Six Issues and Financial Advice FREE

If you know how to invest your savings—if you know all about the proposition in which you are about to invest your hard-earned savings—you need no advice. But if you don't, if there is a single doubt or misgiving in your mind—I shall be pleased to answer any inquiries you may make, or furnish any information I can regarding the art of saving and making money through wise investment.

So sign and mail this coupon now. Get "Investing for Profit" **FREE** for six months. Ask me to put you on my mailing list for Free Financial Advice. Don't put this off. It means too much to you now and in the future. Sign and mail this coupon at once.

H. L. BARBER, Publisher, Chicago

Mail This Now



H. L. BARBER, Publisher
20A W. Jackson Blvd. Chicago



Please send me **FREE** "Investing for Profit" for six months. Put me on your mailing list for Free Advice on Investments.

Name

Address

Take a Pencil and make an "X"

A LITTLE X, like the one shown here, has marked the starting point for a good many big successes. It's an easy thing to make. Your pencil will make it in a jiffy BUT it may mark the turning point in your life.

These days the thing that puts a man above his fellows is TRAINING.

And this little "X" when marked on the coupon below will bring you a handsome free book that will tell just exactly how YOU can get the training that has put THOUSANDS of men into high positions. It won't be necessary for you to leave your home to get this training. For twenty years the American School has been giving ambitious men practical training that started them on the road to success.

Send the Coupon

Take a pencil now and mark an X before the position for which you want to qualify yourself. Let us tell you how we have given other men the training that enabled them to hold these positions. Let us tell you how you can get THIS VERY TRAINING right in your own home during your idle hours. You will be under no obligations by sending the coupon.

Find out for yourself what the American School will do for you. Make your mark in the coupon now for the sake of your ambition and the man you want to be. Opportunity is calling. Your ambition is saying, send the coupon. Do it now.

American School
of Correspondence, Chicago, U.S.A.

Dept. G920B Chicago, U. S. A.

Mark
an X
and
Mail
Today

American School of Correspondence, Dept. G920B Chicago, U. S. A.
Gentlemen: Without obligation please send me booklet and tell me how I can qualify for position marked X.

- | | |
|--------------------------------|----------------------------|
|Electrical Engineer |Business Law |
|Elec. Light & Power Supt. |Business Manager |
|Hydroelectric Engineer |Auditor |
|Telephone Engineer |Accountant |
|Architect |Cert'f'd Public Acc't |
|Architectural Draftsman |Stenographer |
|Building Contractor |Bookkeeper |
|Building Superintendent |Fire Ins. Inspector |
|Structural Engineer |Fire Ins. Adjuster |
|Structural Draftsman |Fire Ins. Expert |
|Mechanical Engineer |Sanitary Engineer |
|Mechanical Draftsman |Master Plumber |
|Civil Engineer |Heat and Vent. Eng. |
|Steam Engineer |Plumb. and Heat. Est. |
|Shop Foreman |Reclamation Engineer |
|Shop Superintendent |Automobile Engineer |
|Sheet Metal Draftsman |Automobile Repairer |
|Lawyer |High School Course |

We also prepare for civil service examinations in all engineering subjects.

Name

Address

When writing to Advertisers please mention Popular Science Monthly

1/3 SAVED

BUY DIRECT

GET FREE BOOK

INSTALL YOUR OWN PLUMBING AT LOW COST



Get our Handy Man Book. Every home-owner needs it. Shows new home improvements and everything in guaranteed plumbing and heating supplies exclusively at wholesale prices. Any handy man can install with our free easy installing plans and instructions with the help of our service.

CUT TO FIT HEATING PLANTS

Our 40 years' experience enables us to furnish heating plants, CUT TO FIT, bathroom outfits, etc., with new, original, easy installing features, combining quality, economy, simplicity and ease of installation.

Our \$500,000 plants behind our guarantee. WRITE TODAY.

The Hardin-Lavin Co. 40 Years at 4534-44 Cottage Grove Ave. Chicago



AVIATION

Practical Aeronautics

BY MAIL

under personal guidance of the well-known aviator, Bud Morriss, Chief Instructor. Salaries of \$50.00 to \$500.00 a week now waiting for trained men. Now is the time and this is your opportunity to step into fame and fortune. Write today for complete literature, all FREE. Special offer open to you now. Write at once.

AMERICAN SCHOOL OF AVIATION
431 So. Dearborn St., Dept. 8137, CHICAGO, ILL.

LEPAGE'S

CHINA CEMENT


STANDS HOT AND COLD WATER 10¢



I PRINT MY OWN

Cards, circulars, menus, book, paper, etc. Press \$5. Larger \$18. Rotary \$60. Save money. Print for others, big profit. All easy, rules sent. Write factory today for illustrated catalog presses, TYPE, cards, samples.

THE PRESS CO. D-33, MERIDEN, CONNECTICUT



ACORN UNI-LITE


FREE

Turns night into day. 300 candle power. Carry as a lantern; use anywhere as a lamp. Weather proof. For house, barn, garage, camp and around the farm. Write for big free offer. Special opportunity to farmers, stockmen and motorists. Agents make big money.

Write tonight for new 1917 offer.

ACORN BRASS MFG. CO., 670 Uni-Lite Bldg., Chicago

"DON'T SHOUT"



"I hear you. I can hear now as well as anybody. 'How?' With THE MORLEY PHONE. I've a pair in my ears now, but they are invisible. I would not know I had them in, myself, only that I hear all right."

"The Morley Phone for the DEAF"

is to the ears what glasses are to the eyes. Invisible, comfortable, weightless and harmless. Anyone can adjust it."

Over one hundred thousand sold. Write for booklet and testimonials.

THE MORLEY CO., Dept. 797, Perry Bldg., Phila.

GENUINE DIAMONDS

**DIRECT
FROM THE
DIAMOND CUTTERS**

**YOU SAVE
FORTY
PER CENT**

We Prove Every Statement

WE sell you diamonds with the distinct understanding that if any jeweler anywhere will duplicate the weight, color and quality of our diamonds at anything like our prices, or if you are not perfectly satisfied in every respect, you may have your money back—every penny you paid. We are the only diamond cutters in the United States selling to the public direct, and by buying from us you save FOUR profits. We will prove every statement to you by sending you a selection at our risk and our expense without a penny from you in advance or a reference. Buy only AFTER you have satisfied yourself that you are getting a greater value than others can possibly offer. When you buy a diamond of us, you buy it cheaper than the average retail jeweler can buy it, for the reason that we import diamonds in the rough from abroad, saving 10 per cent. on the duty and the importers', wholesalers' and cutters' profits.



ONE
CARAT
\$70



3/4
CARAT
\$93.75



7/8
CARAT
\$61.25



2
CARATS
\$250



3/4
CARAT
\$52.50



1 1/2
CARATS
\$187.50



1/2
CARAT
\$35.



4
CARATS
\$500



5/8
CARAT
\$41



1 1/4
CARATS
\$156.25



1/4
CARAT
\$16.25



ONE
CARAT
\$125

1/4 Carat Rings	\$ 6.75	1/4 Carat Rings	\$ 9.75
3-16 Carat Rings	\$10.90	3-16 Carat Rings	\$14.00
1/4 Carat Rings	\$16.25	1/4 Carat Rings	\$21.88
1/4 Carat Rings	\$26.60	1/4 Carat Rings	\$27.90
1/4 Carat Rings	\$35.00	1/4 Carat Rings	\$38.50
1/4 Carat Rings	\$43.75	1/4 Carat Rings	\$58.75
1/4 Carat Rings	\$52.50	1/4 Carat Rings	\$75.63
1/4 Carat Rings	\$61.25	1/4 Carat Rings	\$93.75
1 Carat Rings	\$70.00	1 Carat Rings	\$125.00

Write for this 226-Page Free Catalog

In our catalog we explain how diamonds are mined and cut; how to tell an imperfectly cut diamond from a perfectly cut gem; how to distinguish one grade from another; why one diamond is more brilliant than another, etc., etc. This book is the greatest authority on diamonds ever published and offers positively the most wonderful values ever known. You can buy diamonds from this catalog as low as \$39 a carat up to \$325 a carat for the finest diamonds in the world. This book is yours free for the asking.

MONEY BACK IN FULL ANY TIME WITHIN 1 YEAR

With every diamond, we give our written Protective Money Back Guarantee Bond, absolutely assuring you legally of the full return of all your money any time within one year. Dissatisfaction is, therefore, impossible.

World's Finest Watches At Practically Wholesale Prices



HAMILTON
Elgin or Waltham and
many other world famous
20 year Guaranteed GOLD
Filled Watches

7 Jewel . \$7.00
15 Jewel . \$9.00
17 Jewel \$11.00
10 year Free Repair
Guaranteed Bond given
with every watch

**Extra Special
Guaranteed Gold
Filled Watches**

7 Jewel \$3.98 Value \$6	17 Jewel \$5.75 Value \$10
15 Jewel \$4.98 Value \$8	21 Jewel \$6.75 Value \$14

PRESS & SONS
IMPORTERS AND CUTTERS OF DIAMONDS
WHOLESALE JEWELERS
876 CHESTNUT ST.
PHILADELPHIA, PA.

NEW BOOK ON ROPE SPLICING**USEFUL KNOTS, HITCHES, SPLICES, ETC.**How Different Knots Are Made and What They Are Used For
Indispensable to every Mechanic and Rigger**PRICE
20c**

A most practical handbook giving complete and simple directions for making all the most useful knots, hitches, splices, rigging, etc. Over 100 illustrations.

All about wire rope attachments, lashing, blocks, tackles, etc. 37 Heraldic Knots illustrated. Of great value to mechanics, riggers, campers, boatmen. Price 20c postpd.

**LUMINOUS PAINT****Make Your Watches, Clocks, Etc., Visible by Night**

The very latest discovery in the scientific world. Hitherto, practically unobtainable except at an exorbitant price, we have at last succeeded in producing this remarkable LUMINOUS PAINT, which, applied to the surface of any article, emits rays of white light, rendering it perfectly visible in the dark. THE DARKER THE NIGHT, THE MORE BRILLIANT IT SHINES. Quite simple to use. Anyone—you can do it. A little applied to the dial of your watch or clock will enable you to tell the time by night. You can coat the push buttons or switch plates of your electric lights, match boxes, and innumerable other articles; make your own Luminous Crucifixes, Luminous Rosaries, etc. Bottle containing sufficient to coat several small articles. Price 25c. Larger sizes 50c and \$1.00 postpaid.

**New Vamping Card**

No Teacher Needed

Surprisingly Simple System

Persons having neglected their Musical Education need not despair, for with the aid of our new VAMPING CARD (placing the card upright over the piano keys), you can at once Vamp away to thousands of Songs, Ballads, Waltzes, Rag Time, etc., etc., equal to a Professional Musician. No knowledge of music is required. After using it a few times, you will be able to dispense with the aid of the Vamping Card entirely. The price of this very clever invention is only 15 cents postpaid.

SILK FLAG PINS

4 for 10c.



Wear the colors and show your patriotism. The flags are made in bow shape of silk ribbon, with

pin for sticking into coat or dress. 4 for 10c, 12 for 25c.

Large 232-page catalog of unique, novel and useful articles (unobtainable elsewhere) free with all orders, or mailed on receipt of stamp.

AMERICAN FLAG GUM STICKERS

These flags are about same size as a postage stamp. Gummed on the reverse side ready for use. Use them on your envelopes, stationery, etc., and let everyone know you are an American. Put up in sheets each containing 100 flags. Tear them apart like stamps. PRICE 10c per sheet, 3 sheets for 25c.

Large 232-page catalog of unique, novel and useful articles (unobtainable elsewhere) free with all orders, or mailed on receipt of stamp.

JOHNSON SMITH & CO., 7185**Automatic Repeating Rifle****Fires
20 Shots in
One Loading**

This is a regular size automatic revolver. Shoots B. B. shots obtainable anywhere, same as other rifles and guns. Repeats 20 times with one loading. Hand-

somerely finished in gun metal. No caps or load necessary, as it works with a spring and shoots with rapidity and accuracy. Simply load with 20 B. B. shot, then press the trigger. Nothing to explode—absolutely harmless and safe. Remember, it is not a mere toy, but the same size and shape as a REGULAR AUTOMATIC. Sent complete with a round of shot for ONLY 25c postpaid. Extra shot, 10c a package.

**Only
25c
Postpd****INVISIBLE INK**

The most confidential messages can be written with this ink, for the writing MAKES NO MARK. Cannot be seen unless you know the secret. Invaluable for many reasons. Keep your postals and other private memorandums away from prying eyes. Great fun for playing practical jokes. Only 15c Bottle

**VANISHING INK**Writing written with this remarkable ink vanishes entirely in a few weeks (sooner if desired), leaving the paper QUITE BLANK. 15c p.pd. **LUMINOUS INK** writing can be READ ONLY IN A DARK ROOM; writingshines like fire. Quite invisible at daytime. Very remarkable. 15c

Greatest Toy Sensation of the Day

FIGHTING DREADNAUGHT**SENSATIONALLY REALISTIC!
EXACT MODEL OF A MODERN WARSHIP**

The Fighting Dreadnaught is an exact model of Uncle Sam's latest fighting monster. It carries eight big guns, each of which flashes, at correct intervals, from



twelve to twenty times. Extra ammunition always obtainable. Absolutely harmless. Can be operated indoors or out. Now, boys! Here's your chance to see a battleship in action, and the best of it is you can OWN the ship and command the firing yourself! By having two or more Battleships, you can arrange EXCITING NAVAL BATTLES in your own home. Price of Warship and Ammunition, 15c, three for 40c, or a fleet of 12 ships for \$1.50 postpaid. Extra Ammunition, 5 cents per pkg.

N. CLARK STREET, CHICAGO**Auto Battery Charging PAYS BIG**

One user of an HB Charging Set cleared \$139.50 first month. Average monthly net profit among garage men is \$20.00 to \$60.00. The HB Set can charge eight batteries at once at cost of 15 cents each. Garage owner gets 75c to \$1.50. Big profits easily made. No electrical knowledge required. No repairs. Uses regular lighting current.

Get This Big Money Maker for \$15, first payment, balance in easy monthly payments. Every HB charger fully guaranteed. Can be returned if unsatisfactory. This is YOUR OPPORTUNITY. Send this ad and your name today for full particulars. Hobart Brothers Company, Box 67, Troy, O.

AGENTS—KEROSENE (COAL OIL) BURNER

Makes Any Stove a Gas Stove

Free Sample to Workers



Makes its own gas from Kerosene (coal oil).

Gives every home a gas stove. Absolutely safe. Cheapest fuel known. Agents just coining money.

Wonderful Labor Saver Women wild about it. No coal or ashes to carry. No more danger from **Safe, Clean, Odorless, Cheap** gasoline.Every home a prospect. Low price makes quick sales. Easy to carry and demonstrate. Big profits. Your territory is open. Write, today. **THOMAS BURNER CO., 3647 GAY ST., DAYTON, OHIO**

When writing to Advertisers please mention Popular Science Monthly

**Mobiloils**

A grade for each type of motor

**LONG, STRONG
TAIL****REINFORCED
SIDES****Price 10c**

Do you take advantage of exceptional opportunities? If so, send 10c for Sample Dog. We feel confident a sample will result in continued re-orders. Size 1/2".

THE WHEELER TOOL CO.

135 Water St.,

South Norwalk, Conn.



Aviation

Learn Practical Aeronautics By Mail

FOR the first time in the History of Aviation, a Practical and Efficient Correspondence Course is waiting for you under the direction of Qualified Aviators and Aeroplane Builders, and a **Special Offer of Great Importance** is yours, if you will send the coupon at once.

Aviation is in its infancy. It stands today where the automobile and moving picture business did ten years ago. And the big men; the money kings in these colossal enterprises were ten years ago obscure mechanics with less opportunity than you have today with this wonderful Course in Practical Aeronautics. Now is the time to rise with the tide that means **to you** both fame and fortune.

Earn \$50 to \$500 a Week!

Today there is a great demand for men in all branches of Aviation. Experts in Aeronautics command tremendous salaries. Government Branches, Aero Societies, Aeroplane Builders, Repair Shops and others are clamoring for trained men.

We prepare you by mail to train for flying—at home—in spare time to fill any of these positions:

Aeroplane Mechanic
Aeroplane Builder Aeronautical Engineer
Aeroplane Salesman
Aeroplane Assembler Aeroplane Repairman
Aeronautical Contractor
Aeronautical Instructor Aeroplane Inspector

No matter what your present business may be, equip yourself **NOW** to take up the new profession of Practical Aeronautics. Send the Coupon today for full particulars of our Course and the Special Offer we are now making. This is your opportunity.

Highest Endorsement By Aviation Authorities

This wonderful Course is highly endorsed by leaders in Aviation and Flying Organizations. It has their unqualified approval as a quick and reliable basic training for the business of Aviation. Under the personal direction of Mr. Bud Morriss, well known Aviator and Instructor, assisted by a distinguished Staff of Aviators, Aeroplane Manufacturers, and Aeronautical Engineers, you learn all about this fascinating, profitable profession. Every Lesson, every Lecture, every Blue Print and Bulletin self-explanatory, in plain terms, for quick understanding. Your training is thorough and complete. A common school education is all that is necessary to thoroughly understand the Course. Get the facts today. Send the Free Coupon.

Special Limited Offer-- Write Now

Send the coupon at once for full particulars of our remarkable special offer open to you now. Find out all about the marvelous opportunities that are opening in the Aviation game. This offer is the greatest stepping stone to bigger opportunities ever known. Write today for complete literature, all free and prepaid. You are not obligated

in any way. Do not waste time in thinking about it. Act! Send the coupon or a letter or a post card will do. **WRITE AT ONCE.**

AMERICAN SCHOOL OF AVIATION
 431 S. Dearborn St., Dept. 2747, Chicago, Ill.



EXHIBITION FLYING



AERONAUTICAL ENGINEER


American School of Aviation
 431 S. Dearborn St., Dept. 2747, Chicago, Ill.

Gentlemen: Please send me free and without obligation, full particulars of your Course in Practical Aeronautics and your Special Offer to those who write at once.

Name.....

Address.....

Brown & Sharpe Tools

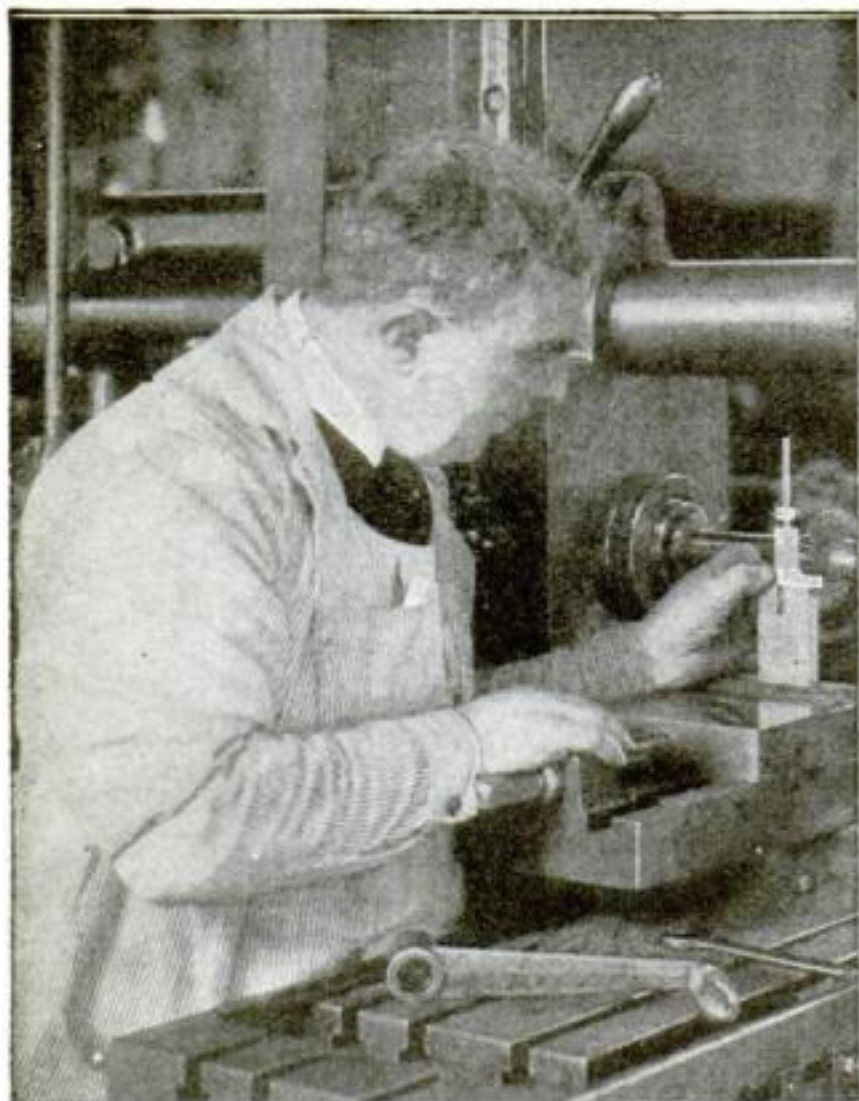

Mechanics The World Over

find in Brown & Sharpe Tools the reliable means of keeping an accurate check on their important work. You, too,

Whether Toolmaker, Machinist, Manufacturer or Experimenter,

will find in this extensive sixty-six year old line of machinists' tools the accuracy, reliability and handiness you demand.

Send for Catalog 27 TODAY. It's interesting, instructive and FREE.

Brown & Sharpe Mfg. Co.
Providence, R. I., U. S. A.

ASBESTOS

We are miners and shippers of Crude Asbestos in any quantity. We produce all grades at our world famous Bell Asbestos Mines, in Canada. We also card fibres, spin yarns, weave cloths, and make all sorts of Asbestos products.

For anything you want in Asbestos, turn to

KEASBEY & MATTISON COMPANY,
Dept. S-4, AMBLER, PENNA., U. S. A.

Owners of the world's largest Asbestos Mines.


Tool Cases



for Machinists and Tool Makers, none better; seventeen styles. Quartered oak and covered. Ask for booklet, "Built for Service."

The Pilliod Lumber Co.
Swanton, Ohio

BARTLETT Drop Forged Compound Lever SNIPS.

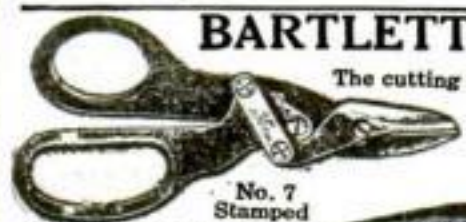

Sizes: 7, 8, 10, 12 & 14 in. long
Prices: \$1.20, \$1.80,
\$2.70, \$3.60, \$4.20,
Prepaid

BARTLETT MANUFACTURING CO.
31 East Lafayette Ave., DETROIT, MICH.

The cutting power of these snips is three times that of the common straight snip. They are Drop Forged from Crucible Tool Steel. Cut 18 ga metal easily.

No. 10-12-14



A
B
A
R
G
A
I
N



\$3 Cash with order buys this
BENCH LATHE

Swing 3 in. 8 in. C. to C. Shipping Wt. 10 Lbs.
Peter Austin, 910 W. First St., Muncie, Ind.

O
R
D
E
R
N
O
W




KEROSENE ENGINES

OTTAWA LATEST DESIGN

Durable, powerful, reliable, massive, built to last; to do hard, heavy work. Uses cheapest fuel, pulls $\frac{1}{4}$ to $\frac{1}{2}$ H. P. more than rated. Three Months' Trial, Easy Terms. Sizes $\frac{1}{2}$ to 22 H. P. Easy to start. No cranking. No batteries. Ten Year Guarantee. Most practical engine ever built

ENGINE BOOK FREE. A POSTAL BRINGS IT.
OTTAWA MANUFACTURING CO., 1951 King St., OTTAWA, KANS.

THE MIDGET SLIDE RULE



will add, subtract, multiply, divide, solve problems involving even and uneven roots and powers. It will also give the Logarithms of numbers and the Sines, Cosines, Tangents and Cotangents of all angles.

Its operation is very simple and with this instrument one can quickly solve any mathematical problem. This slide rule is made of wood and metal and it is adapted for shop as well as office use.

Size $3\frac{1}{4} \times 3\frac{1}{4}$ in. Price, with instructions, 75c. Your money back if you are not satisfied.

GILSON SLIDE RULE CO., Niles, Mich.



Quality
First

TOOL CASES

for
Machinists and Toolmakers

Write for our booklet showing the best built and most practical selection of Tool Cases on the market. We ship direct from factory and guarantee to please you or refund all money.

J. Gerstner & Sons.

50 Columbia St. Dayton, Ohio

Build Your Own Grandfather's Clock with our help

We furnish blue prints, finishing material and instructions. Buy the works, dial, weights and pendulum from us at surprisingly low prices. You make a fine profit building artistic clocks for your friends.

Complete Works \$5.00
Others with chimes at all prices
Ask for attractive Free Offer
CLOCK COMPANY
1663 Ruffner St., Philadelphia, Pa.



Veeder COUNTERS

register reciprocating movements or revolutions. Any mechanical engineer will tell you that the word Veeder stands for the best constructed and most accurate counting devices in the world.

There are many kinds of Veeder counters, to suit practically every need. Send for our free booklet, which illustrates our counters and gives much interesting information.

Cyclometers, Odometers, Tachometers. All kinds of counters. Fine Die Castings.

Veeder Mfg. Co.
44 Sargeant Street
Hartford, Conn.



Full Size
\$1.25

WITTE HIGH-GRADE ENGINES

Kerosene, Gasoline, Gas, Distillate.

2 to 22 H-P.




For operating belted machinery, elevators, pumps, bone mills, feed grinders, cream separators, crushers, mills, blowers, hoists, etc.—Stationary or portable, also Saw-Rigs, complete. Largest exclusive engine factory in the world selling direct to the user. Saves \$25 to \$100—**Immediate Shipment**—Write for latest WITTE prices and catalog of engines. State size wanted or what work you have.—ED. H. WITTE, Pres.,

WITTE ENGINE WORKS,

2220 Oakland Avenue,
2220 Empire Building,

Kansas City, Mo.
Pittsburgh, Pa.




Money Spent for Good Tools Is
an Investment, Not an Expense

They will work more faithfully for you under all conditions, stand harder wear and outlast other tools if you will specify

"Red Devil" Tools

A complete line of Pliers, Glass Cutters, Hack Saws, Snips, Screw Drivers, etc. You will consider their ownership the best investment. To be obtained from all good dealers. Literature free.

SMITH & HEMENWAY CO., Inc.
126 Coit Street, Irvington, N. J.

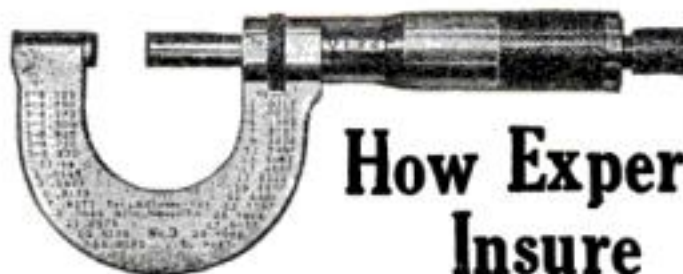

How Experts Insure Accuracy

Fine mechanical work must be laid out accurately and accurately checked up as work progresses. In the finest shops in the world, mechanics maintain accuracy by using

Starrett Tools

The 2100 styles and sizes in this line include tools for every practical requirement in laying out and measuring mechanical work.

The micrometer shown above is the No. 3, one inch size, with ratchet stop, lock nut, and decimal equivalents.

Send for free catalog No. 21W describing the full line.

THE L. S. STARRETT CO.,

THE WORLD'S GREATEST
TOOL MAKERS

Athol, Mass.




42-554



When writing to Advertisers please mention Popular Science Monthly

*When you thread pipe
do it the easiest way—*

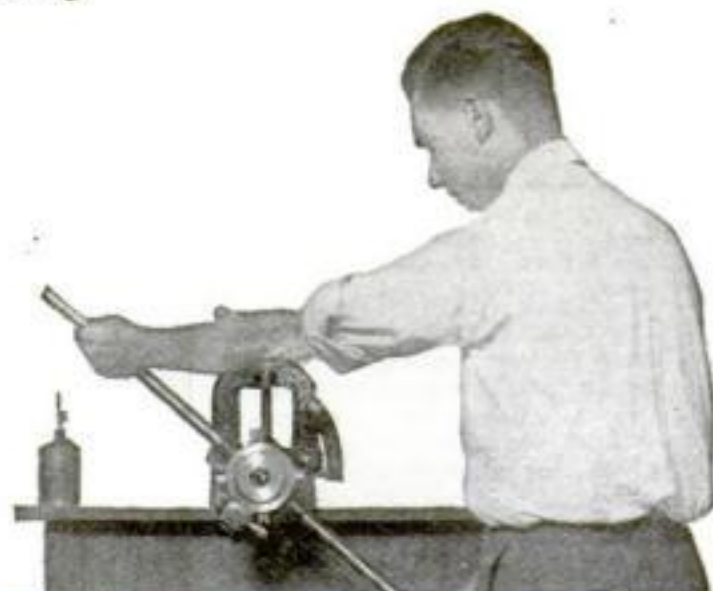

OSTER BULL-DOG DIE STOCKS

Don't waste your time tinkering with studs and bushings. Use the simplified Bull-Dog—the tool with the perfected lever control. The dies open and close and reset to size at the twist of a lever. The guides, lever operated, center the pipe automatically. There's not a loose part, set-screw, stud or bushing to bother you.

Better write today for a catalog of Bull-Dog Tools—ask for List 29.

The Oster Manufacturing Co.,
2180 East 61st Street, Cleveland, Ohio

You Will



certainly be interested in this new catalog. (Our No. 17.)

Contains a fund of information that will be of considerable value to linemen, electricians, the dealer, jobber, telephone, telegraph and electric light and power companies. All tools illustrated, described and priced in a clear manner. It is for free distribution. Don't hesitate to ask for a copy.

Mathias Klein & Sons, Mfrs., Canal Sta. 3, Chicago

Booklet free. Send 10c stamps for sample.

"RED DEVIL" GLASS CUTTERS
Cut Glass and Expenses

You need one in the household for repairing windows, picture frames, etc. Also for replacing glass plates for wireless condensers. Used wherever glass is known. Cut like diamonds.

SMITH & HEMENWAY CO., Inc.
126 Coit Street, Irvington, N. J.

ARMSTRONG TOOLS of CONSTANT SERVICE

Every kit, from the Master Workman down to the Apprentice, should contain ARMSTRONG TOOLS.

These tools are the result of years of constant study and experimenting. They are perfect yet simple in construction. Strong, durable, easily operated, doing the work quickly and accurately.

Have You a Set in Your Kit?

Our catalog tells the rest of this interesting story, send for it *to-day*.

THE ARMSTRONG MFG. CO.
337 Knowlton Street - Bridgeport, Conn.


When writing to Advertisers please mention Popular Science Monthly

This One



CQ4N-NWL-ZCN2

True in any position

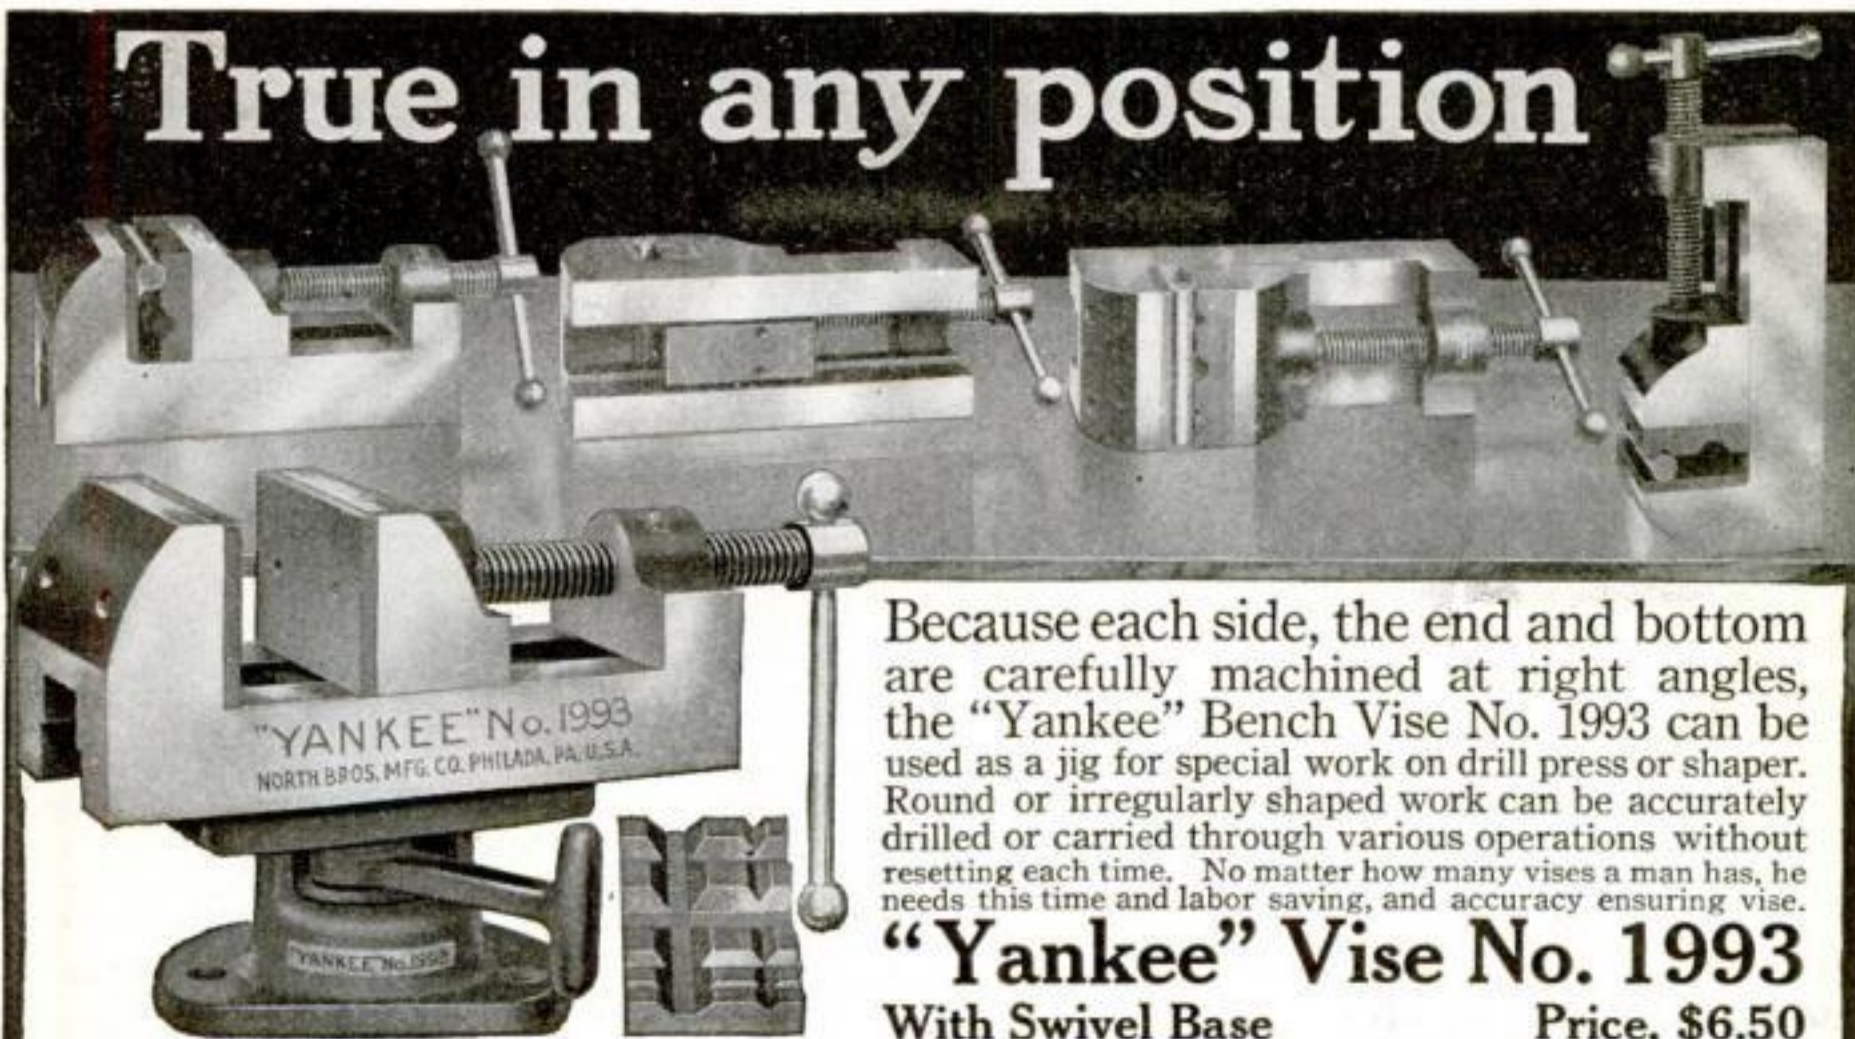

Height with base, 5 $\frac{1}{4}$ in., length of body 7 $\frac{1}{4}$ in. Base 4 $\frac{1}{4}$ in. diameter. Jaws 2 $\frac{1}{4}$ in. wide, 1 $\frac{1}{4}$ in. deep; open 3 $\frac{1}{4}$ in. Jaws have hardened steel faces. The hardened Steel Block with V-shaped grooves of various sizes is used for holding round or irregularly shaped work at any angle. Steel screw. Weight, 13 lbs., 6 oz.

Because each side, the end and bottom are carefully machined at right angles, the "Yankee" Bench Vise No. 1993 can be used as a jig for special work on drill press or shaper. Round or irregularly shaped work can be accurately drilled or carried through various operations without resetting each time. No matter how many vices a man has, he needs this time and labor saving, and accuracy ensuring vise.

"Yankee" Vise No. 1993

With Swivel Base

Price, \$6.50

Securely locked to its Swivel Base by turning set screw. Camthrow Lever locks Vise firmly in any position.

Your dealer can supply you.

Write for "Yankee" Tool Book" showing all "Yankee" wood- and metal-boring and screw-driving tools. Free. NORTH BROS. MFG. CO., Philadelphia, U. S. A.

"YANKEE" TOOLS *Make Better Mechanics*

Stanley Tools



Bailey Iron Planes

"Bailey" Iron Planes have been in use for nearly fifty years, and are the recognized standard for Planes of this type.

While retaining all the original features, many valuable improvements in construction have been added from time to time. Only the finest materials and the best workmanship are used in their manufacture.

Always insist that your order be filled with Planes made by THE STANLEY RULE & LEVEL CO., which carry with them a GUARANTEE backed by a Company that has been manufacturing Carpenters' and Mechanics' tools for over half a century.

For Sale by all Hardware Dealers.

STANLEY RULE & LEVEL CO.
NEW BRITAIN, CONN. U.S.A.

SIMONDS



Eighty-five years of saw making have made "Simonds" a synonym for good saws. The only steel good enough for them is "Simonds" steel. That is why they have such sturdy construction and fine cutting qualities.

SIMONDS SAWS

should be in every tool chest. Are they in yours? We have saws for every purpose. Send for our interesting booklet and catalog.

Simonds Manufacturing Co.

Fitchburg, Mass.


5 Factories

11 Branches



"I Tell You It's A Great Saw"

MANY an order directing the deadly curtain of fire, many a reconnaissance dispatch, is today taking legible, official form on sturdy little Coronas, carried from point to point as the lines of battle change.

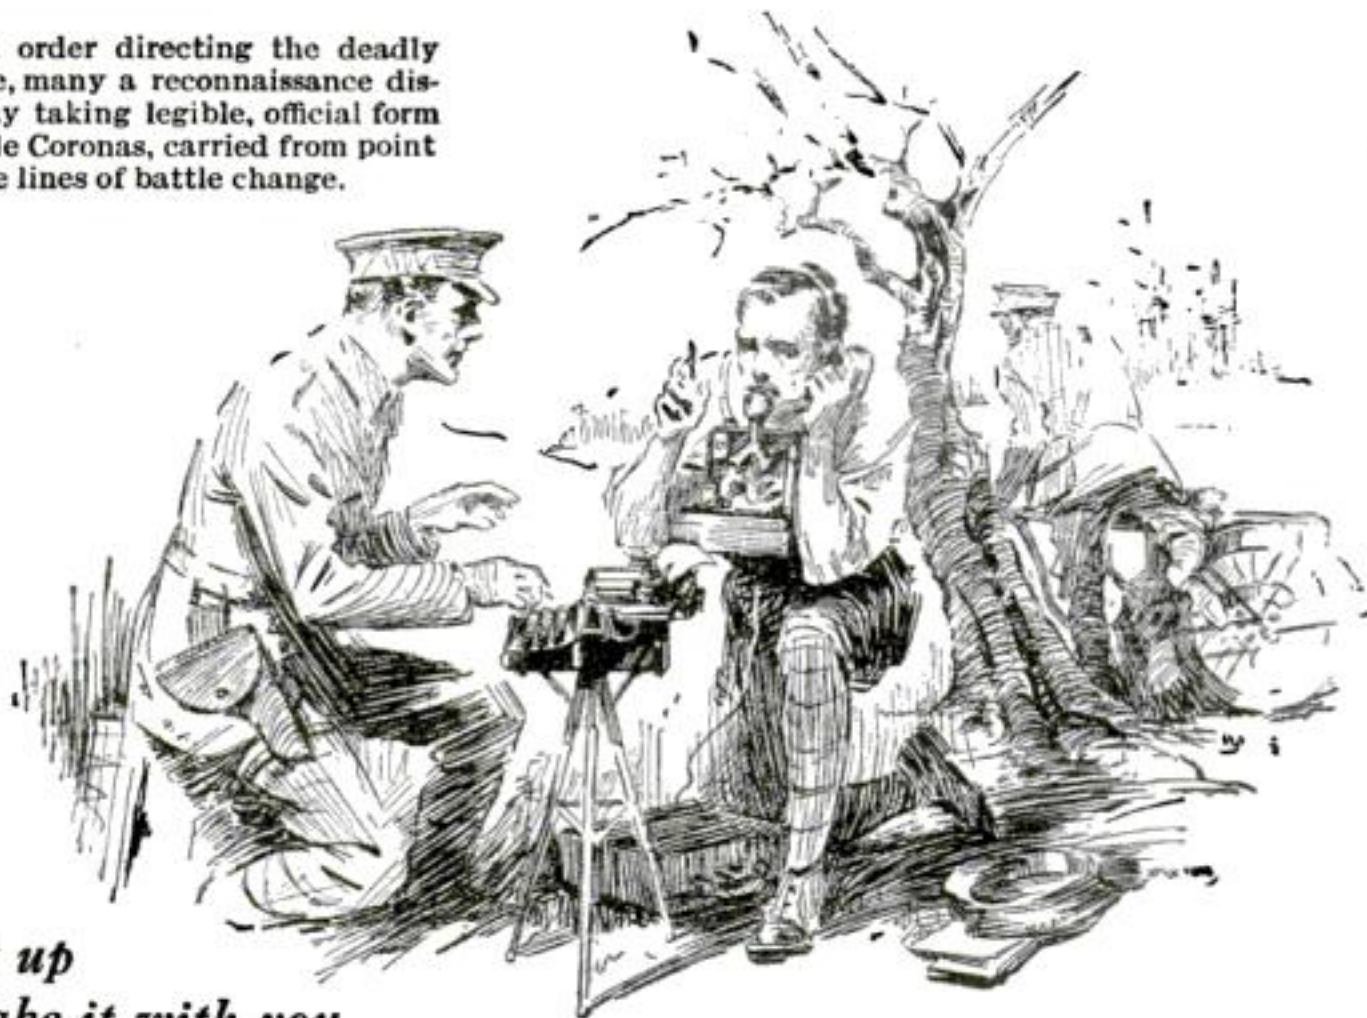

—fold it up

—take it with you

—typewrite anywhere

CORONA

The Personal Writing Machine

Countless Coronas are in daily use in many sectors of the great battle-fields. Their ready portability, made possible by their light weight and compactness, appeals alike to the officer whose orders must be legible and to the war correspondent who today is contributing history.

The same qualities of convenience and dependability which mark Corona for the service of war, establish it securely in the broader development of the arts of peace. Not a mere writing machine, but a machine for your individual use—because you can take it with you anywhere. Corona folds for travel and weighs but six pounds—can be carried in one hand from room to room or from office to home, or used on train or steamer or in the wilderness camp.

Complete with neat black case, Corona costs fifty dollars. Our Booklet No. 26—"The Personal Touch in Typing"—tells about it; and a copy is yours for the asking.

CORONA TYPEWRITER CO., GROTON, N. Y.
NEW YORK CHICAGO SAN FRANCISCO
AGENCIES IN ALL PRINCIPAL CITIES



When writing to Advertisers please mention Popular Science Monthly

Chesterfield

CIGARETTES

of IMPORTED and DOMESTIC tobaccos — Blended



Mild? Sure!

—yet they “Satisfy”

Here's a cigarette, Chesterfield, that is mild, *yes*. But they do something never before done by any other *mild* cigarette—they *let you know you are smoking*—they “*Satisfy*”! You'll know what “*Satisfy*” means when you light your first Chesterfield.

Liggett & Myers Tobacco Co.

20 for 10c

DONALD
GARDNER



Kodak, as you go

Catalogue free at your dealer's or by mail.

EASTMAN KODAK CO., ROCHESTER, N. Y., *The Kodak City.*